



SONIC LOG

Company	TRIPLE CROWN OPERATING LLC	Company	TRIPLE CROWN OPERATING LLC
Well	DAVID #1-35	Well	DAVID #1-35
Field	REINERT	Field	REINERT
County	NESS	County	NESS
State	KANSAS	State	KANSAS
Location:	API # : 15-135-26212 1810" FNL & 1140' FEL	Other Services ML DIL CDNL/PE	
Permanent Datum	SEC 35 TWP 20S RGE 23W	Elevation	2253'
Log Measured From	KB 12' AGL	K.B. 2265 D.F. 2263 G.L. 2253	
Drilling Measured From	KB		
Date	11/6/23		
Run Number	Two		
Depth Driller	4571		
Depth Logger	4570		
Bottom Logged Interval	4565		
Top Log Interval	00		
Casing Driller	8 5/8"@1489'		
Casing Logger	1489'		
Bit Size	7 7/8"		
Type Fluid in Hole	Chemical		
Density / Viscosity	9.5/61		
pH / Fluid Loss	10.0/9.2		
Source of Sample	Pit		
Rm @ Meas. Temp	1.6@70degf		
Rmf @ Meas. Temp	1.2@70degf		
Rmc @ Meas. Temp	1.92@70degf		
Source of Rmf / Rmc	Calculated		
Rm @ BHT	1.07@105degf		
Time Circulation Stopped	11:00 AM		
Time Logger on Bottom	1:00 PM		
Maximum Recorded Temperature	105degf		
Equipment Number	T-605		
Location	Hays, KS.		
Recorded By	COLBY DREILING		
Witnessed By	SEAN DEENIHAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

FROM NESS CITY, GO 11.2 MILES SOUTH ON HW 283, THEN 4 MILES EAST ON 20 RD, THEN 0.8 MILES SOUTH, AND FINALLY SOUTH INTO.


Thanks for using Gemini Wireline LLC
785-625-1182




MAIN PASS

Database File	tcdavid#1-35oh.db
Dataset Pathname	pass5
Presentation Format	kbc
Dataset Creation	Mon Nov 06 15:53:06 2023
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	140	DT (usec/ft)	40
6	MCAL (in)	16	30	SPOR (pu)	-10
6	BOREID (in)	16	0	ITT (msec)	20
0	MINMK	50			

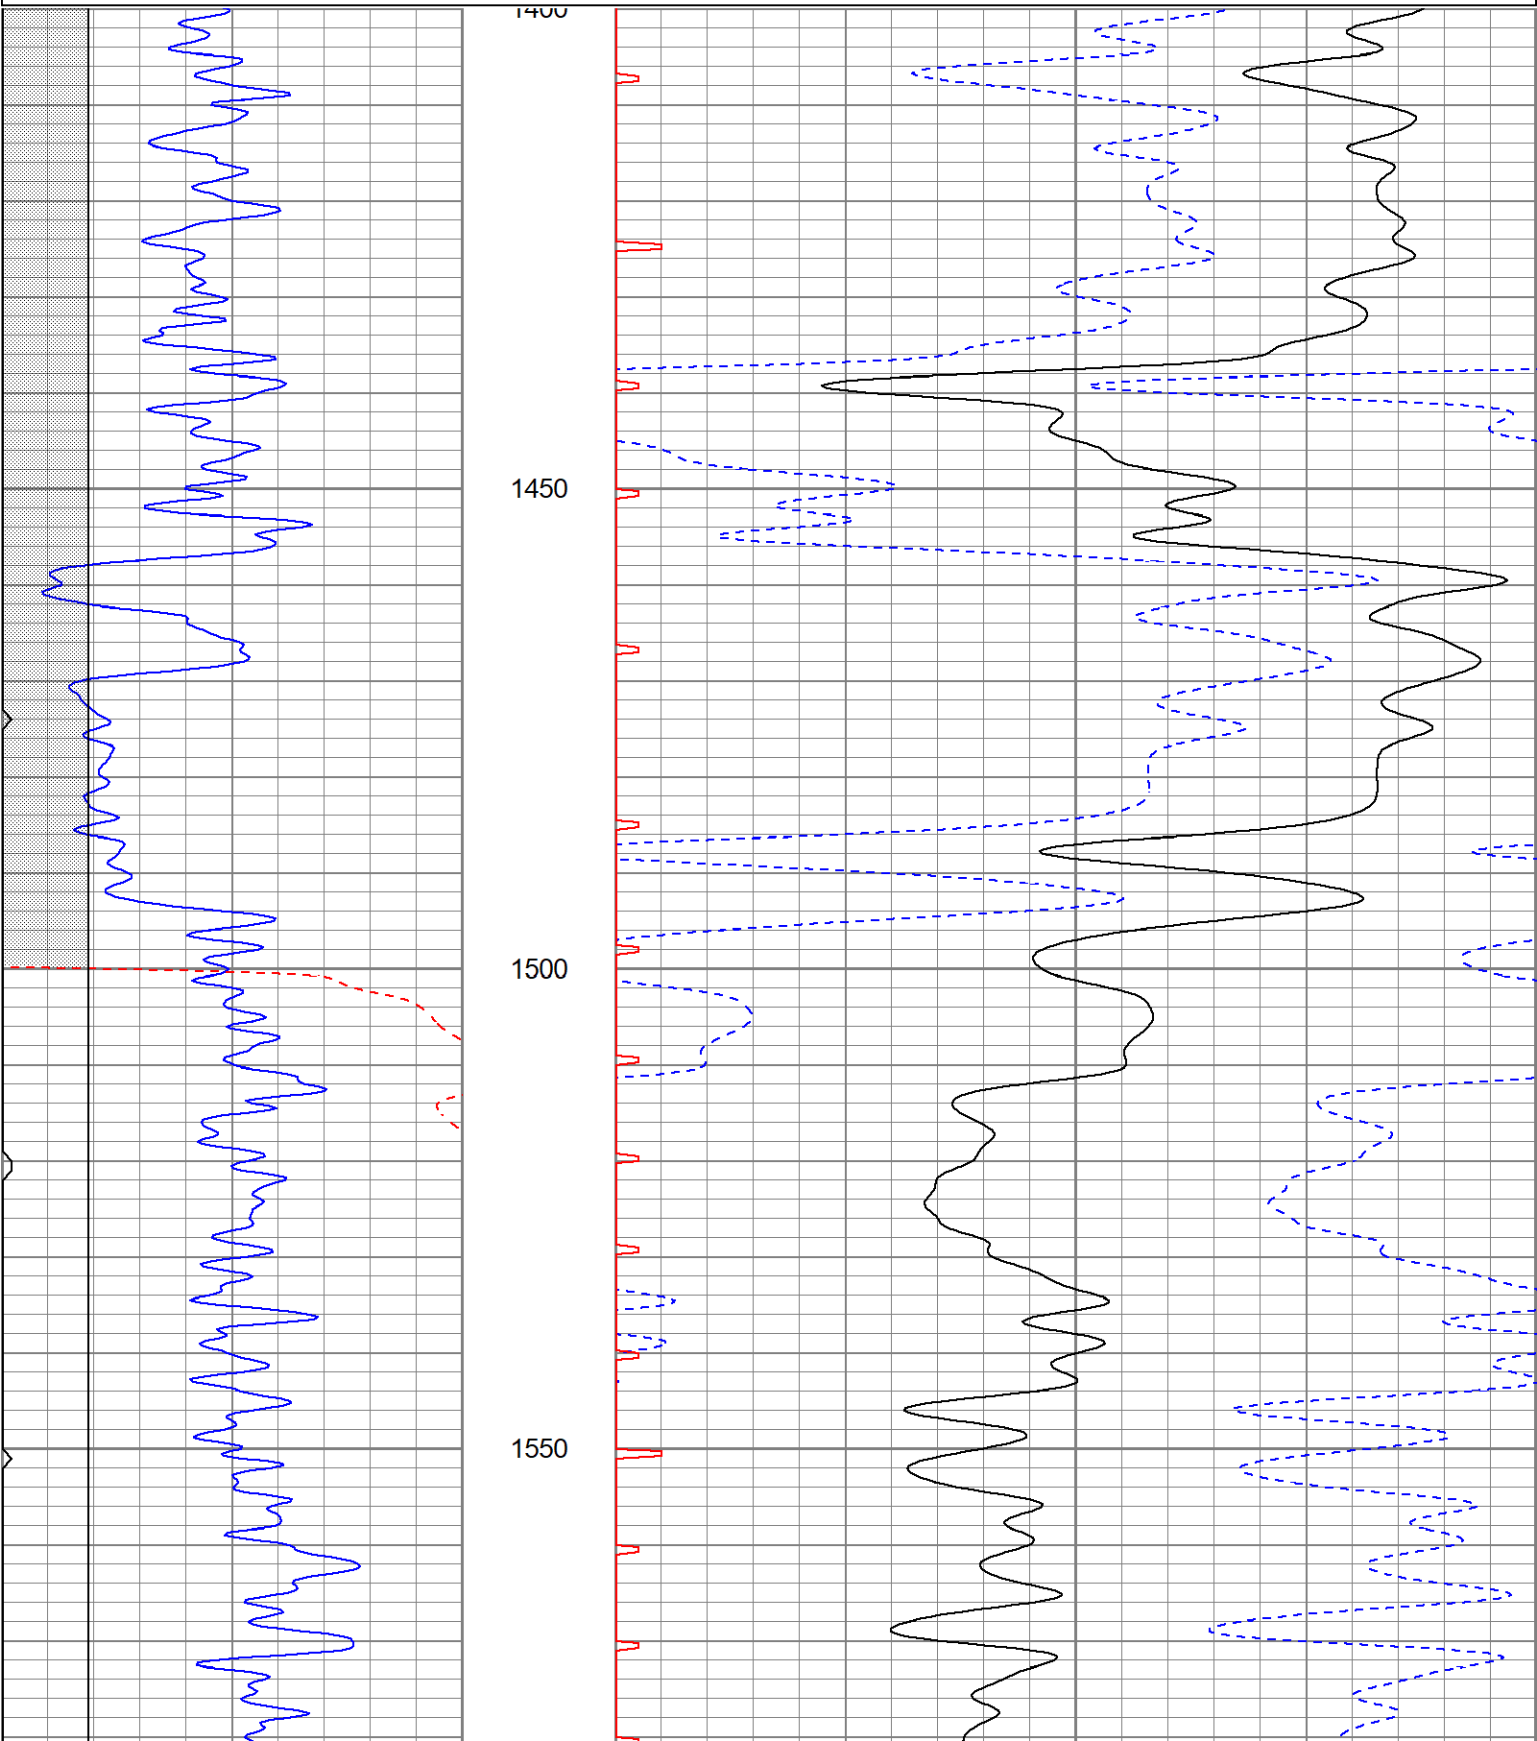

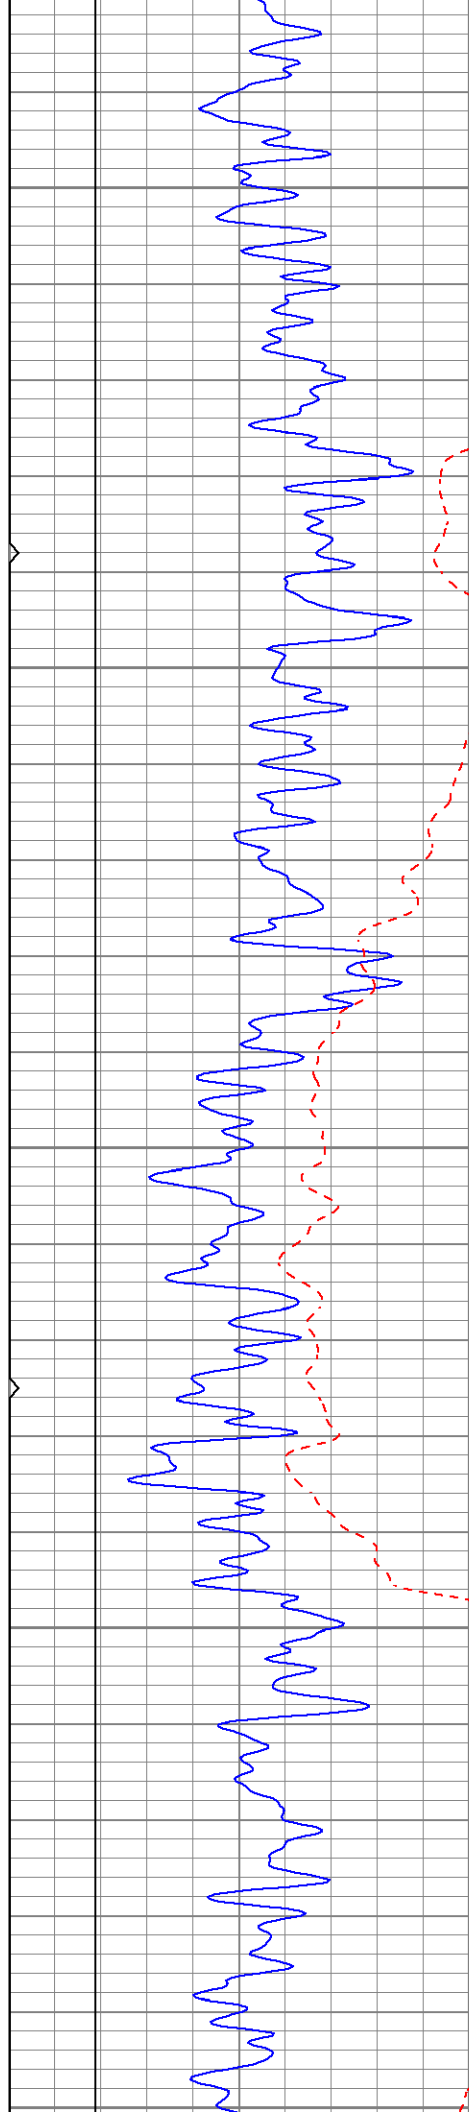


1600


1650

1700

1750

1800

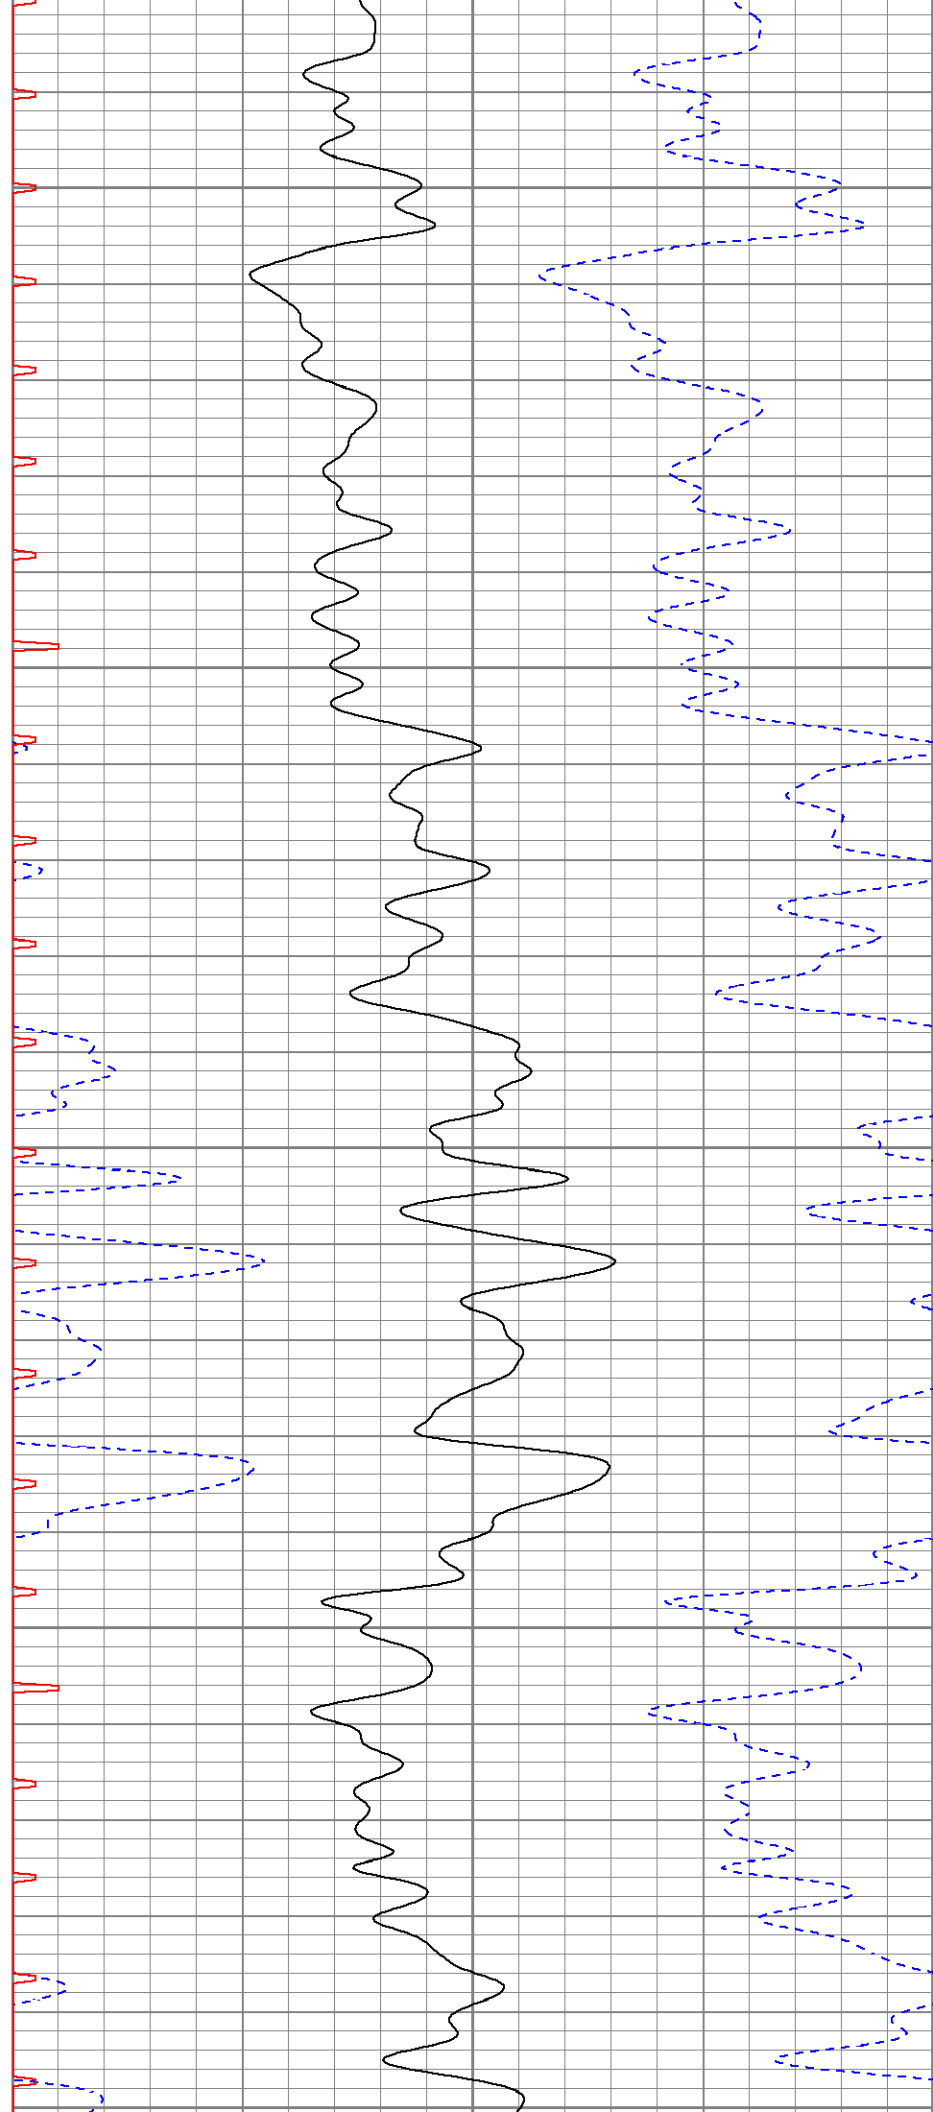

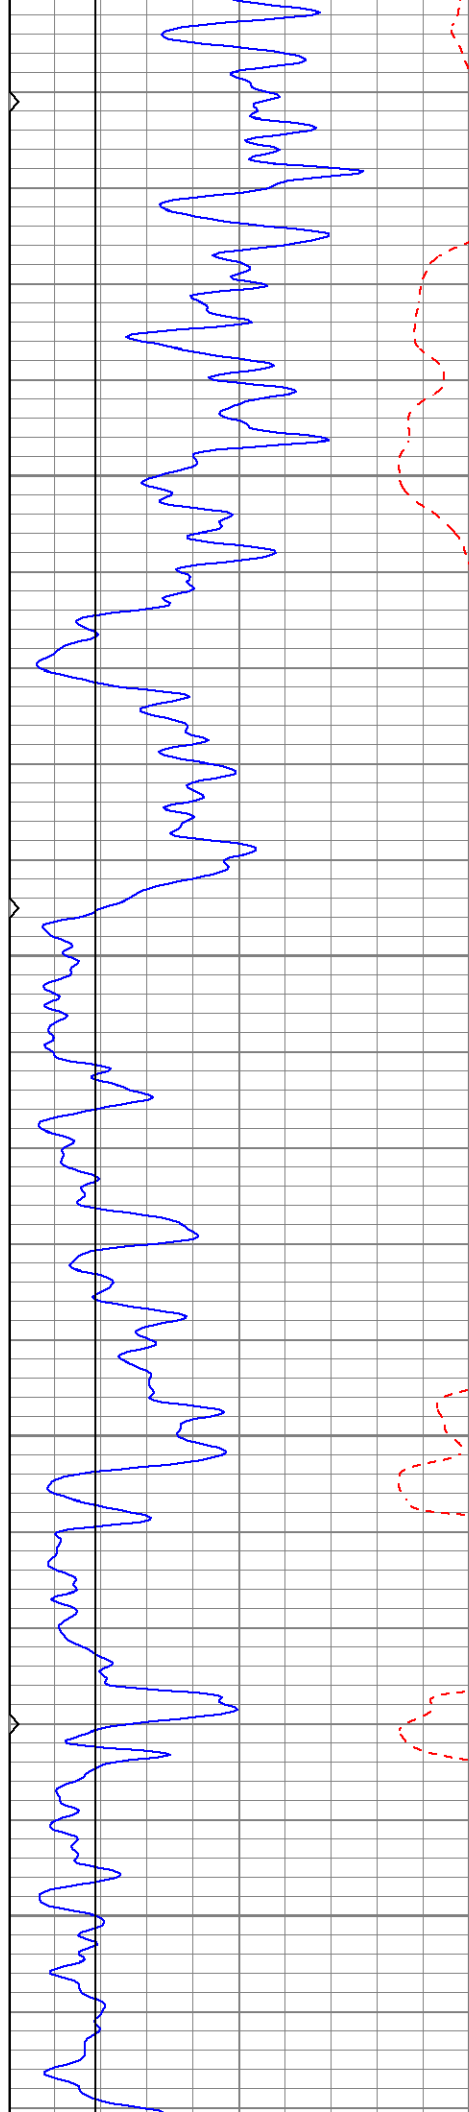


1800


1850

1900

1950

2000

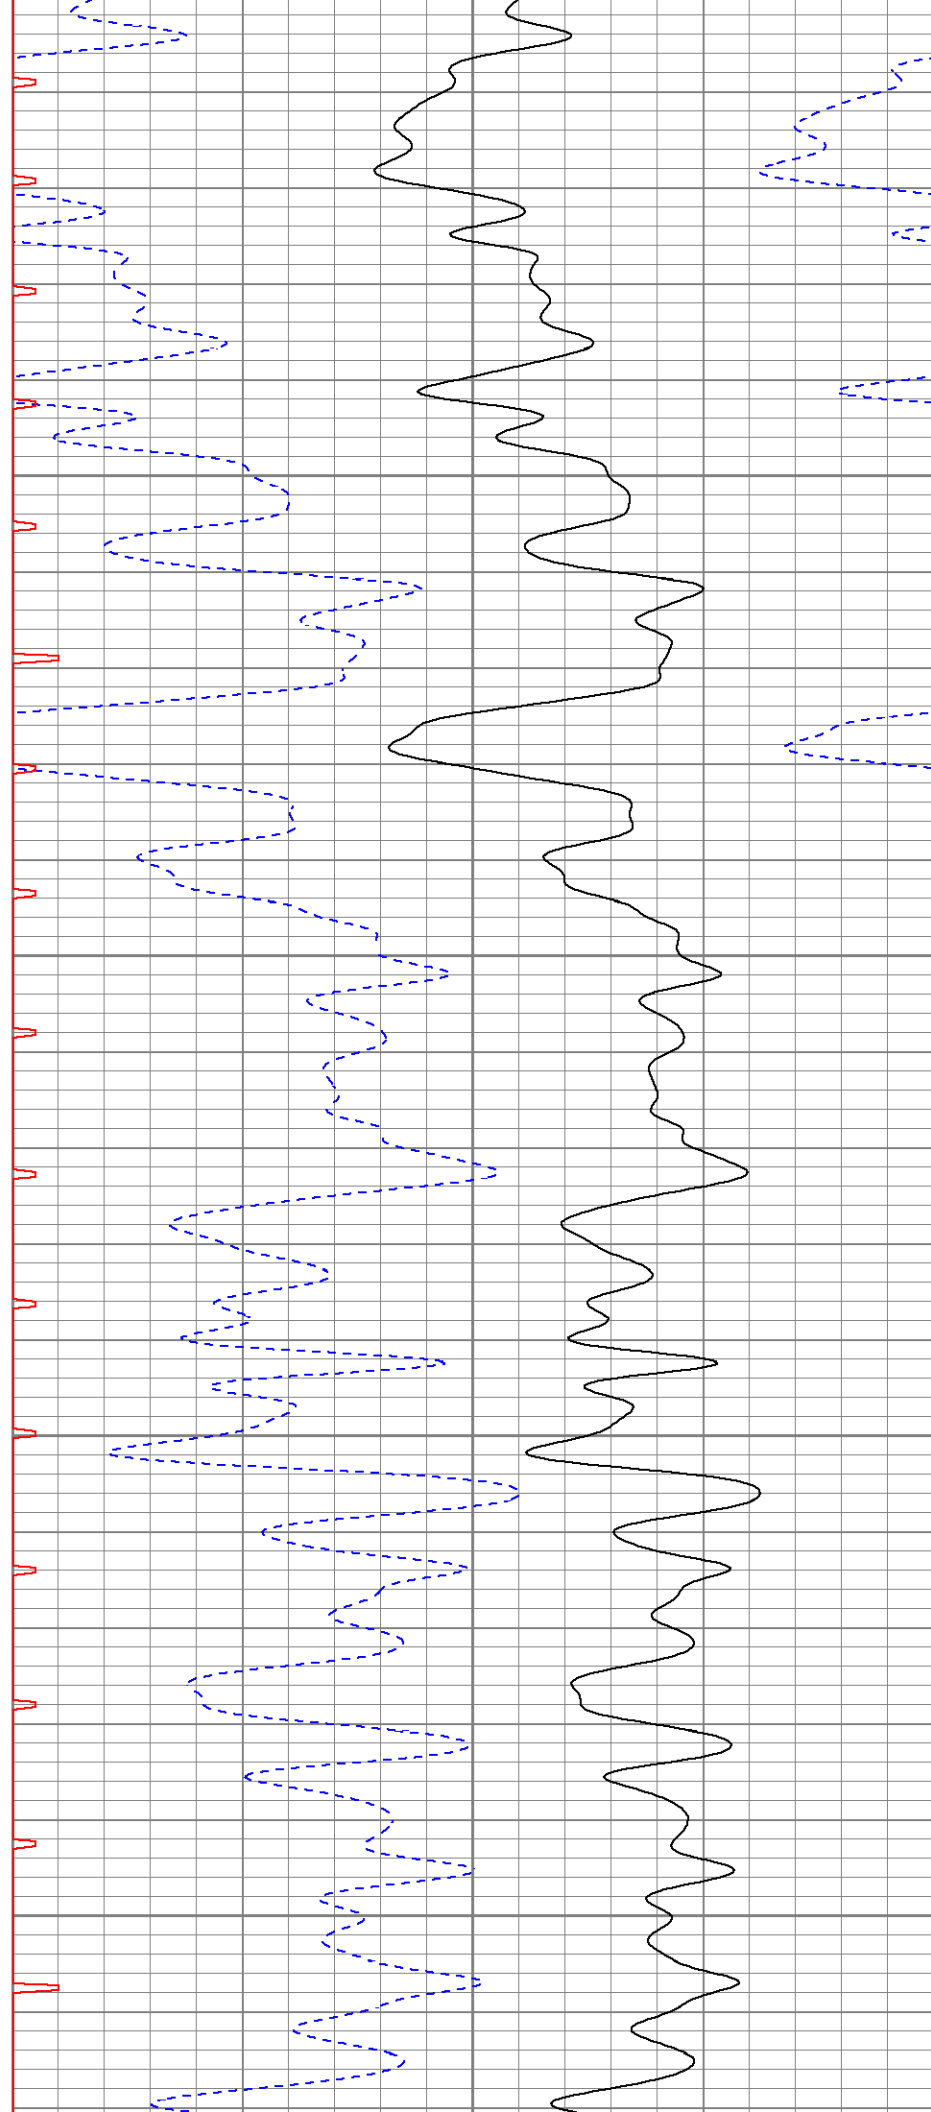

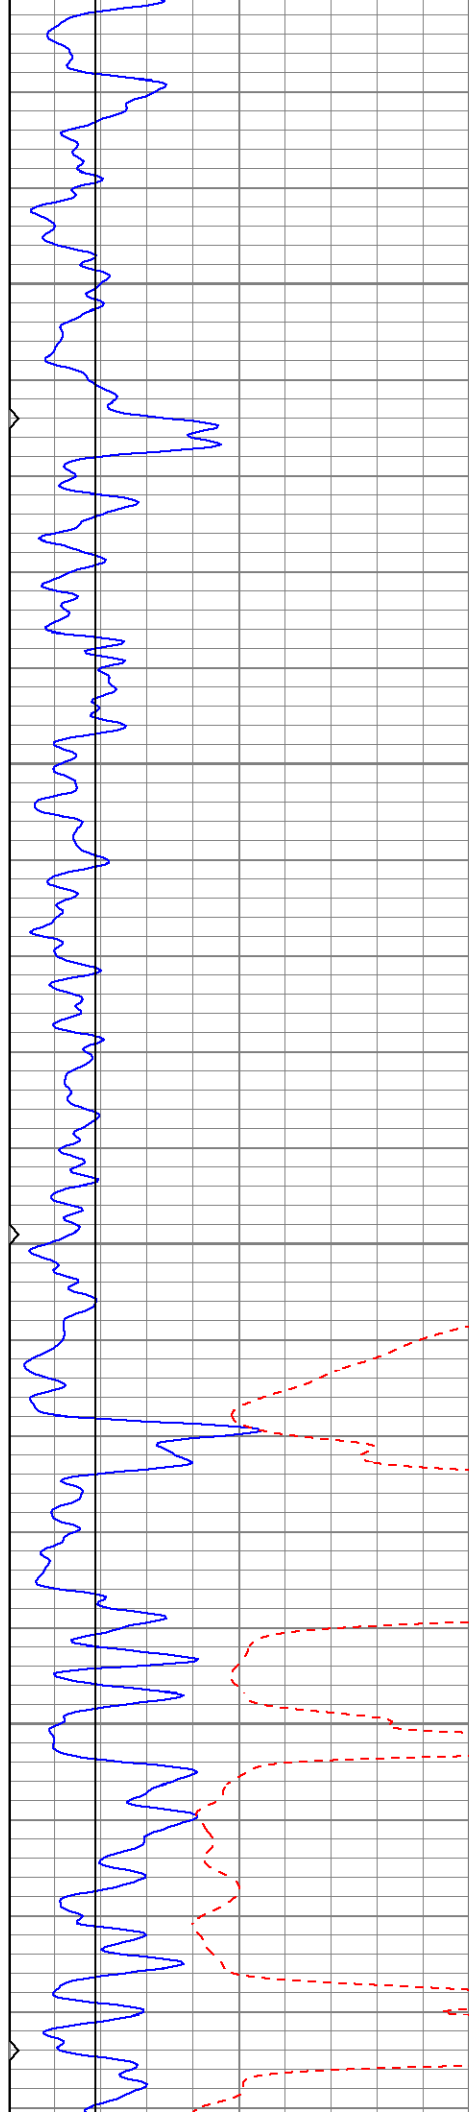



2050

2100

2150

2200

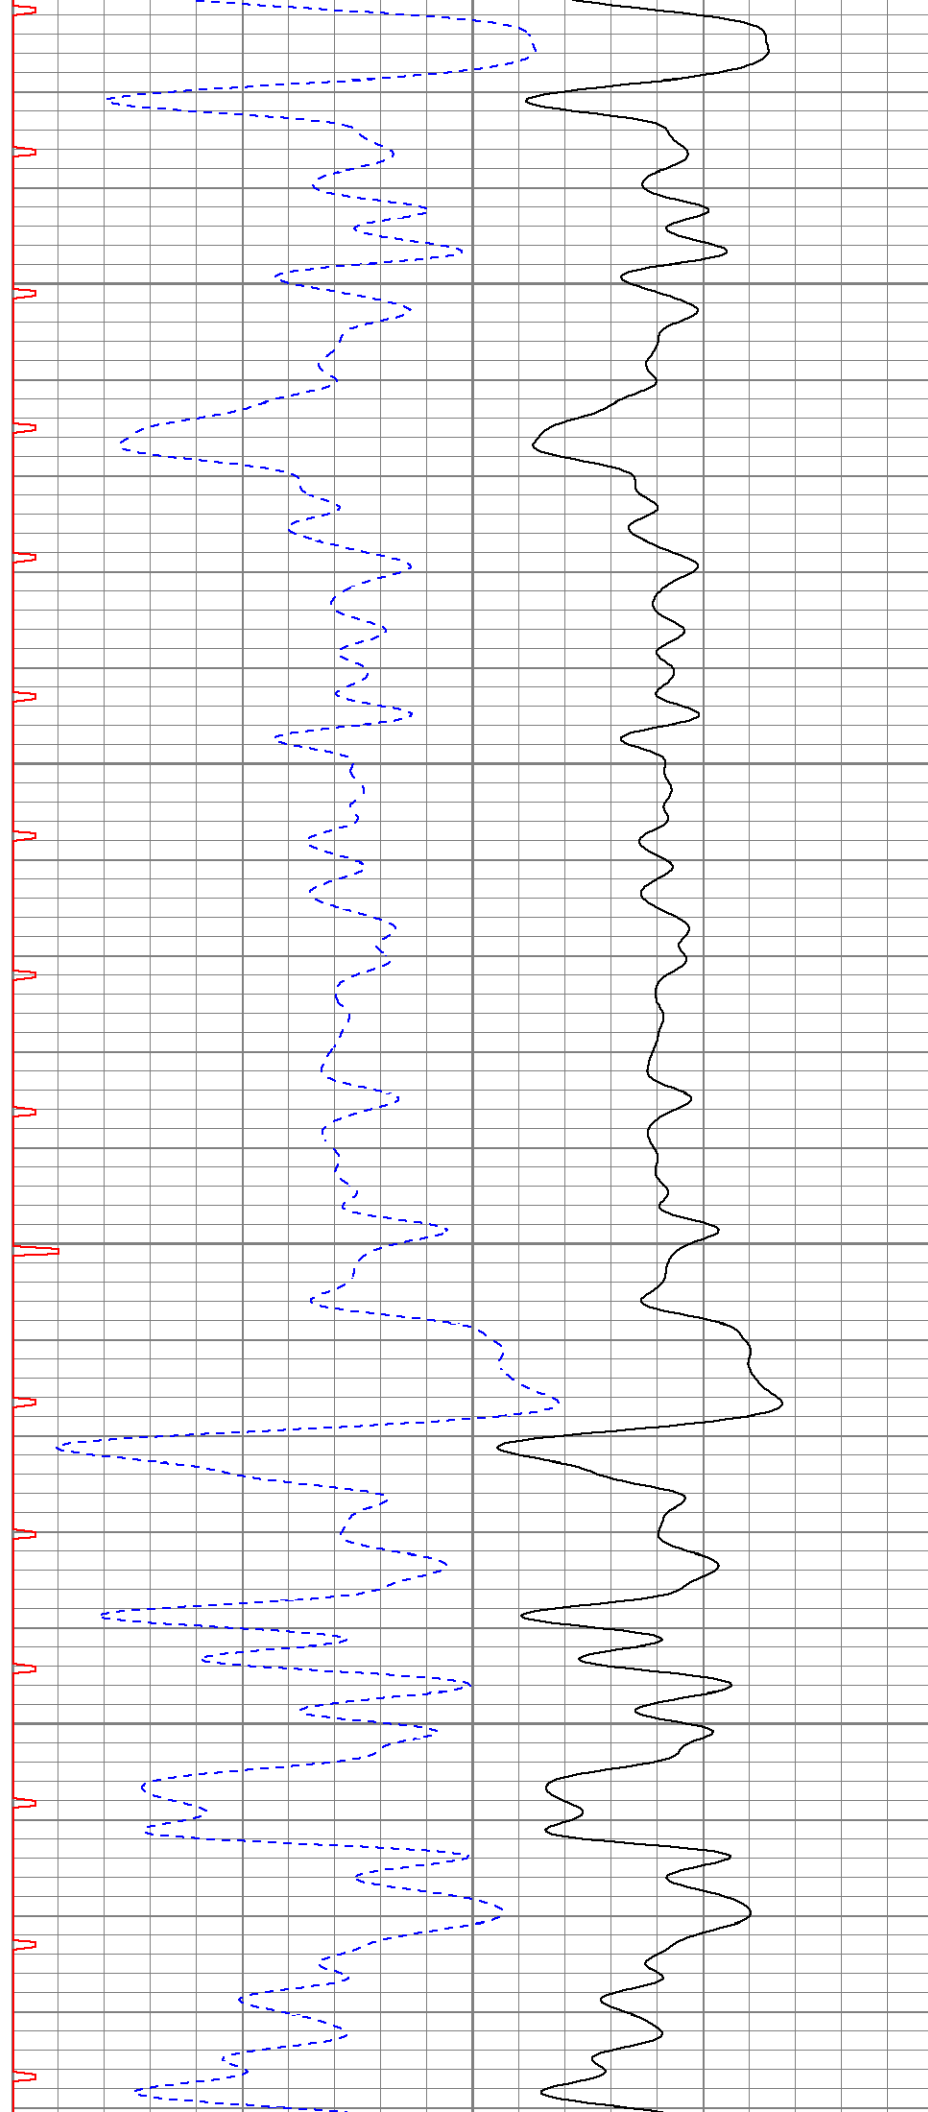

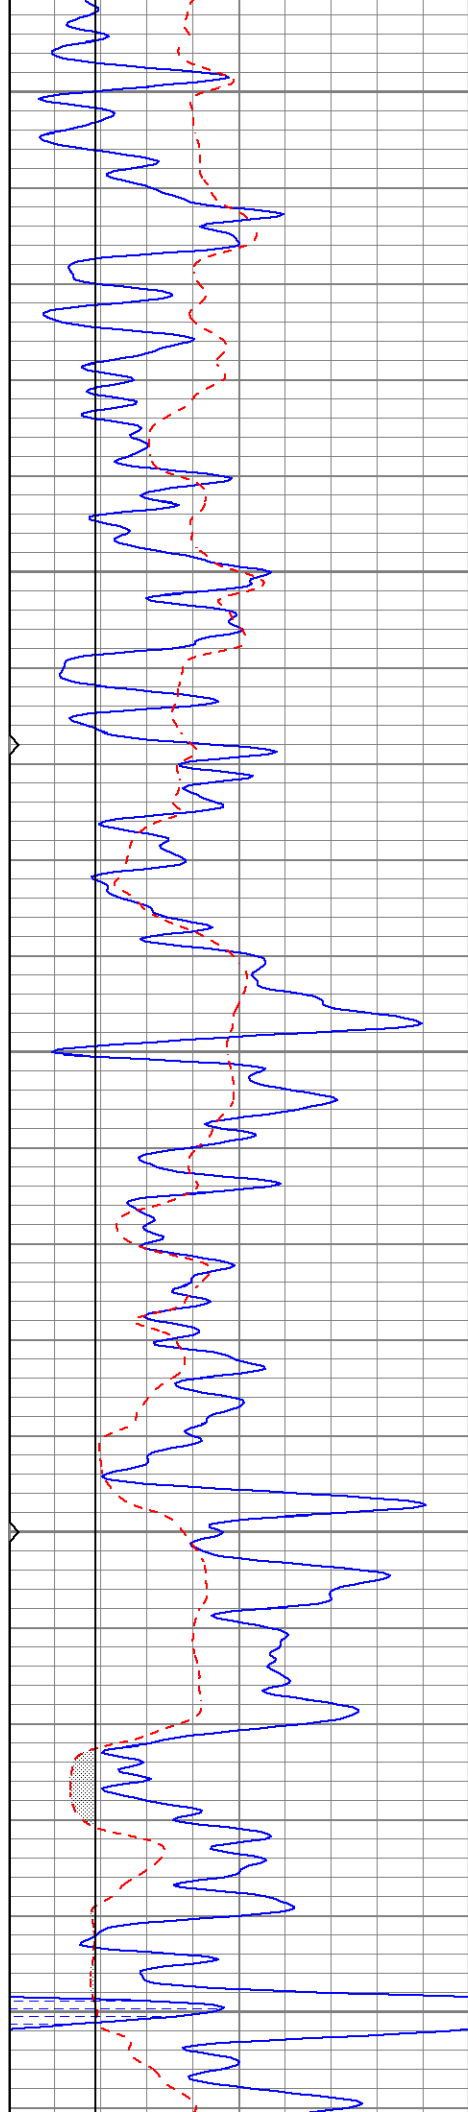


2250


2300

2350

2400

2450

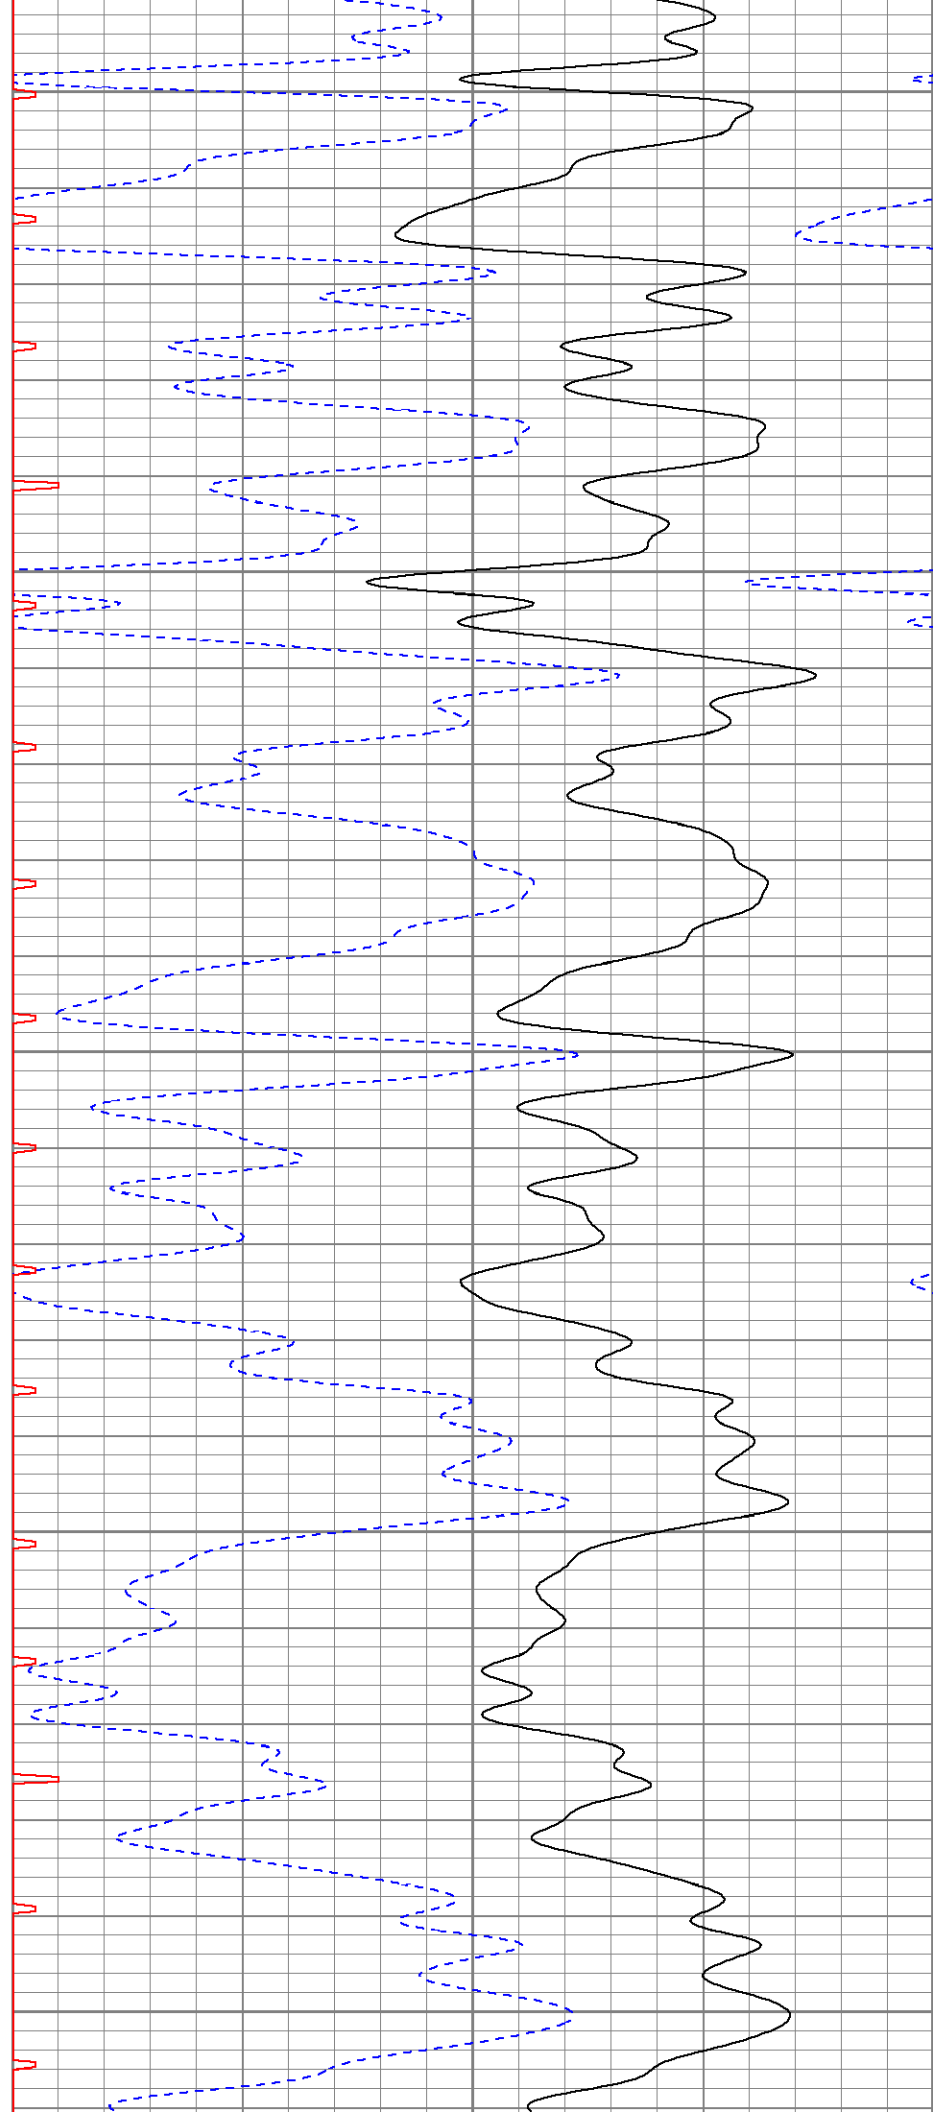

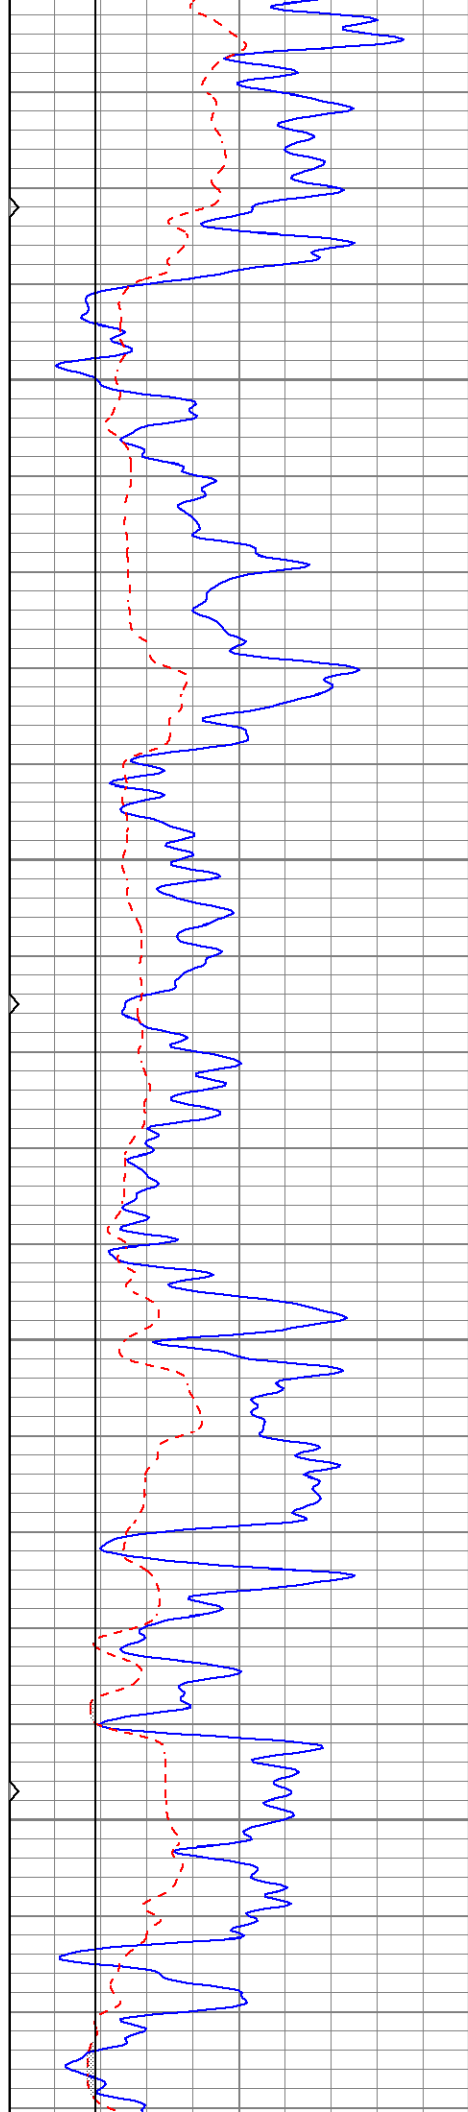



2500

2550

2600

2650

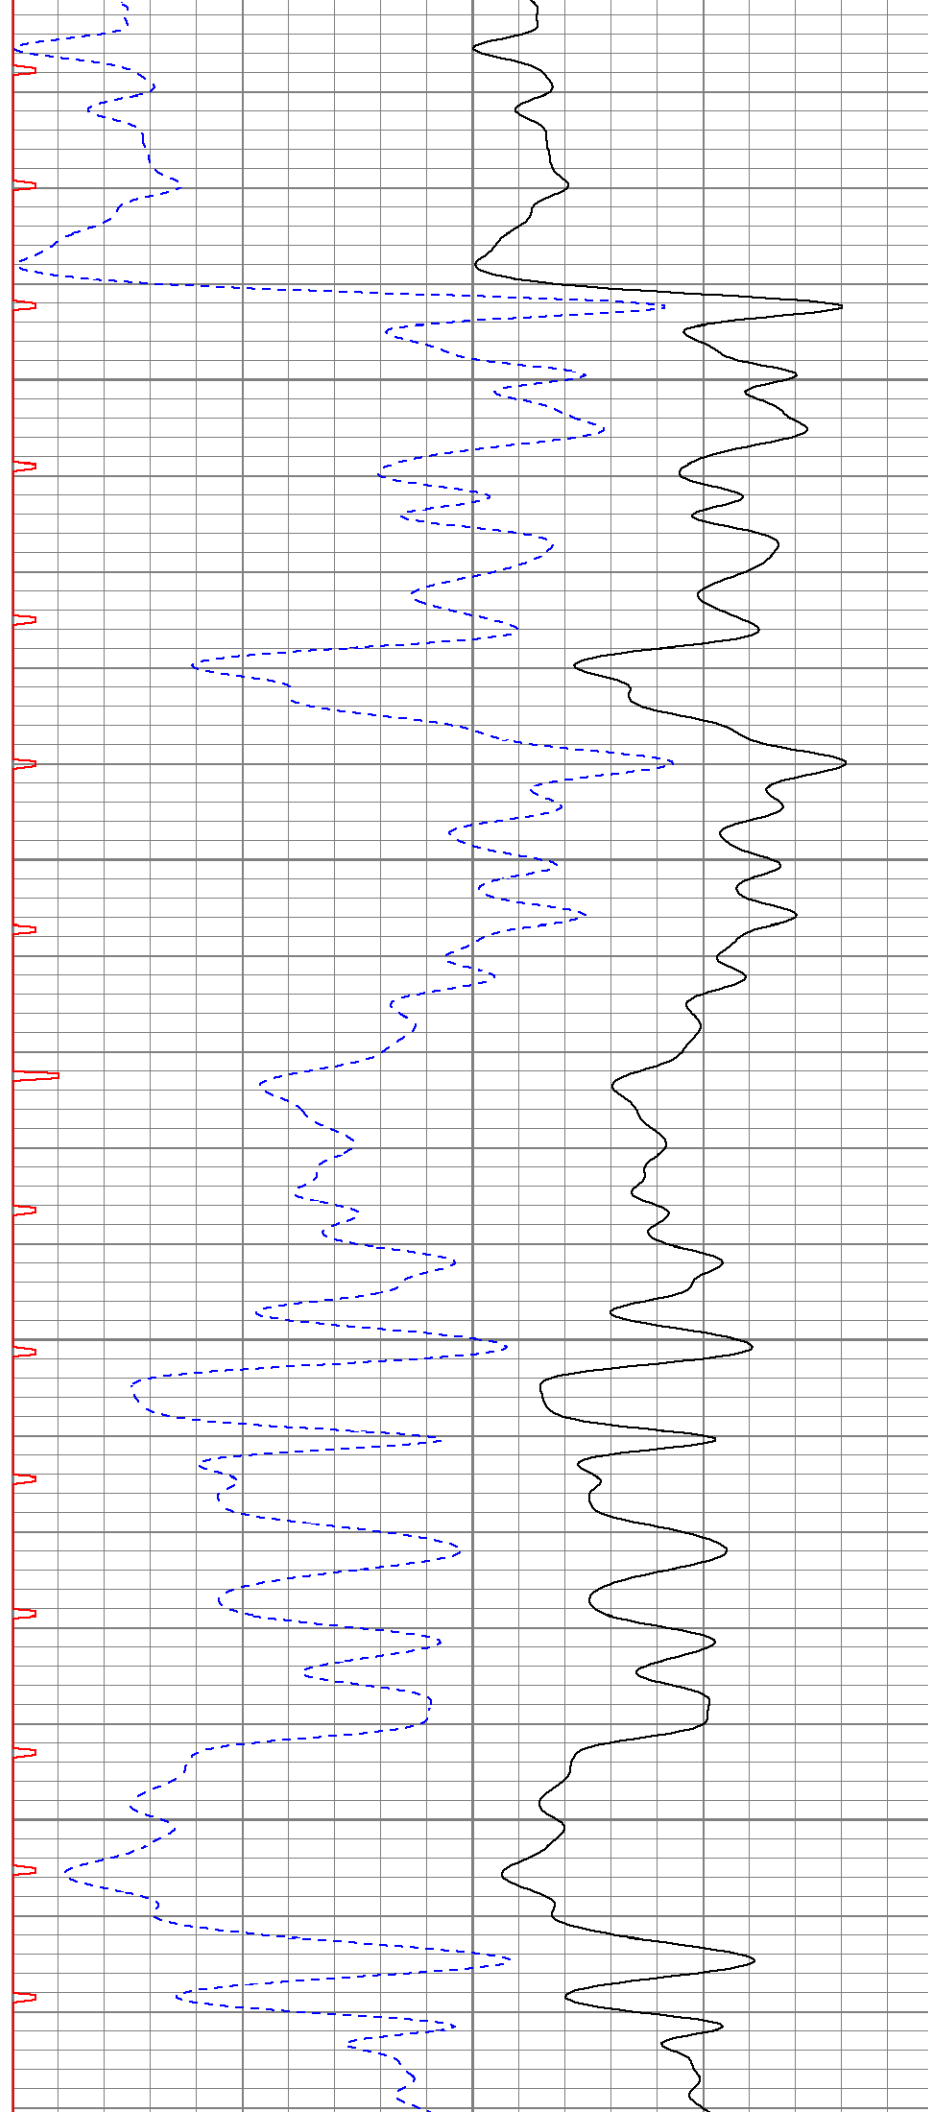

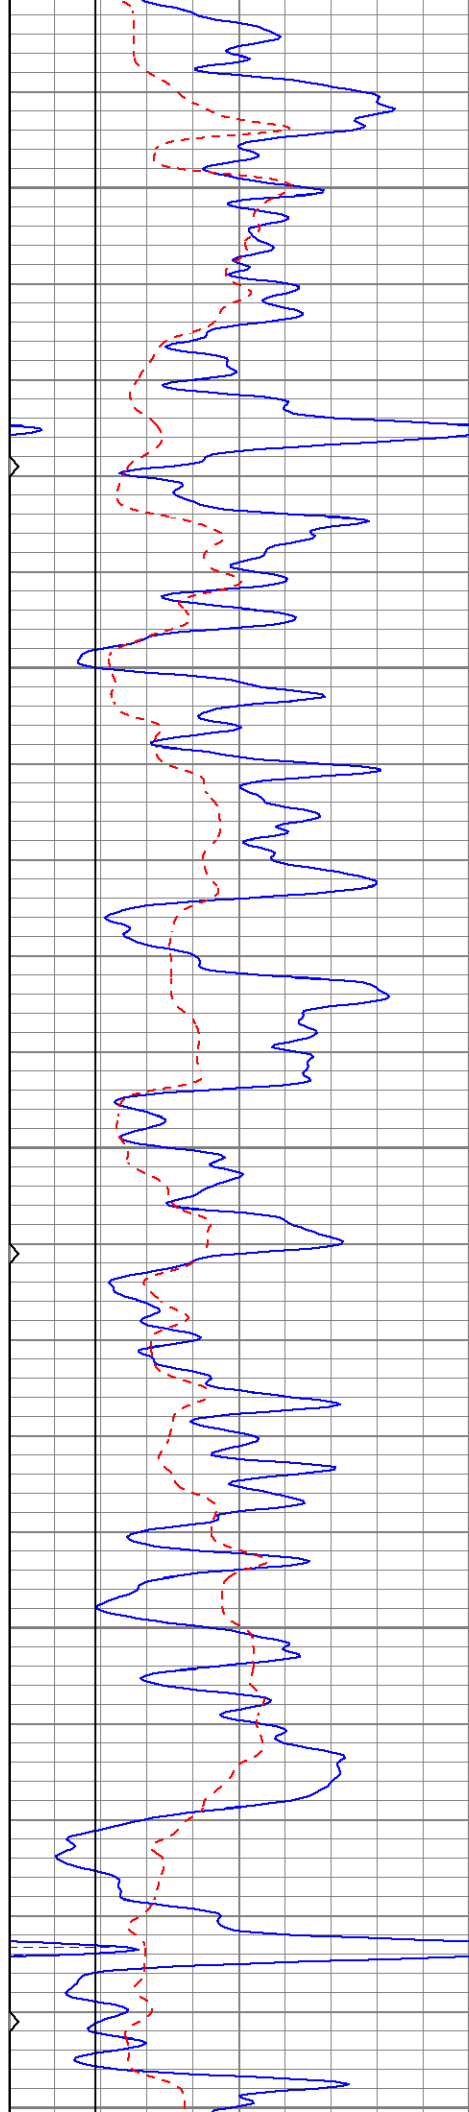


2700



2750


2800

2850

2900

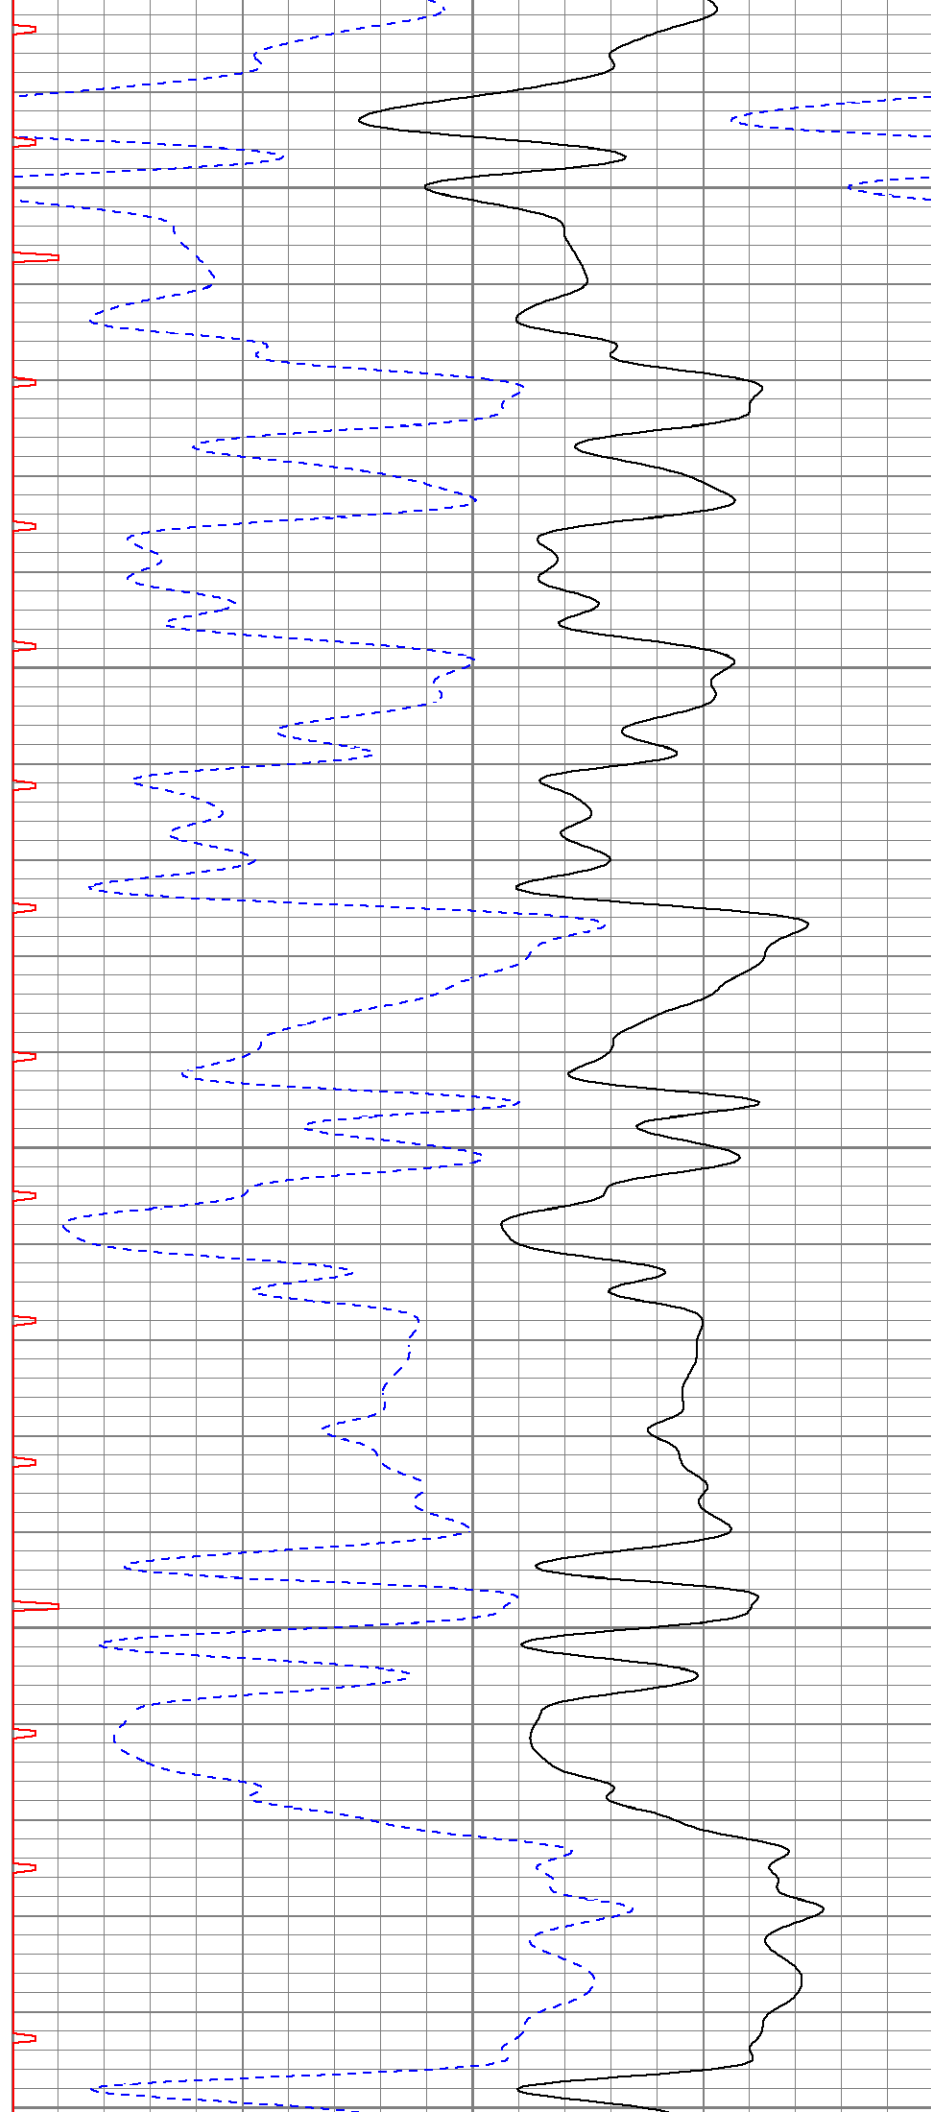

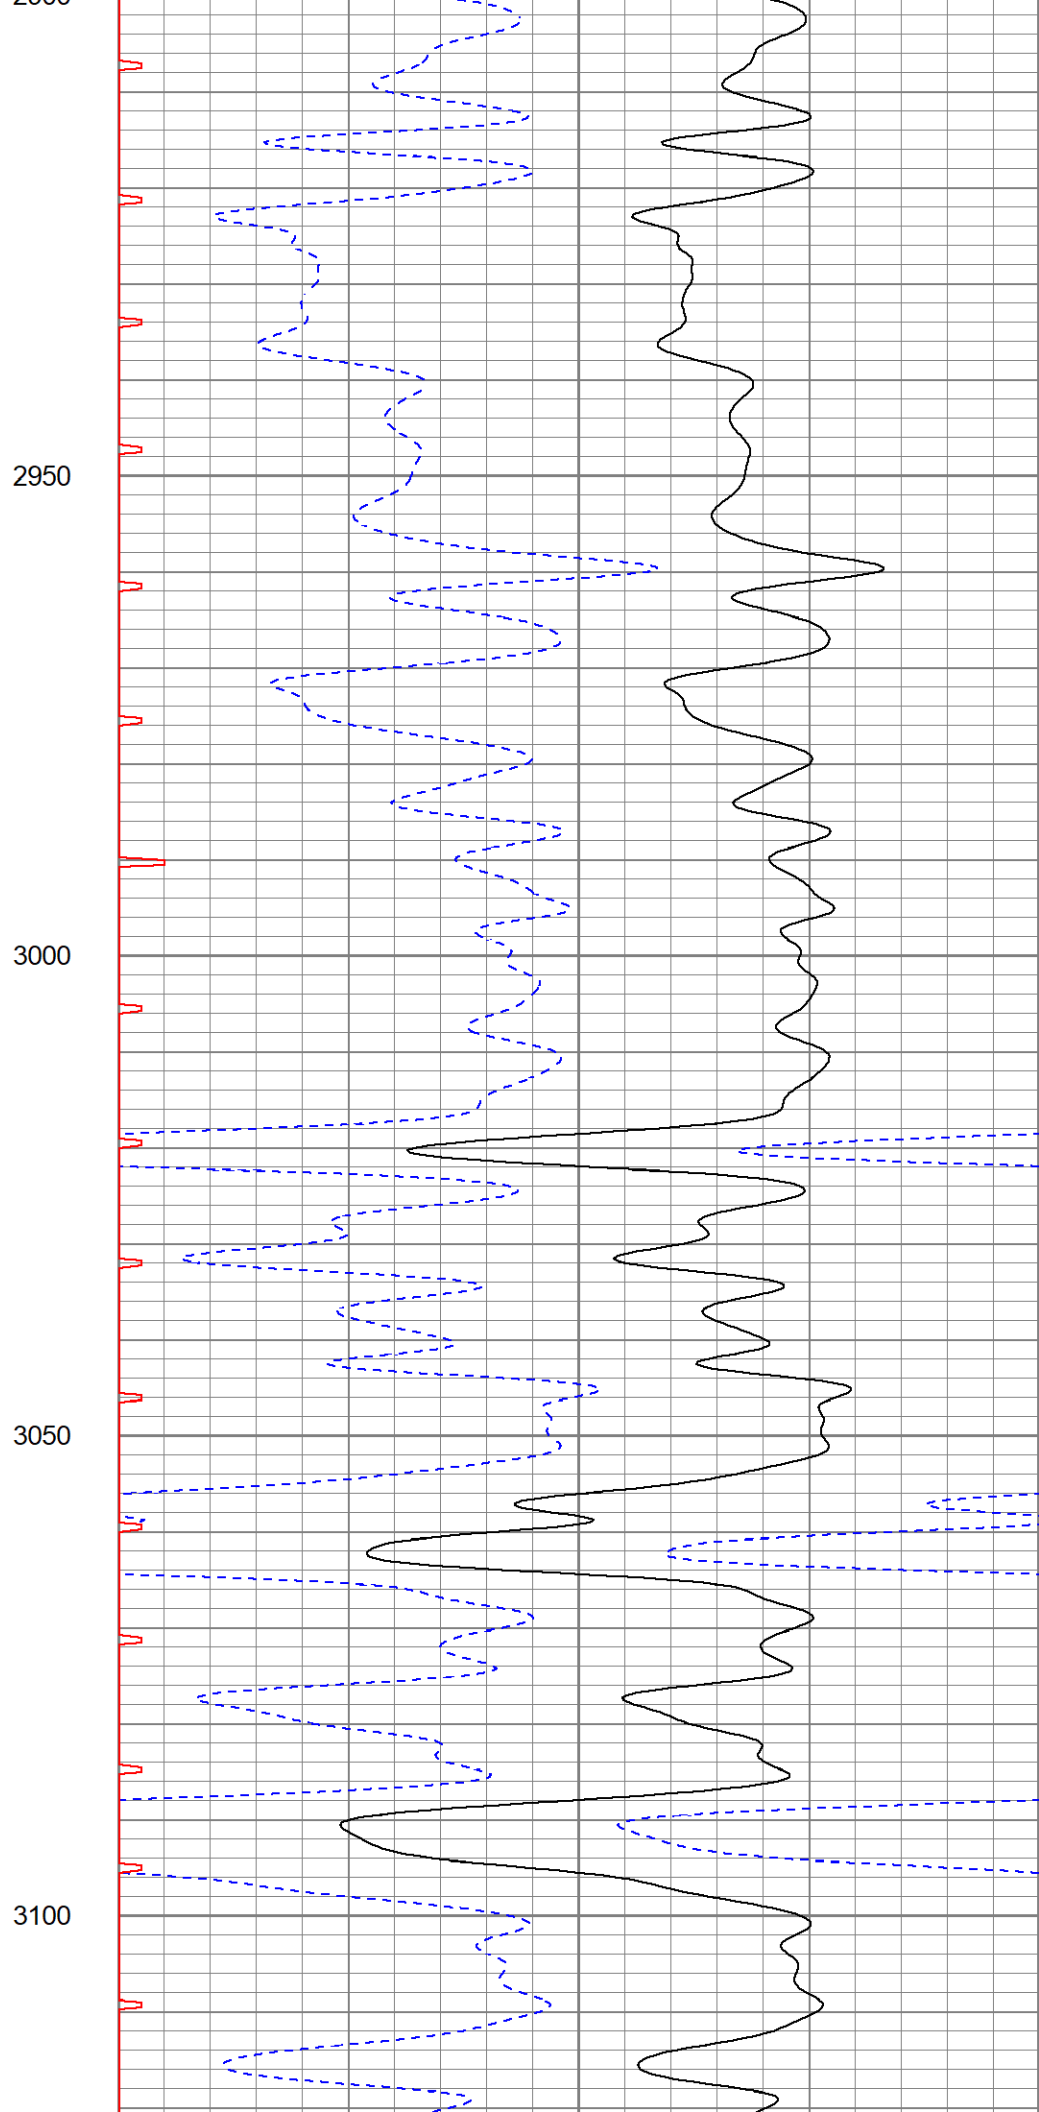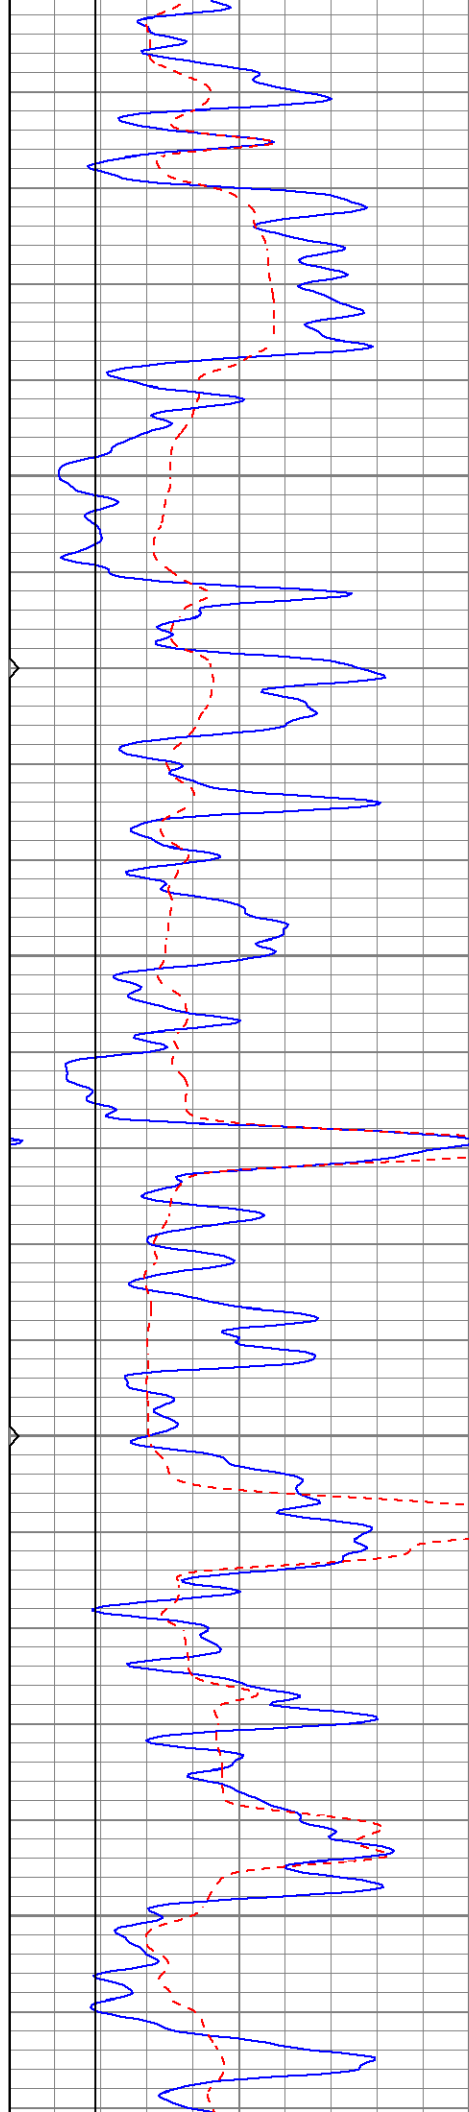

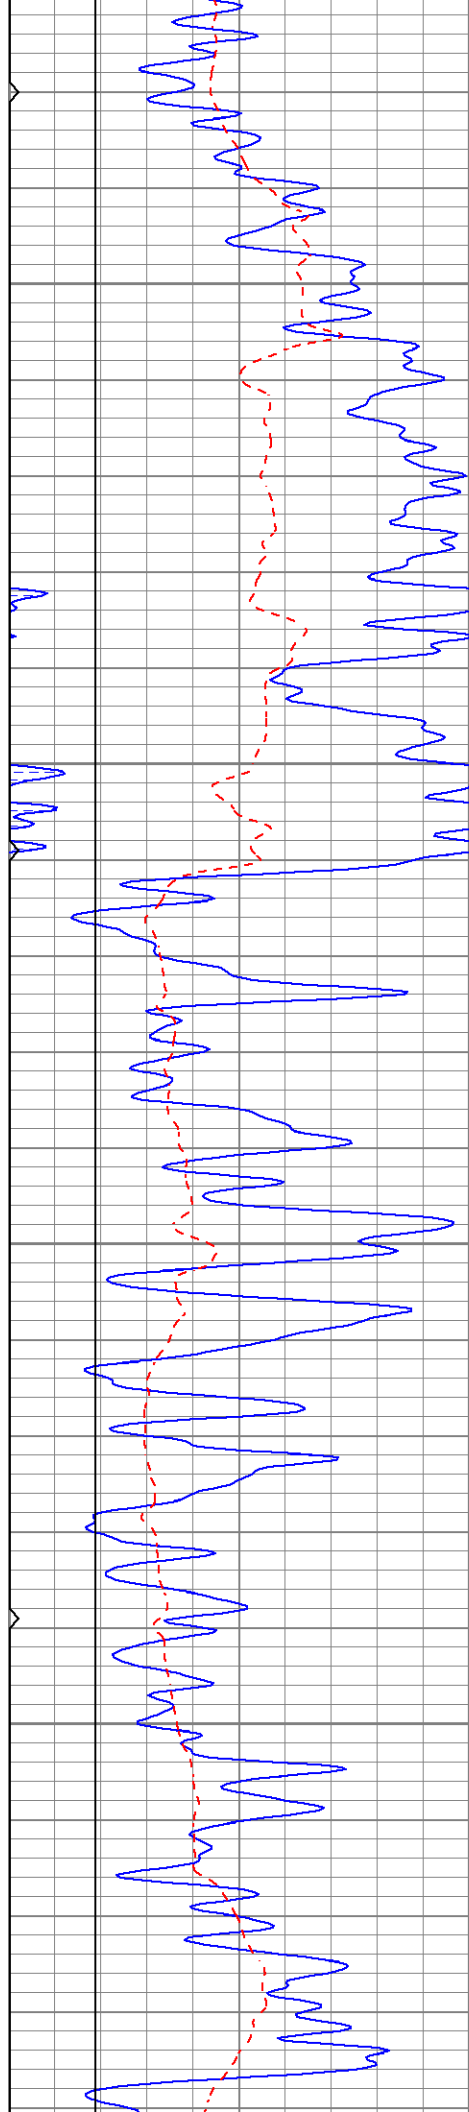



3150

3200

3250

3300

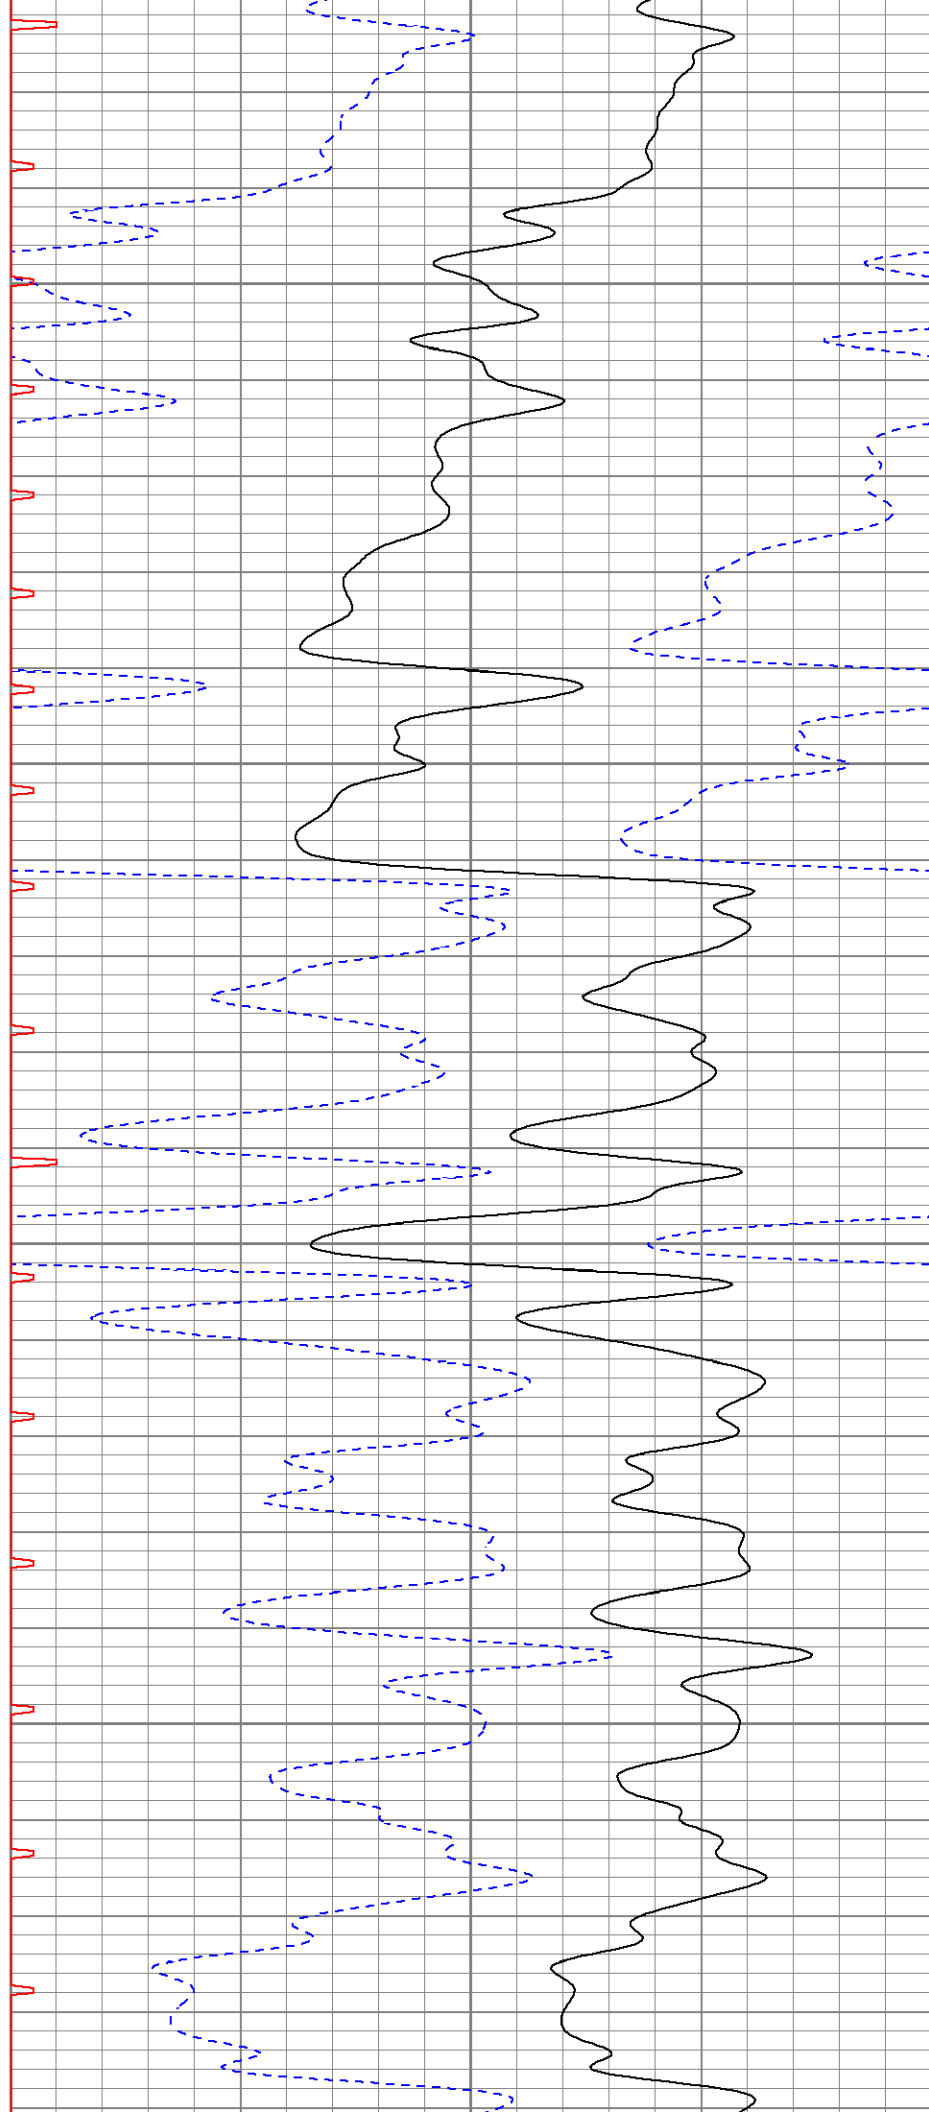

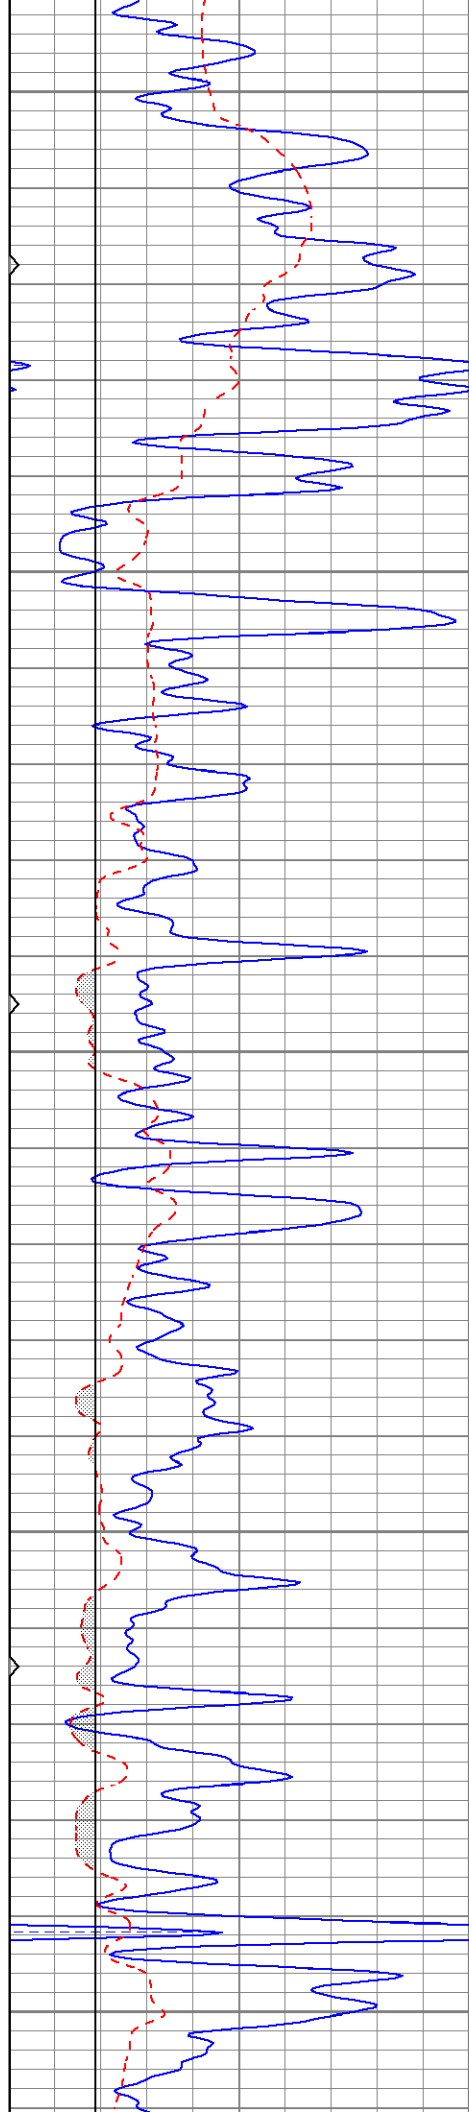


3350


3400

3450

3500

3550

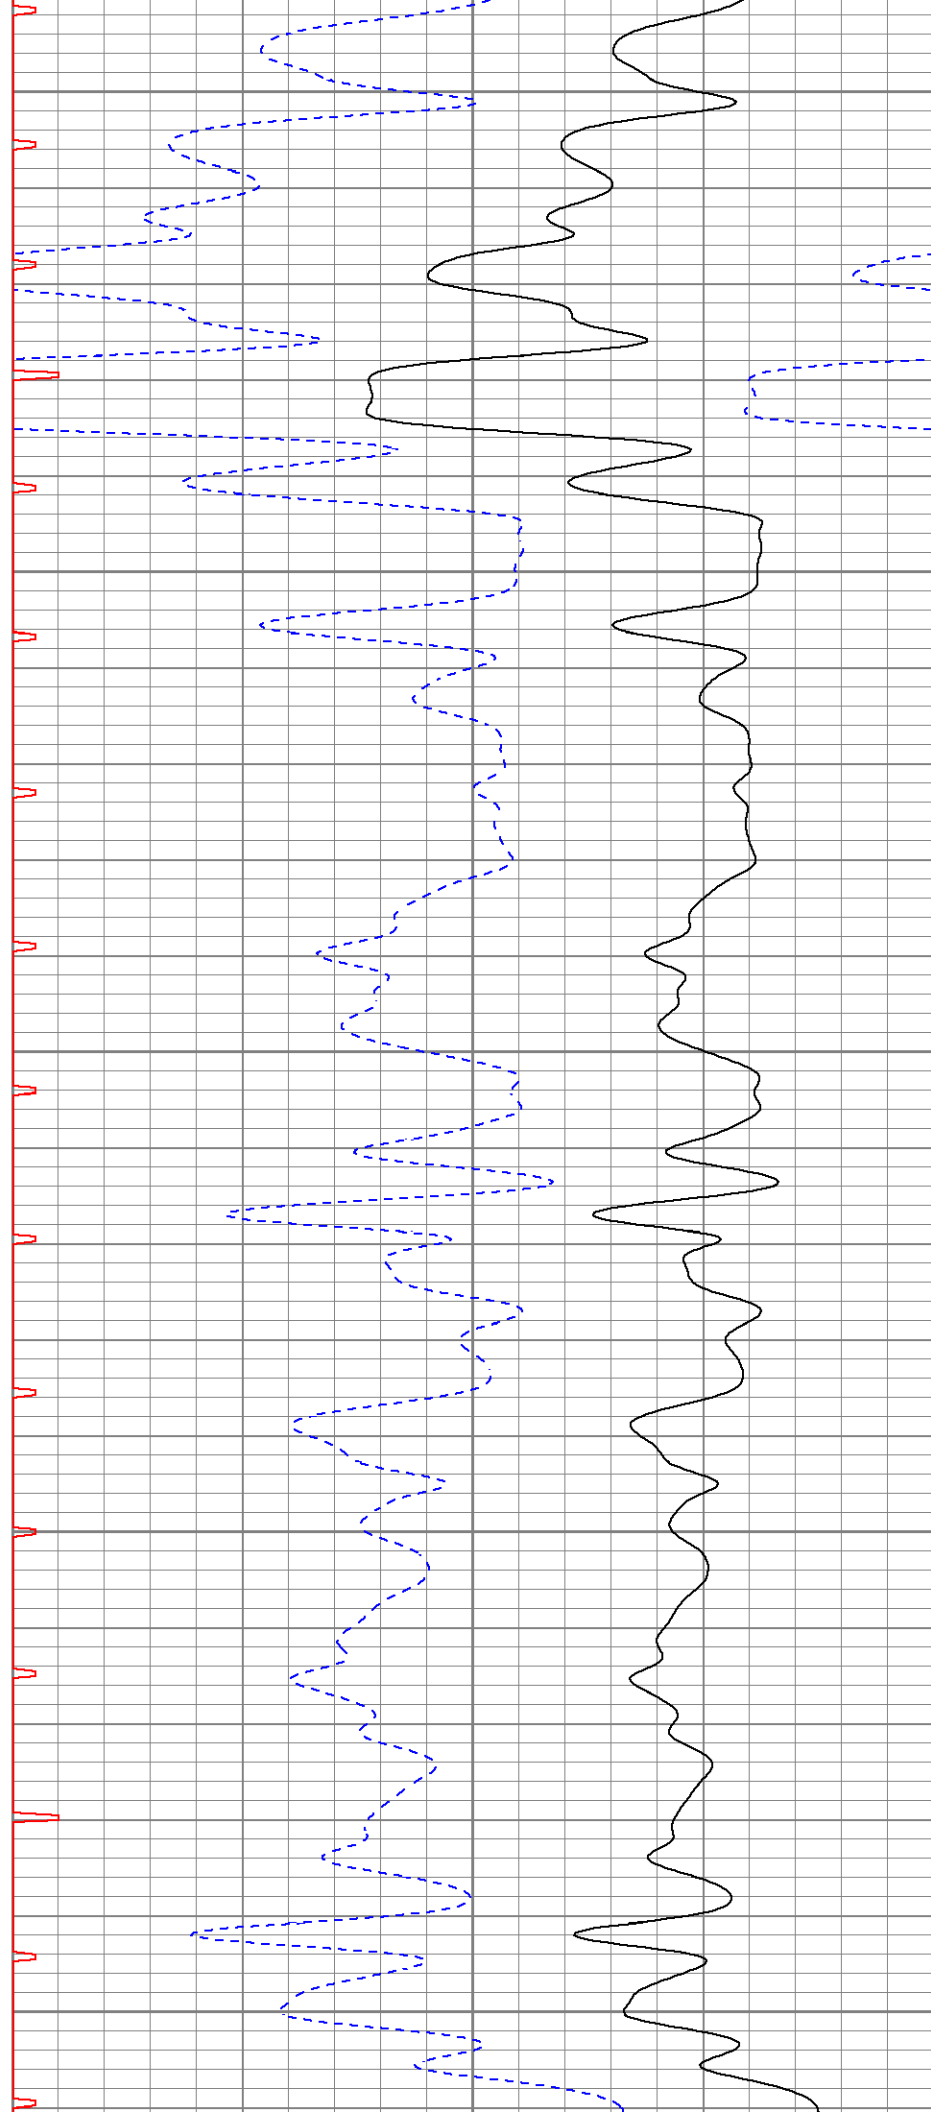

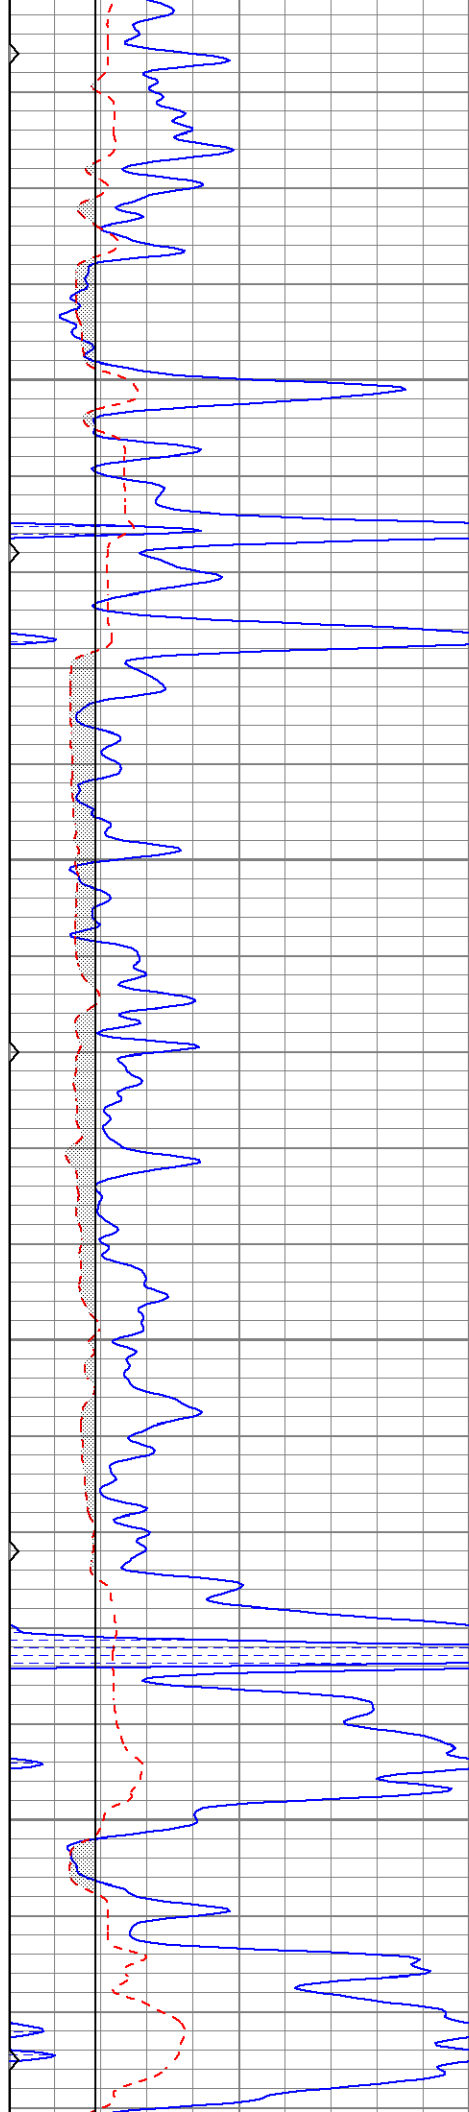




3600


3650

3700

3750

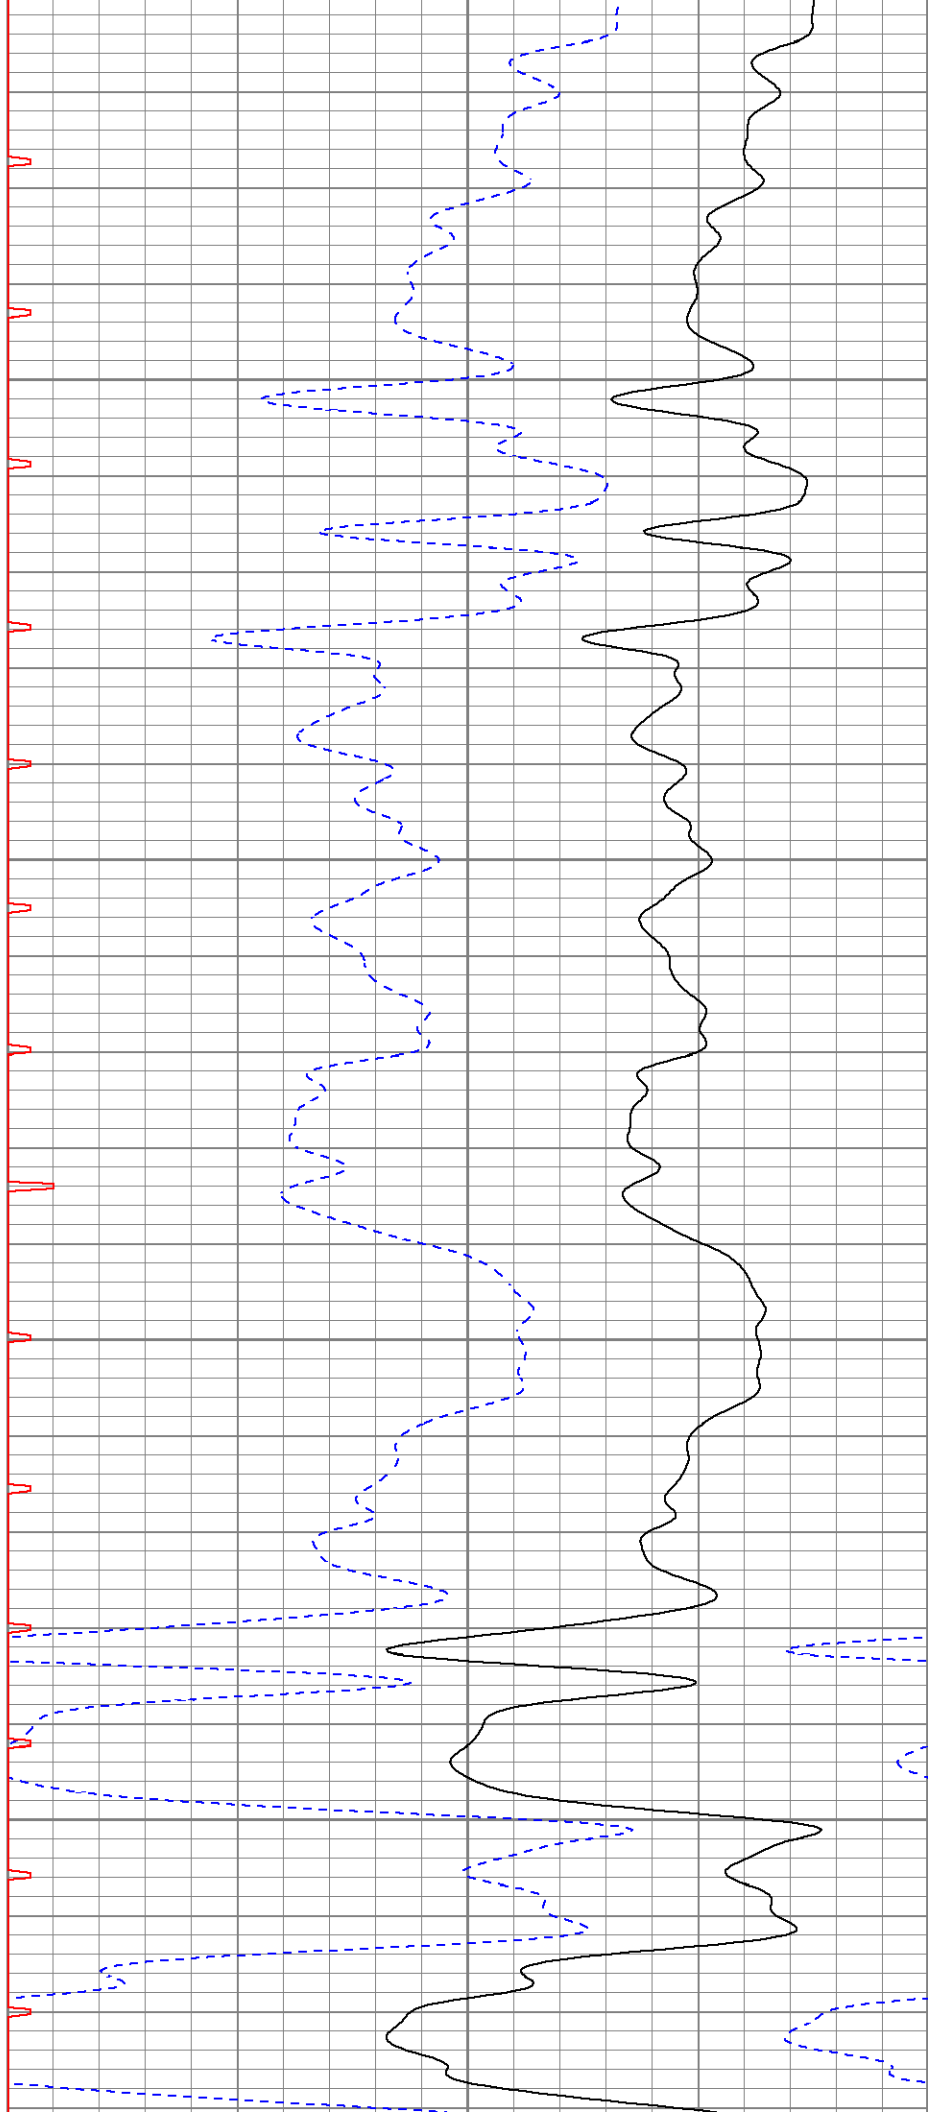

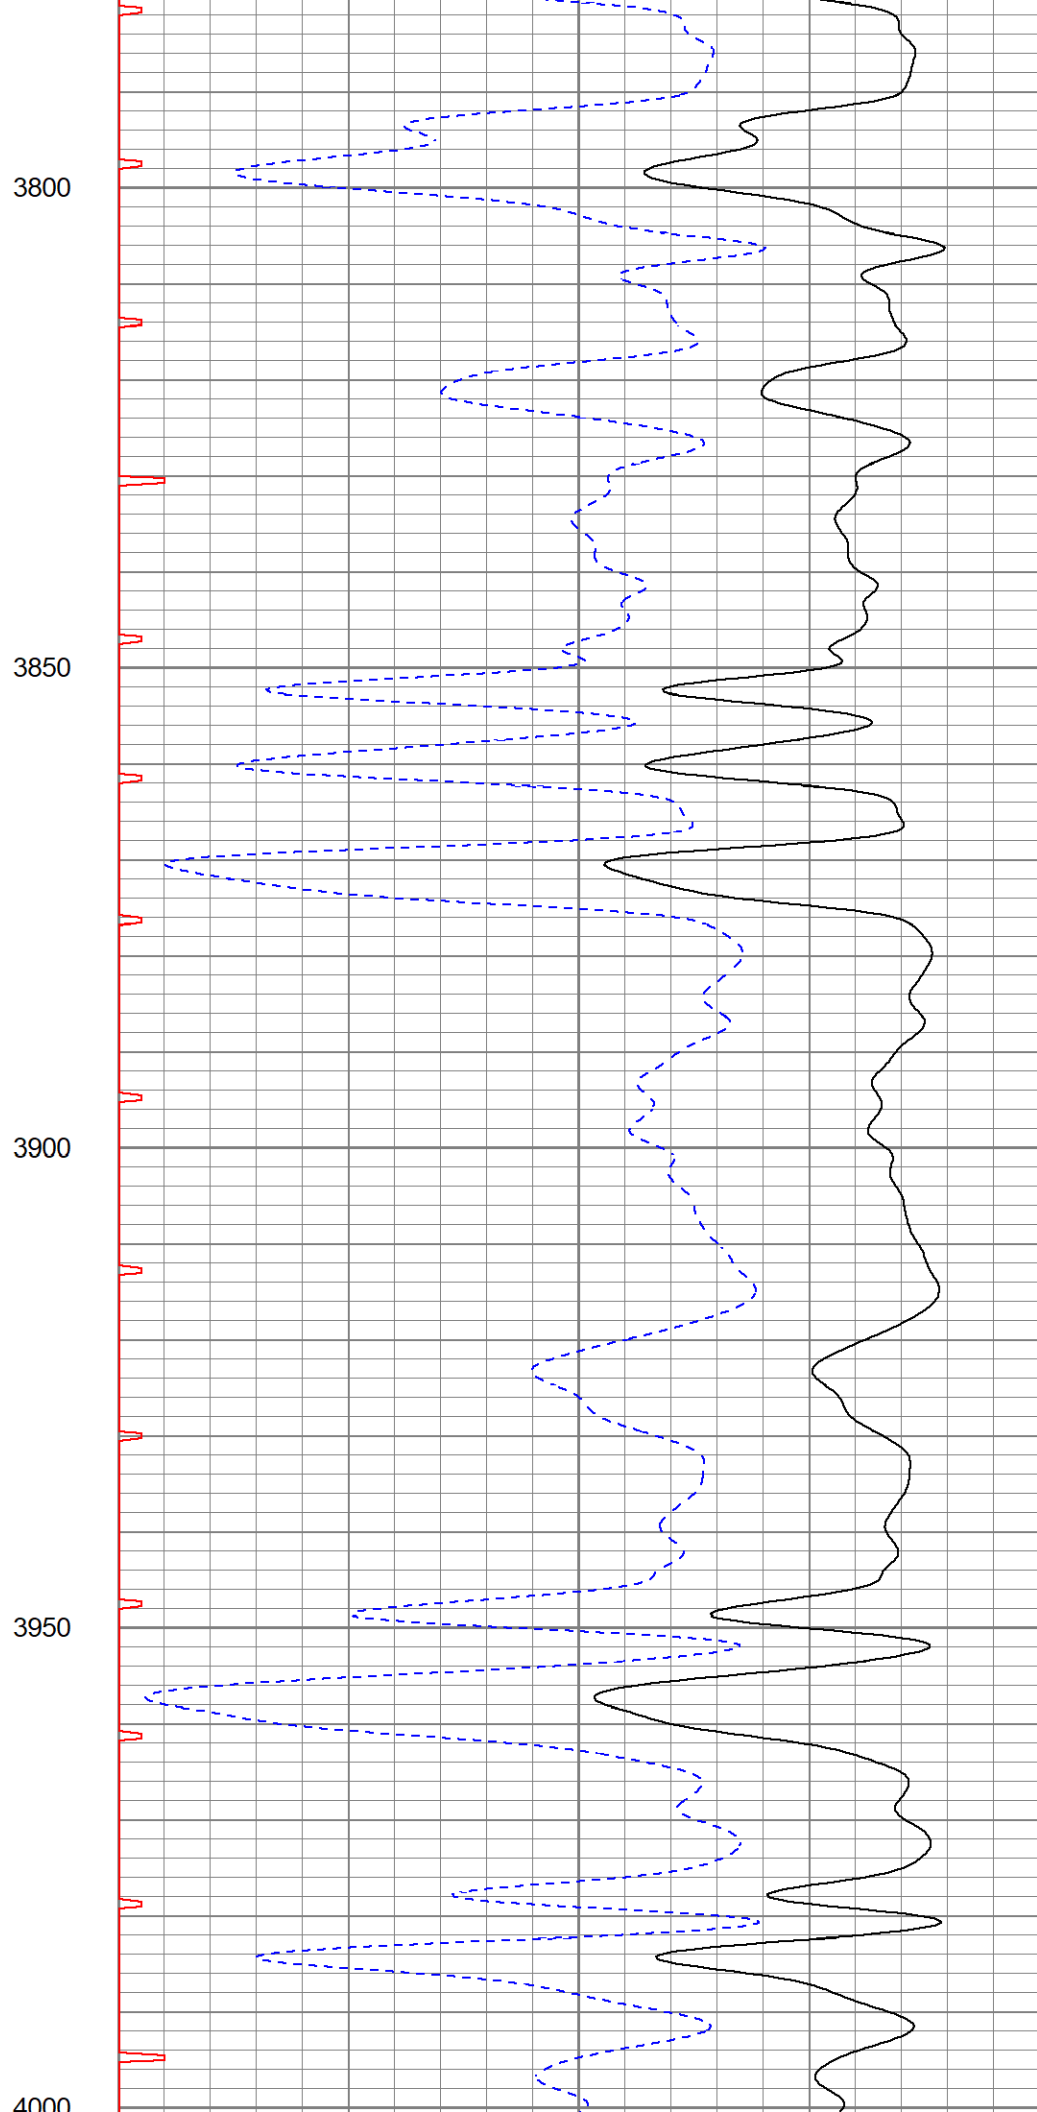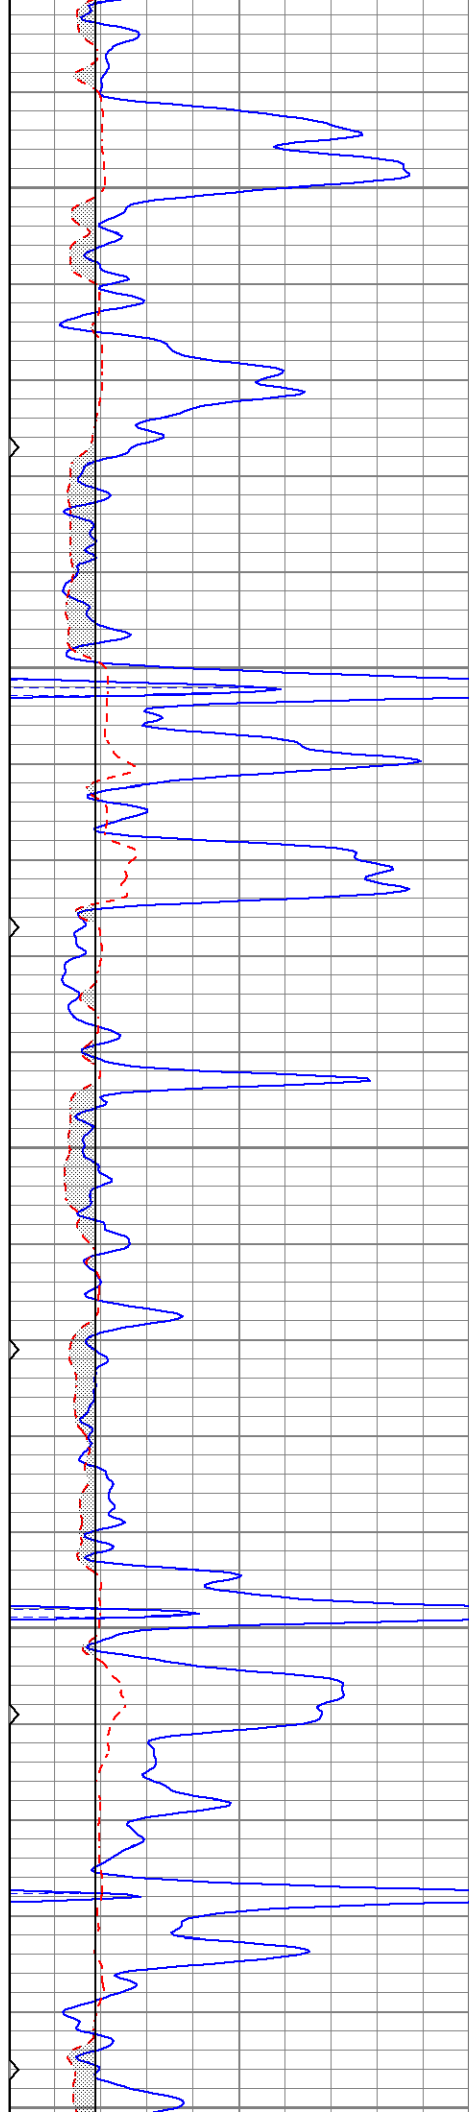

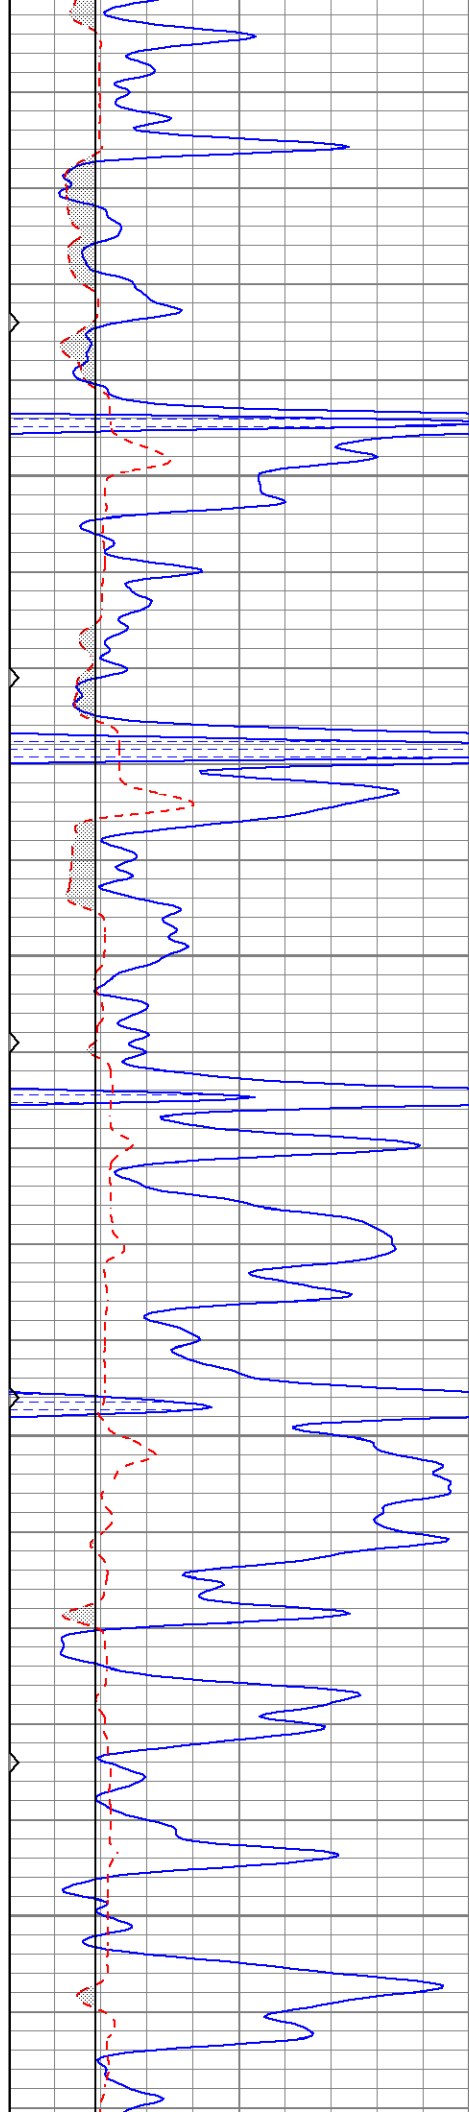


4000


4050

4100

4150

4200

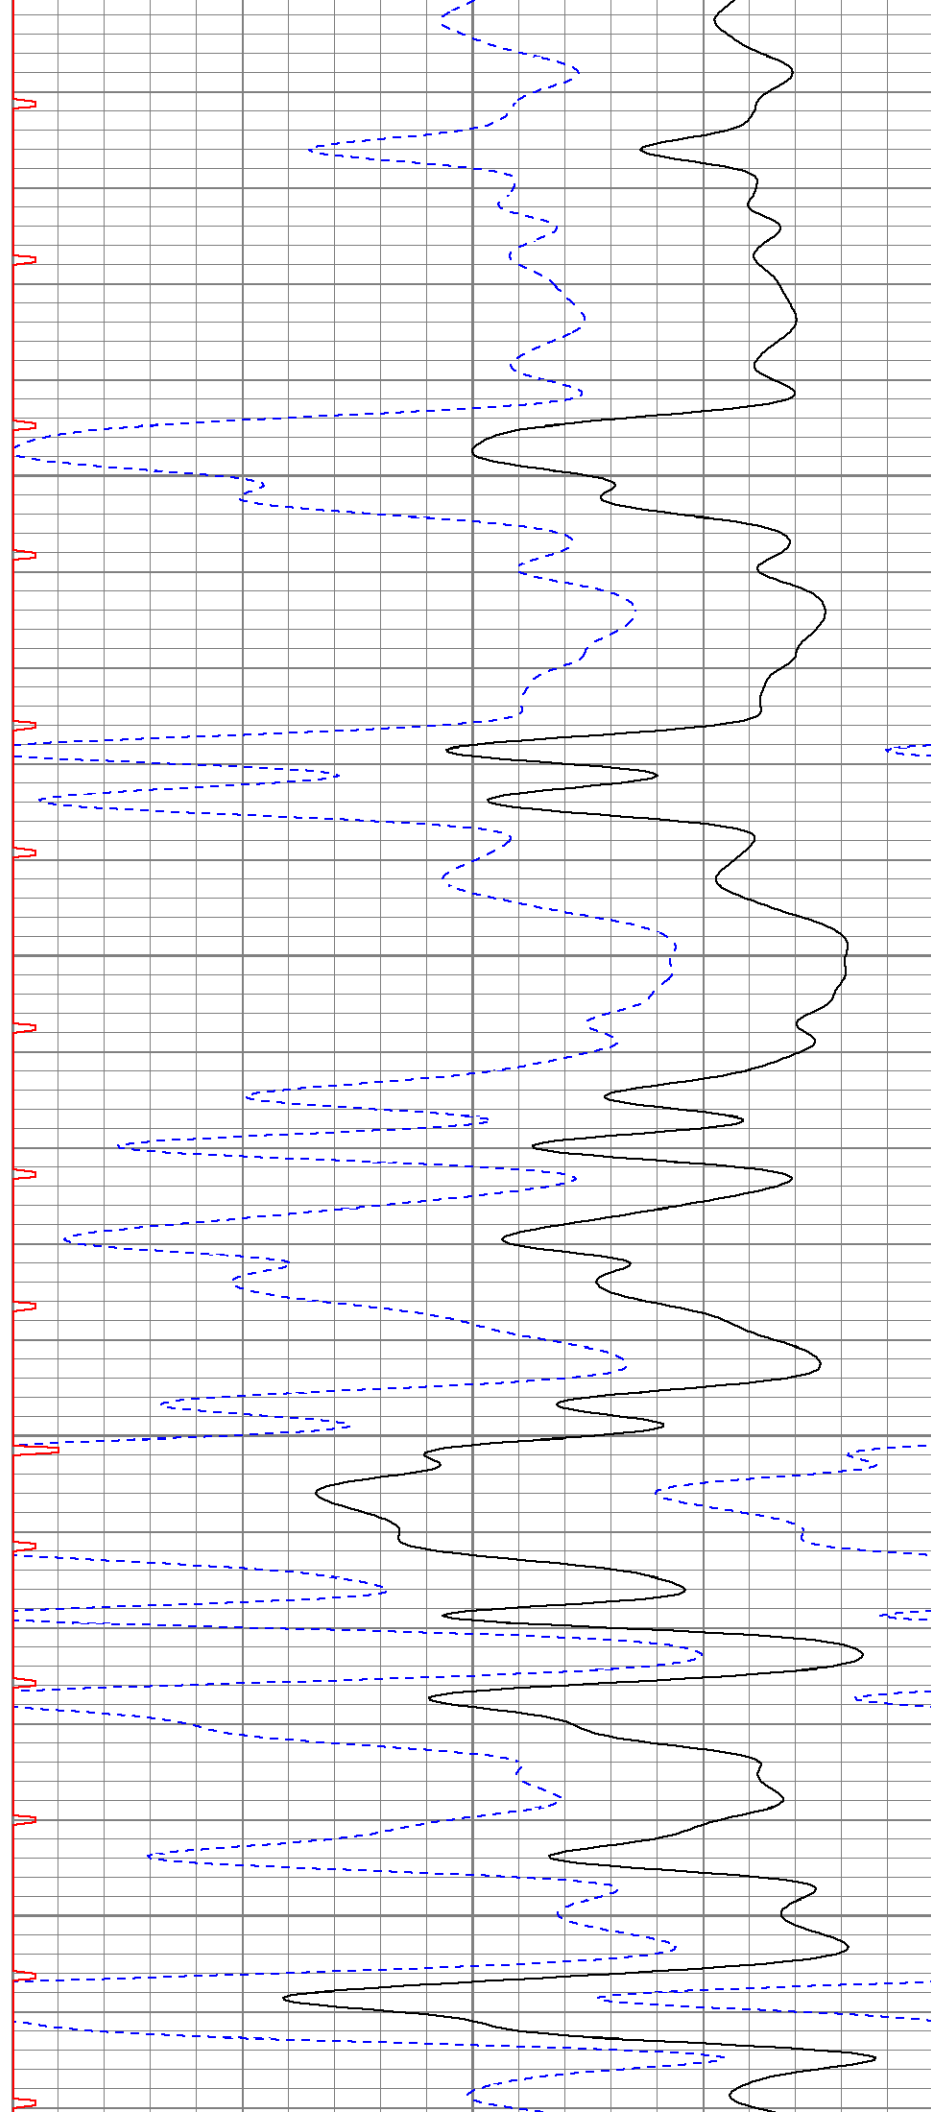

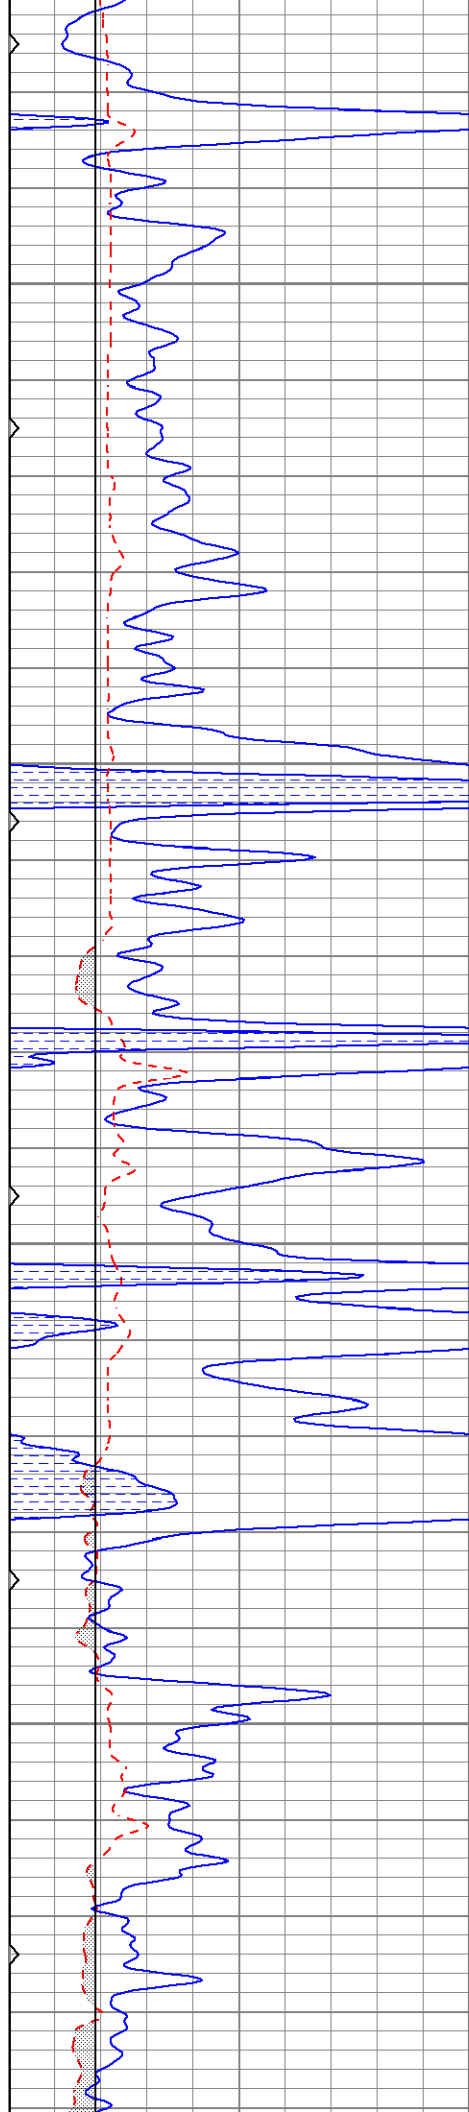



4250

4300

4350

4400

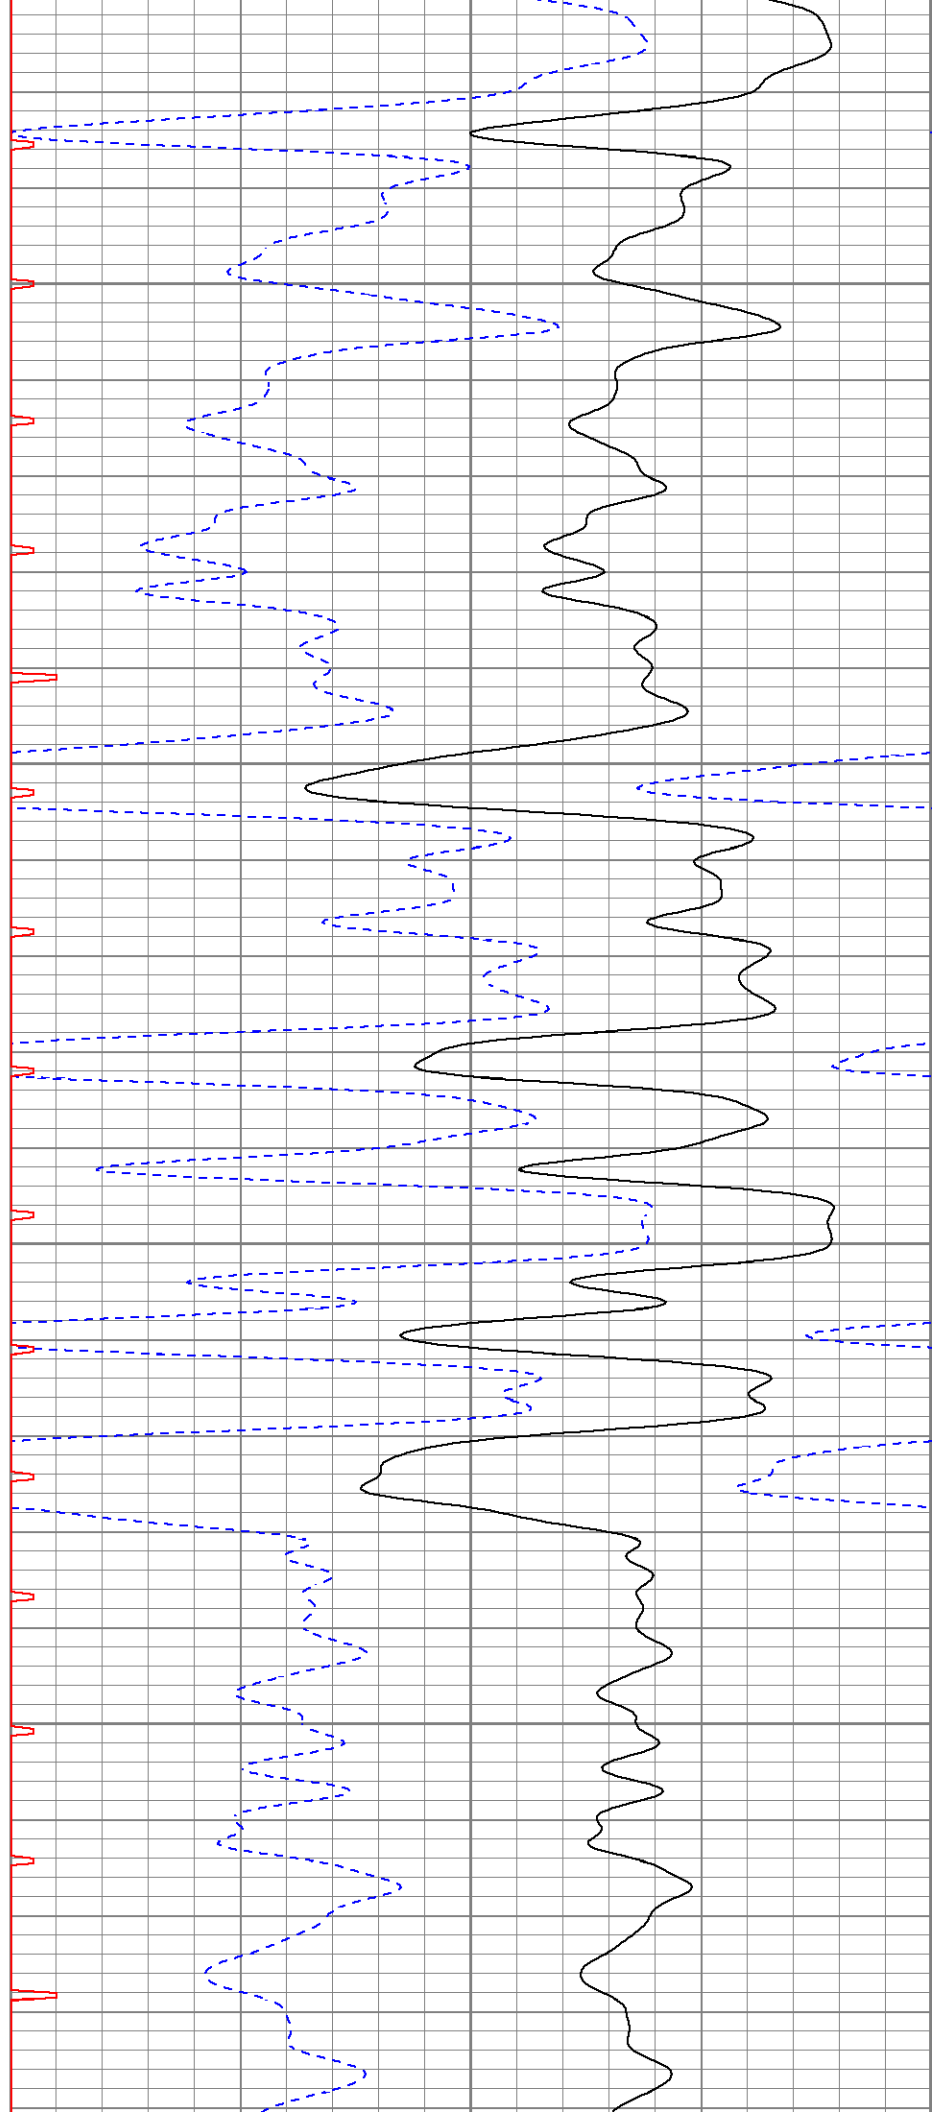


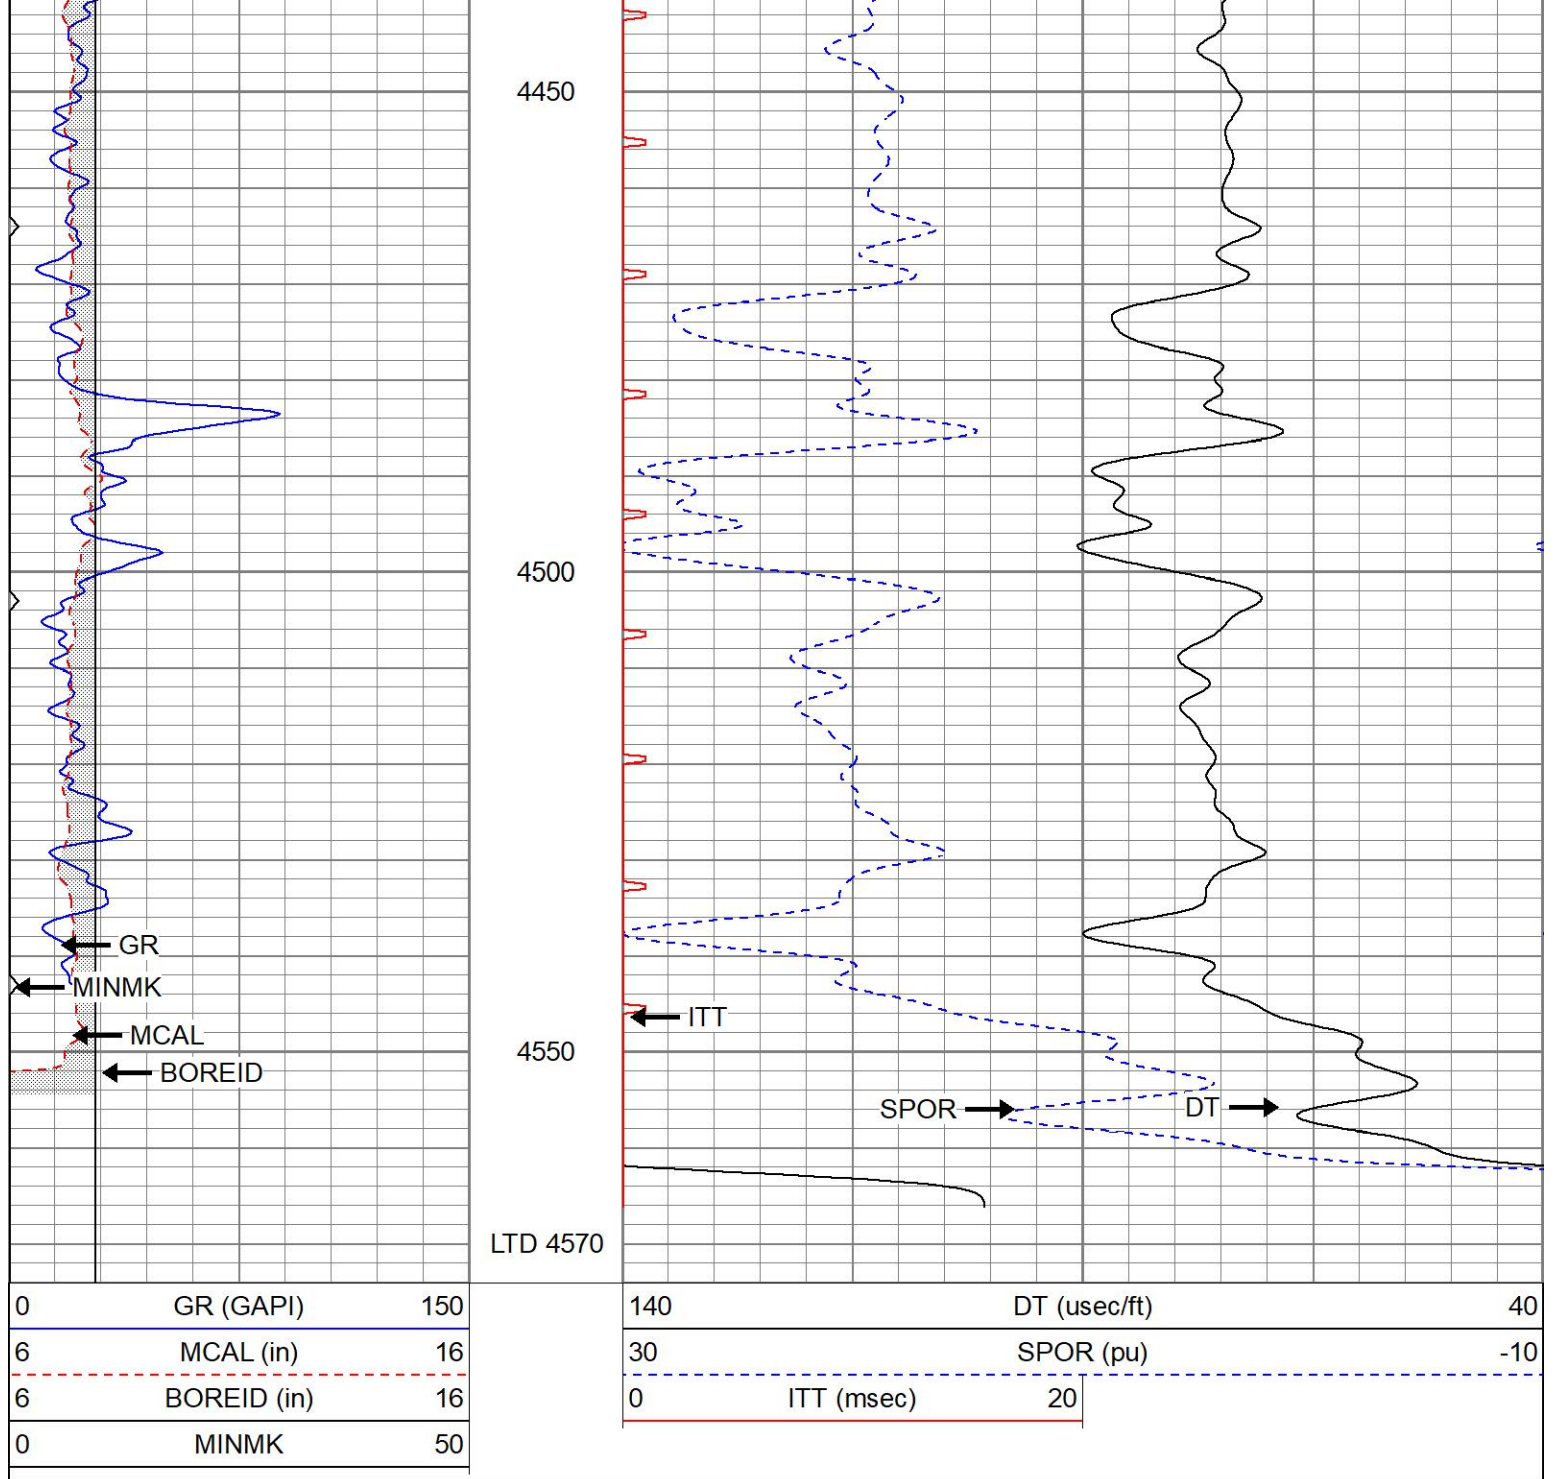

REPEAT SECTION

Database File tcdavid#1-35oh.db
 Dataset Pathname pass4
 Presentation Format kbc
 Dataset Creation Mon Nov 06 15:41:19 2023
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	140	DT (usec/ft)	40
6	MCAL (in)	16	30	SPOR (pu)	-10
6	BOREID (in)	16	0	ITT (msec)	20
0	MINMK	50			

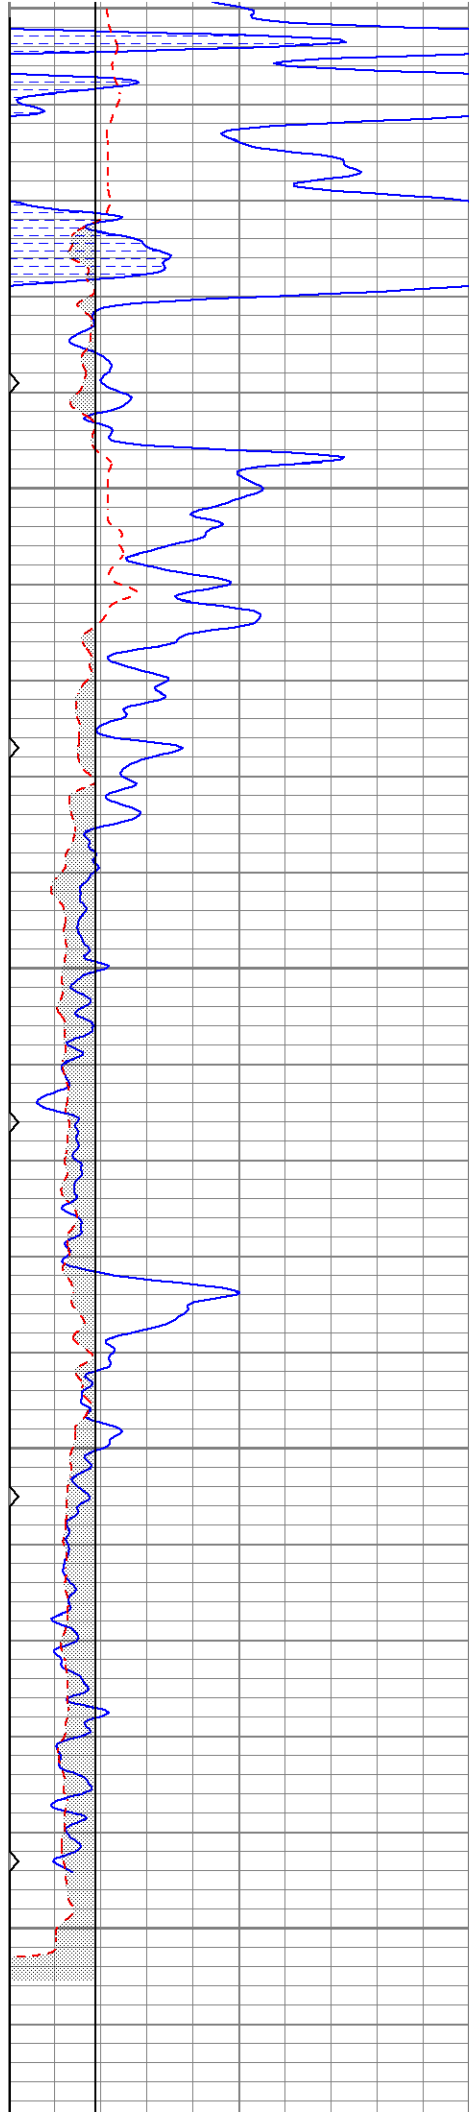


4350

4400

4450

4500

4550

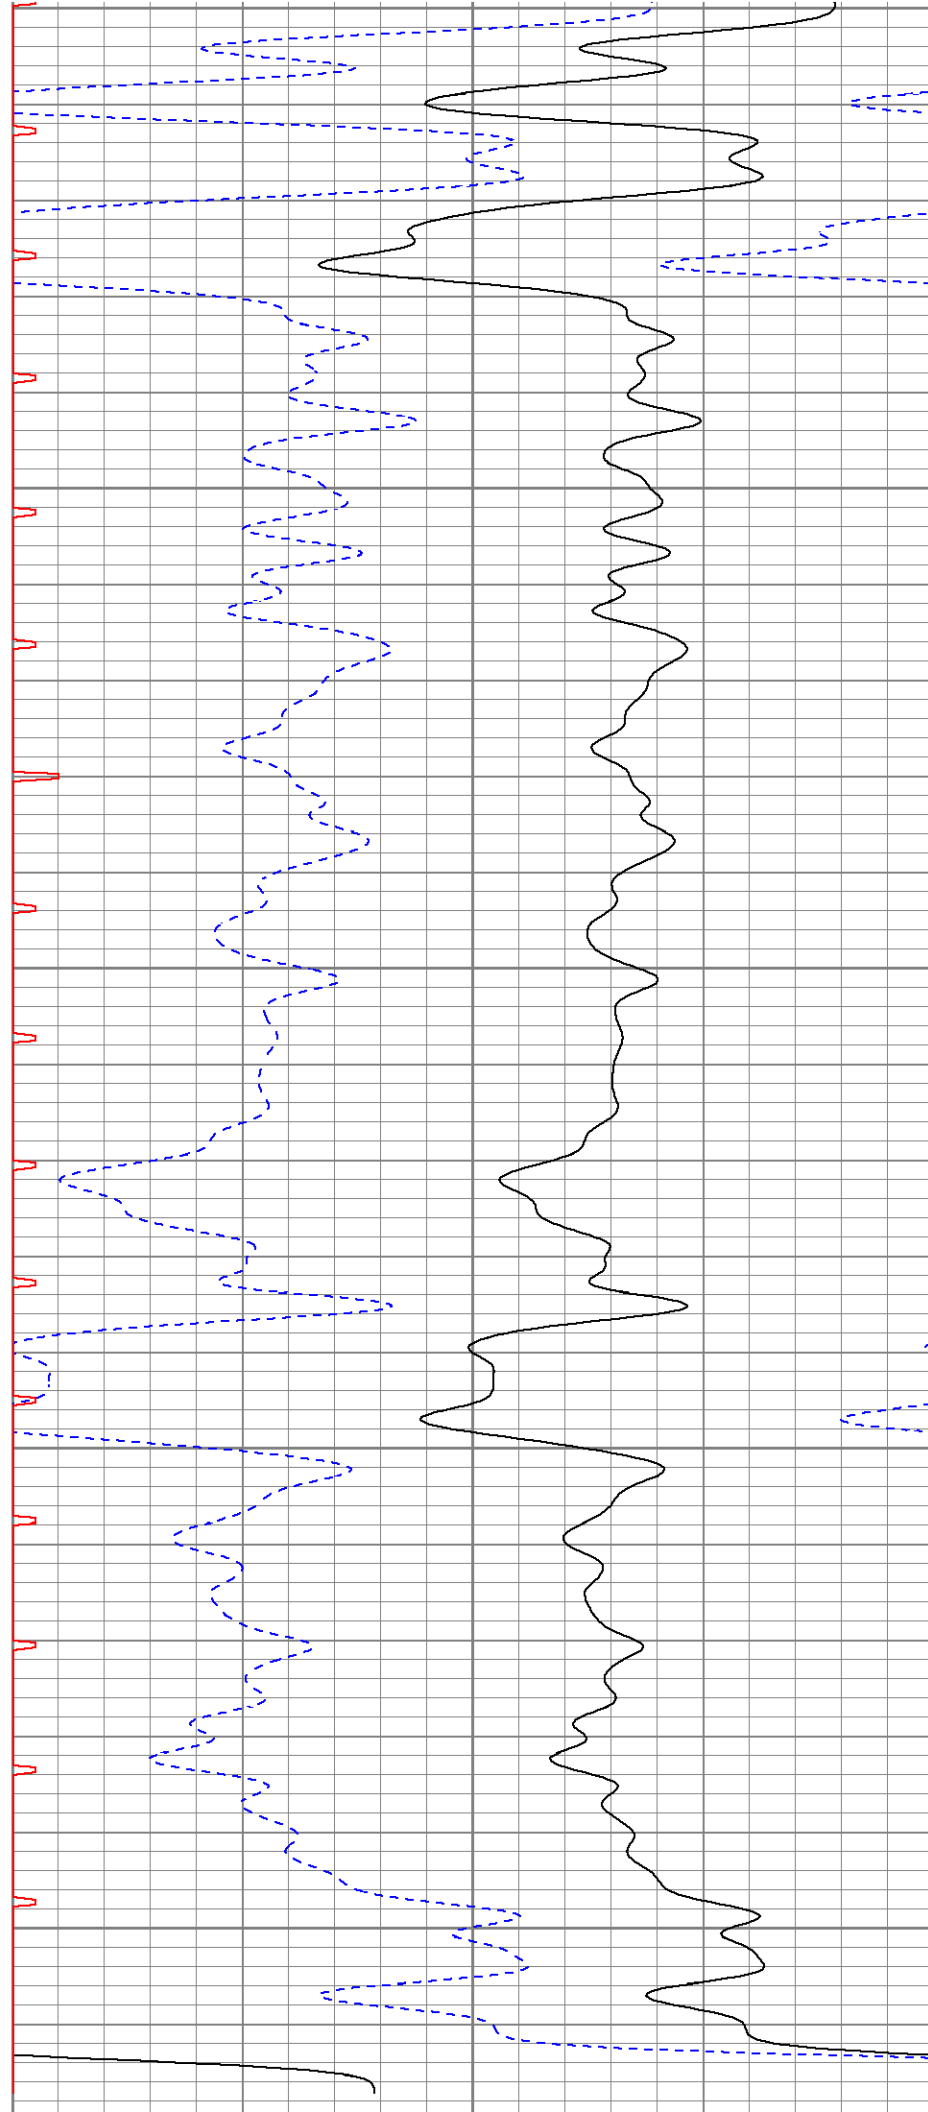

0	GR (GAPI)	150	140	DT (usec/ft)	40
6	MCAL (in)	16	30	SPOR (pu)	-10
6	BOREID (in)	16	0	ITT (msec)	20
0	MINMK	50			