



MICRO LOG

Company	TRIPLE CROWN OPERATING LLC		
Well	DAVID #1-35		
Field	REINERT		
County	NESS	State	KANSAS
Location:	API # : 15-135-26212 1810" FNL & 1140' FEL		Other Services SON DIL CDNL/PE
Permanent Datum	SEC 35 TWP 20S RGE 23W	Ground Level	Elevation 2253'
Log Measured From	KB 12' AGL		K.B. 2265 D.F. 2263 G.L. 2253
Drilling Measured From	KB		
Date	11/6/23		
Run Number	Two		
Depth Driller	4571		
Depth Logger	4570		
Bottom Logged Interval	4548		
Top Log Interval	3500		
Casing Driller	8 5/8"@1489'		
Casing Logger	1489'		
Bit Size	7 7/8"		
Type Fluid in Hole	Chemical		
Density / Viscosity	9.5/61		
pH / Fluid Loss	10.0/9.2		
Source of Sample	Pit		
Rm @ Meas. Temp	1.6@70degf		
Rmf @ Meas. Temp	1.2@70degf		
Rmc @ Meas. Temp	1.92@70degf		
Source of Rmf / Rmc	Calculated		
Rm @ BHT	1.07@105degf		
Time Circulation Stopped	11:00 AM		
Time Logger on Bottom	1:00 PM		
Maximum Recorded Temperature	105degf		
Equipment Number	T-605		
Location	Hays, KS.		
Recorded By	COLBY DREILING		
Witnessed By	SEAN DEENIHAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

FROM NESS CITY, GO 11.2 MILES SOUTH ON HW 283, THEN 4 MILES EAST ON 20 RD, THEN 0.8 MILES SOUTH, AND FINALLY SOUTH INTO.


Thanks for using Gemini Wireline LLC
785-625-1182




MAIN PASS

Database File	tcdavid#1-35oh.db
Dataset Pathname	pass5
Presentation Format	kml
Dataset Creation	Mon Nov 06 15:53:06 2023
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	0	MN 2" (Ohm-m)	20
6	MCAL (in)	16	0	MI 1" (Ohm-m)	20
6	BOREID (in)	16	10000	LTEN (lb)	0
0	MINMK	50			

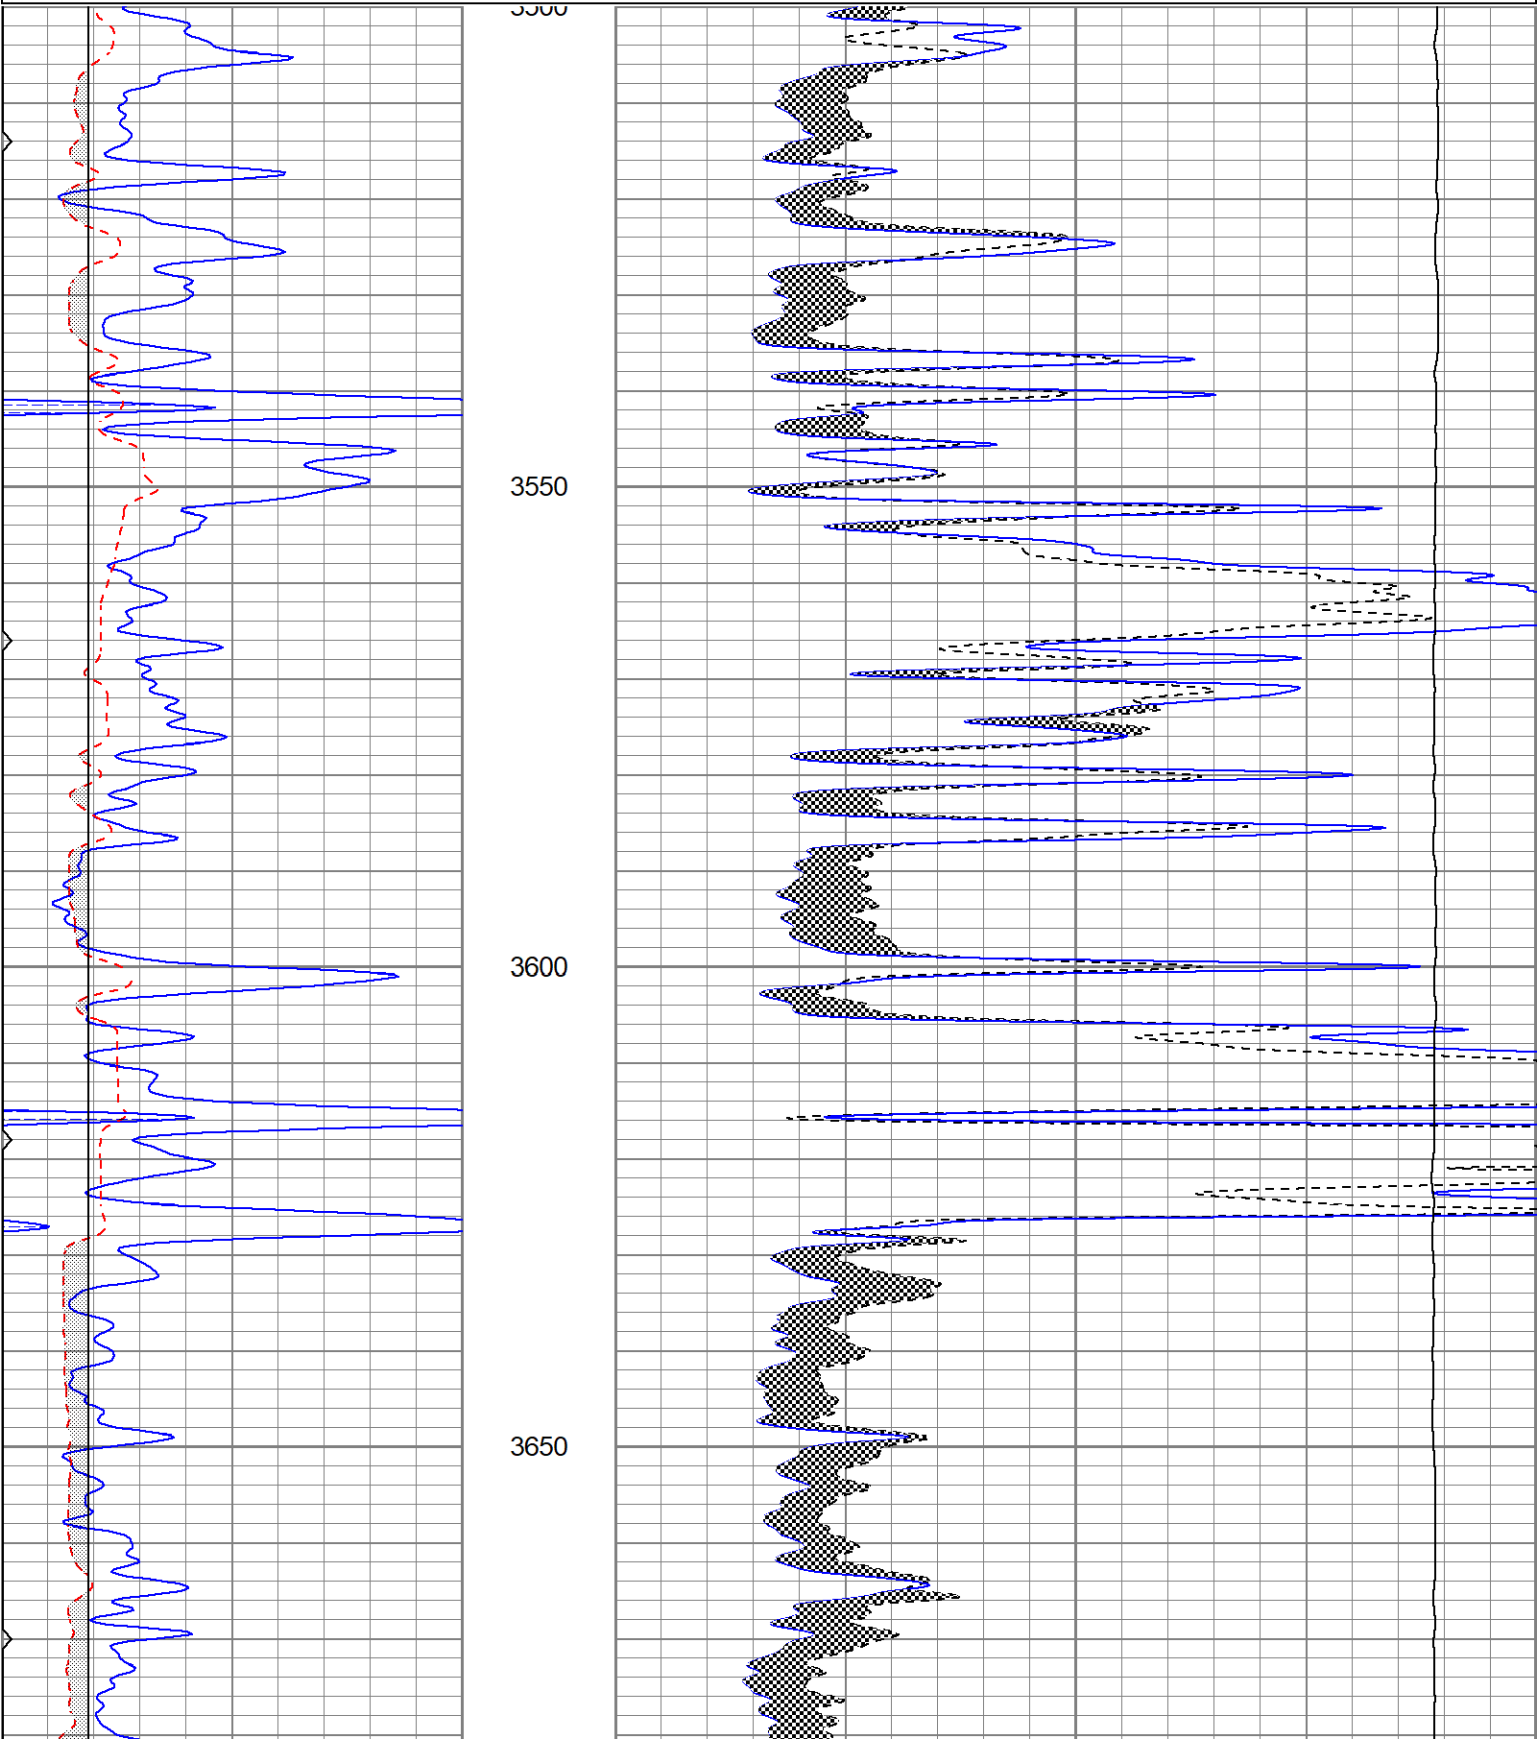

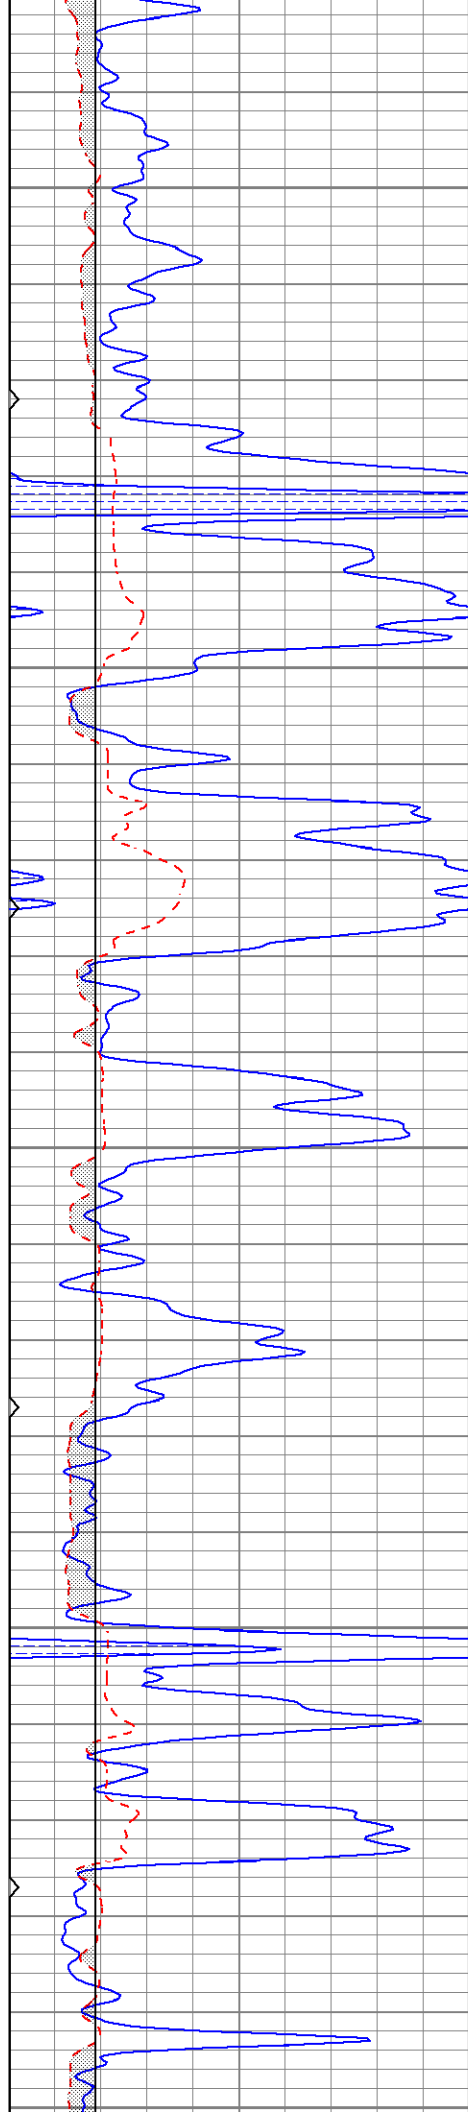


3700


3750

3800

3850

3900

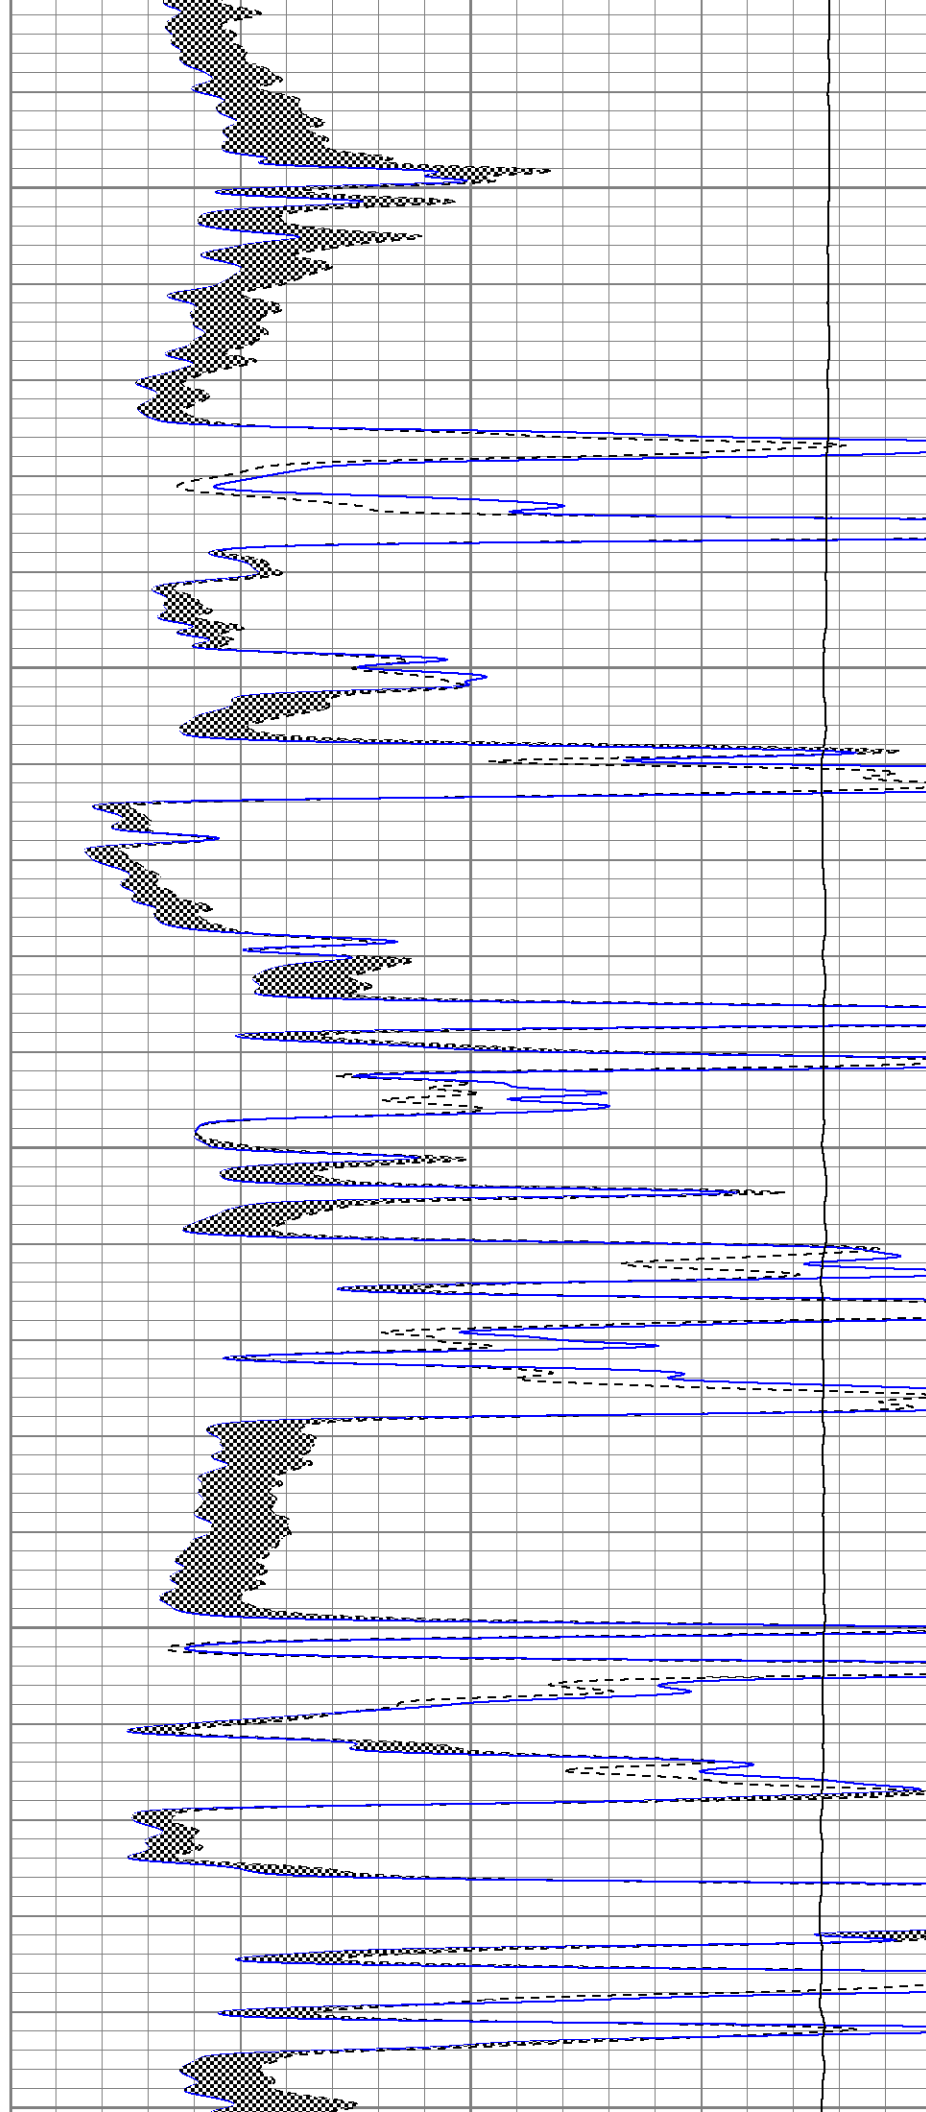

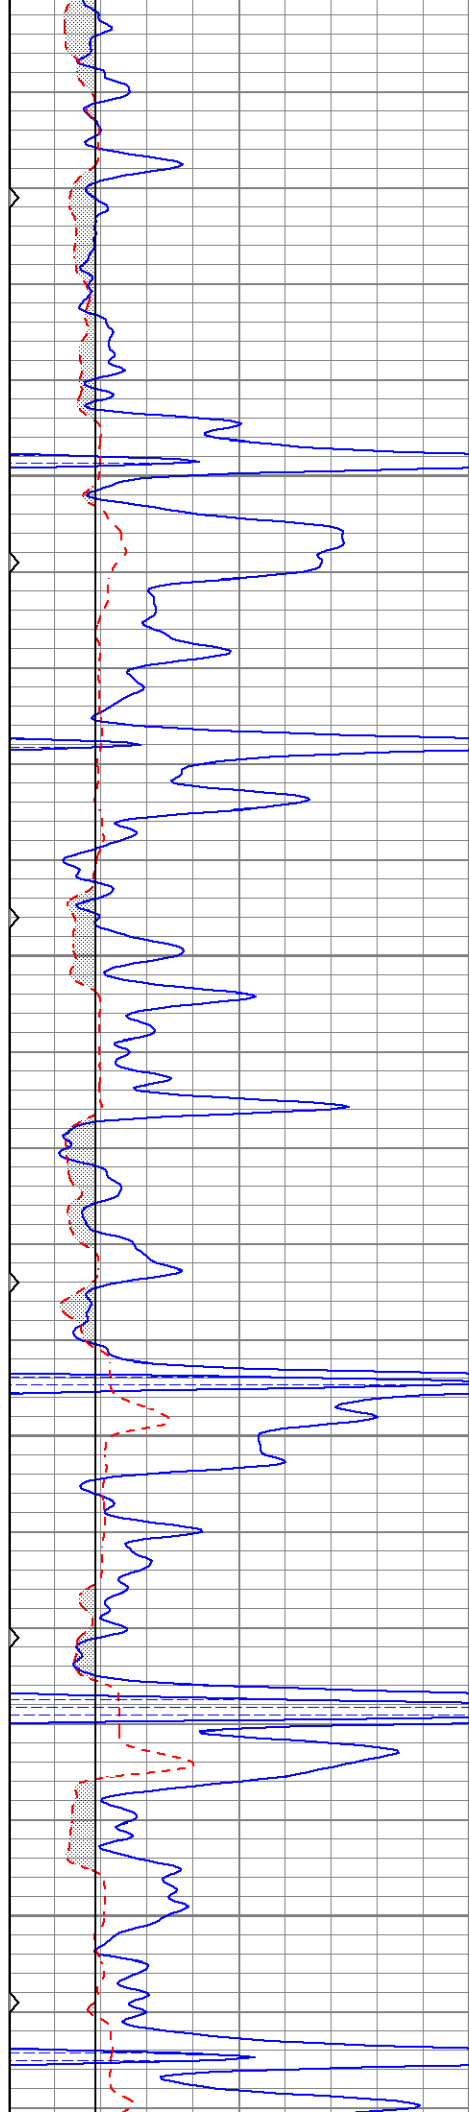


3900


3950

4000

4050

4100

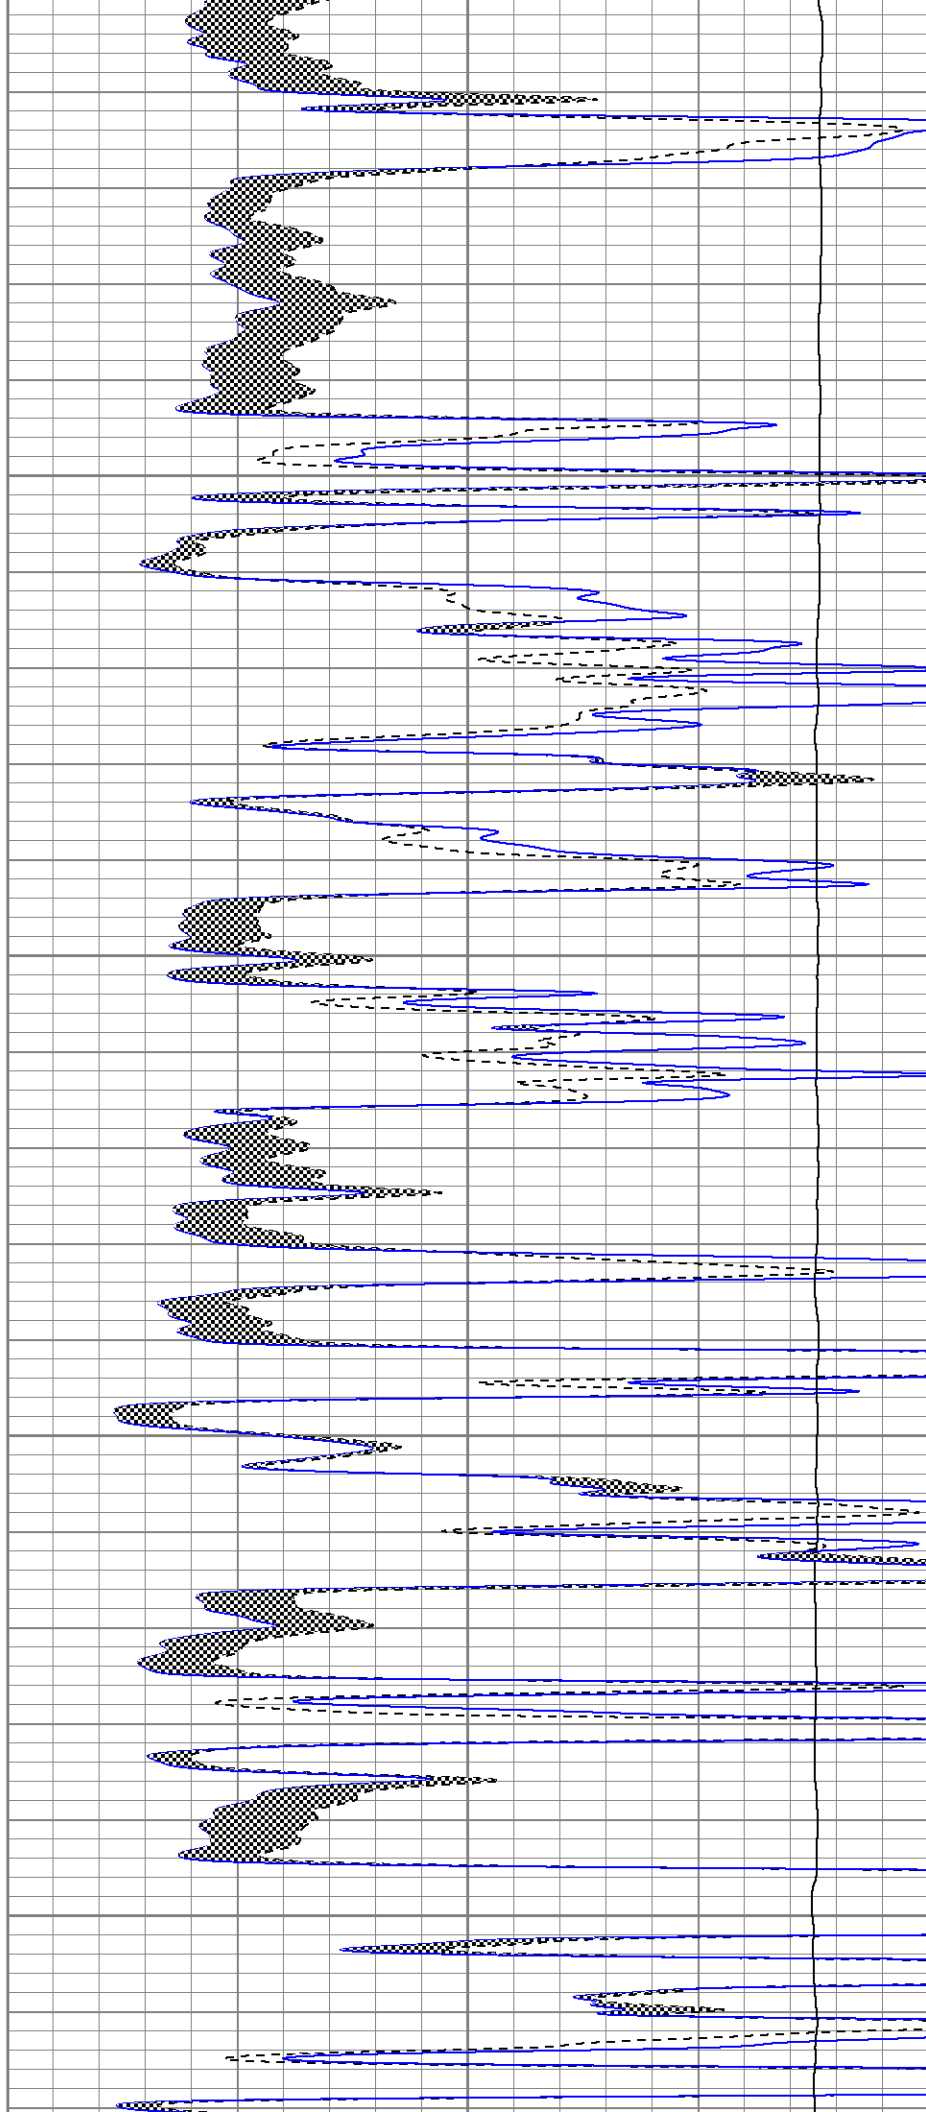

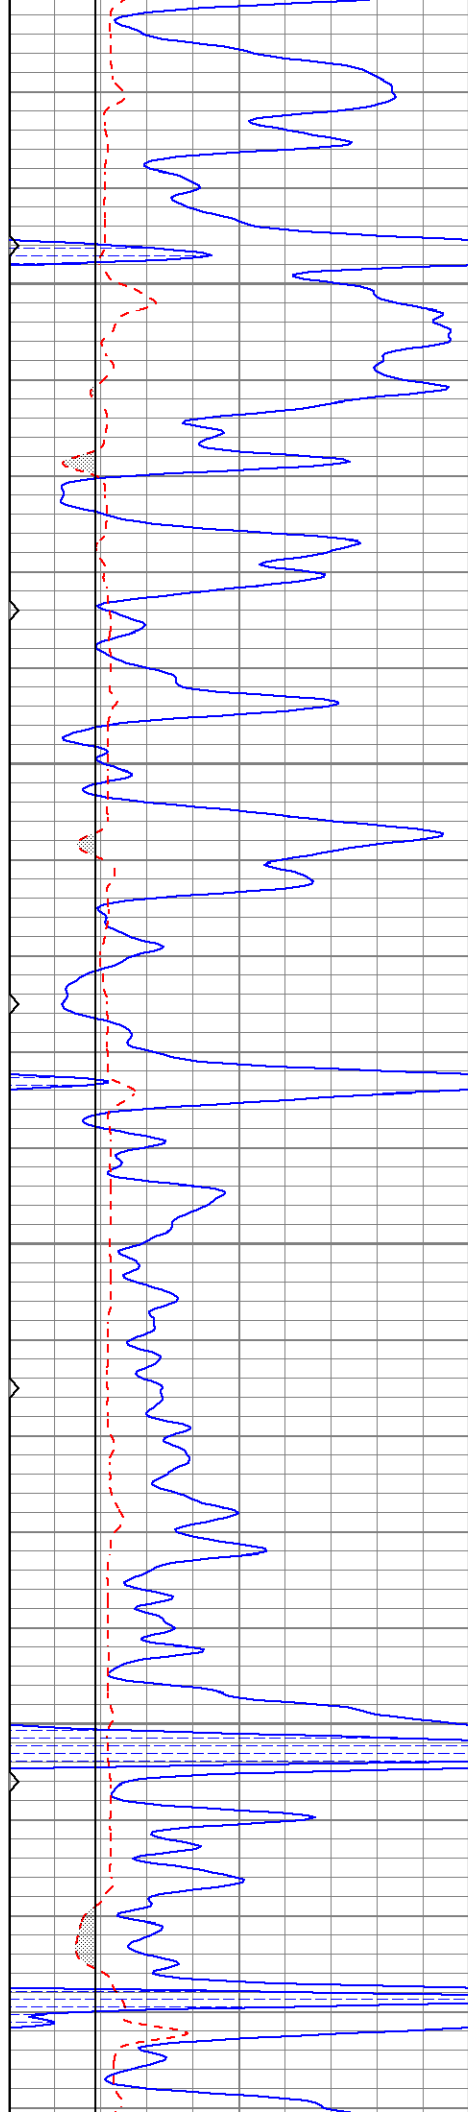



4150

4200

4250

4300

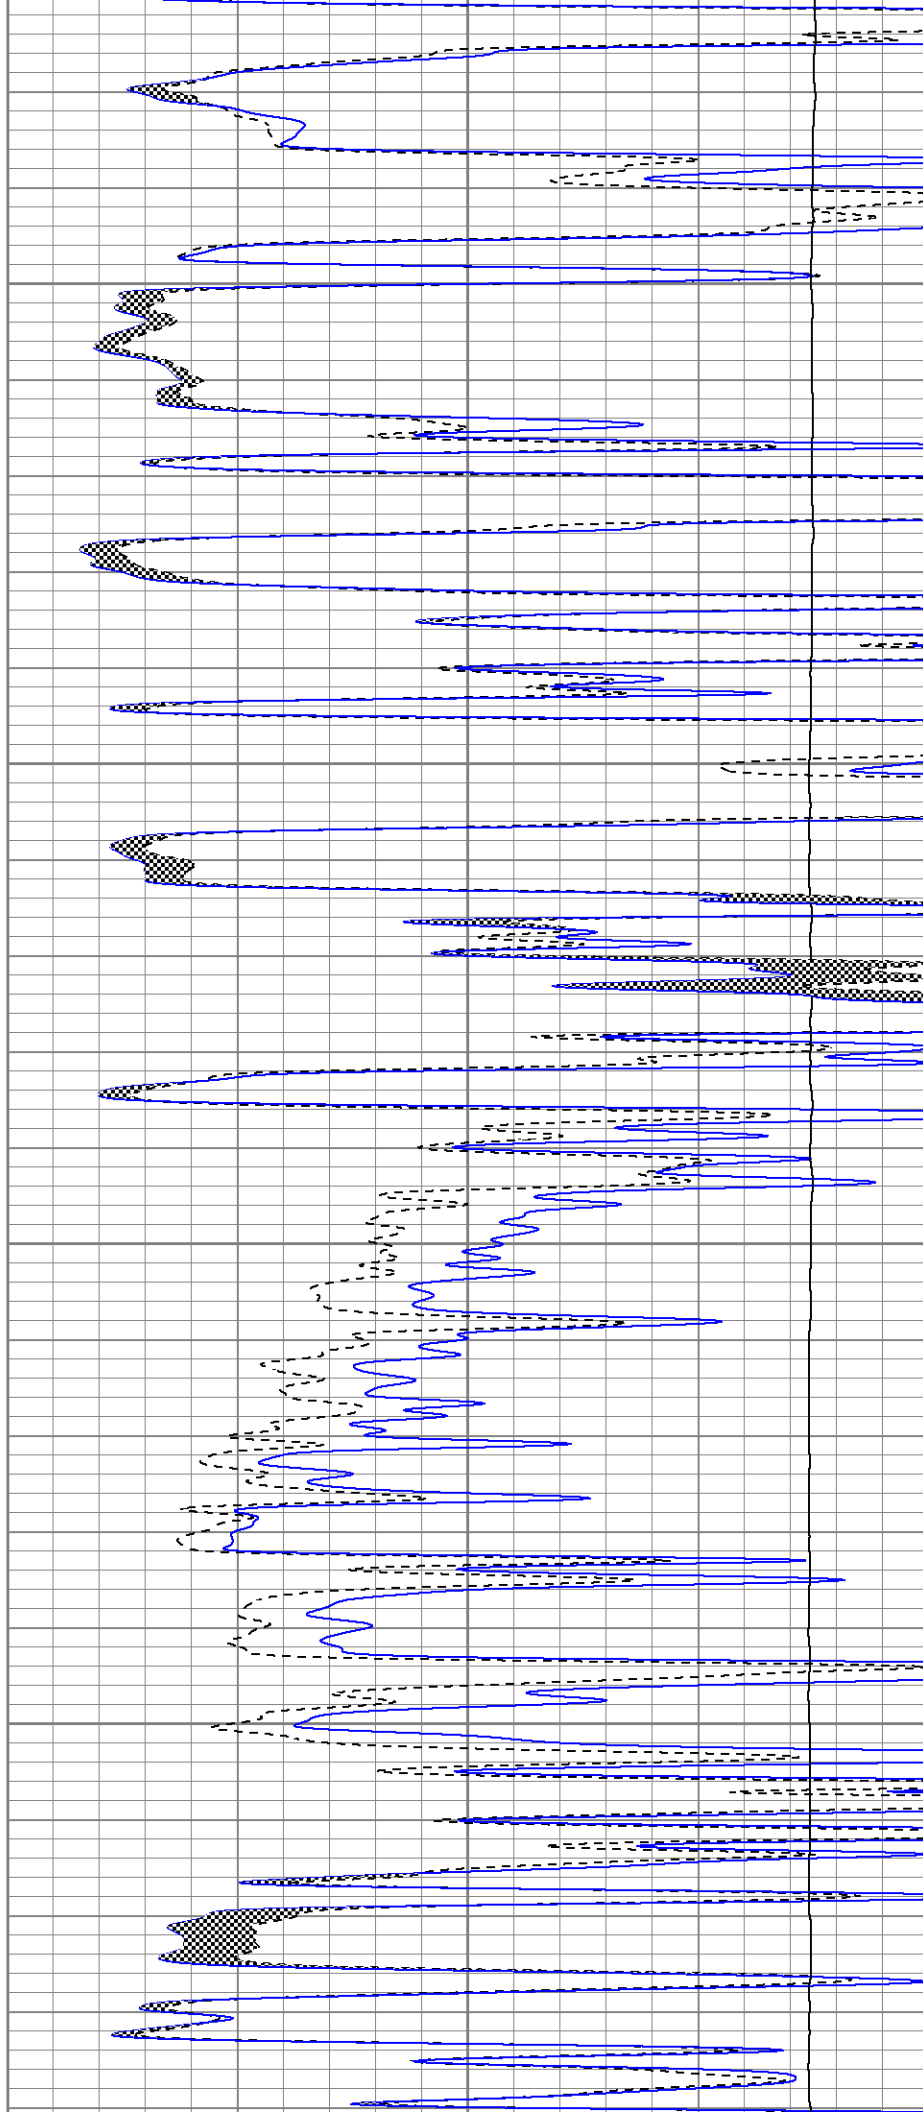

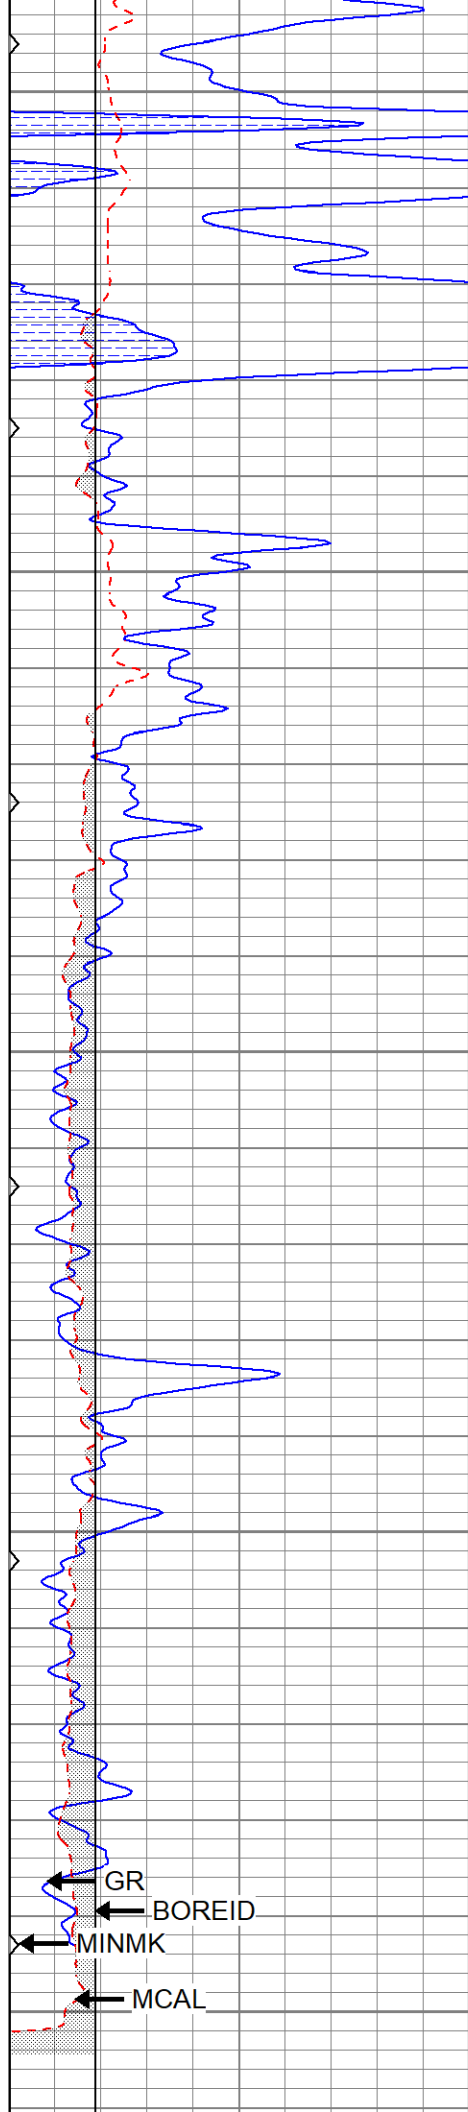


4350

4400

4450

4500

4550

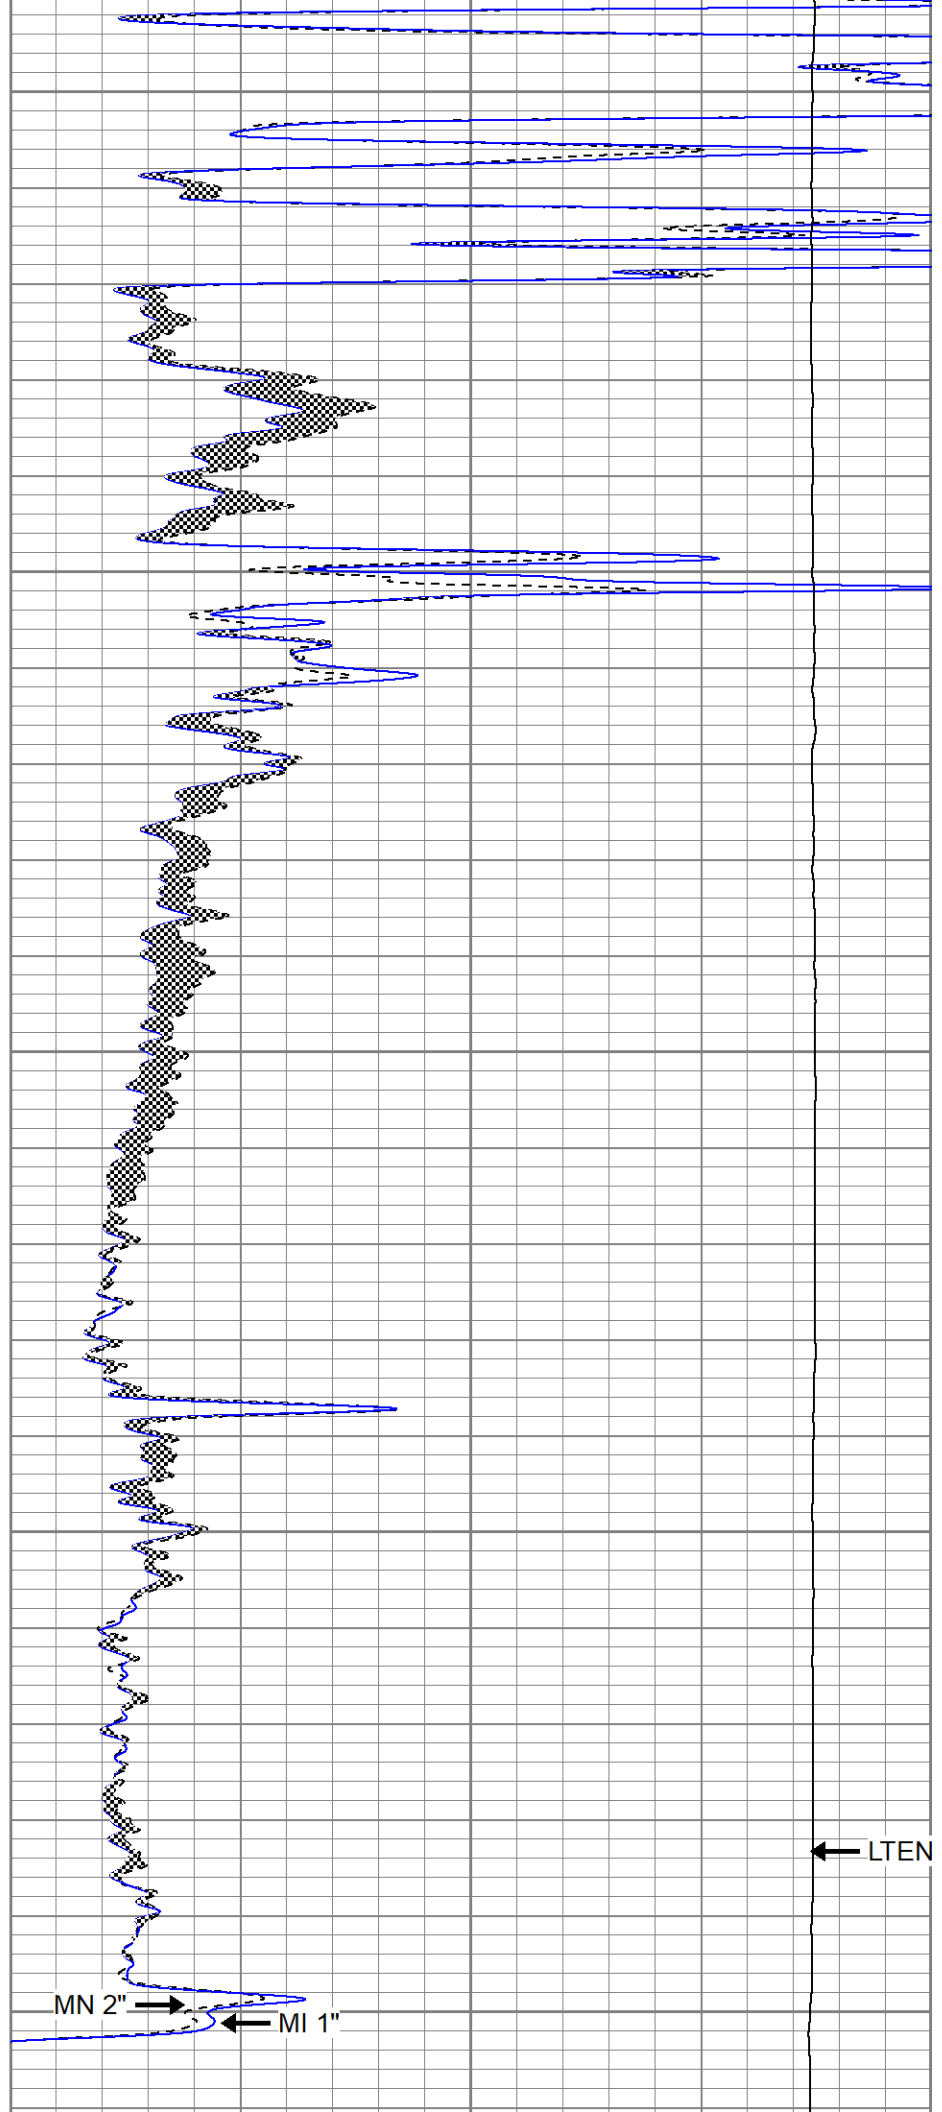

MN 2"

MI 1"

LTEN

LTD 4570

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0




REPEAT SECTION

Database File tcdavid#1-35oh.db
Dataset Pathname pass4
Presentation Format kml
Dataset Creation Mon Nov 06 15:41:19 2023
Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50


0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

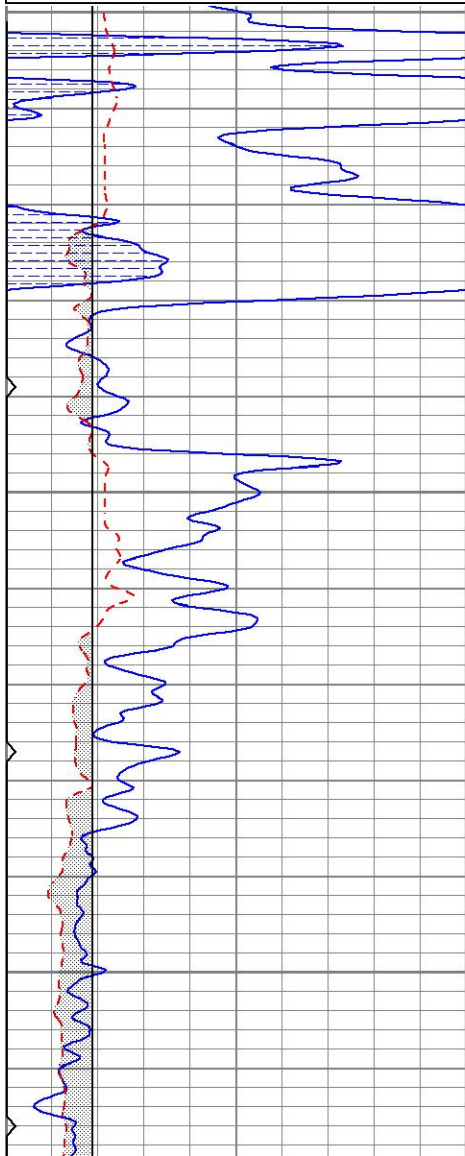


4350

4400

4450

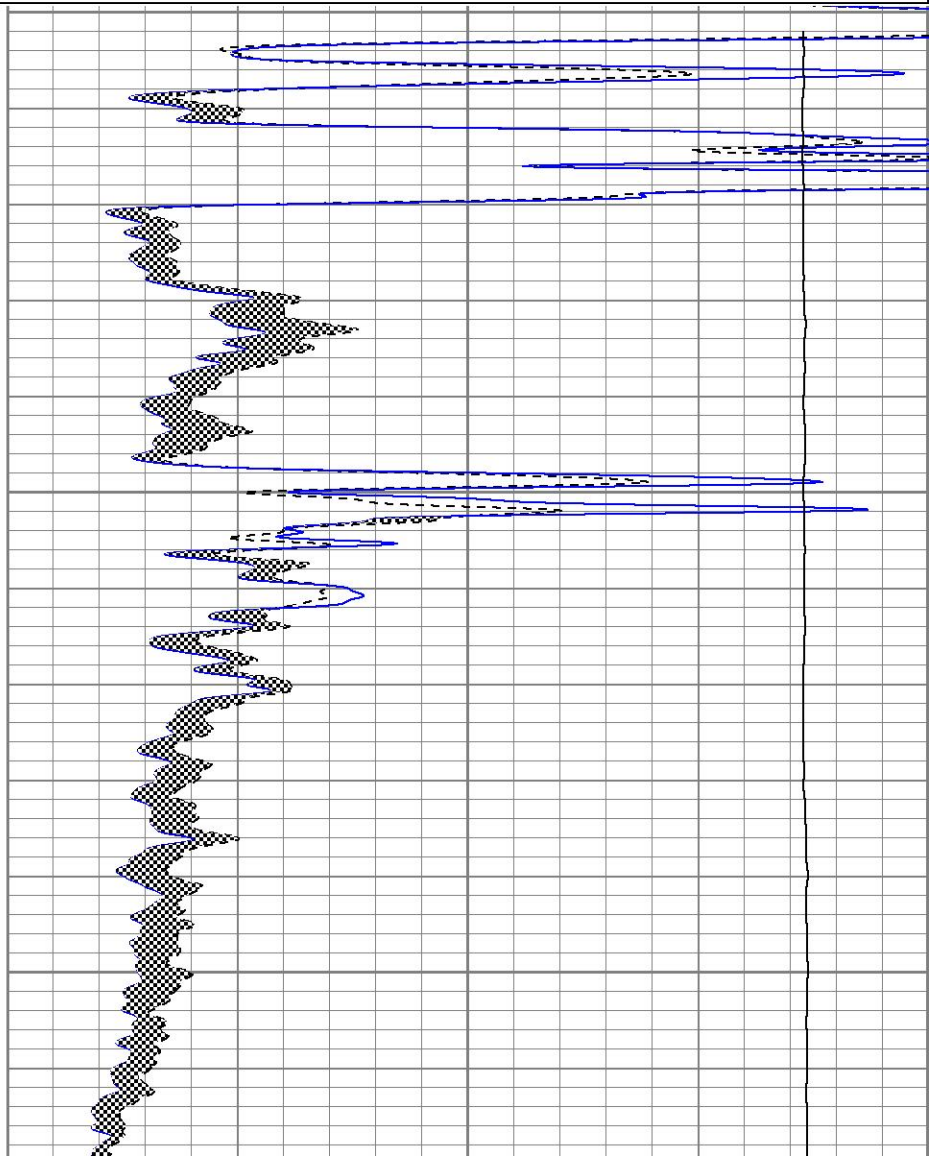

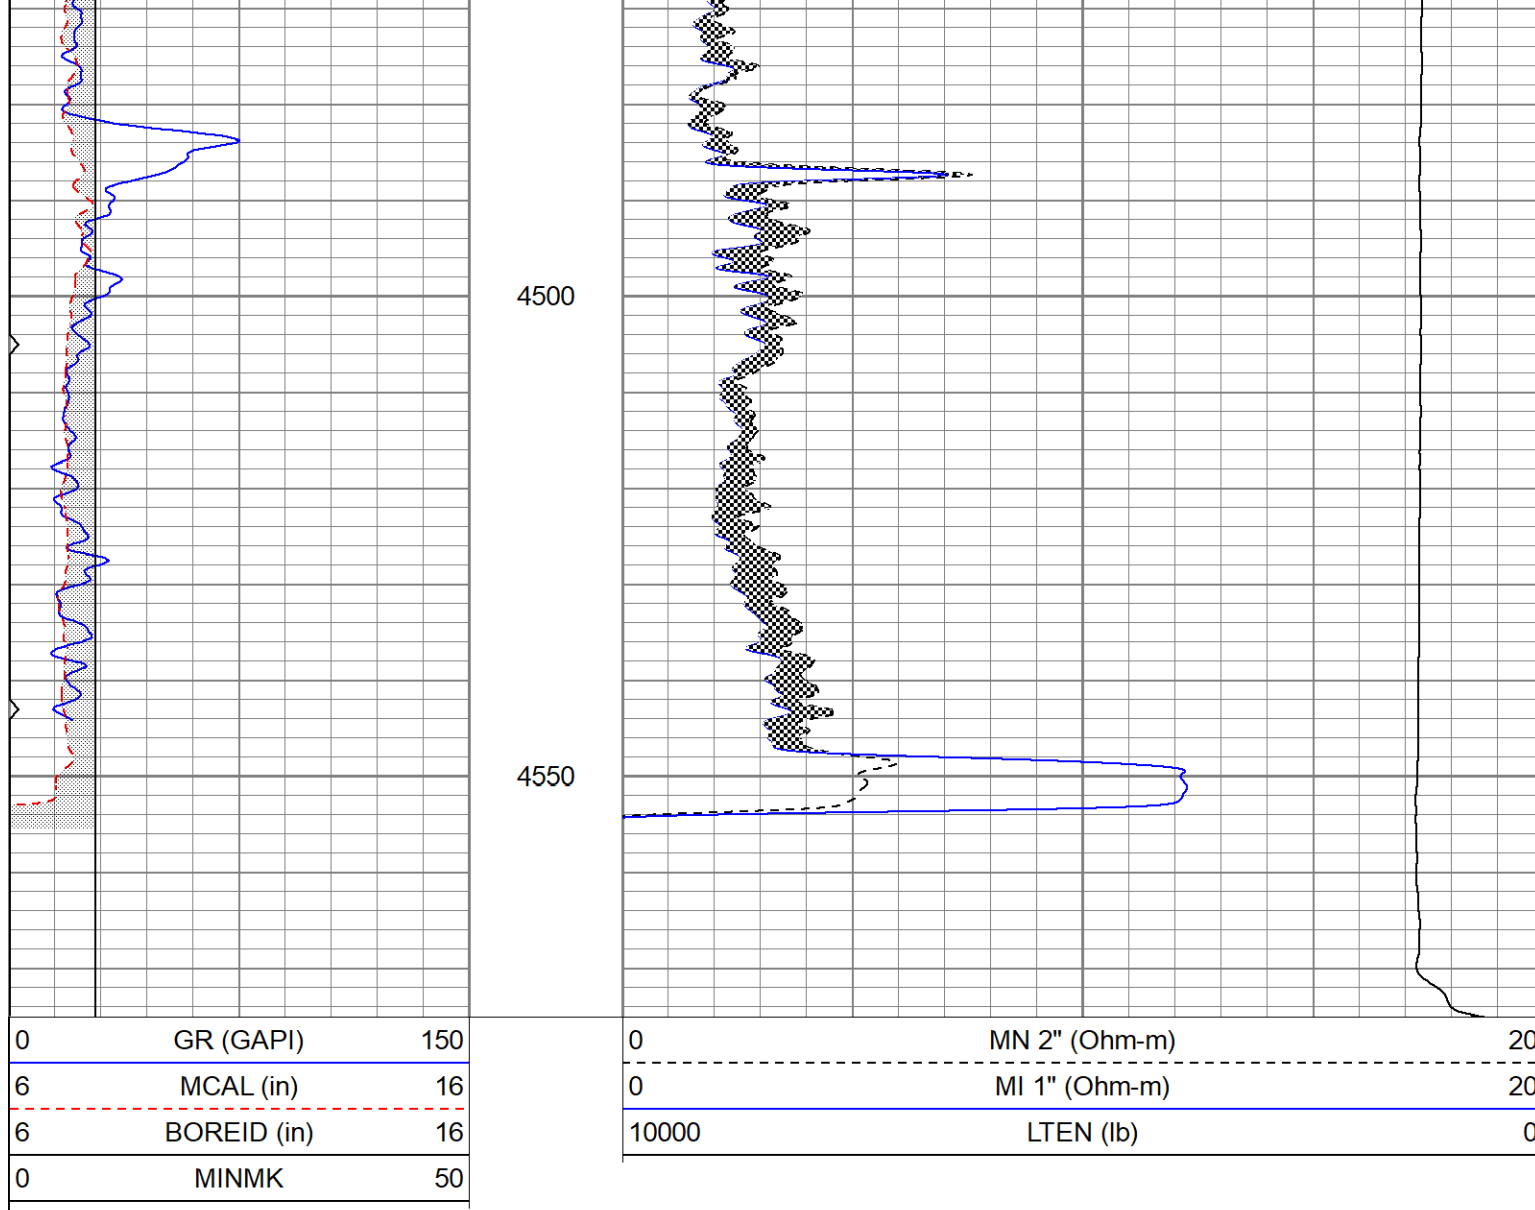

Calibration Report		
Database File	tcdavid#1-35oh.db	
Dataset Pathname	pass4	
Dataset Creation	Mon Nov 06 15:41:19 2023	

Microlog Calibration Report

Serial-Model:	012-Pengo
Performed:	Sun Nov 5 15:30:55 2023

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0058	0.0999	V	0.0000	10.0000	Ohm-m	106.2790	-0.6172
Inverse	0.0081	0.1265	V	0.0000	10.0000	Ohm-m	84.4645	-0.6875
Caliper	2.7578	4.6384	V	7.9000	16.0000	in	4.8072	-3.9782

Gamma Ray Calibration Report

Serial Number:	2001
Tool Model:	OH
Performed:	Sat Nov 4 10:32:21 2023

Calibrator Value:	1.0	GAPI
-------------------	-----	------

Background Reading:	0.0	cps
---------------------	-----	-----

Calibrator Reading:	1.0	cps
Sensitivity:	1.0000	GAPI/cps