



MICRO LOG

Company FOURWINDS OIL CORPORATION
 Well MARY #2
 Field RAY
 County PHILLIPPS State KANSAS

Location: API #: 15-147-20763-0000
 715' FNL & 1765' FWL
 NE - SW - NE - NW
 SEC 28 TWP 5S RGE 20W
 Permanent Datum GROUND LEVEL Elevation 2209
 Log Measured From KELLY BUSHING 8' A.G.L
 Drilling Measured From KELLY BUSHING
 Other Services
 CDL/CNL
 DIL/SON
 Elevation
 K.B. 2217
 D.F. 2215
 G.L. 2209

Date	9/25/23
Run Number	TWO
Depth Driller	3700
Depth Logger	3699
Bottom Logged Interval	3683
Top Log Interval	3000
Casing Driller	8 5/8" @ 221'
Casing Logger	221'
Bit Size	7 7/8
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.4/46
PH / Fluid Loss	10.5/8
Source of Sample	FLOWLINE
Rm @ Meas. Temp	1.60 @ 79F
Rmt @ Meas. Temp	1.20 @ 79F
Rmc @ Meas. Temp	1.92 @ 79F
Source of Rmf / Rmc	MEASUREMENT
Rm @ BHT	1.19 @ 113F
Time Circulation Stopped	4 HOURS
Time Logger on Bottom	4:00 A.M.
Maximum Recorded Temperature	113F
Equipment Number	8916
Location	HAYS, KANSAS
Recorded By	COLE ROBBEN
Witnessed By	CAMERON BRIN


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395


DIRECTIONS:
 FROM STOCKTON, KANSAS GO 11 MILES NORTH TO COZY COVE ROAD, WEST 15 MILES,
 SOUTH INTO OVER CATTLE GUARD ON WEST SIDE OF TANK BATTERY

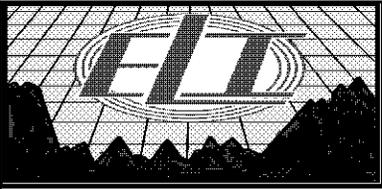



MAIN SECTION



Database File 8351ddn.db
 Dataset Pathname pass7D
 Presentation Format _micro
 Dataset Creation Mon Sep 25 04:25:21 2023
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV	0	LTEN (lb)	5000
			0 (ft3)	10		

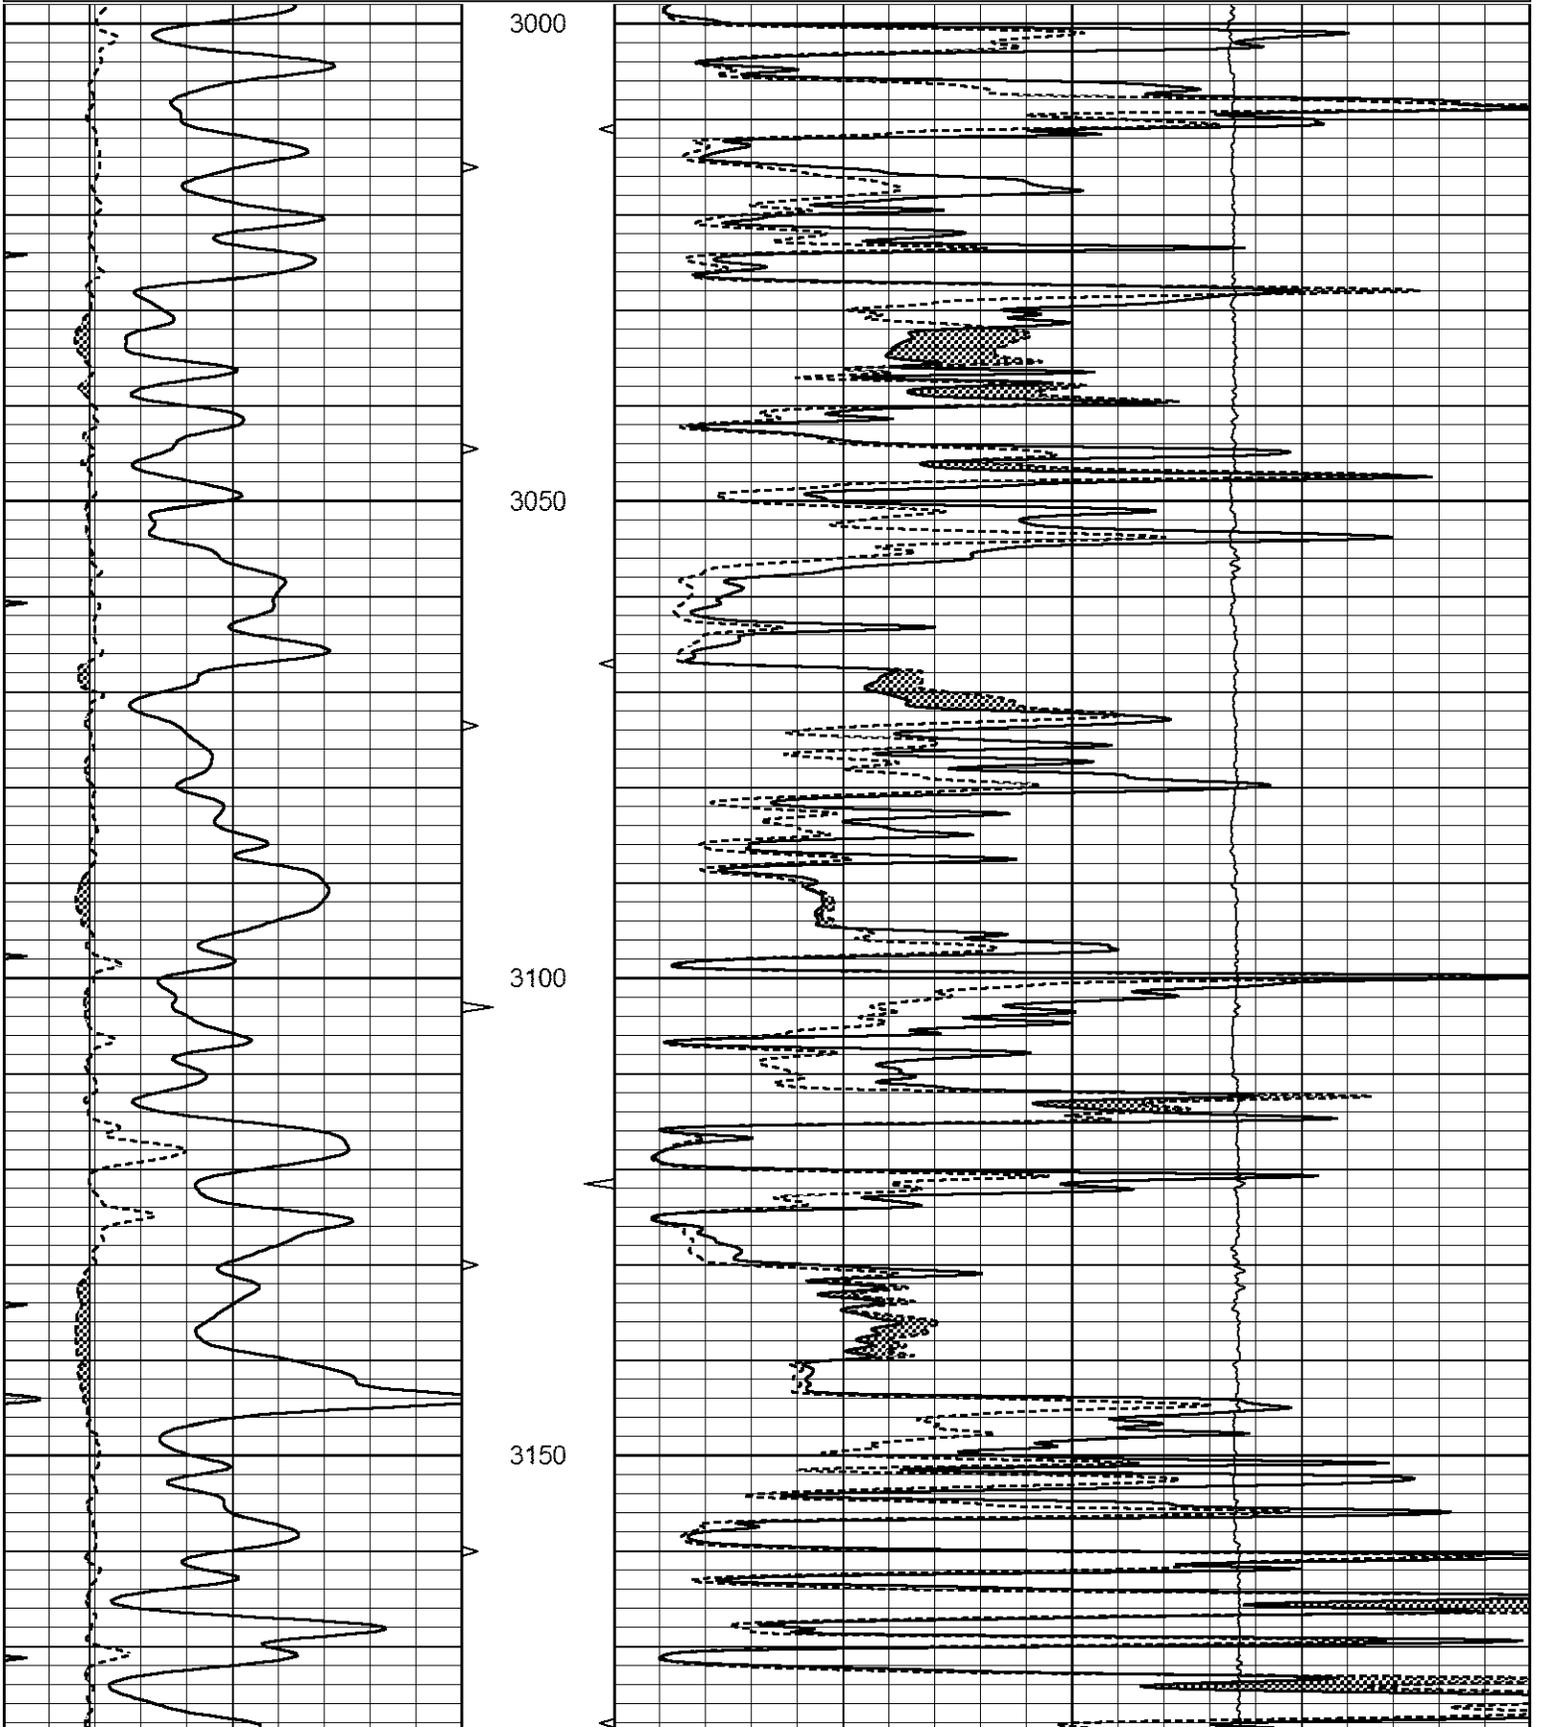

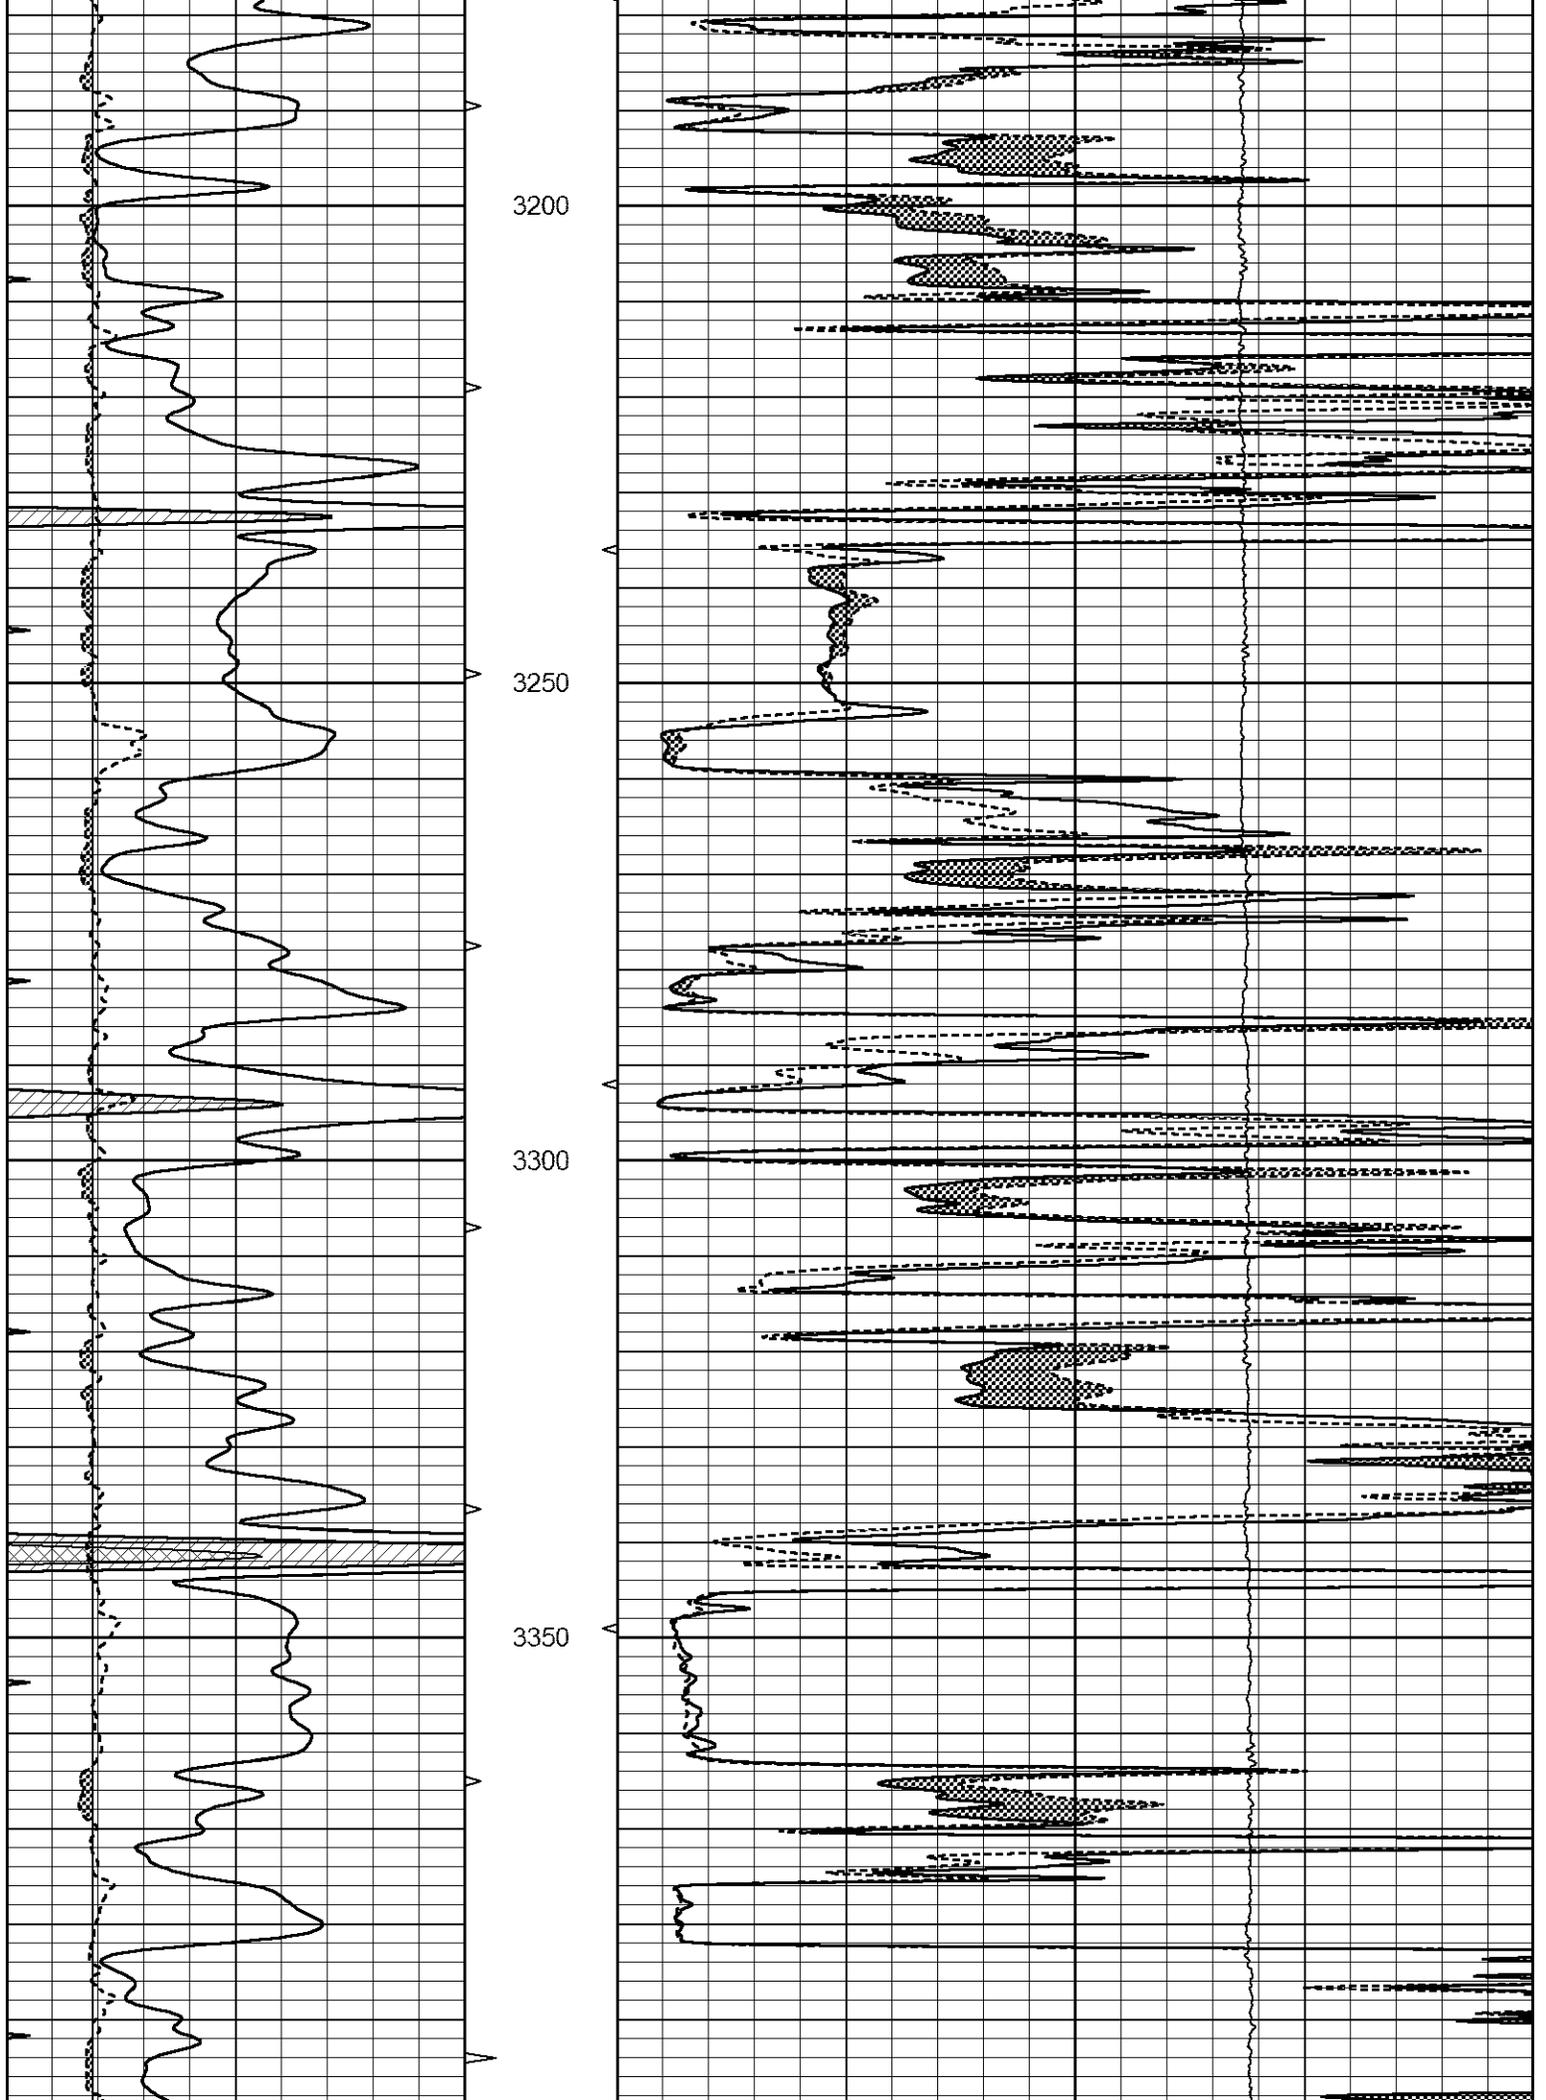

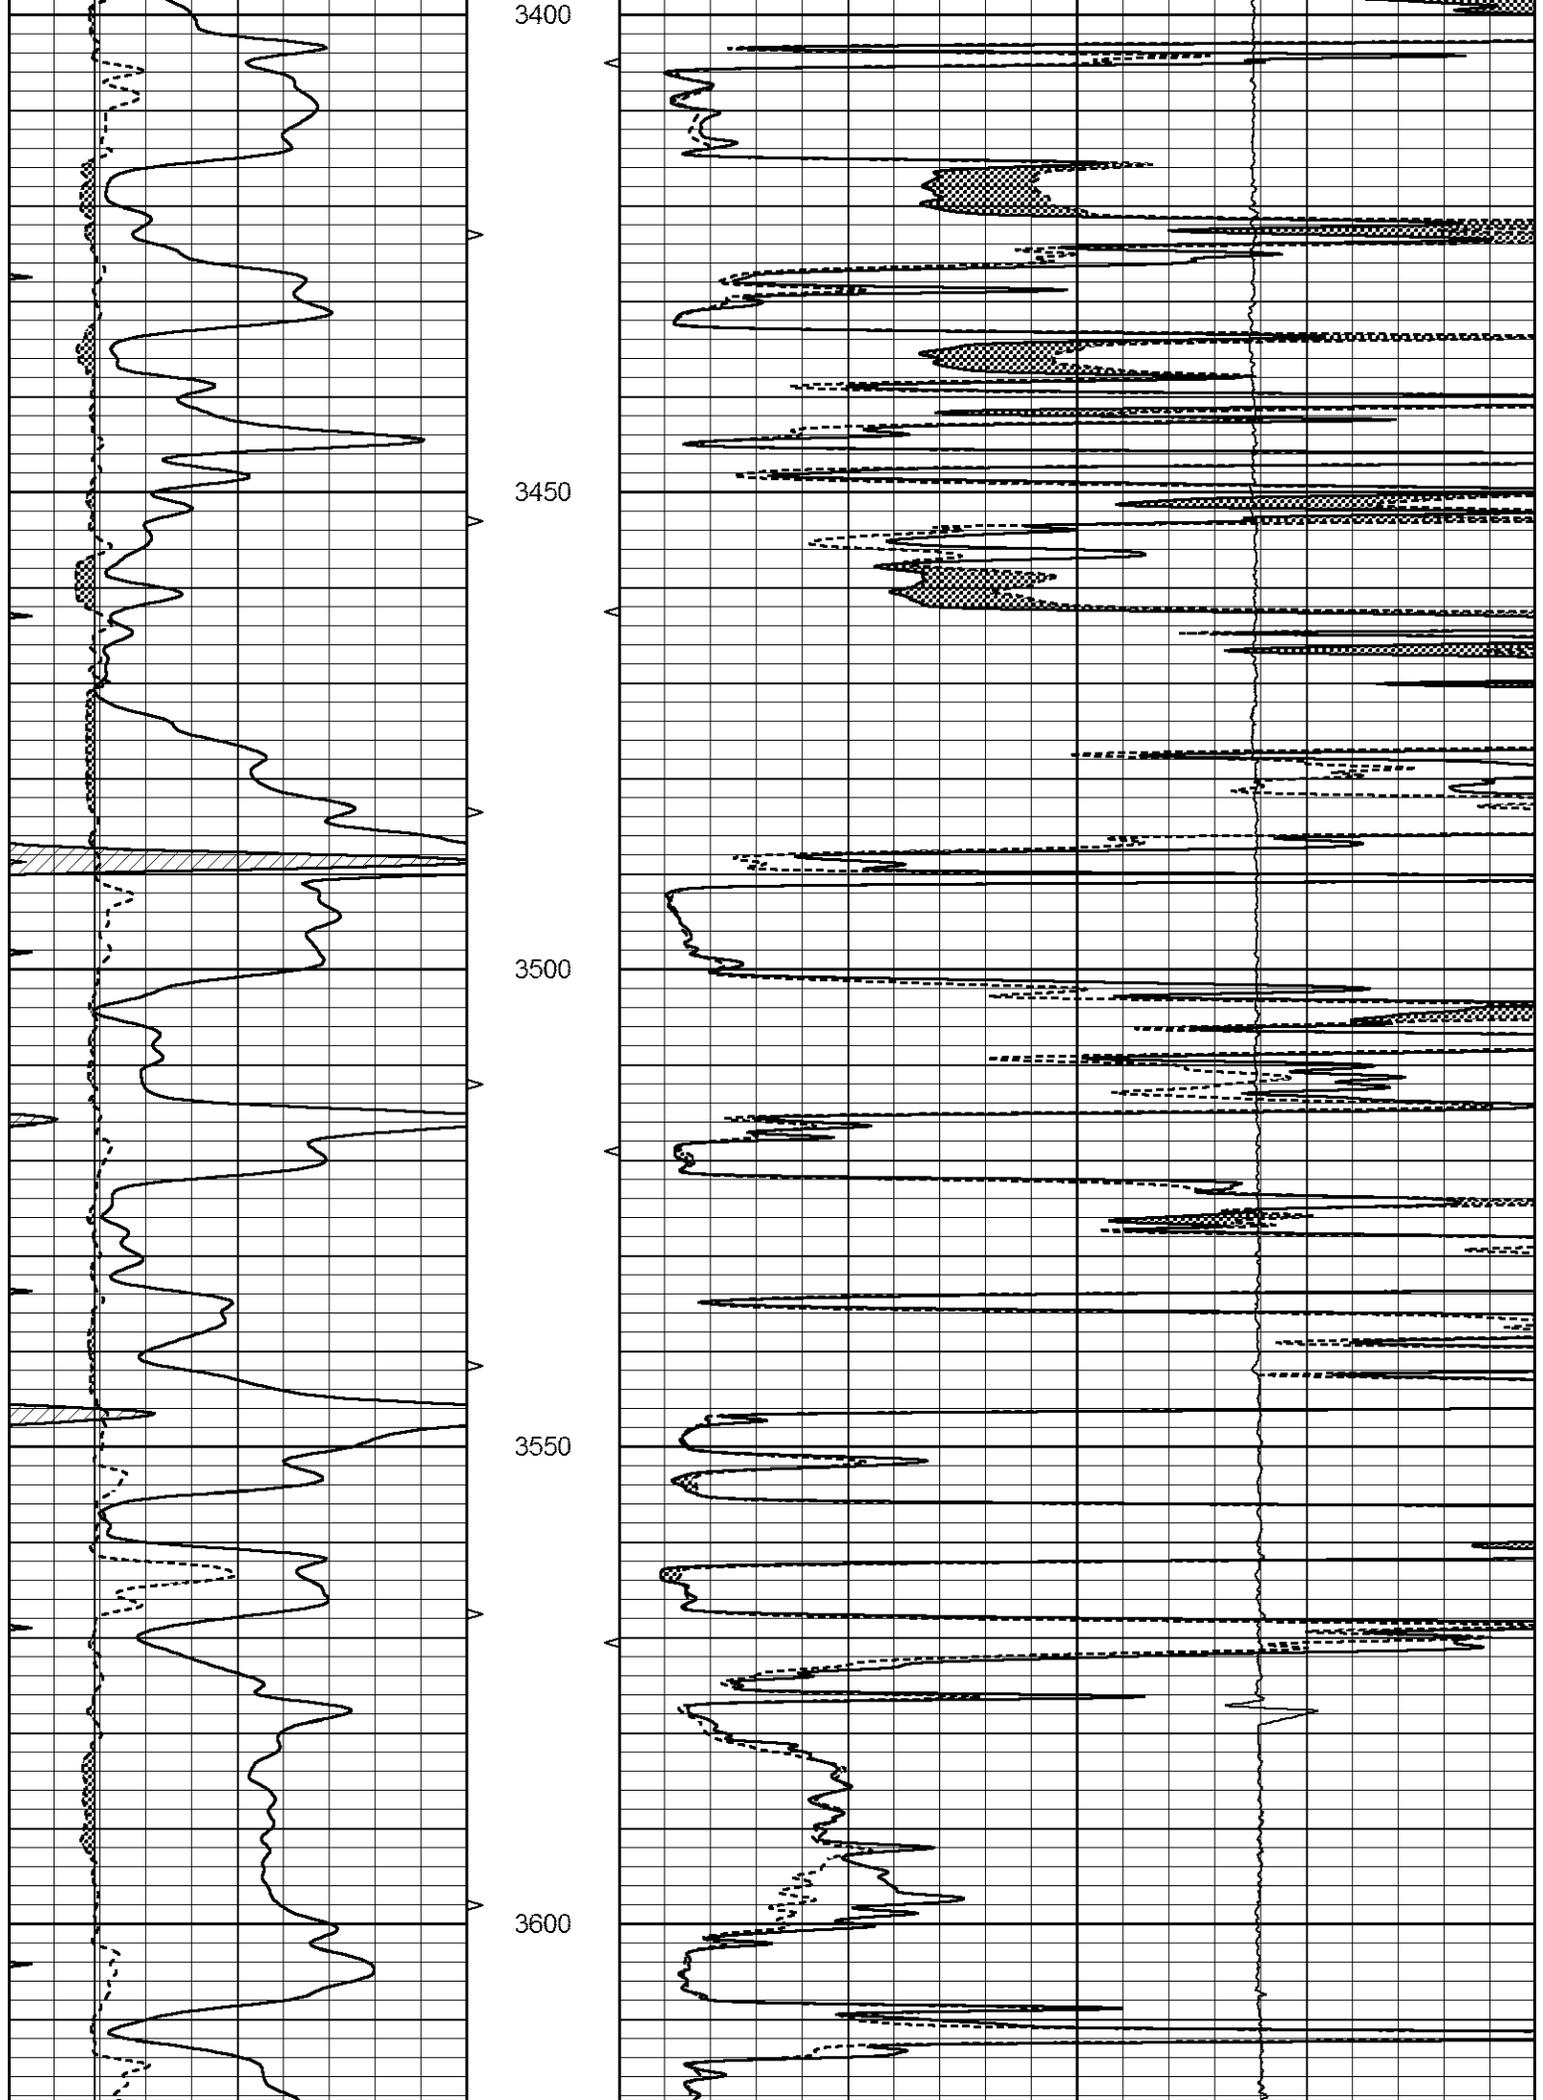


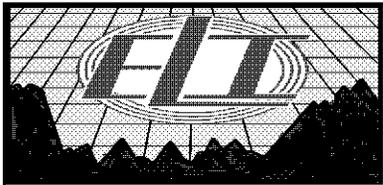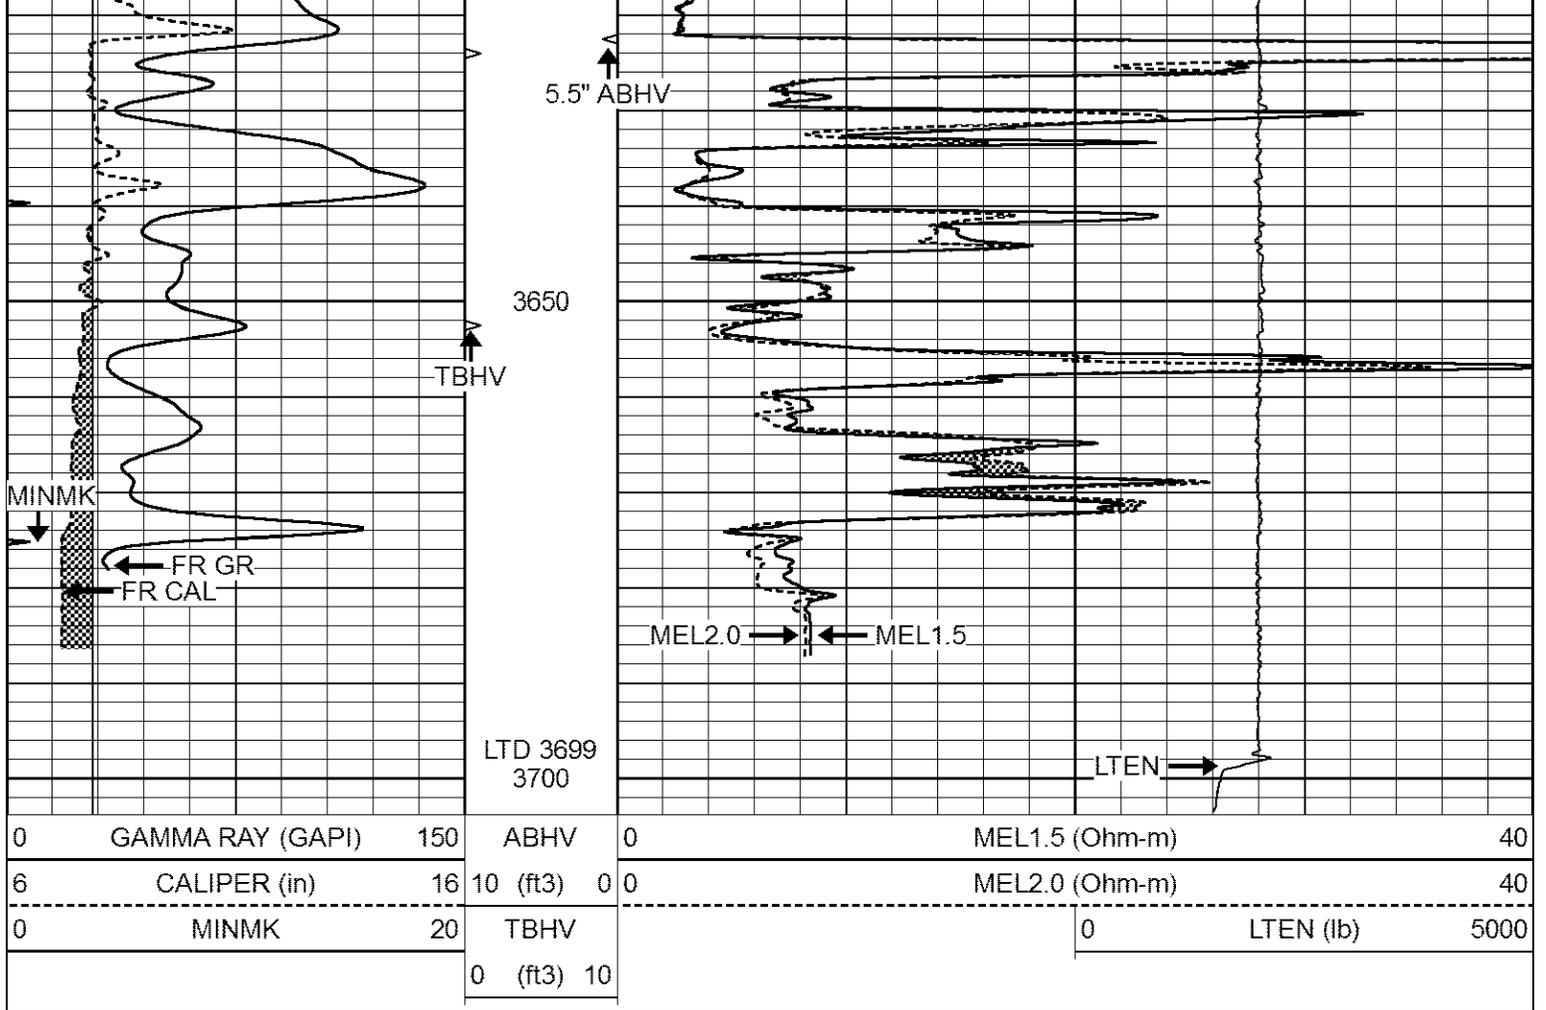


REPEAT SECTION

Database File 8351ddn.db
 Dataset Pathname pass6R
 Presentation Format _micro
 Dataset Creation Mon Sep 25 04:10:24 2023
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV	0	LTEN (lb)	5000
			0 (ft3) 10			

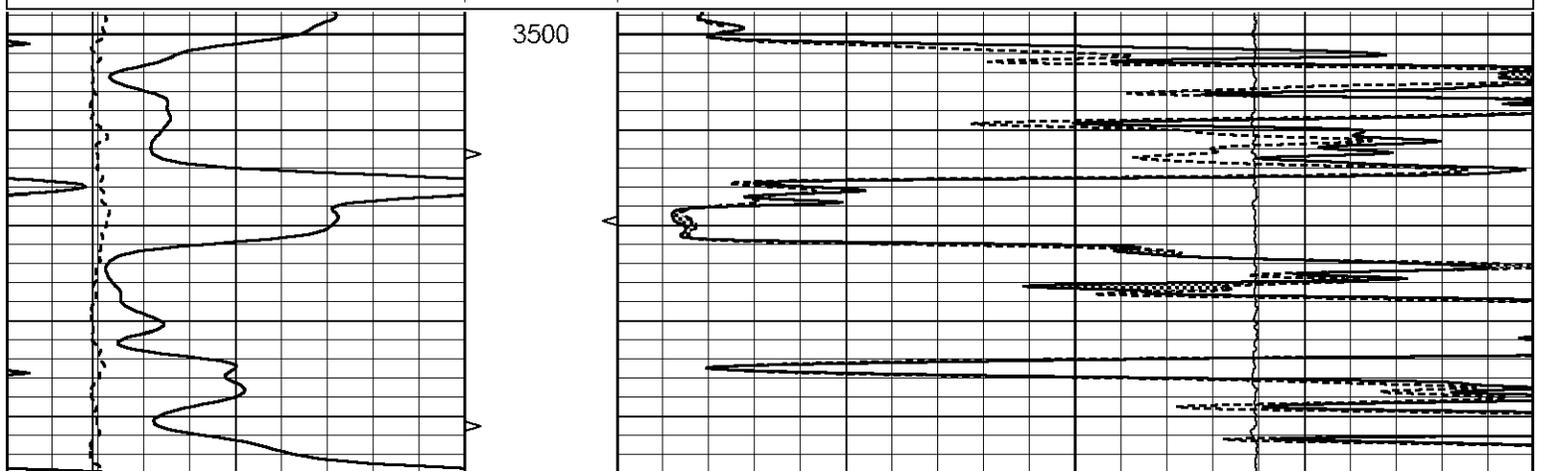

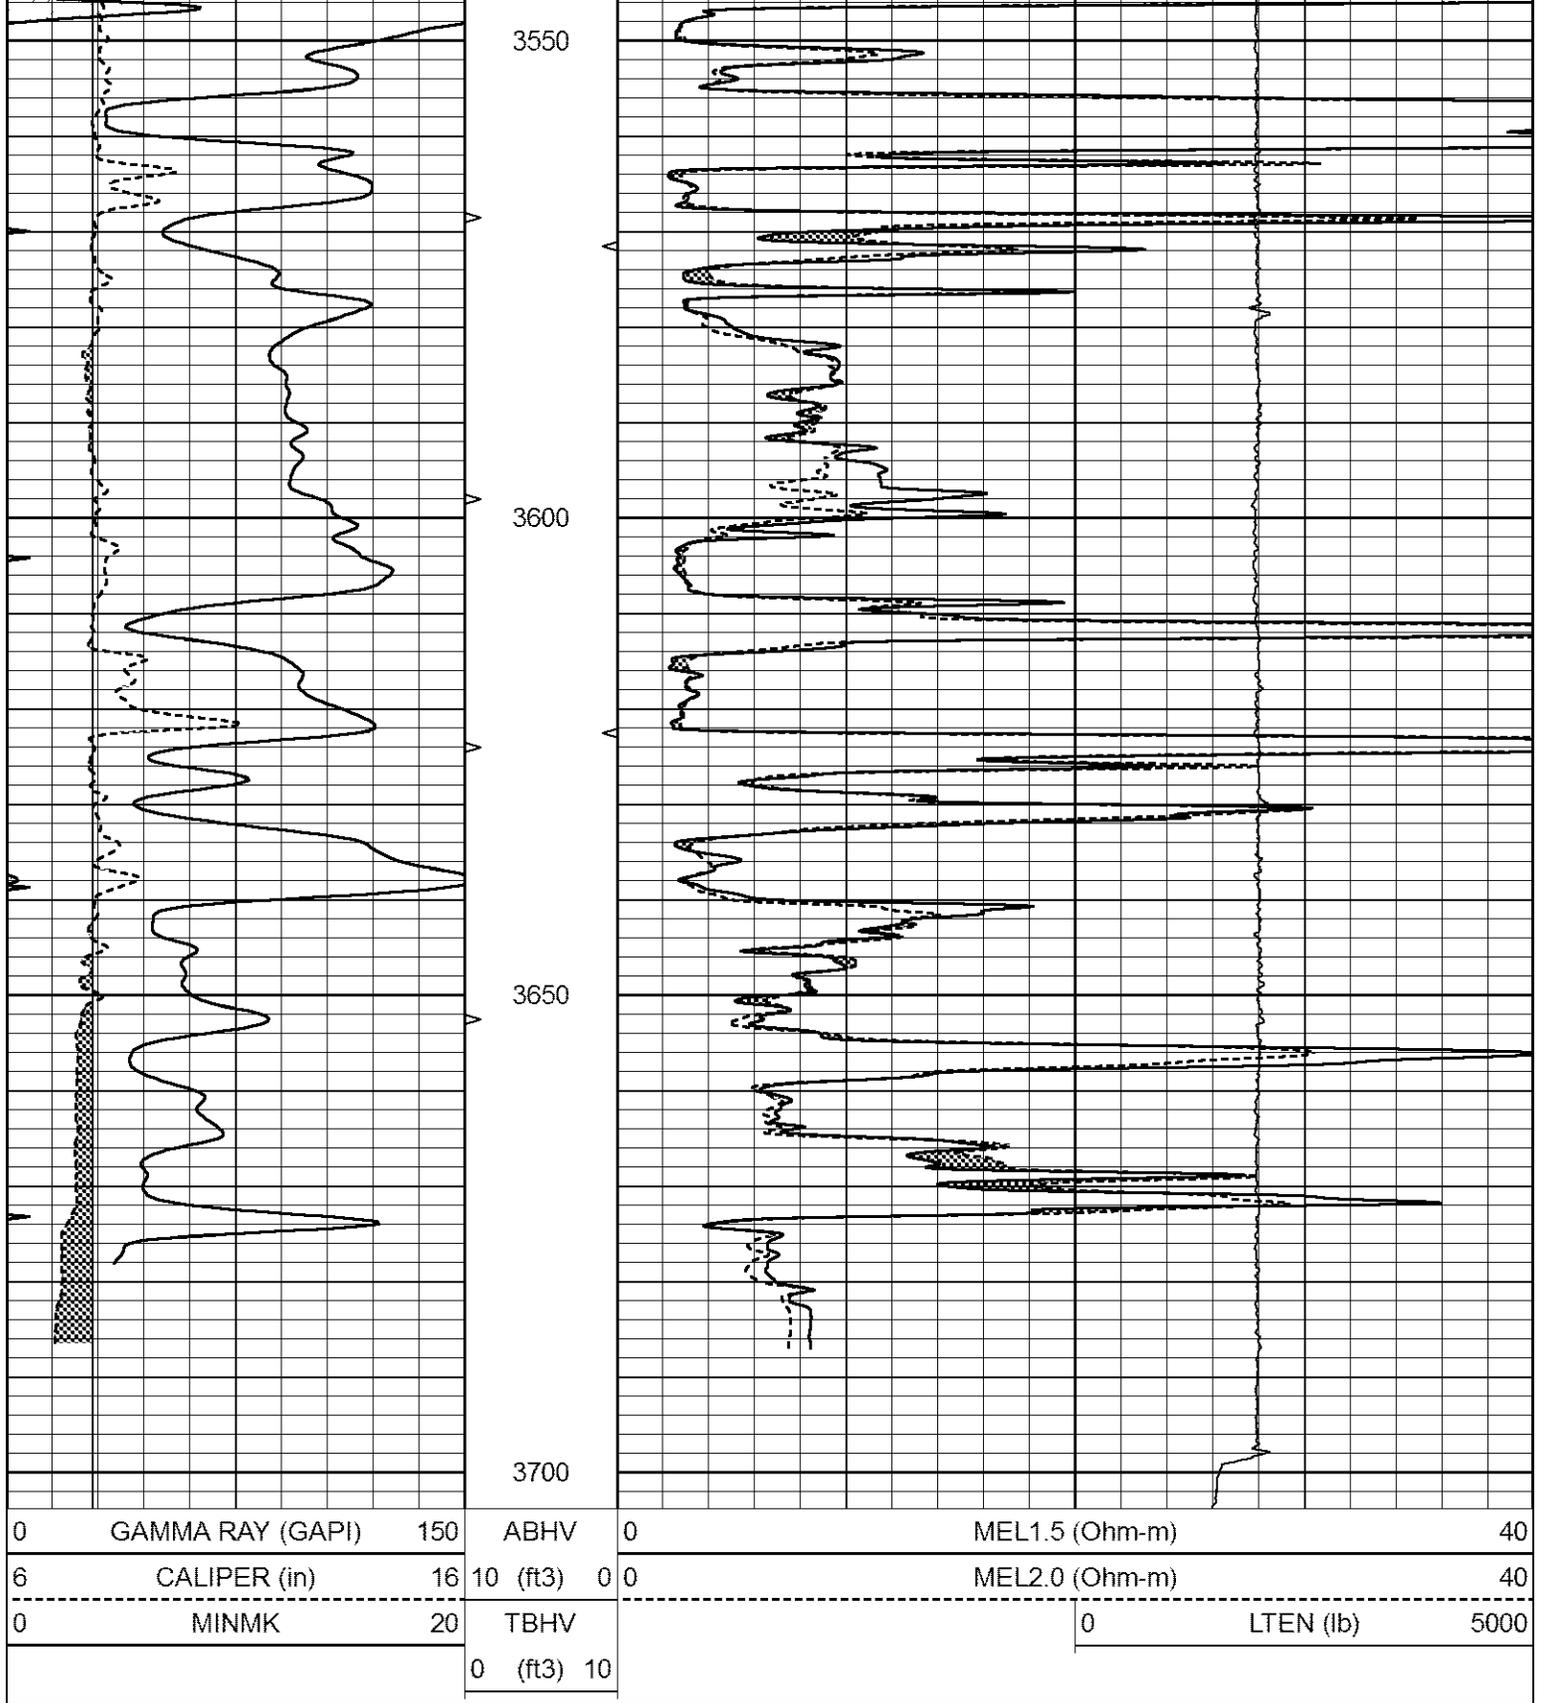

Calibration Report

Database File 8351ddn.db
 Dataset Pathname pass7D
 Dataset Creation Mon Sep 25 04:25:21 2023

MICRO_USR Calibration Report

Serial Number: 070911
 Tool Model: Probel
 Performed: Fri Sep 15 13:51:55 2023

Caliper Calibration: Gain=4.500 Offset=-0.700

References Low Cal 8.000 High Cal 14.000
Readings 1.451 3.049

1.5" Calibration: Gain=30.000 Offset=-0.500

References Low Cal 0.000 High Cal 20.000
Readings 0.004 0.843

2" Calibration: Gain=33.000 Offset=-0.500

References Low Cal 0.000 High Cal 20.000
Readings 0.021 0.810

Microlog Calibration Report

Serial-Model: 070911-ProbeL
Performed: Sat May 14 04:48:25 2022

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number: 070558
Tool Model: Probe1
Performed: Mon Jul 17 10:21:25 2023

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 1.0 cps

Sensitivity: 0.2700 GAPI/cps