



MICRO LOG

Company ANCHOR BAY PETROLEUM, LLC.

Well PBR #1

Field RANKIN

County ELLIS State KANSAS

Location: API #: 15-051-27099-0000

1850 FSL & 4018 FEL
NE - SE - NW - SW

SEC 33 TWP 13S RGE 20W

Permanent Datum GROUND LEVEL Elevation 2321
Log Measured From KELLY BUSHING 8' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL
DIL
Elevation
K.B. 2329
D.F. 2327
G.L. 2321

Date 10/26/23

Run Number TWO

Depth Driller 4020

Depth Logger 4022

Bottom Logged Interval 4020

Top Log Interval 3100

Casing Driller 8.625 @ 224

Casing Logger 224

Bit Size 7.875

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.0/57

pH / Fluid Loss 10.5/6.0

Source of Sample FLOWLINE

Rm @ Meas. Temp 1.10 @ 74F

Rmf @ Meas. Temp .825 @ 74F

Rmc @ Meas. Temp 1.32 @ 74F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .702 @ 116F

Time Circulation Stopped 4 HOURS

Time Logger on Bottom 7:00 A.M.

Maximum Recorded Temperature 116F

Equipment Number 3802

Location HAYS, KANSAS

Recorded By COLE ROBEN

Witnessed By ED GLASSMAN


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395


DIRECTIONS:
SOUTH OF ELLIS, KANSAS ON BLACKTOP FOR 3 3/4 MILES, EAST INTO

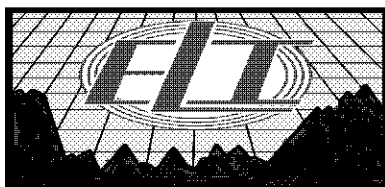


MAIN SECTION

Database File	7787ddn.db
Dataset Pathname	pass6D
Presentation Format	_micro
Dataset Creation	Thu Oct 26 07:42:48 2023
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV		0	LTEN (lb)
			0 (ft3)	10		5000

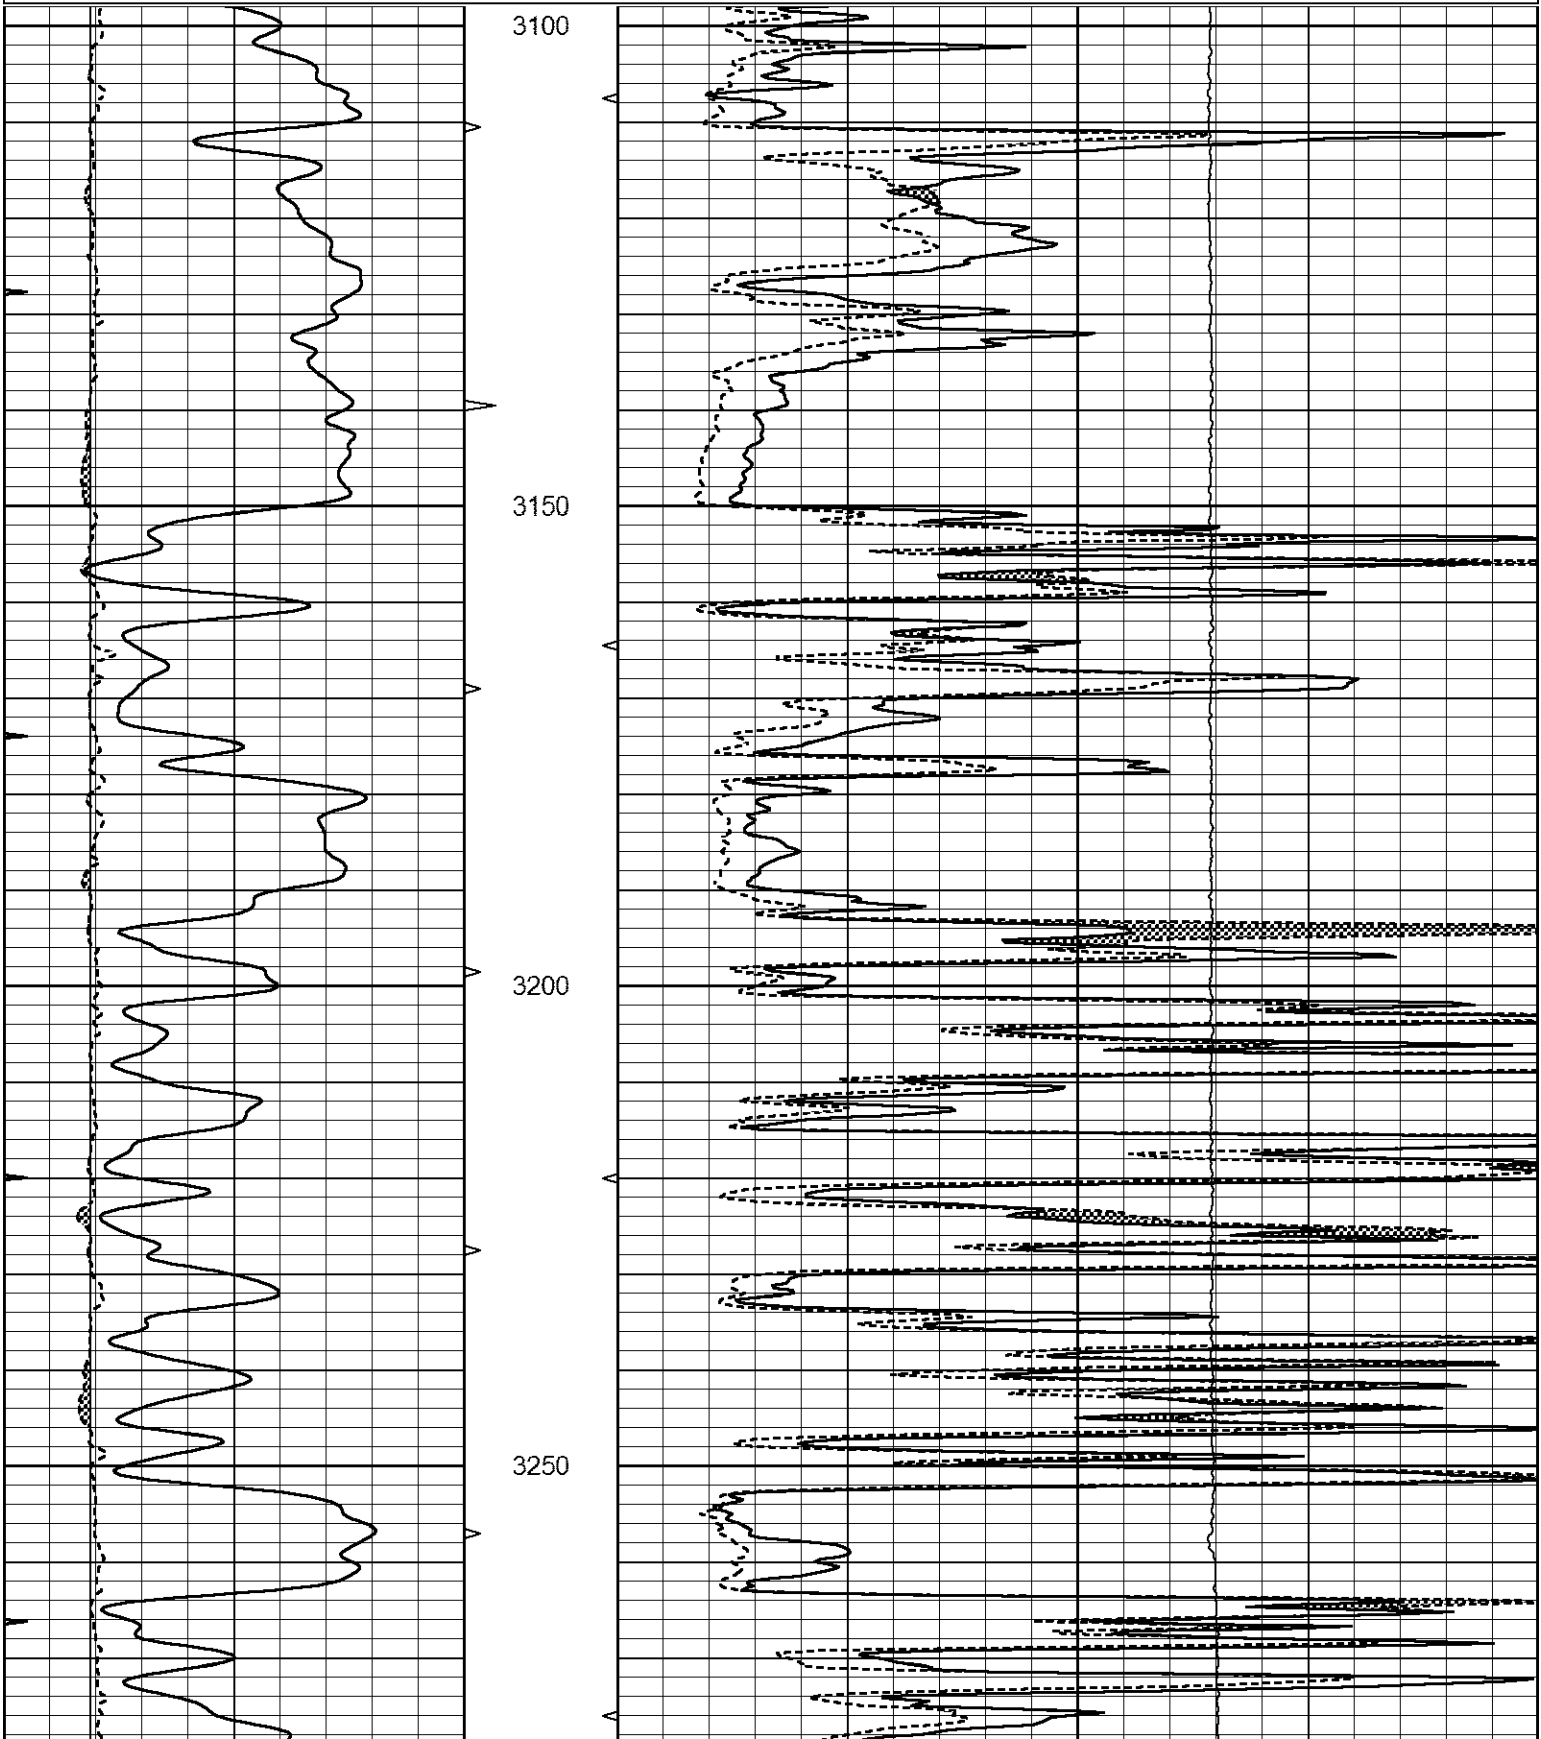

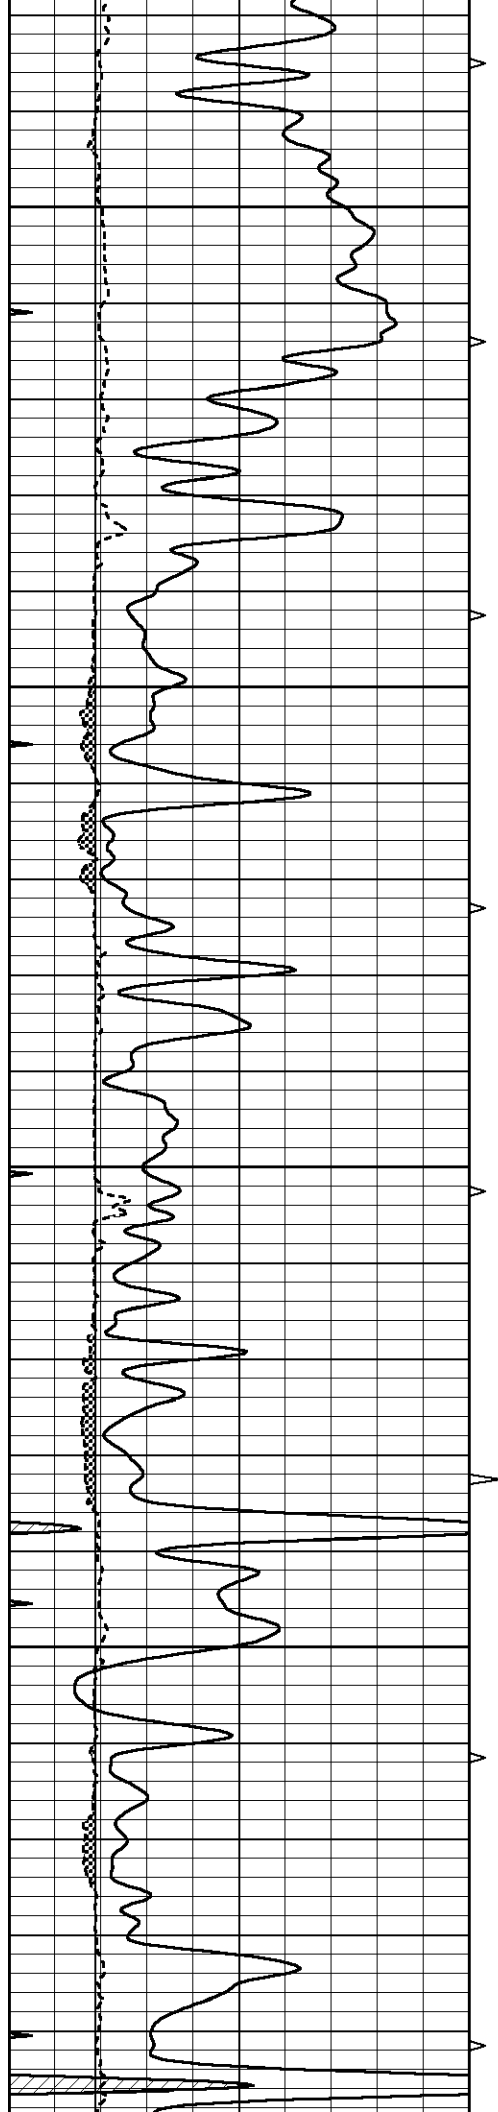



3300

3350

3400

3450

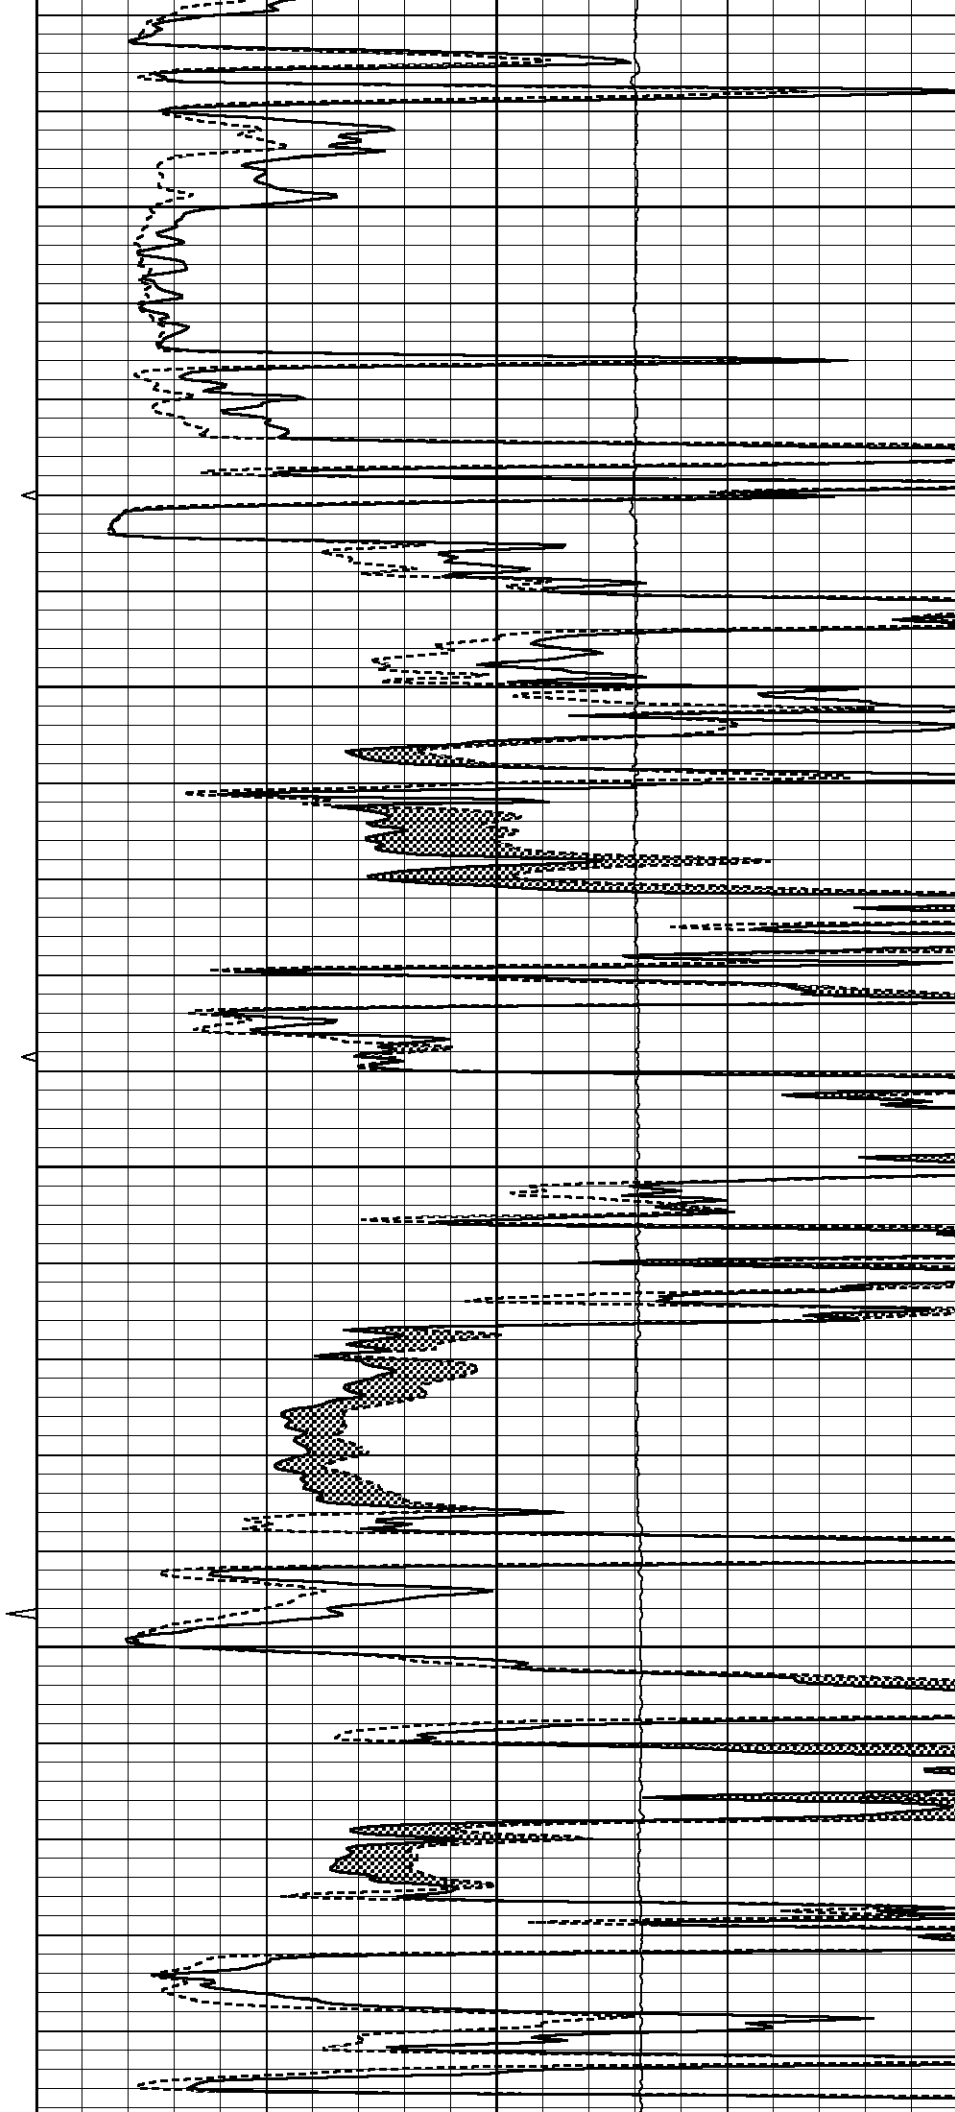

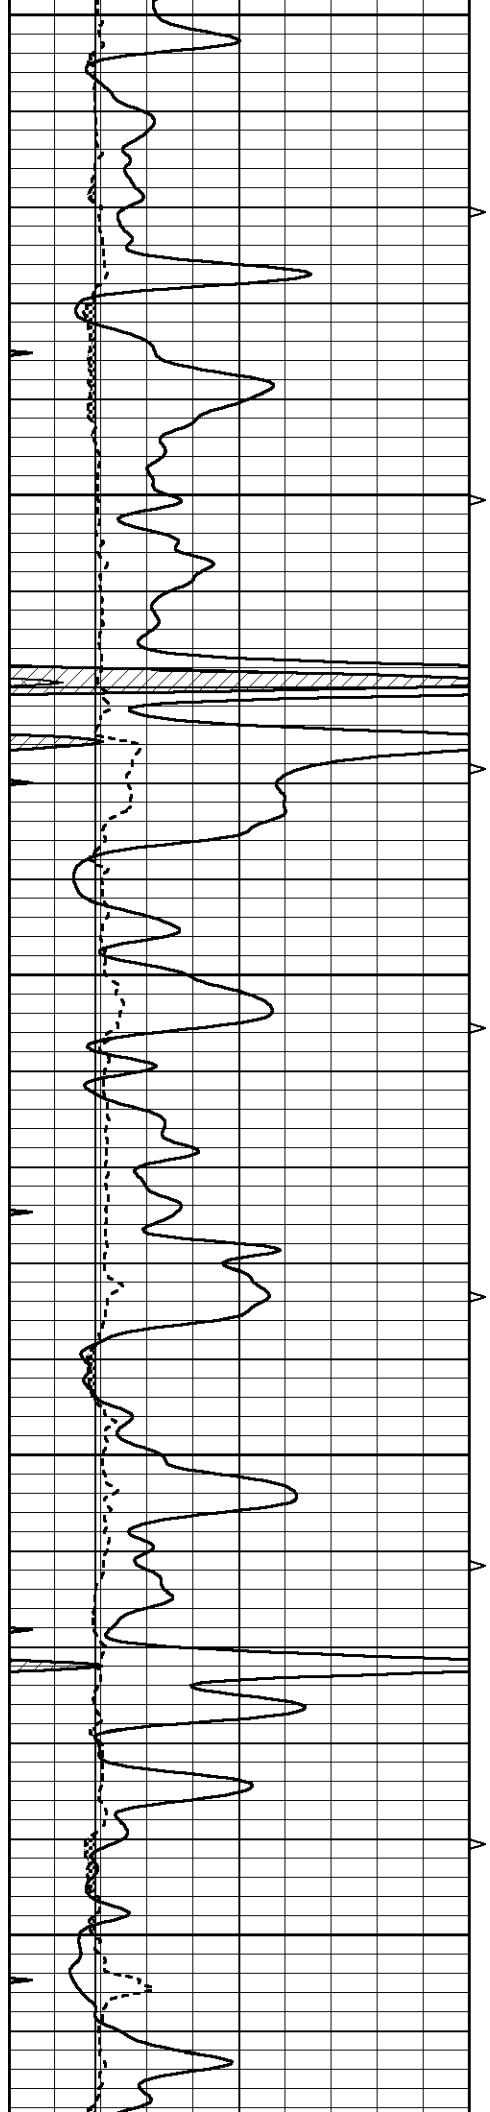


3500


3550

3600

3650

3700

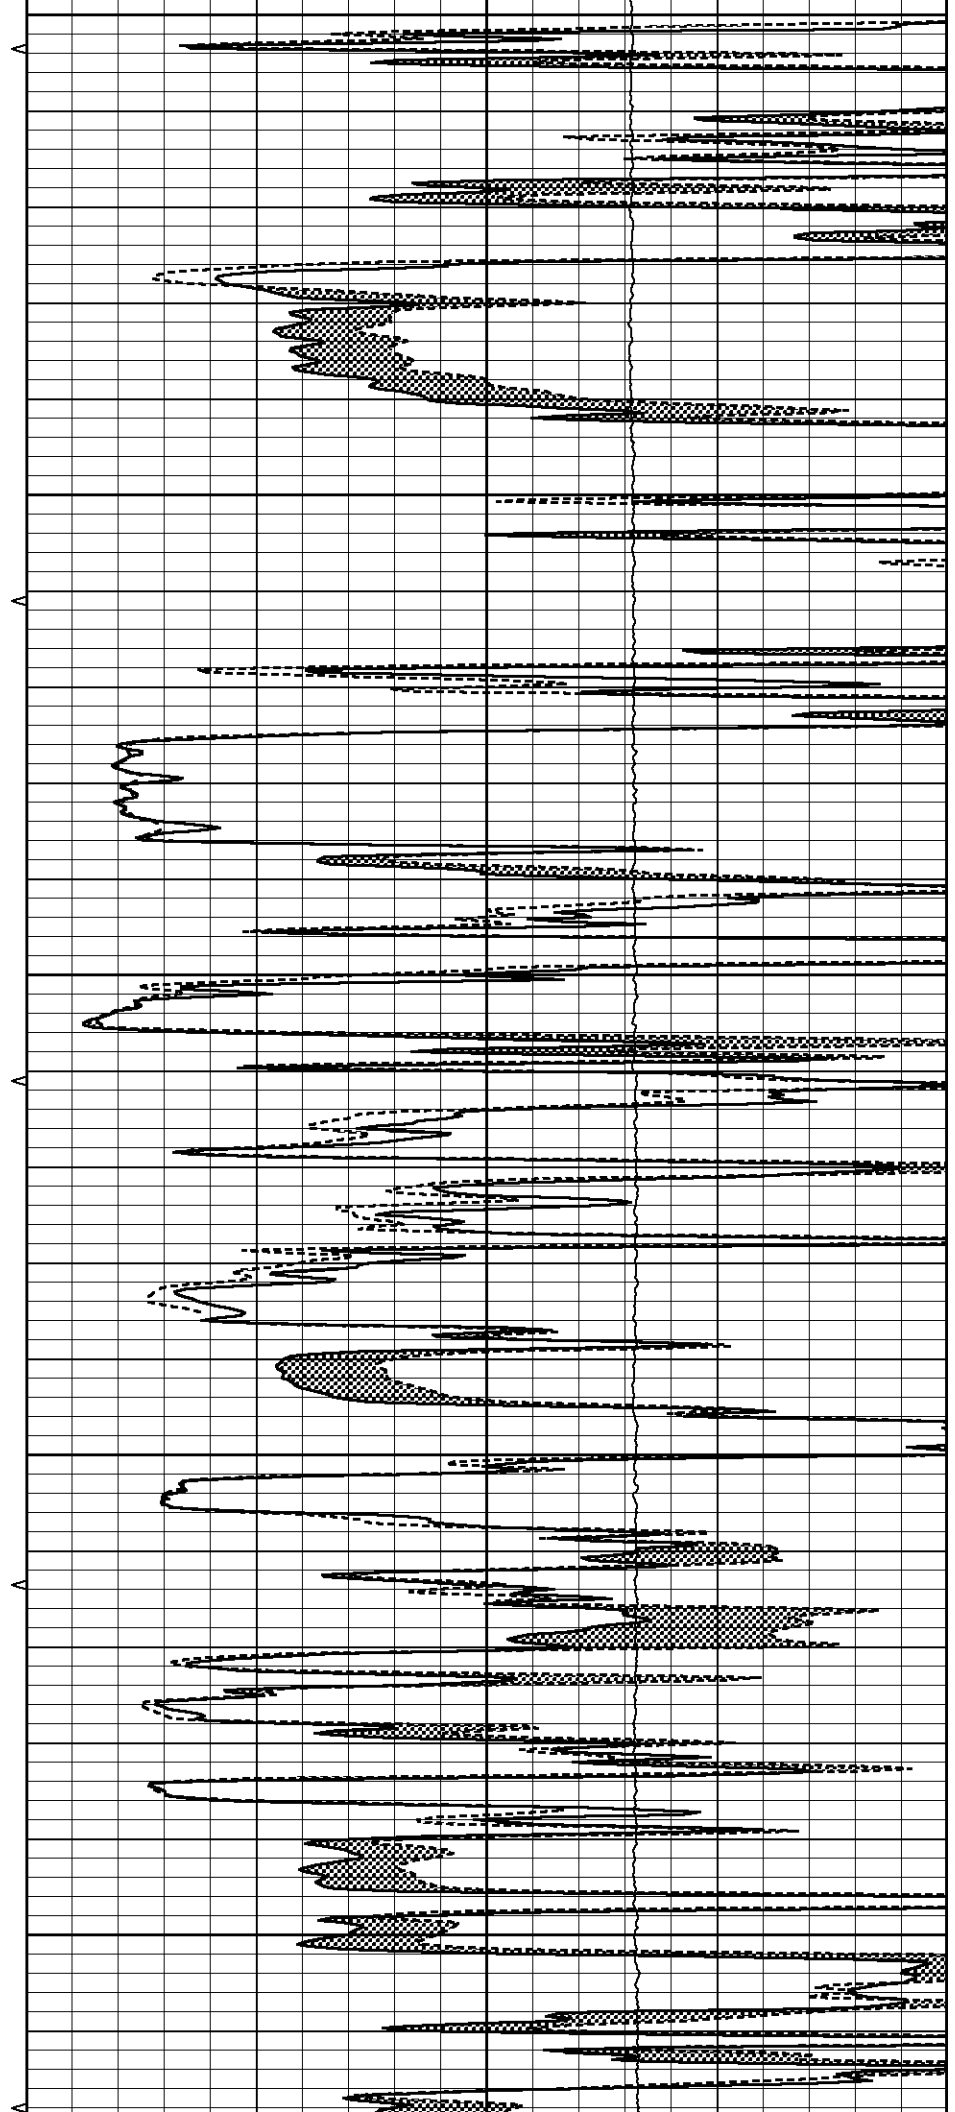

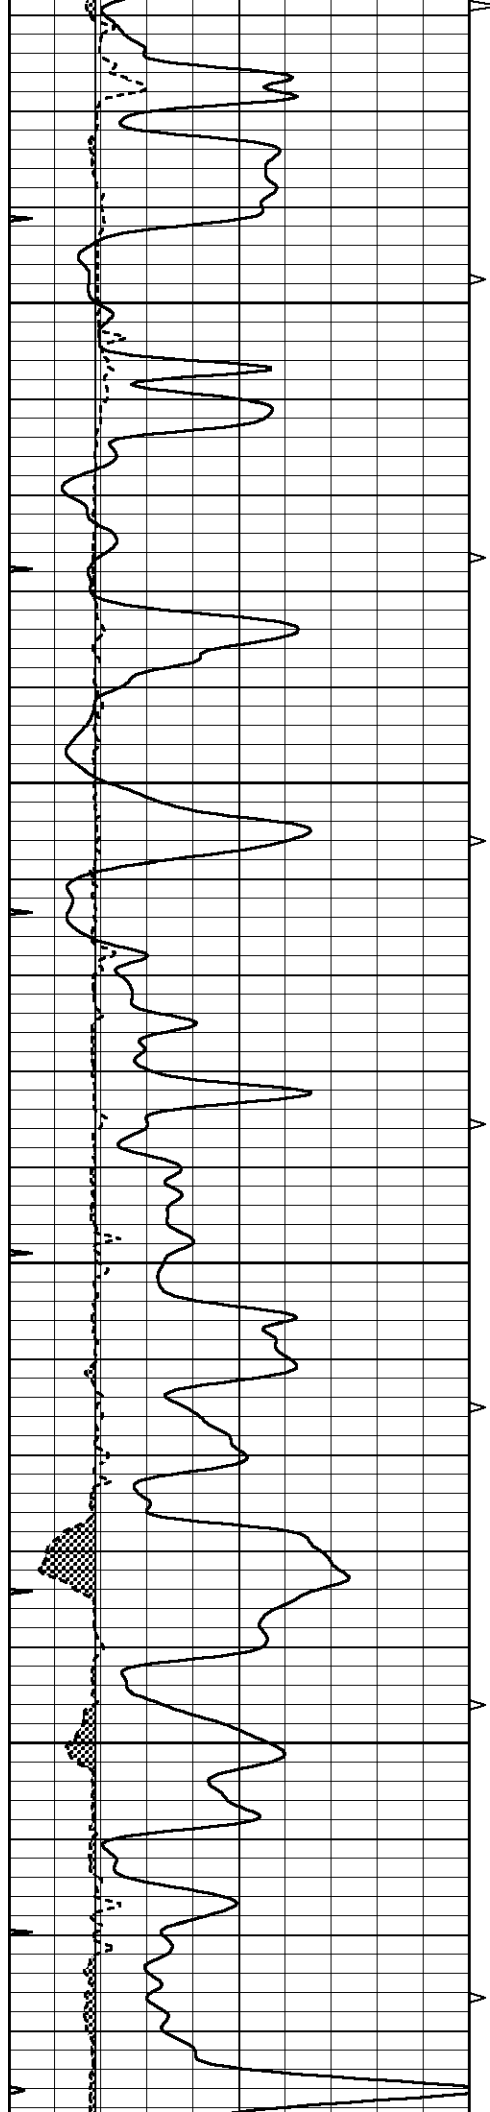




3750

3800

3850

3900

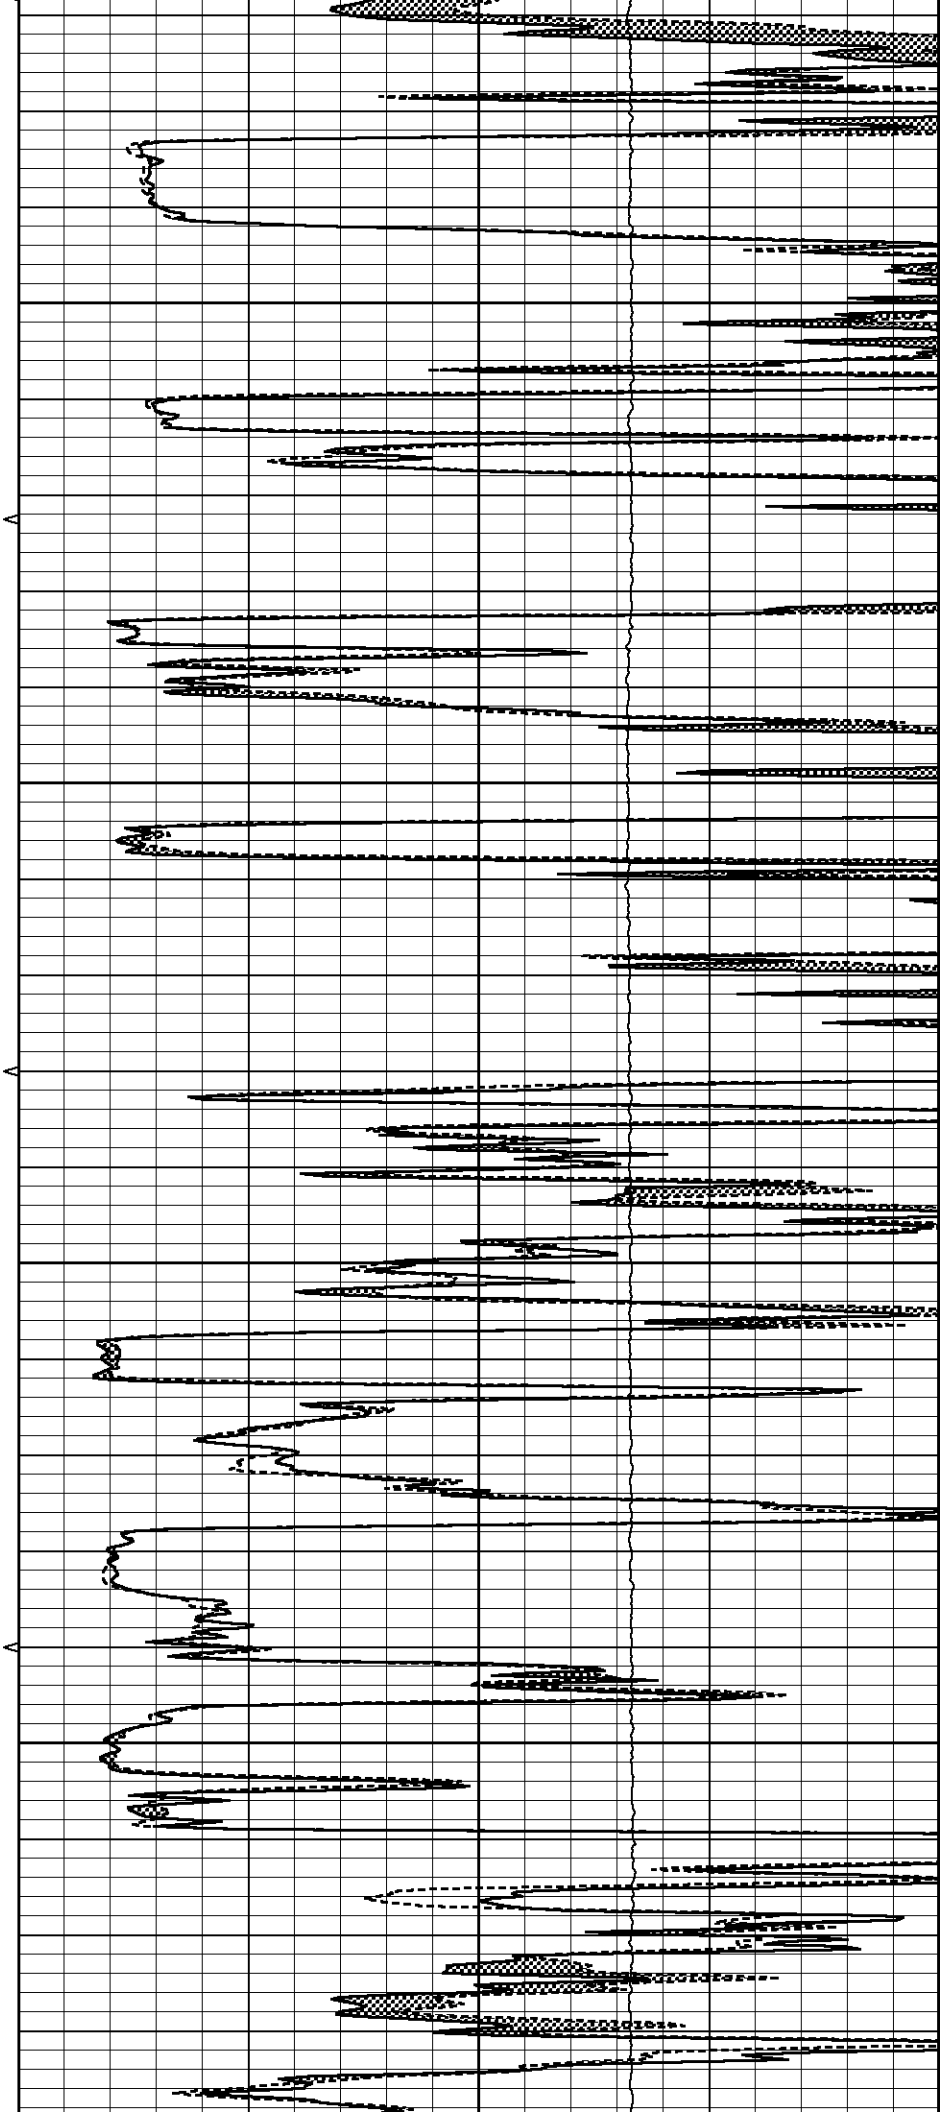


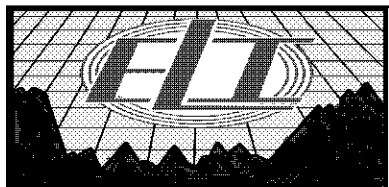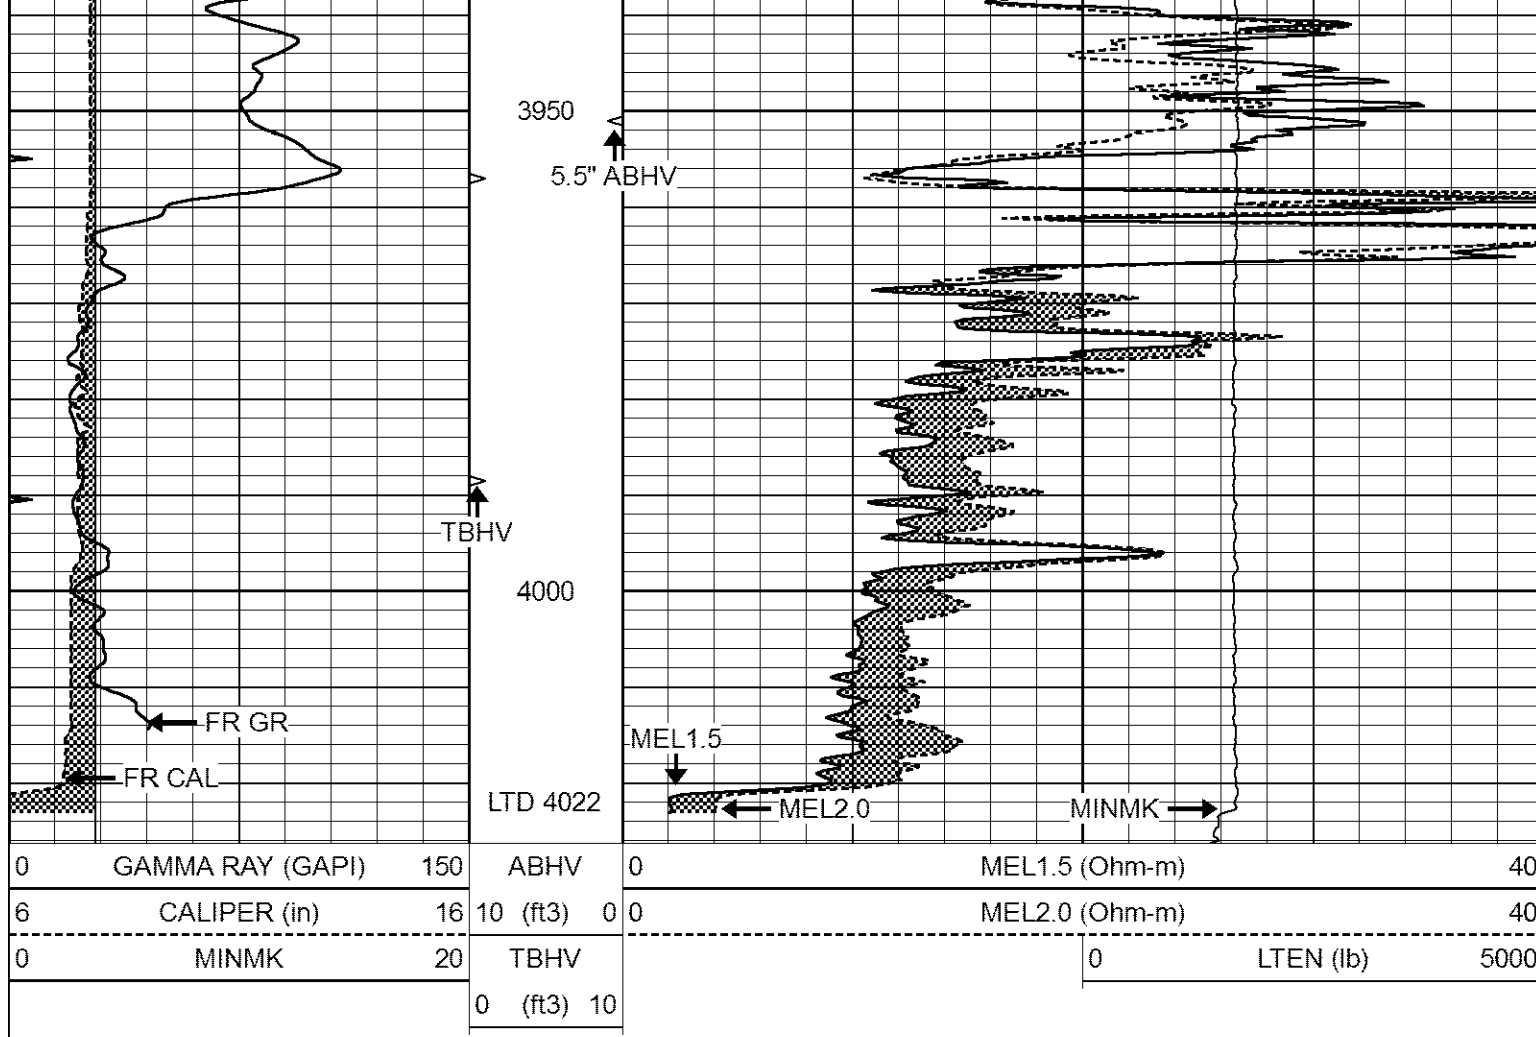


REPEAT SECTION

Database File 7787ddn.db
 Dataset Pathname pass5R
 Presentation Format _micro
 Dataset Creation Thu Oct 26 07:25:58 2023
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV	0	LTEN (lb)	5000
			0 (ft3) 10			

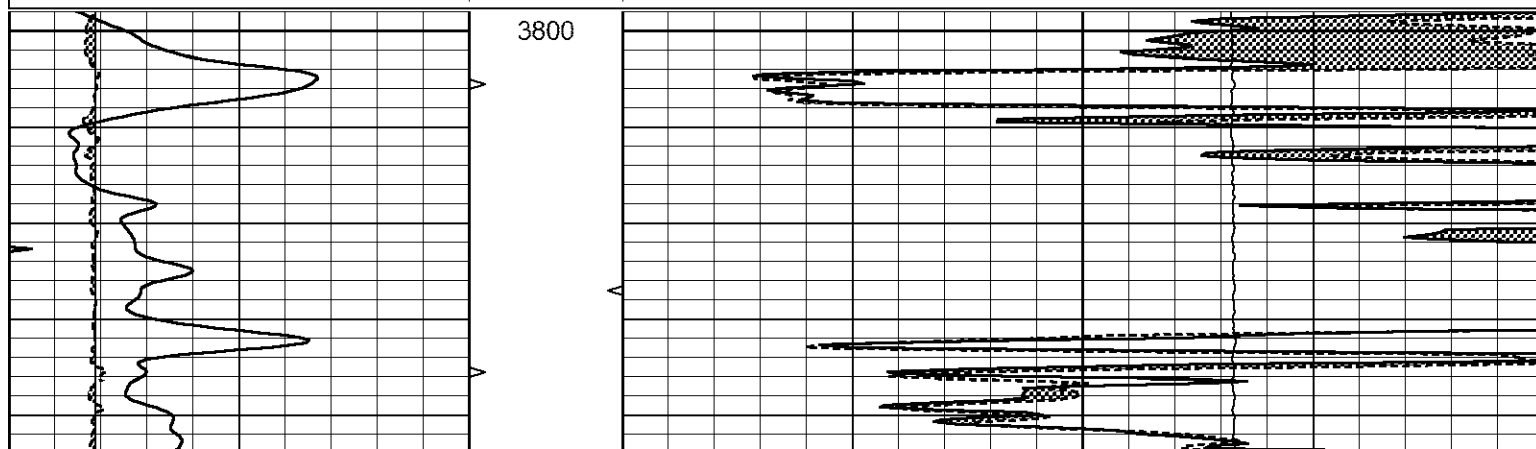

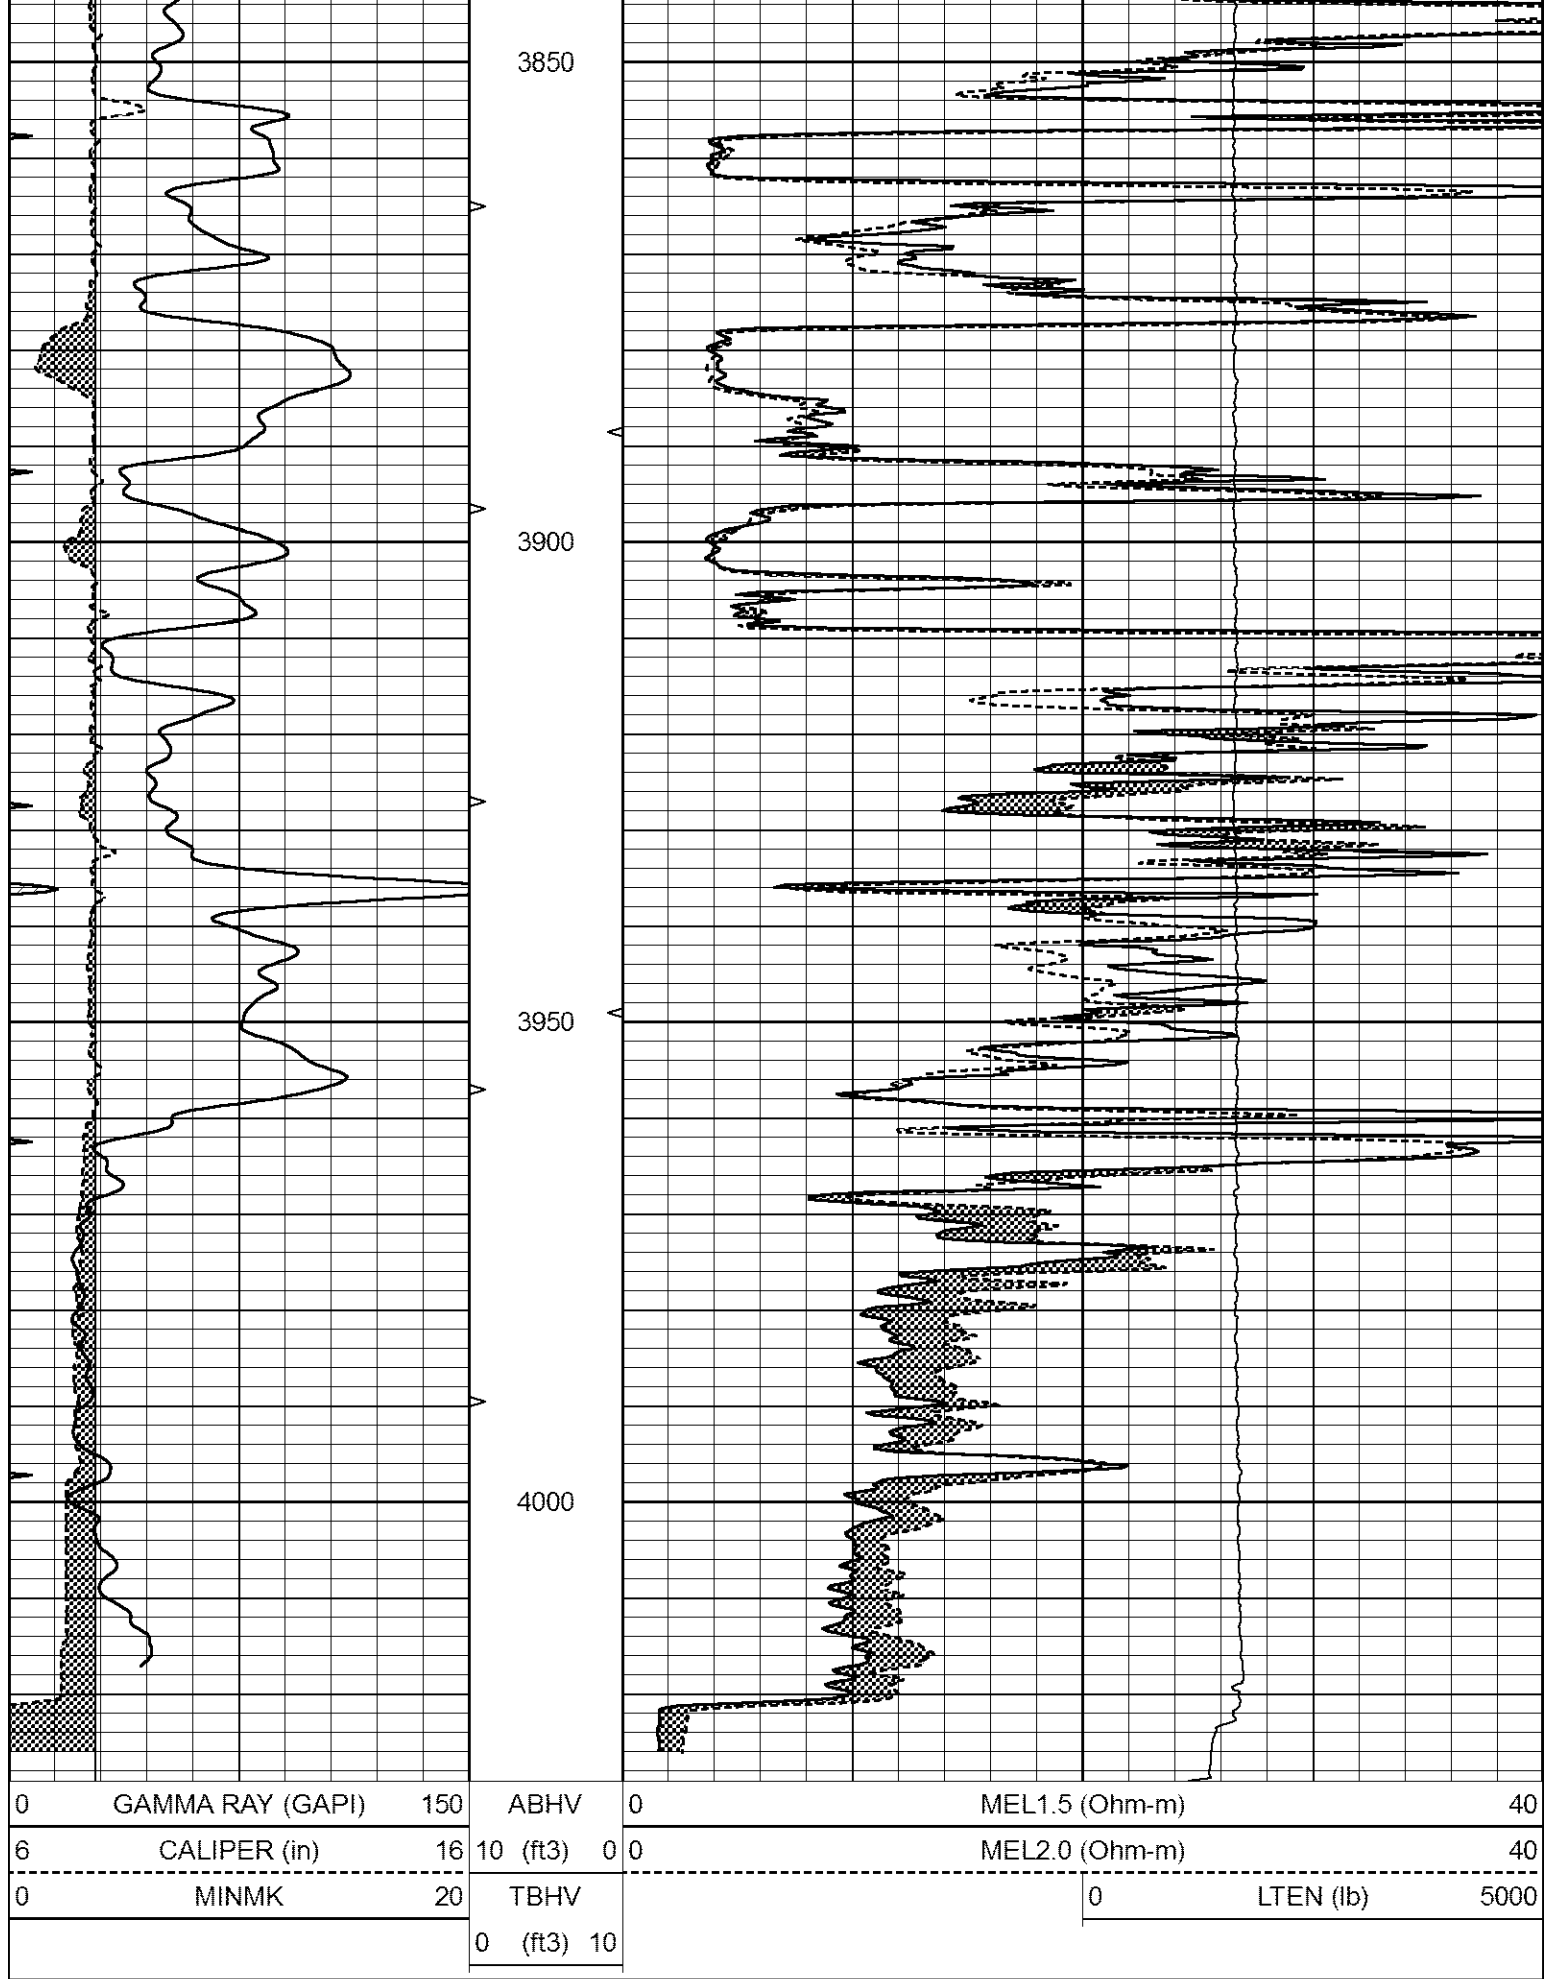

MICRO_USR Calibration Report

Serial Number: 070911
Tool Model: ProbeL
Performed: Fri Sep 15 13:51:55 2023

Caliper Calibration: Gain=4.500 Offset=0.700

	Low Cal	High Cal
References	8.000	14.000
Readings	1.451	3.049

1.5" Calibration: Gain=50.000 Offset=-0.900

	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	0.843

2" Calibration: Gain=48.000 Offset=0.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.021	0.810

Microlog Calibration Report

Serial-Model: 070911-ProbeL
Performed: Sat May 14 04:48:25 2022

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number: 070558
Tool Model: Probe1
Performed: Sat Sep 30 18:38:35 2023

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 1.0 cps

Sensitivity: 0.2700 GAPI/cps