

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-081-21032-00-00
Spot: SWSESW Sec/Twnshp/Rge: 4-30S-32W
70 feet from S Section Line, 1358 feet from W Section Line
Lease Name: C A VOSHELL Well #: 1
County: HASKELL Total Vertical Depth: 1502 feet

Operator License No.: 5952
Op Name: BP AMERICA PRODUCTION COMPANY
Address: 2225 WEST OKLAHOMA AVENUE
ULYSSES, KS 67880

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	2.375	1502	0	WITH 260 SX CMT
SURF	4.5	697		WITH 260 SX CMT

\$48.82

Well Type: SWD UIC Docket No: D27324.0 Date/Time to Plug: 02/28/2007 10:00 AM
Plug Co. License No.: 33338 Plug Co. Name: ORR ENTERPRISES, INC.
Proposal Rcvd. from: JOE EUDY Company: BP AMERICA Phone: (620) 356-6955

Proposed Plugging Method: PUMP 60/40 POZMIX WITH 6% GEL CEMENT (WITH COTTONSEED HULLS TO PLUG OFF THE PERFS) AND FILL THE 2.375' CASING FROM THE BOTTOM PERFS TO GROUND LEVEL. PRESSURE CASING TO 300 PSI. TIE ONTO ANNULUS BETWEEN SURFACE CASING AND 2.375' INJECTION STRING AND FILL WITH CEMENT. CUT OFF AND CAP CASINGS 4' BELOW GROUND LEVEL. RESTORE THE LOCATION.

Plugging Proposal Received By: _____ WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/28/2007 12:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

PUMP 100# HULLS & 50 SX CMT FROM 1380' TO SURFACE THROUGH 2 3/8" TUBING. PRESSURE TO 200# & SHUT IN. CHECK 2 3/8" X 4 1/2" ANNULUS. PRESSURED IMMEDIATELY. BACKSIDE FULL.

Perfs:


Top	Bot	Thru	Comments
1379	1502		

INVOICED
DATE 3-12-07
INV. NO. 2007061452

RECEIVED
KANSAS CORPORATION COMMISSION
MAR 09 2007
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED CLASS C CEMENT BY ORR ENTERPRISES.

Plugged through: TBG

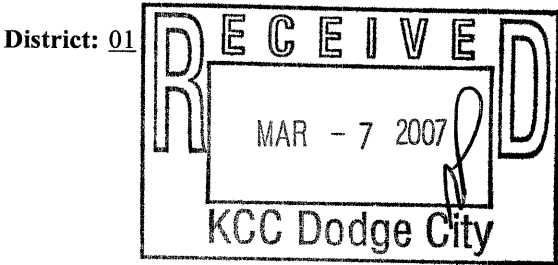

Signed Jim Holland PIRT III
(TECHNICIAN)

[Handwritten initials]