



MICRO LOG

Company CHIZUM OIL, LLC.
 Well LHR #2-26
 Field GERTRUDE NORTHWEST
 County SHERMAN
 State KANSAS

Company CHIZUM OIL, LLC.
 Well LHR #2-26
 Field GERTRUDE NORTHWEST
 County SHERMAN State KANSAS

Location: API #: 15-181-20645-0000
 1408' FNL & 2550' FEL
 N.W. - NW - SW - NE
 SEC 26 TWP 7S RGE 37W
 Permanent Datum GROUND LEVEL Elevation 3437
 Log Measured From KELLY BUSHING 6' A.G.L.
 Drilling Measured From KELLY BUSHING
 Other Services
 CDL/CNL
 DIL
 Elevation
 K.B. 3443
 D.F. 3441
 G.L. 3437


Date	6/25/22		
Run Number	TWO		
Depth Driller	4870		
Depth Logger	4871		
Bottom Logged Interval	4869		
Top Log Interval	3900		
Casing Driller	8 5/8" @ 368		
Casing Logger	368		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5,000 PPM	
Density / Viscosity	9.2/58		
PH / Fluid Loss	10.0/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.800 @ 80F		
Rmt @ Meas. Temp	.600 @ 80F		
Rmc @ Meas. Temp	.960 @ 80F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.516 @ 124F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	2:30 P.M.		
Maximum Recorded Temperature	124F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	COLE ROBBEN		
Witnessed By	TIM PRIEST		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
 DIRECTIONS:
 FROM BREWSTER, KANSAS TAKE MANCHESTER ROAD WEST THREE MILES
 TO ROAD 35, NORTH TO ROAD 70, EAST HALF MILE, AND SOUTH INTO

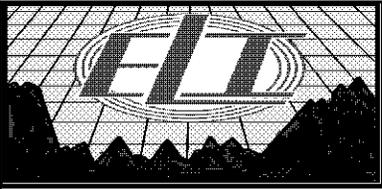


MAIN SECTION

Database File 6547ddn.db
 Dataset Pathname pass11.1M
 Presentation Format _micro
 Dataset Creation Sat Jun 25 16:51:43 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

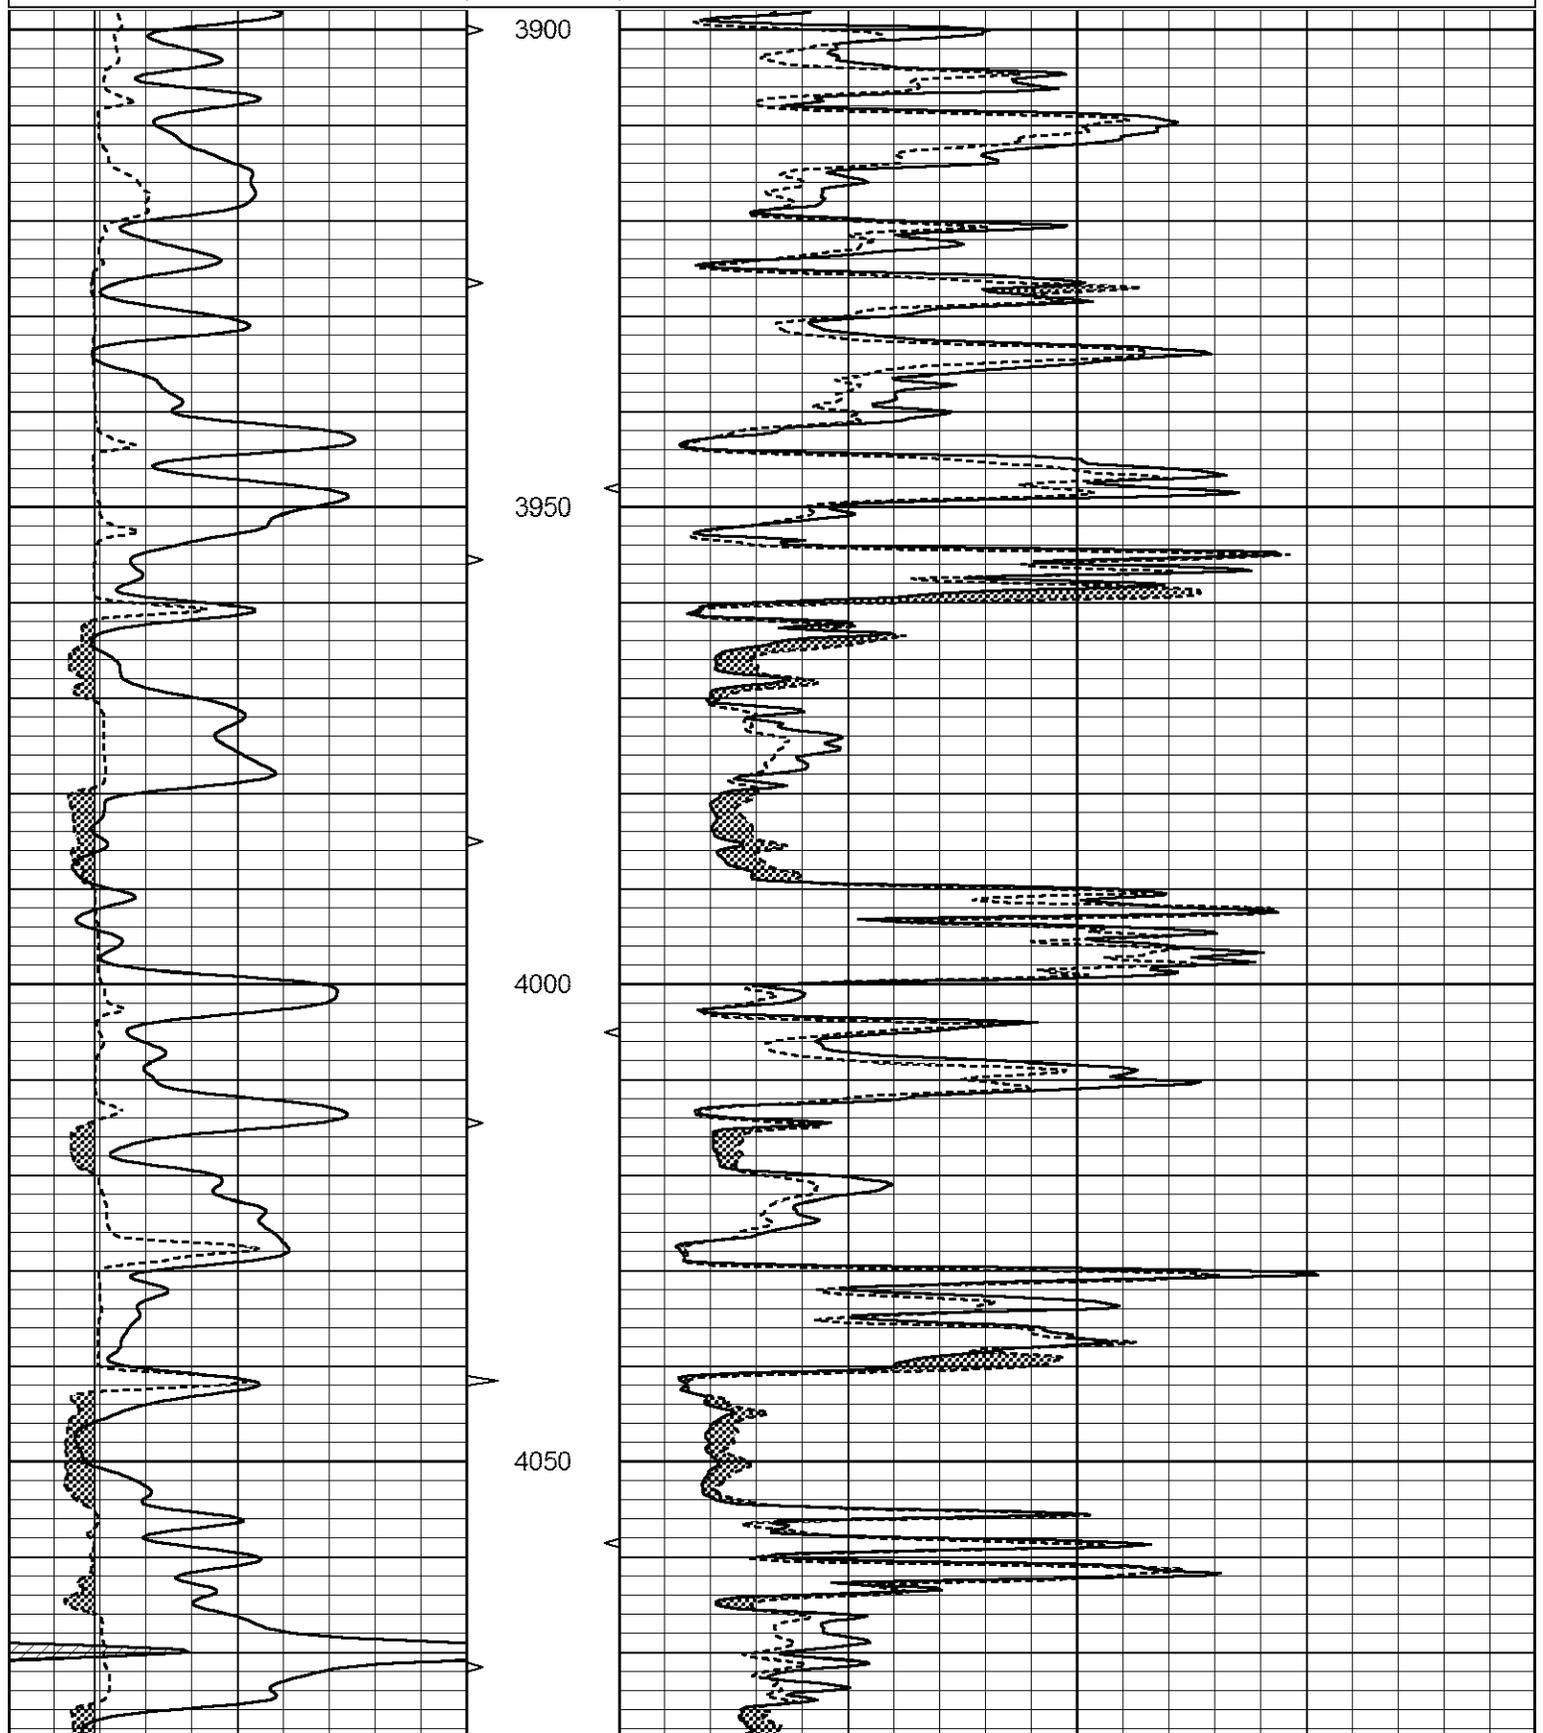

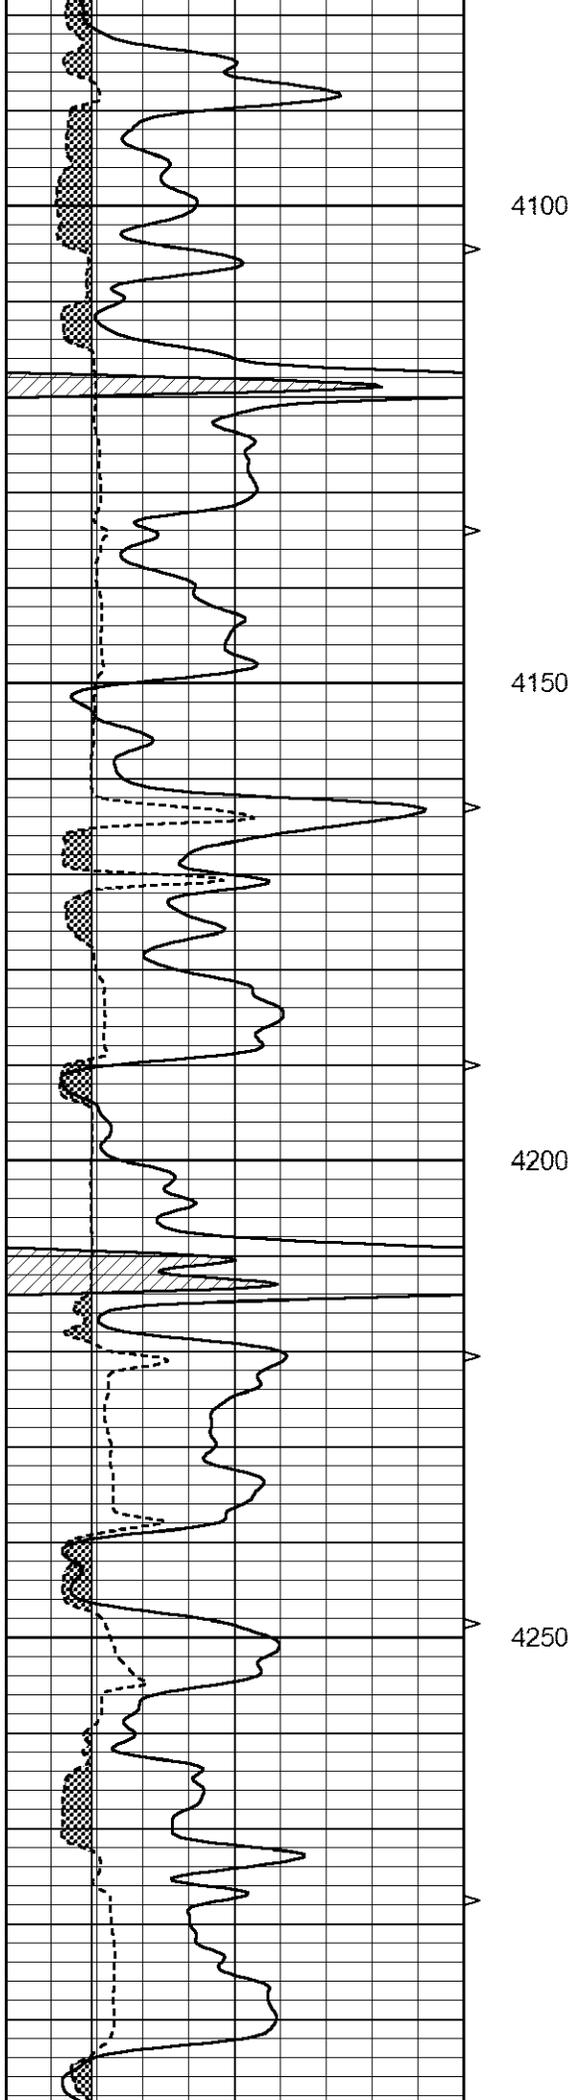



4100

4150


4200


4250

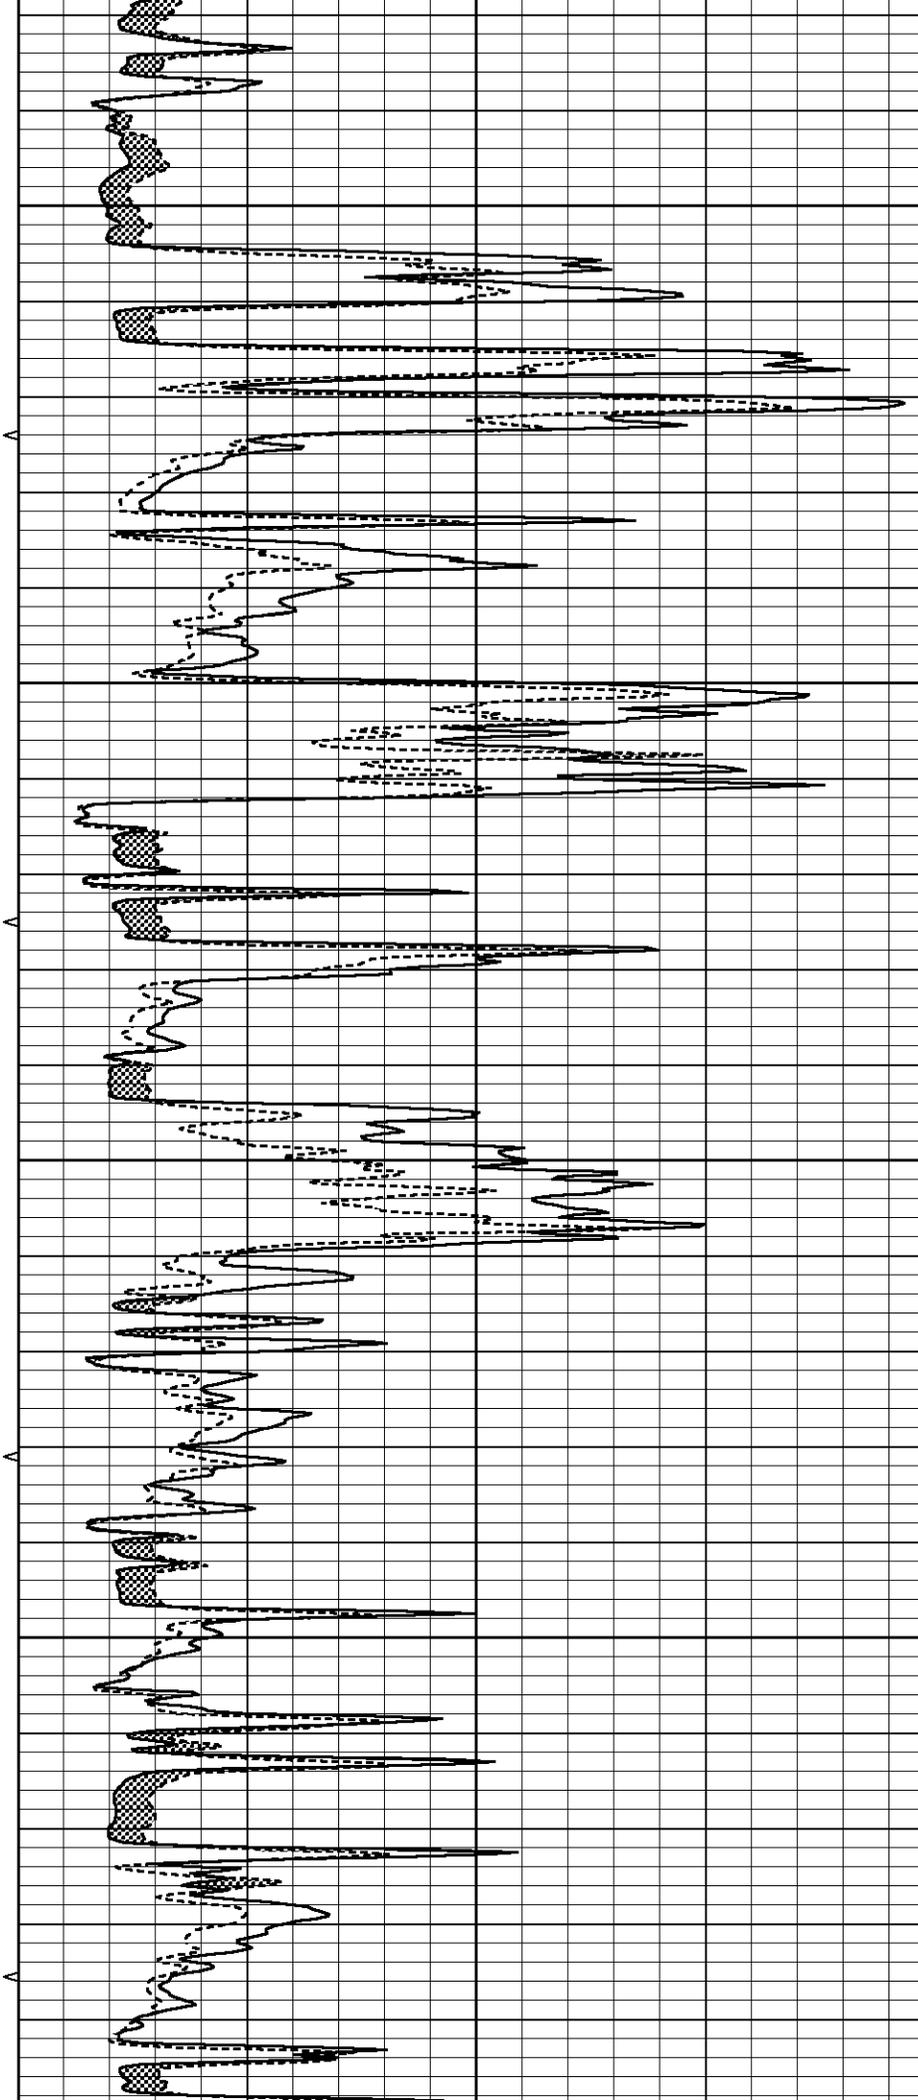


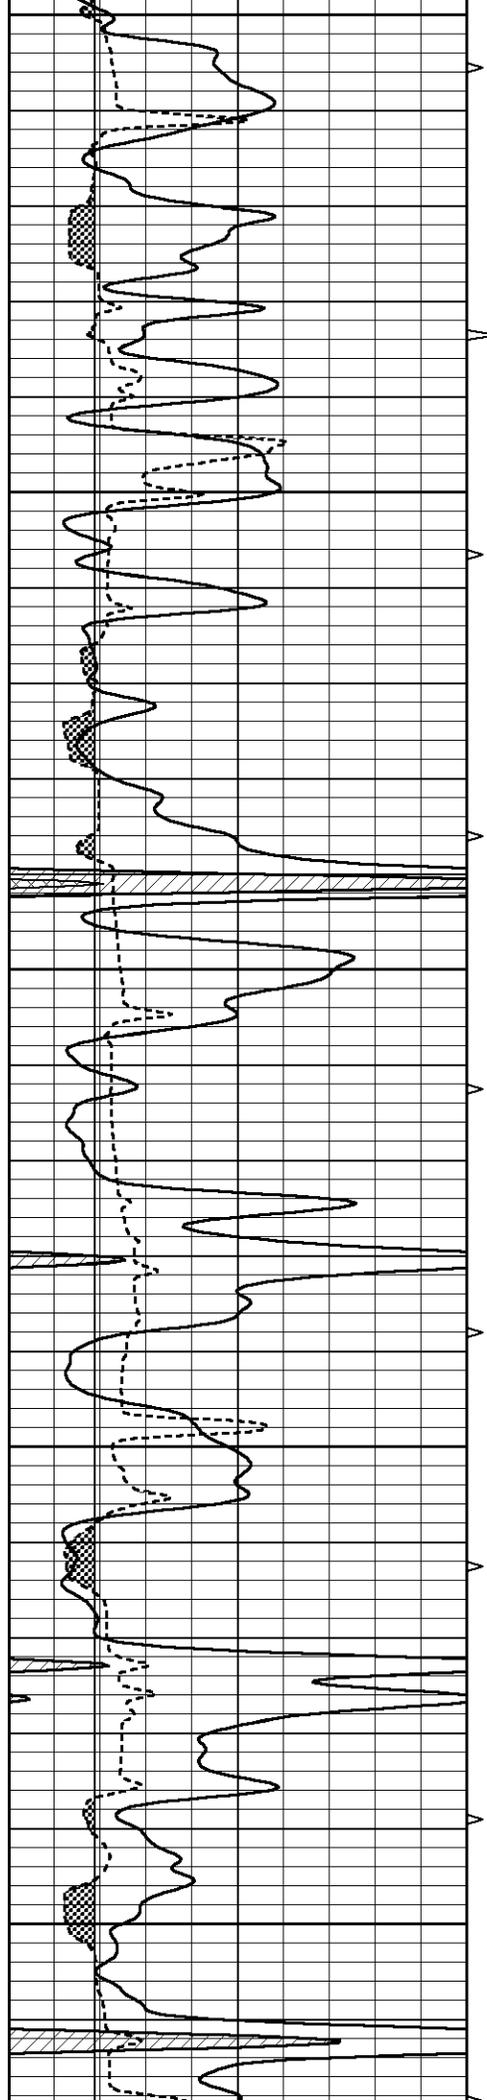

4300
4350
4400
4450
4500

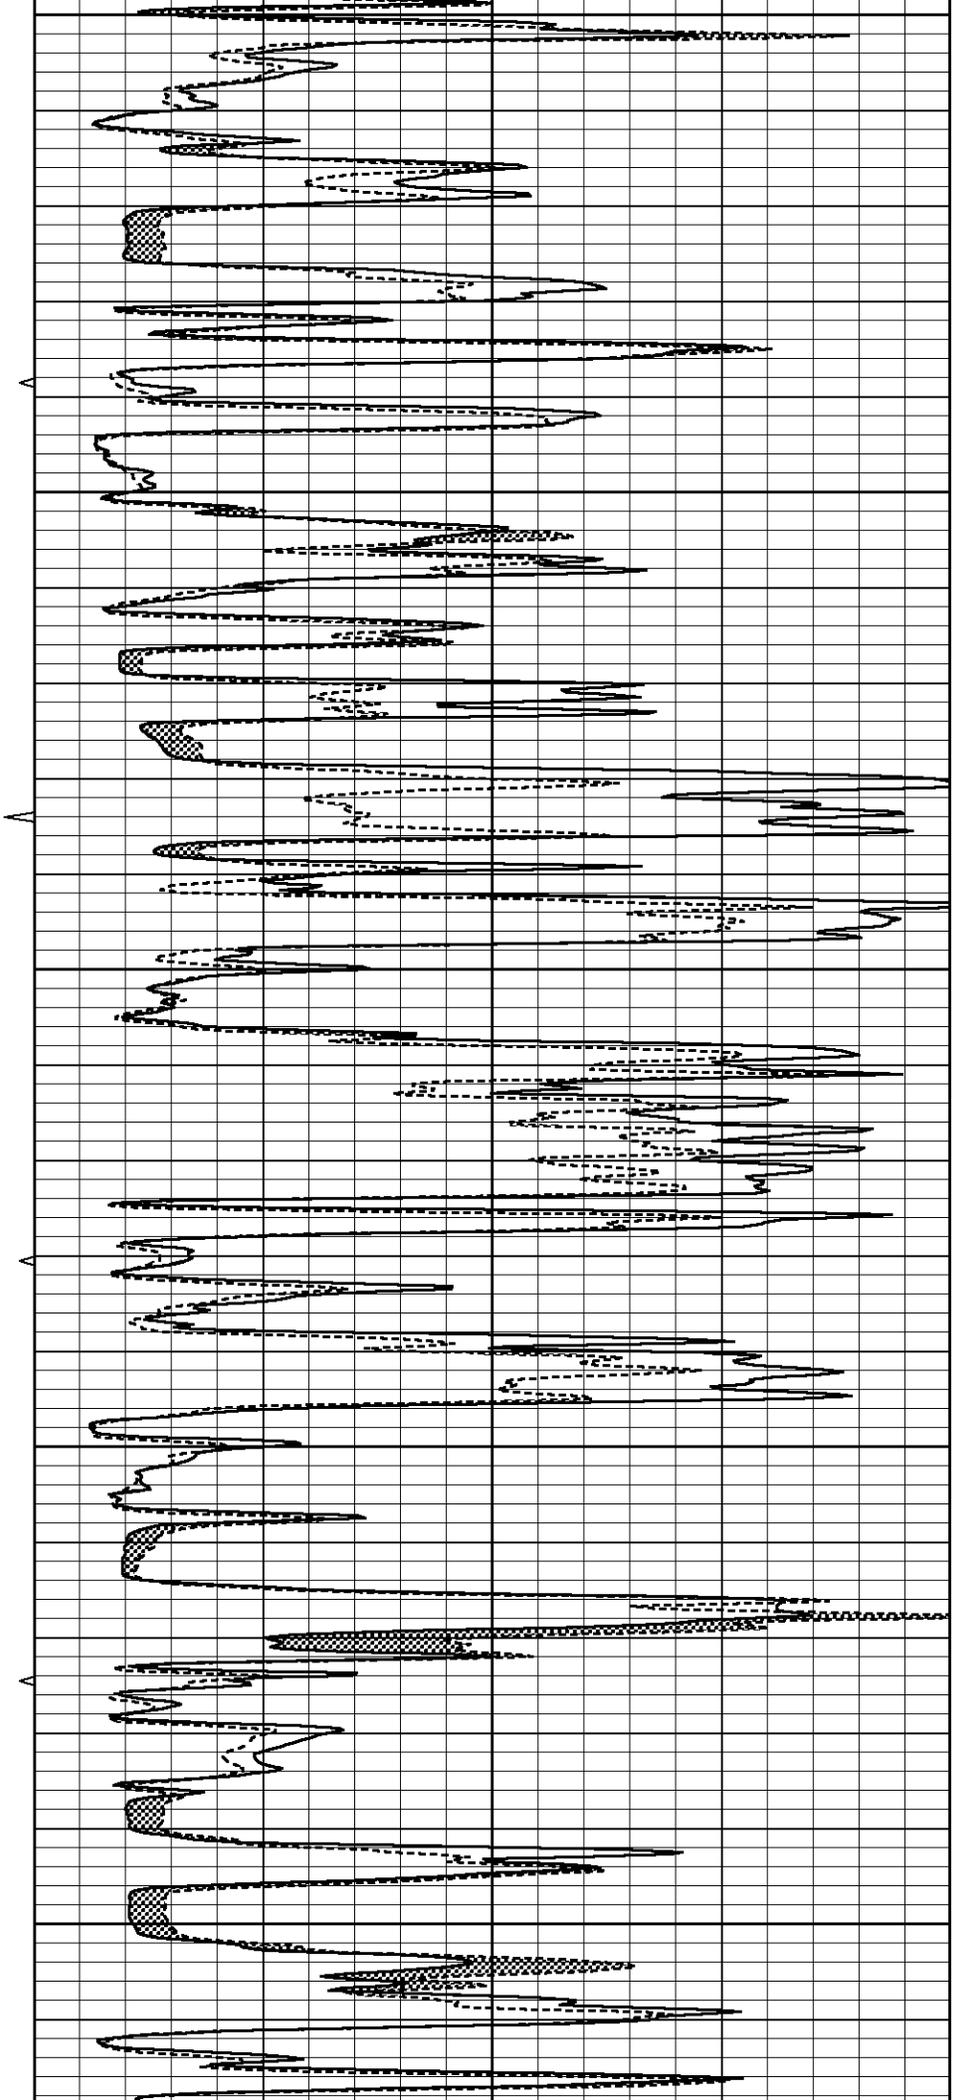

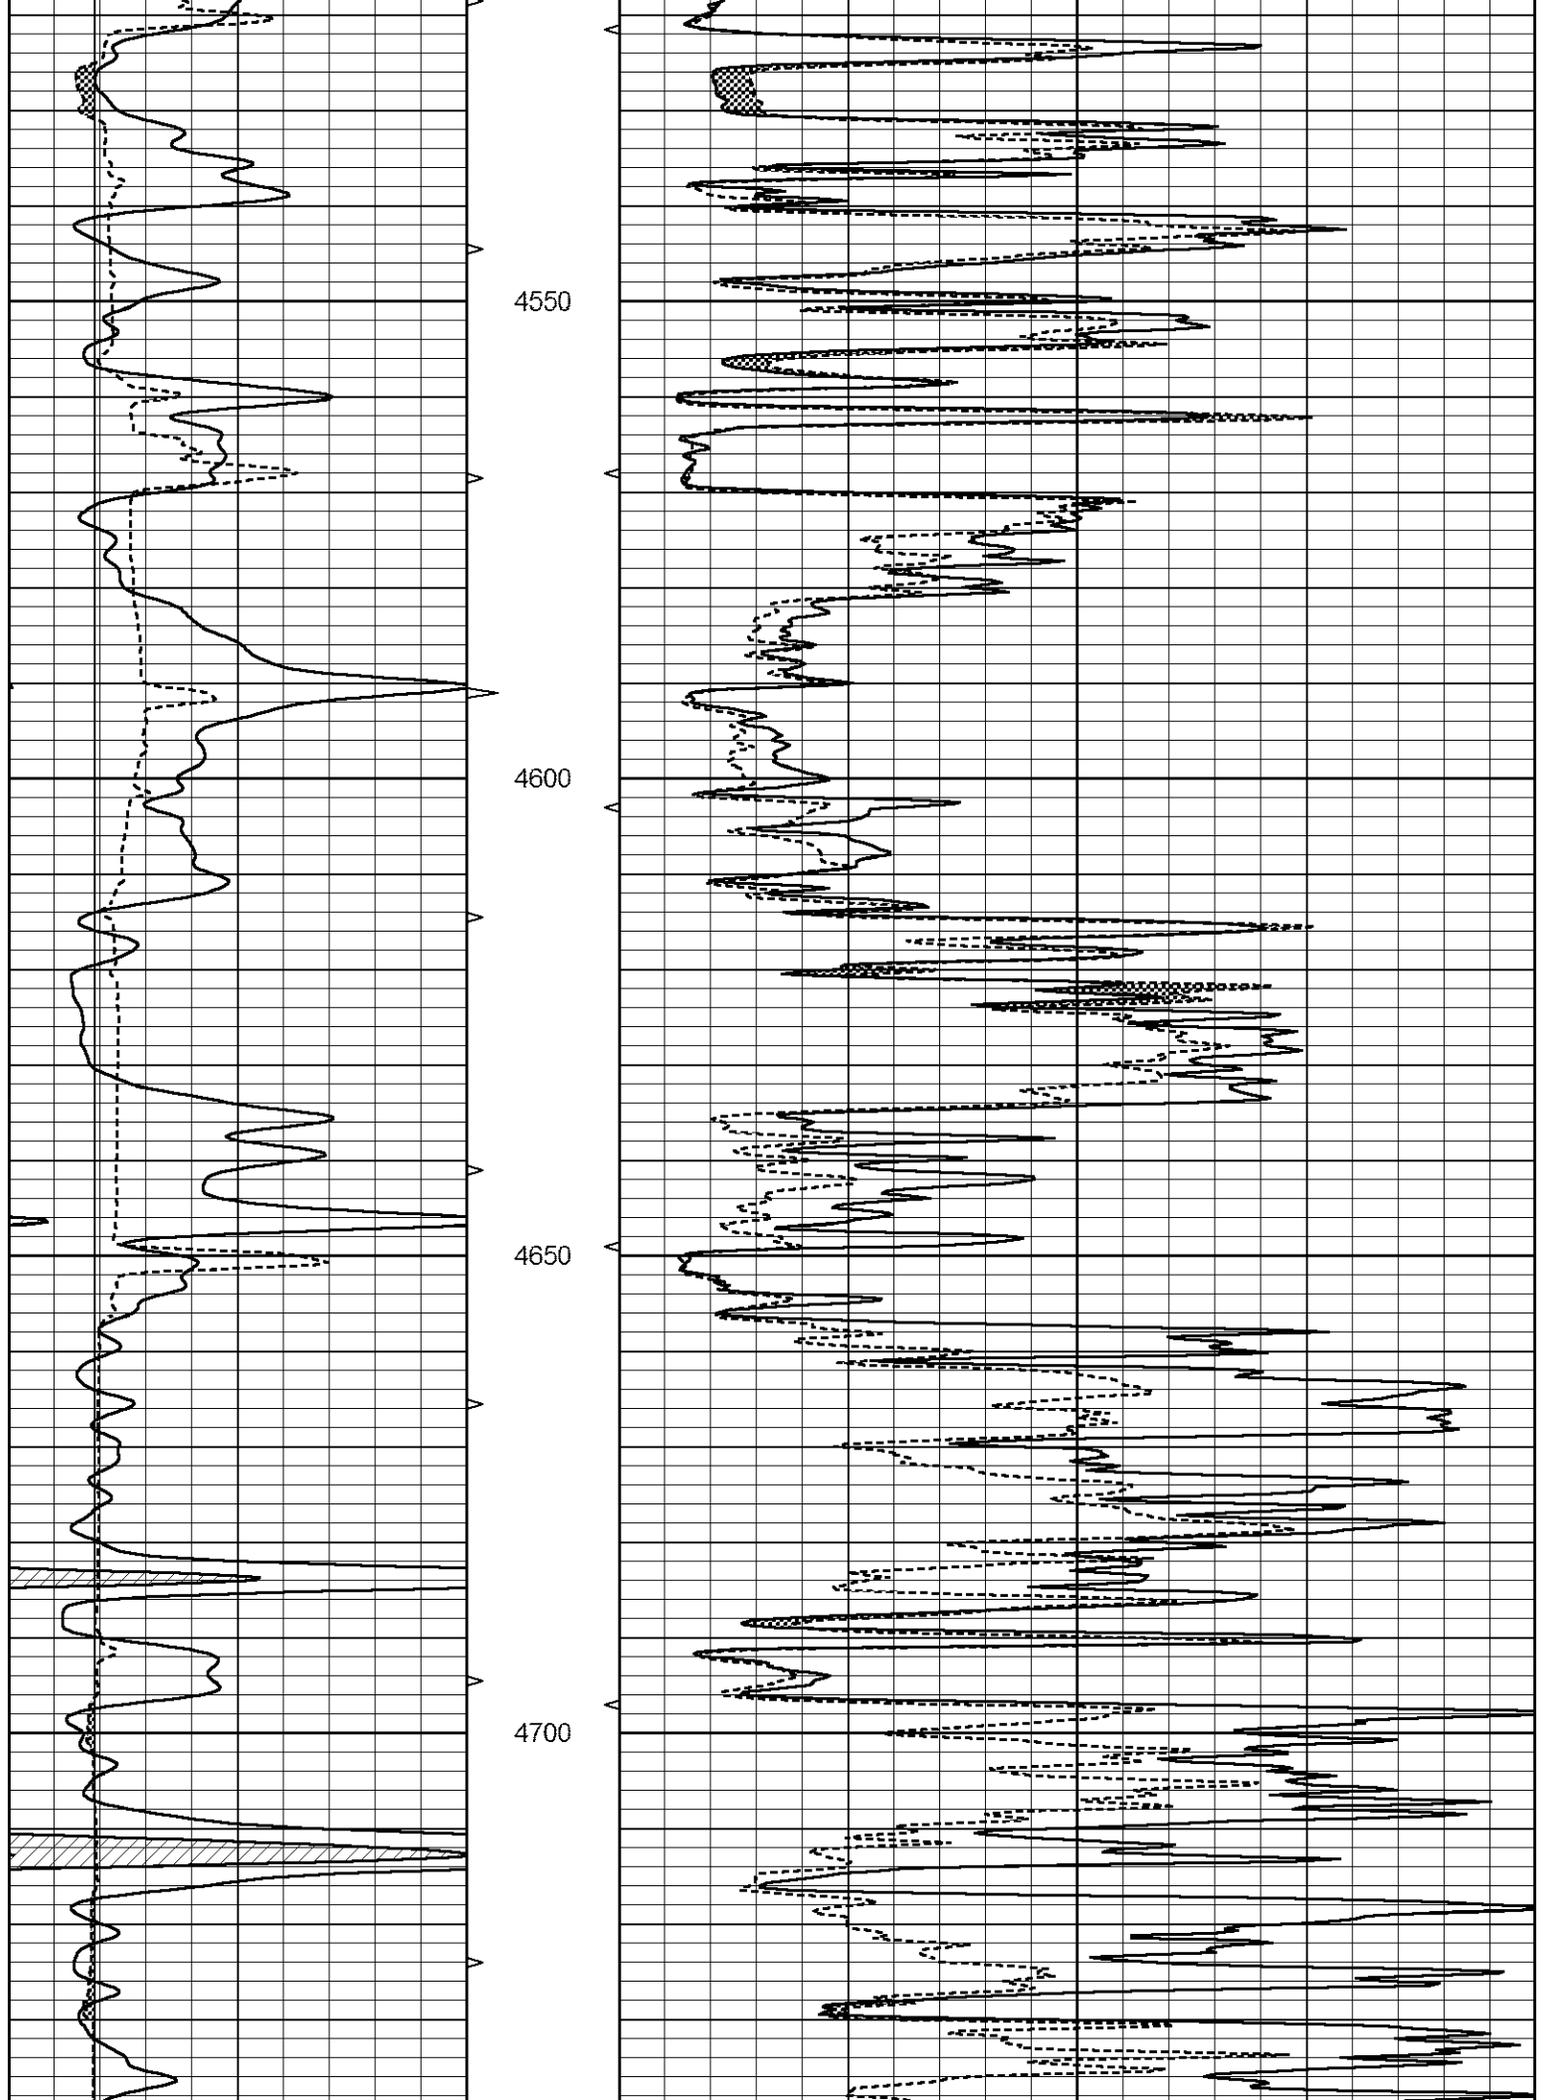

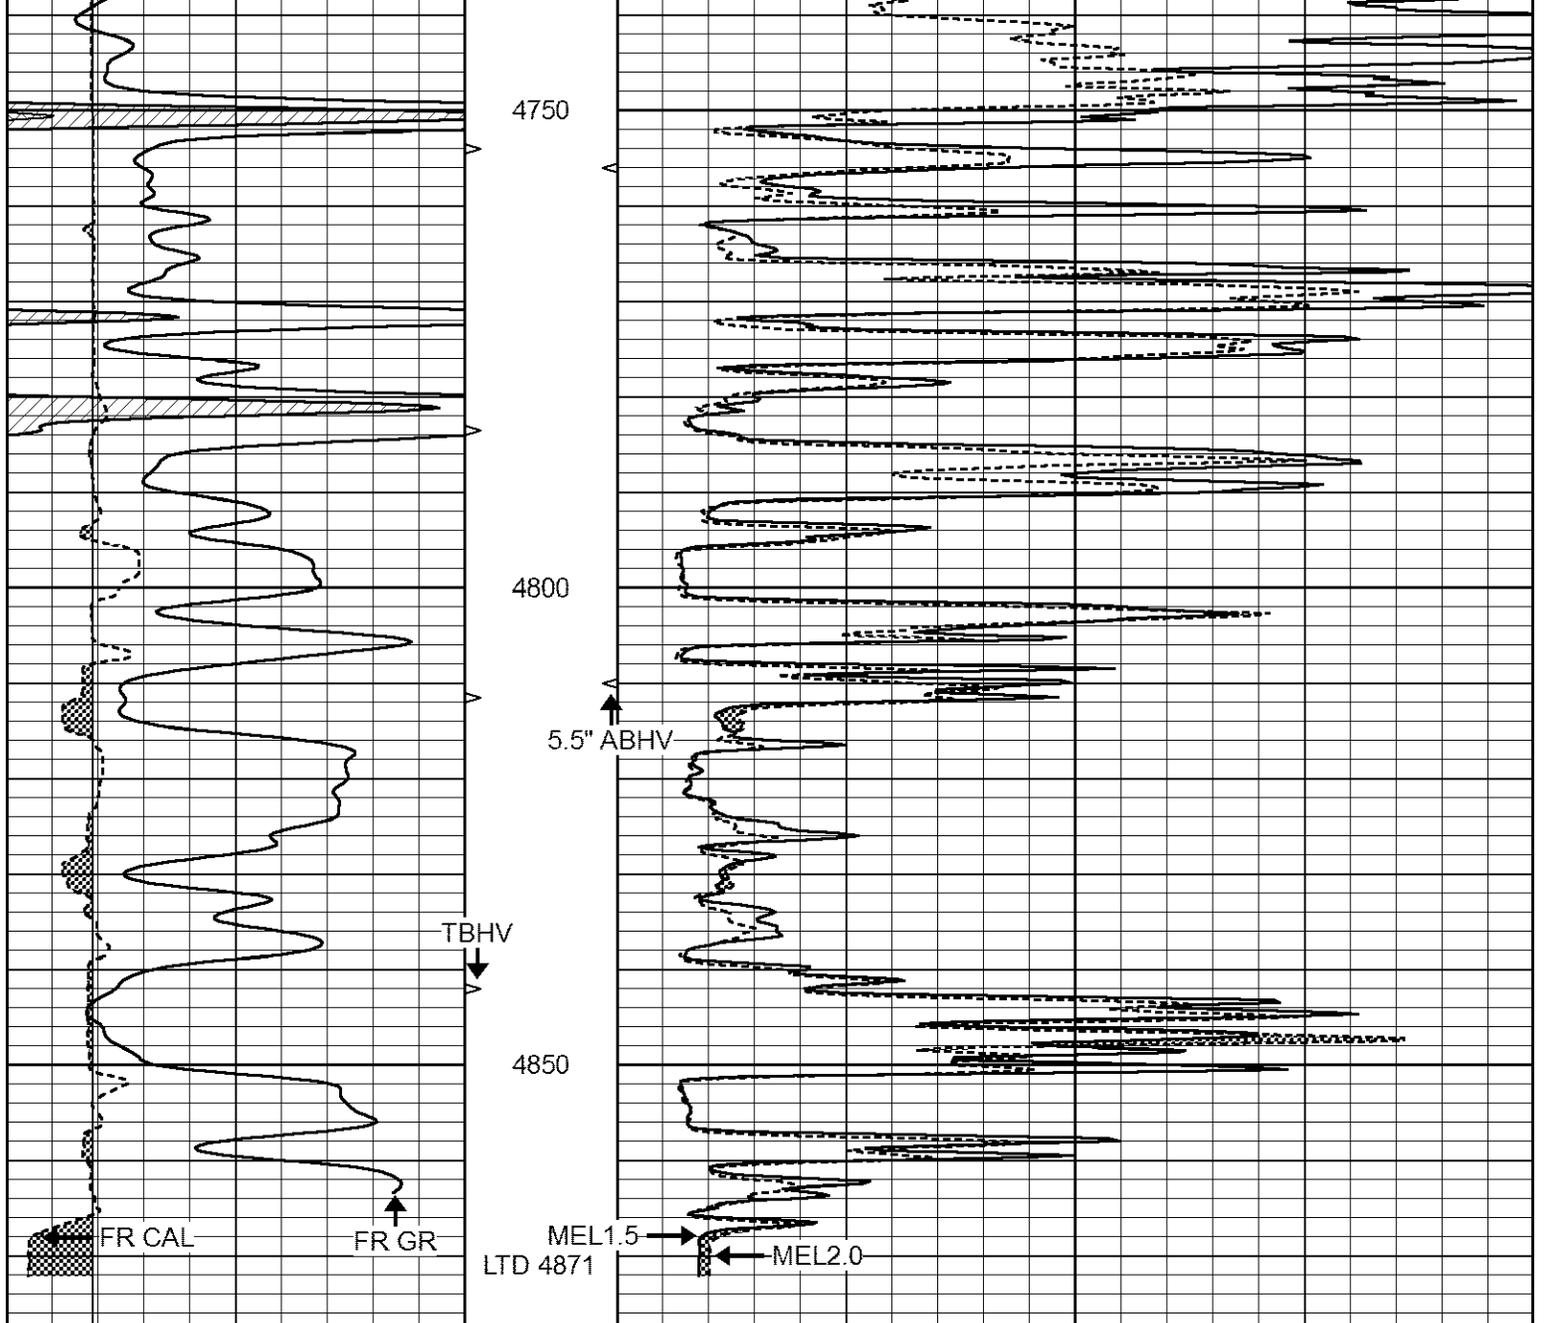

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		




REPEAT SECTION

Database File 6547ddn.db
 Dataset Pathname pass10.1R
 Presentation Format _micro
 Dataset Creation Sat Jun 25 16:45:37 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			

0 (ft3) 10

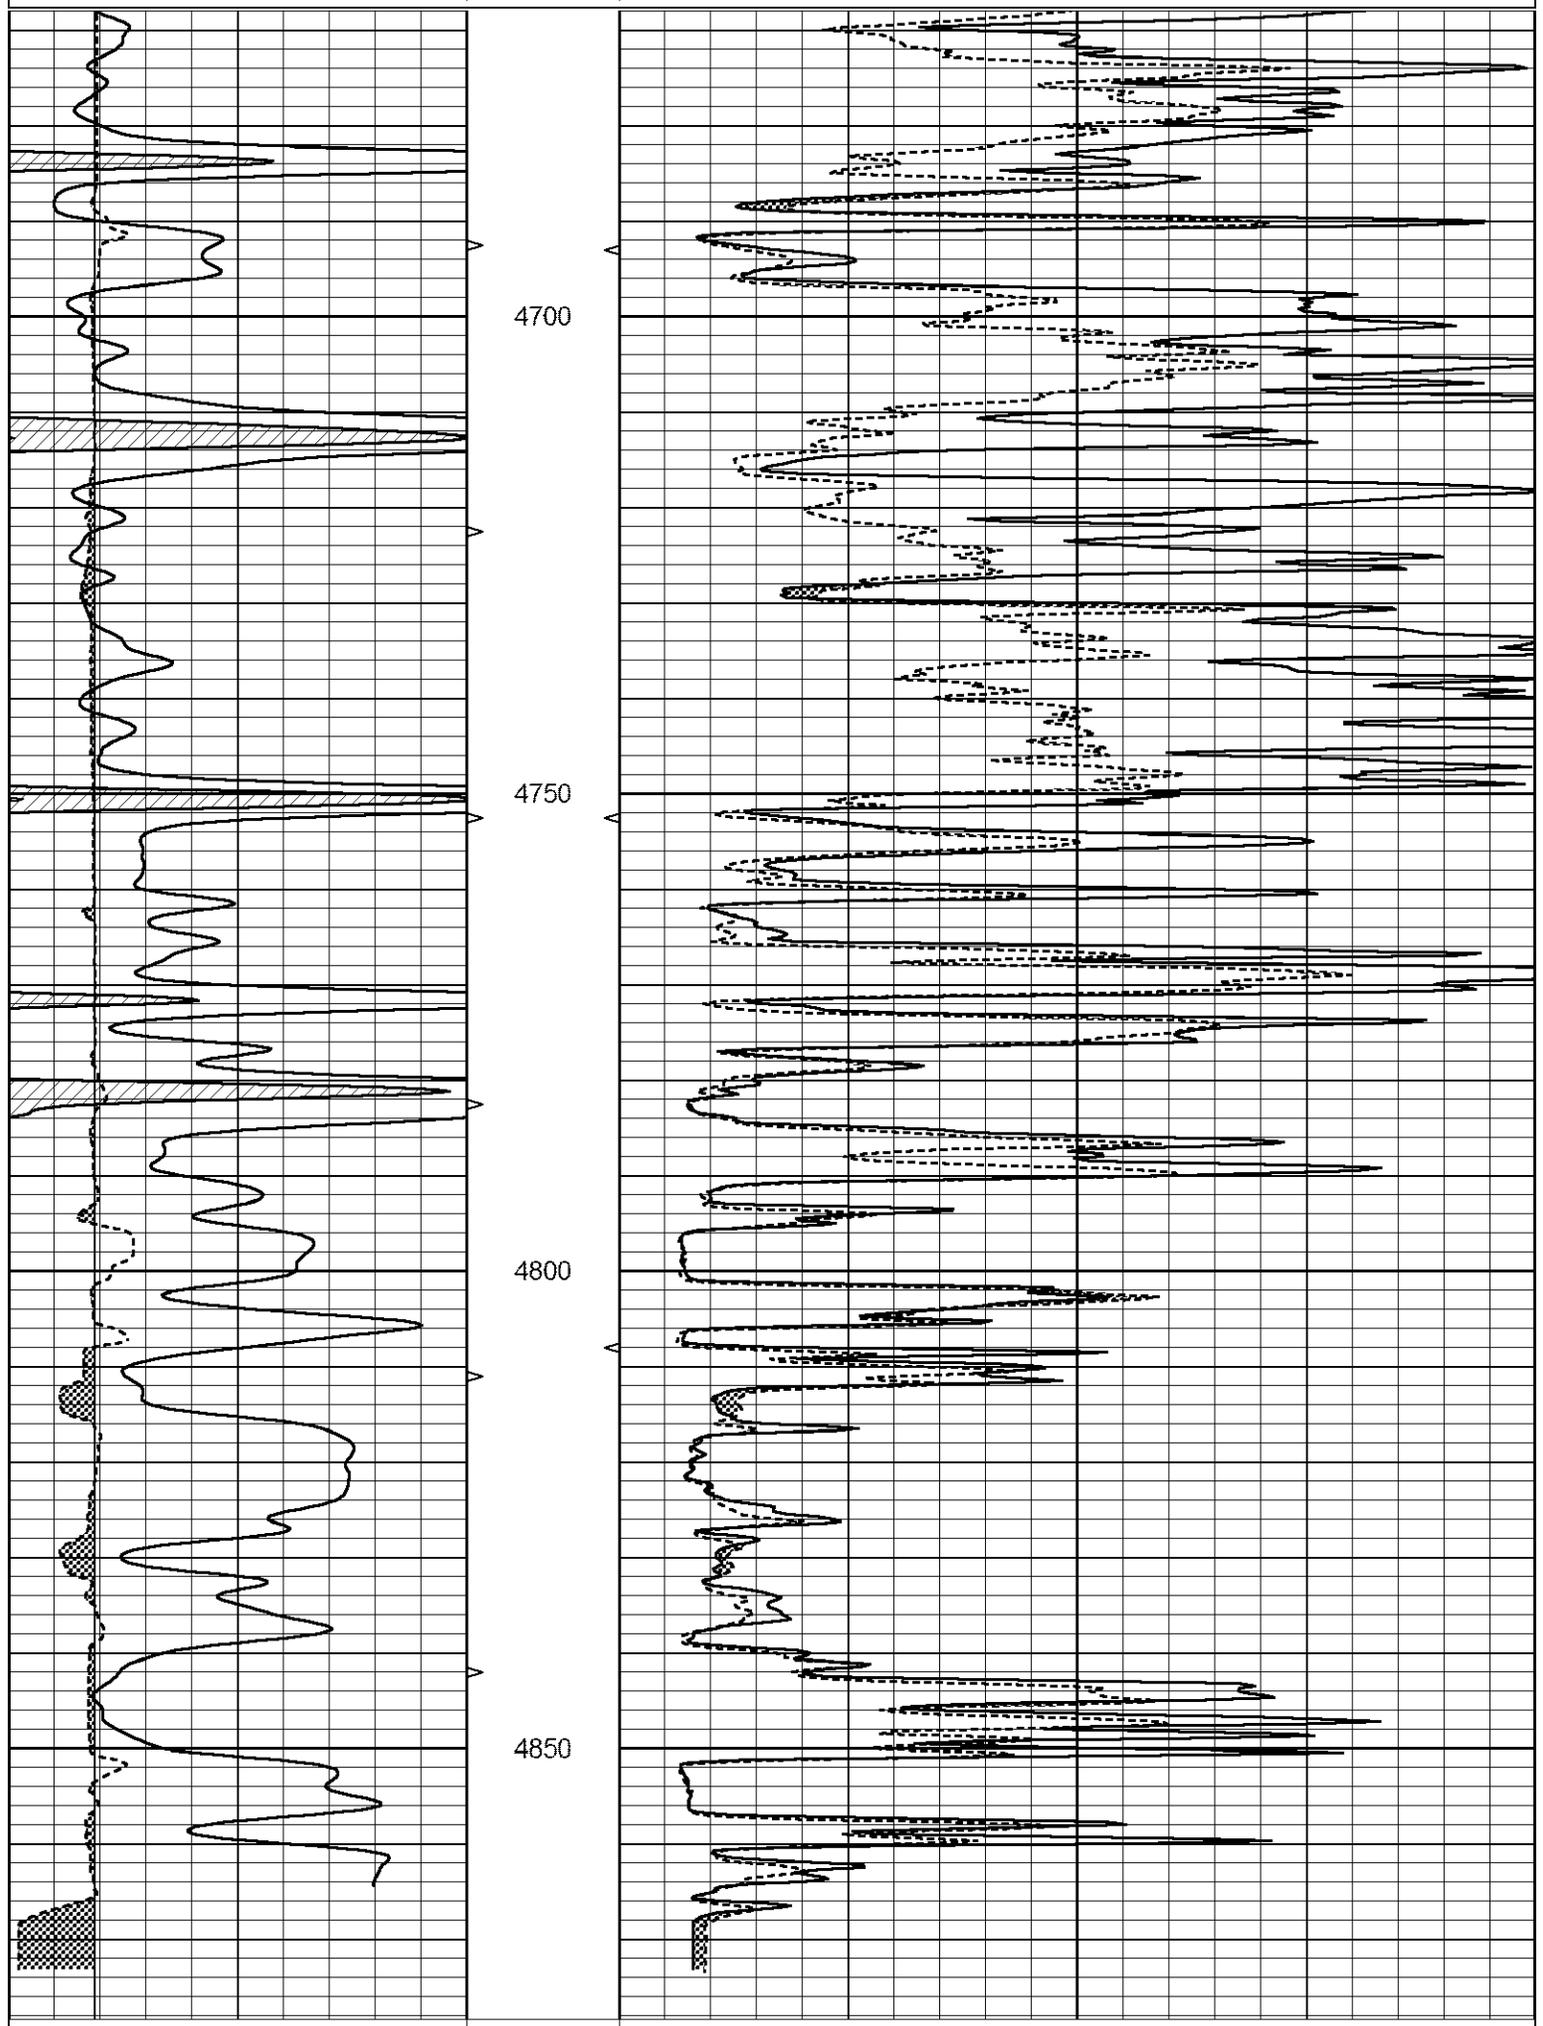

0 GAMMA RAY (GAPI) 150

ABHV

0 MEL1.5 (Ohm-m) 40

6	CALIPER (in)	16	10 (ft3)	0	0	MEL2.0 (Ohm-m)	40
			TBHV				
			0 (ft3)	10			

Calibration Report

Database File 6547ddn.db
 Dataset Pathname pass11.1M
 Dataset Creation Sat Jun 25 16:51:43 2022

MICRO_USR Calibration Report

Serial Number: 070910
 Tool Model: ProbeL
 Performed: Thu Jun 23 15:00:37 2022

Caliper Calibration: Gain=7.212 Offset=2.600
 References Low Cal High Cal
 8.000 14.000
 Readings 0.725 1.557

1.5" Calibration: Gain=30.000 Offset=1.700
 References Low Cal High Cal
 0.000 20.000
 Readings 0.004 1.335

2" Calibration: Gain=50.000 Offset=1.200
 References Low Cal High Cal
 0.000 20.000
 Readings 0.004 1.029

Microlog Calibration Report

Serial-Model: 070910-ProbeL
 Performed: (Not Performed)

	Readings		V	References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number: 070558
 Tool Model: Probe1
 Performed: Tue May 17 15:23:49 2022

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 1.0 cps

Sensitivity: 0.2200 GAPI/cps