



**MICRO
LOG**

Company PALOMINO PETROLEUM
Well LOVE ME TENDER #1
Field STOLTENBERG
County ELLSWORTH
State KS

Company PALOMINO PETROLEUM
Well LOVE ME TENDER #1
Field STOLTENBERG
County ELLSWORTH State KS

Location: API #: 15-053-21384
549' FNL & 1924' FEL
SEC 18 TWP 16S RGE 10W
Permanent Datum Ground Level Elevation 1882
Log Measured From KB 8' AGL
Drilling Measured From KB
Other Services
CDNL
DIL
Elevation
K.B. 1890
D.F. 1888
G.L. 1882

Date	07/16/22
Run Number	TWO
Depth Driller	3480
Depth Logger	3480
Bottom Logged Interval	3478
Top Log Interval	2600
Casing Driller	8 5/8" @ 349
Casing Logger	349
Bit Size	7 7/8"
Type Fluid in Hole	Chemical
Density / Viscosity	9.2/43
pH / Fluid Loss	10.0/6.8
Source of Sample	Pit
Rm @ Meas. Temp	1.4@70degf
Rmf @ Meas. Temp	1.05@70degf
Rmc @ Meas. Temp	1.68@70degf
Source of Rmf / Rmc	Calculated
Rm @ BHT	88@103degf
Time Circulation Stopped	3:00 A.M.
Time Logger on Bottom	5:00 AM
Maximum Recorded Temperature	103degf
Equipment Number	T605
Location	Hays, KS
Recorded By	GUS PFANENSTIEL
Witnessed By	KIM SHOEMAKER

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

WILSON SOUTH 14 MILES TO P RD. 1 EAST, 1/2 NORTH
WEST INTO. (DOUBLE GATE AFTER TANK BATTERY)

Thank You for using Gemini Wireline LLC
785-625-1182





MAIN PASS

Database File pplovemetender#1oh.db
 Dataset Pathname pass5
 Presentation Format kml
 Dataset Creation Sat Jul 16 06:58:54 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

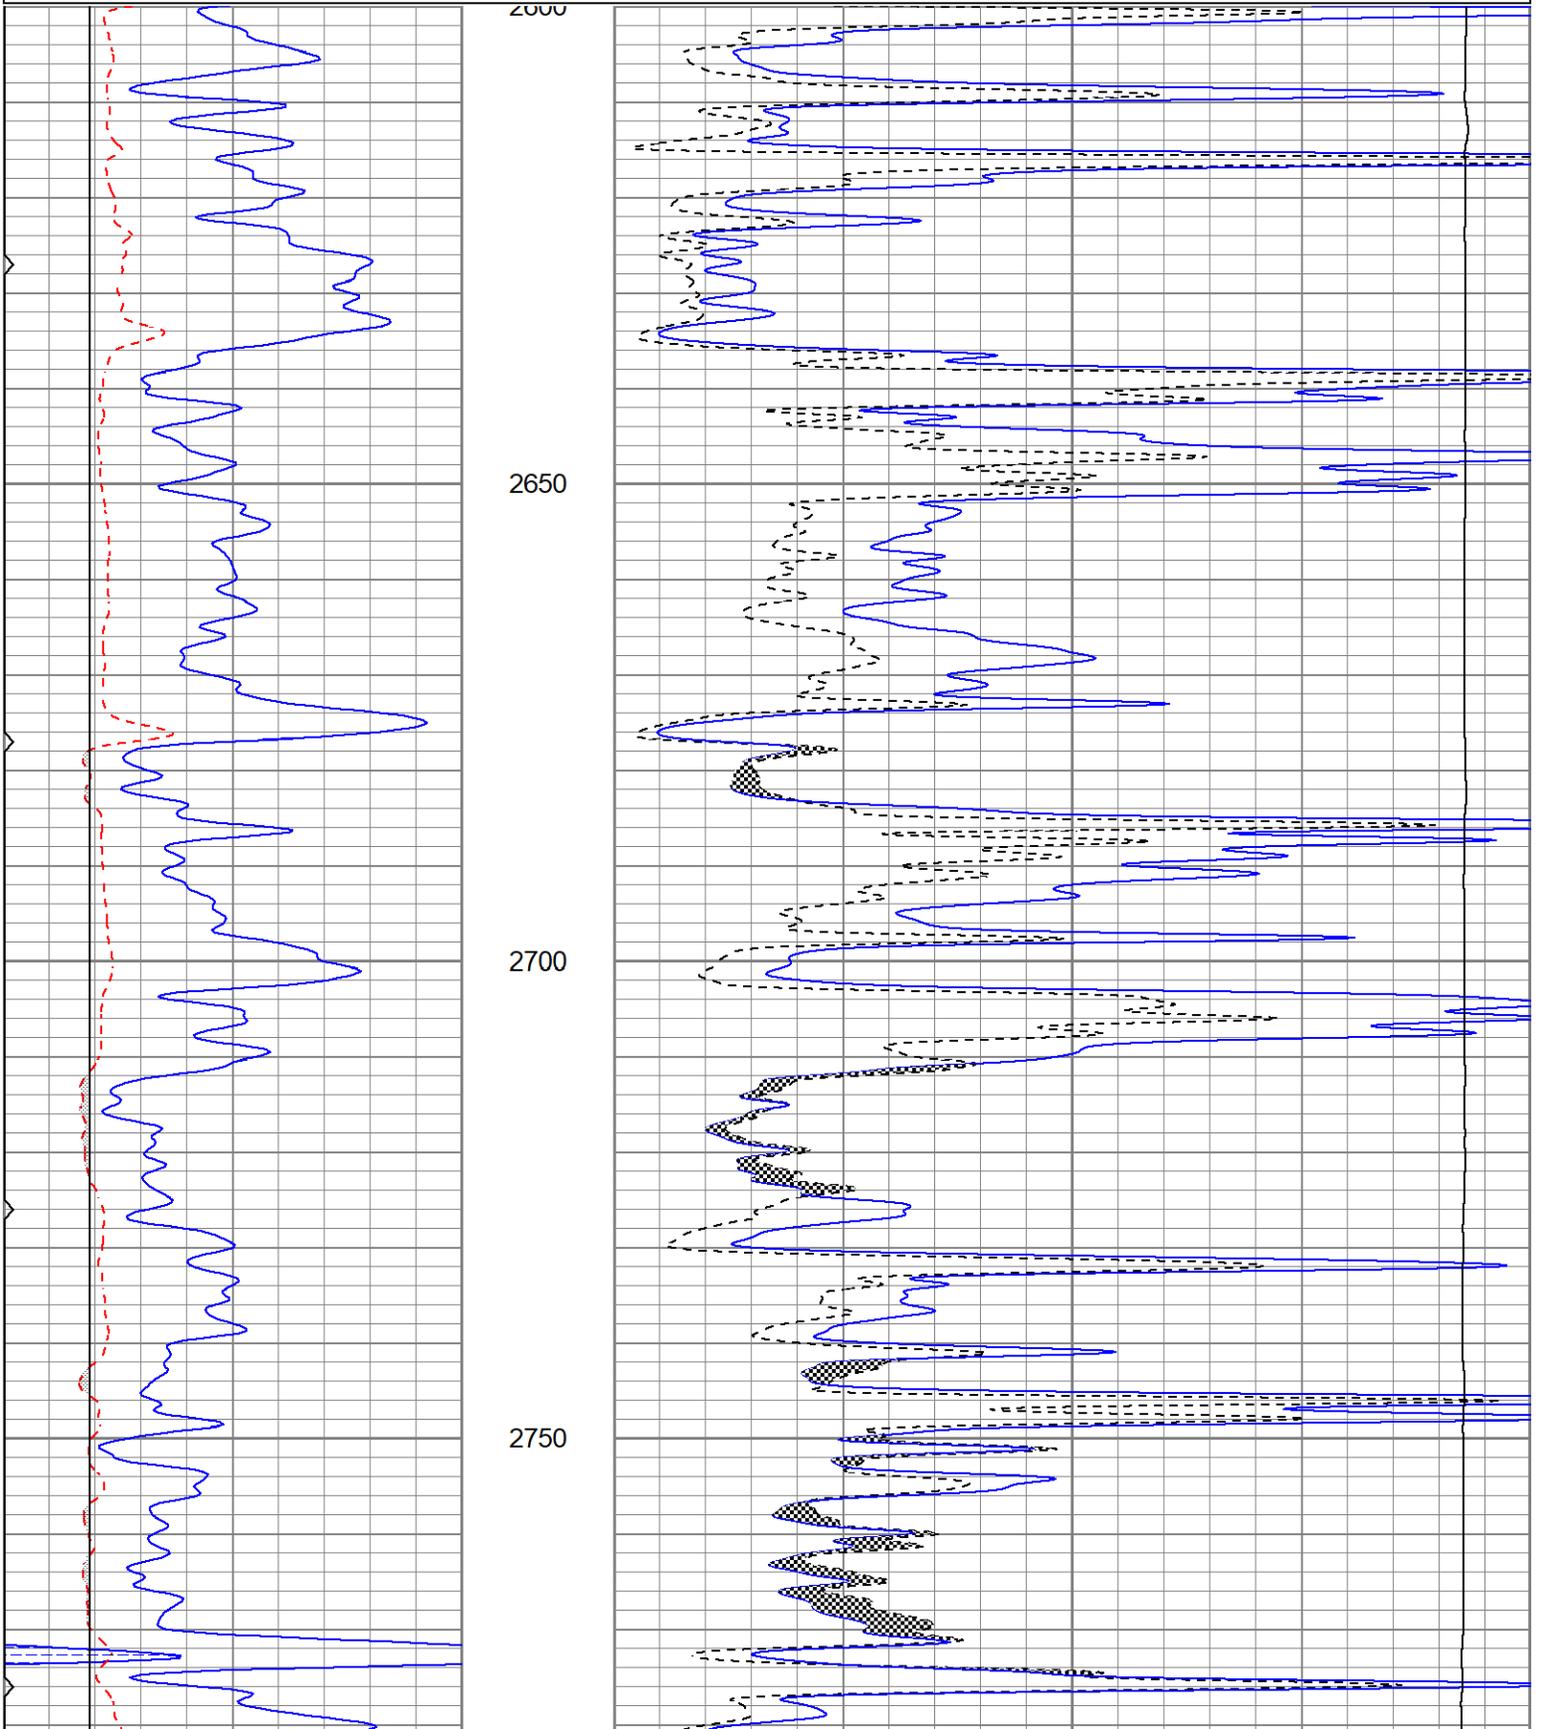

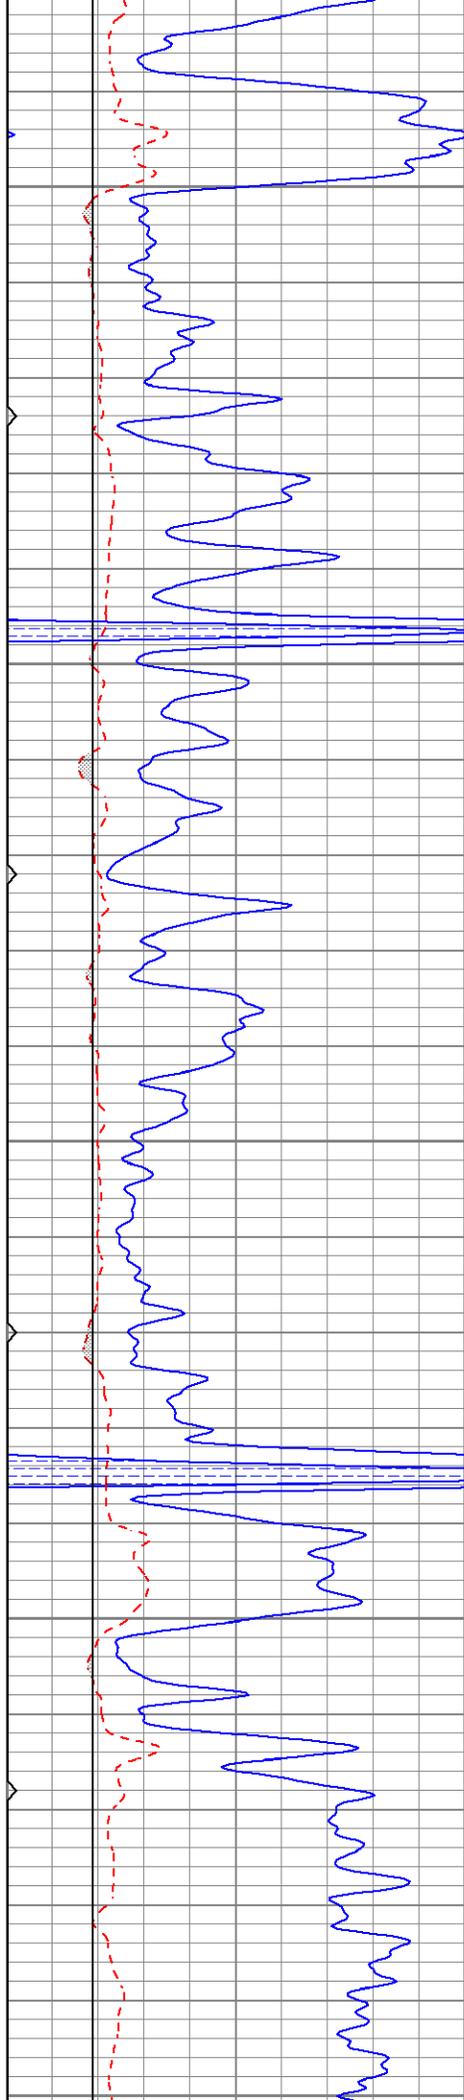


2800


2850

2900

2950

3000

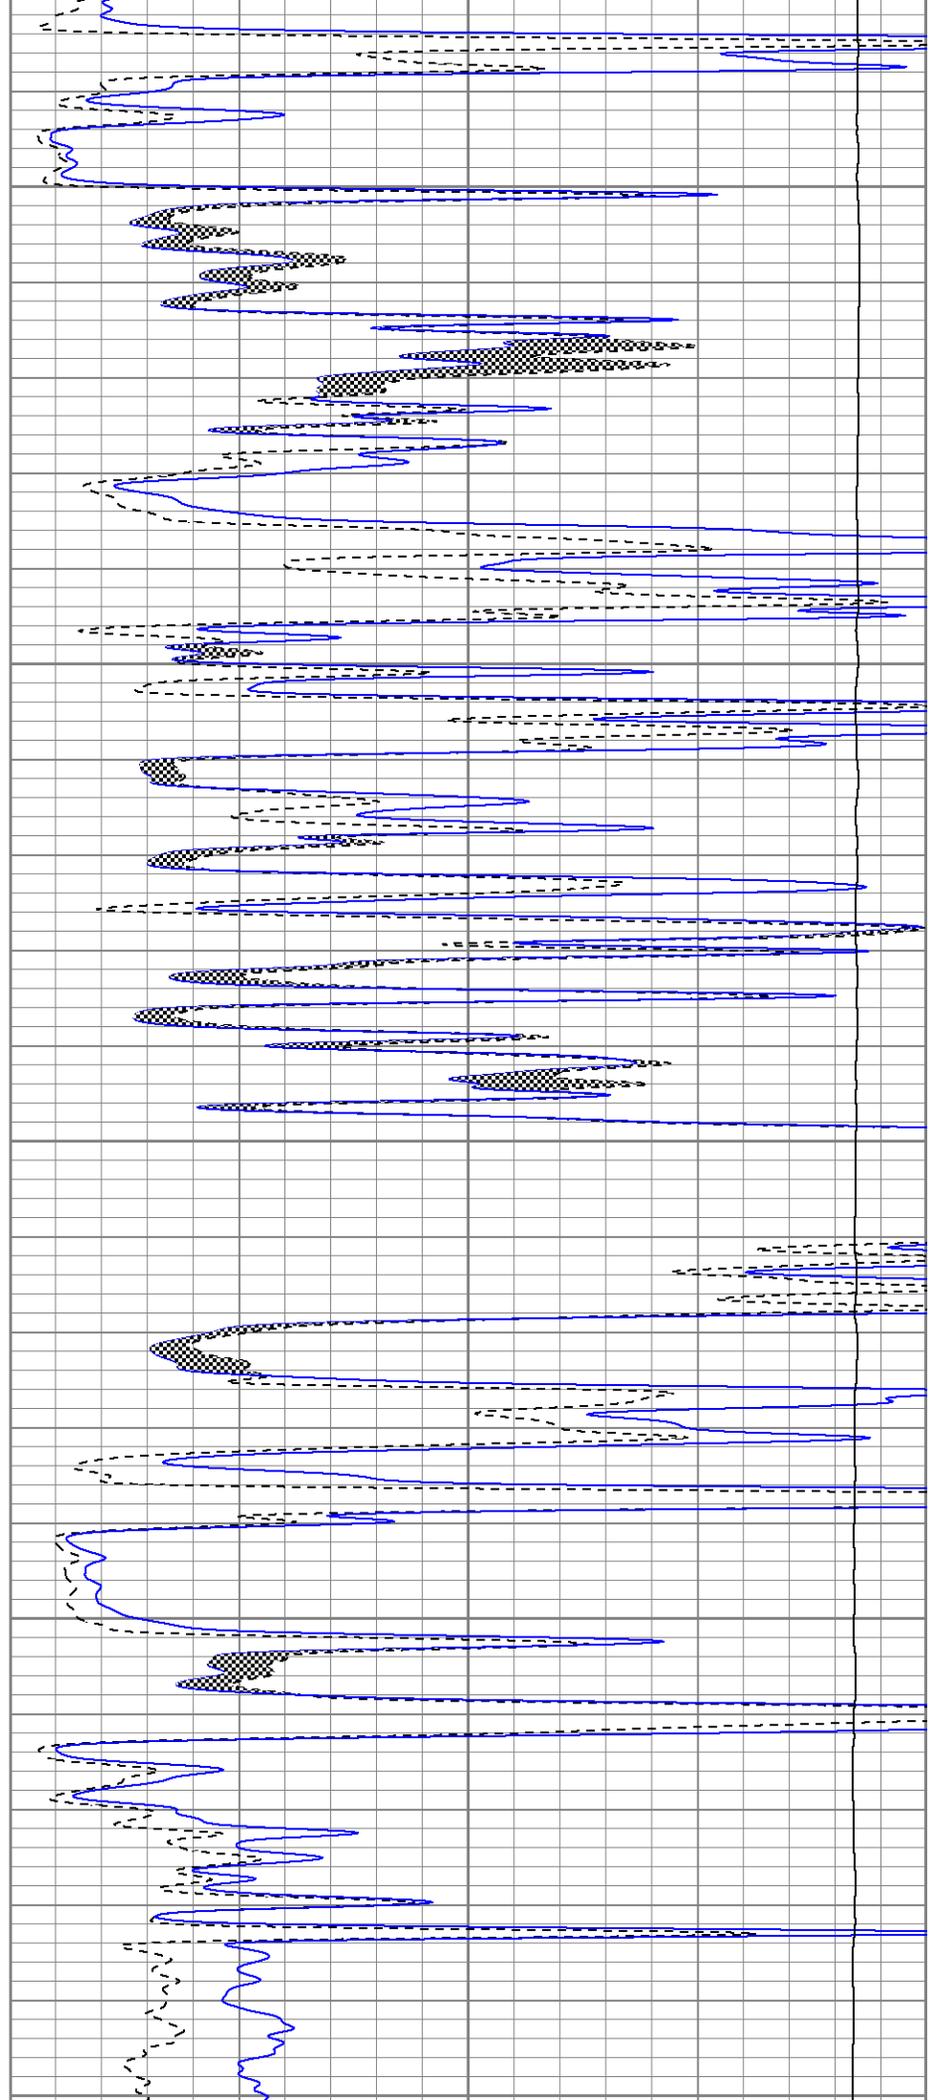

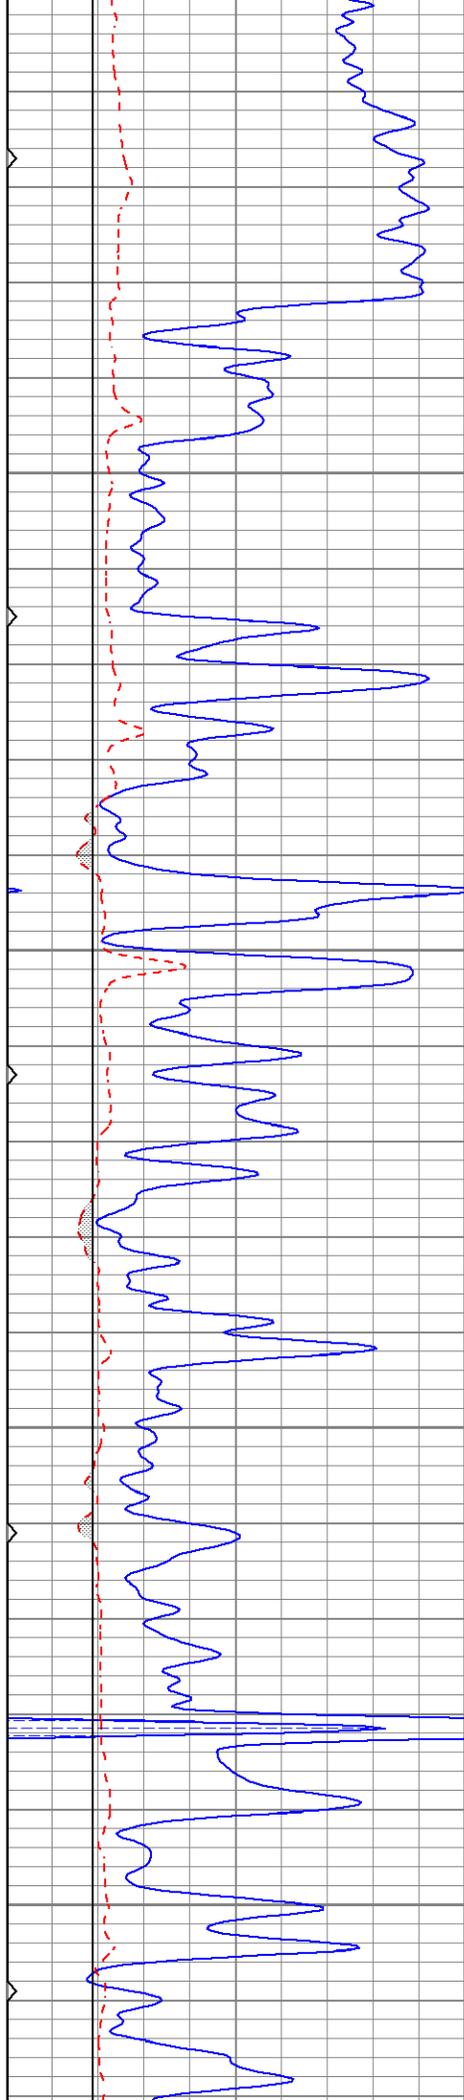



3050

3100

3150

3200

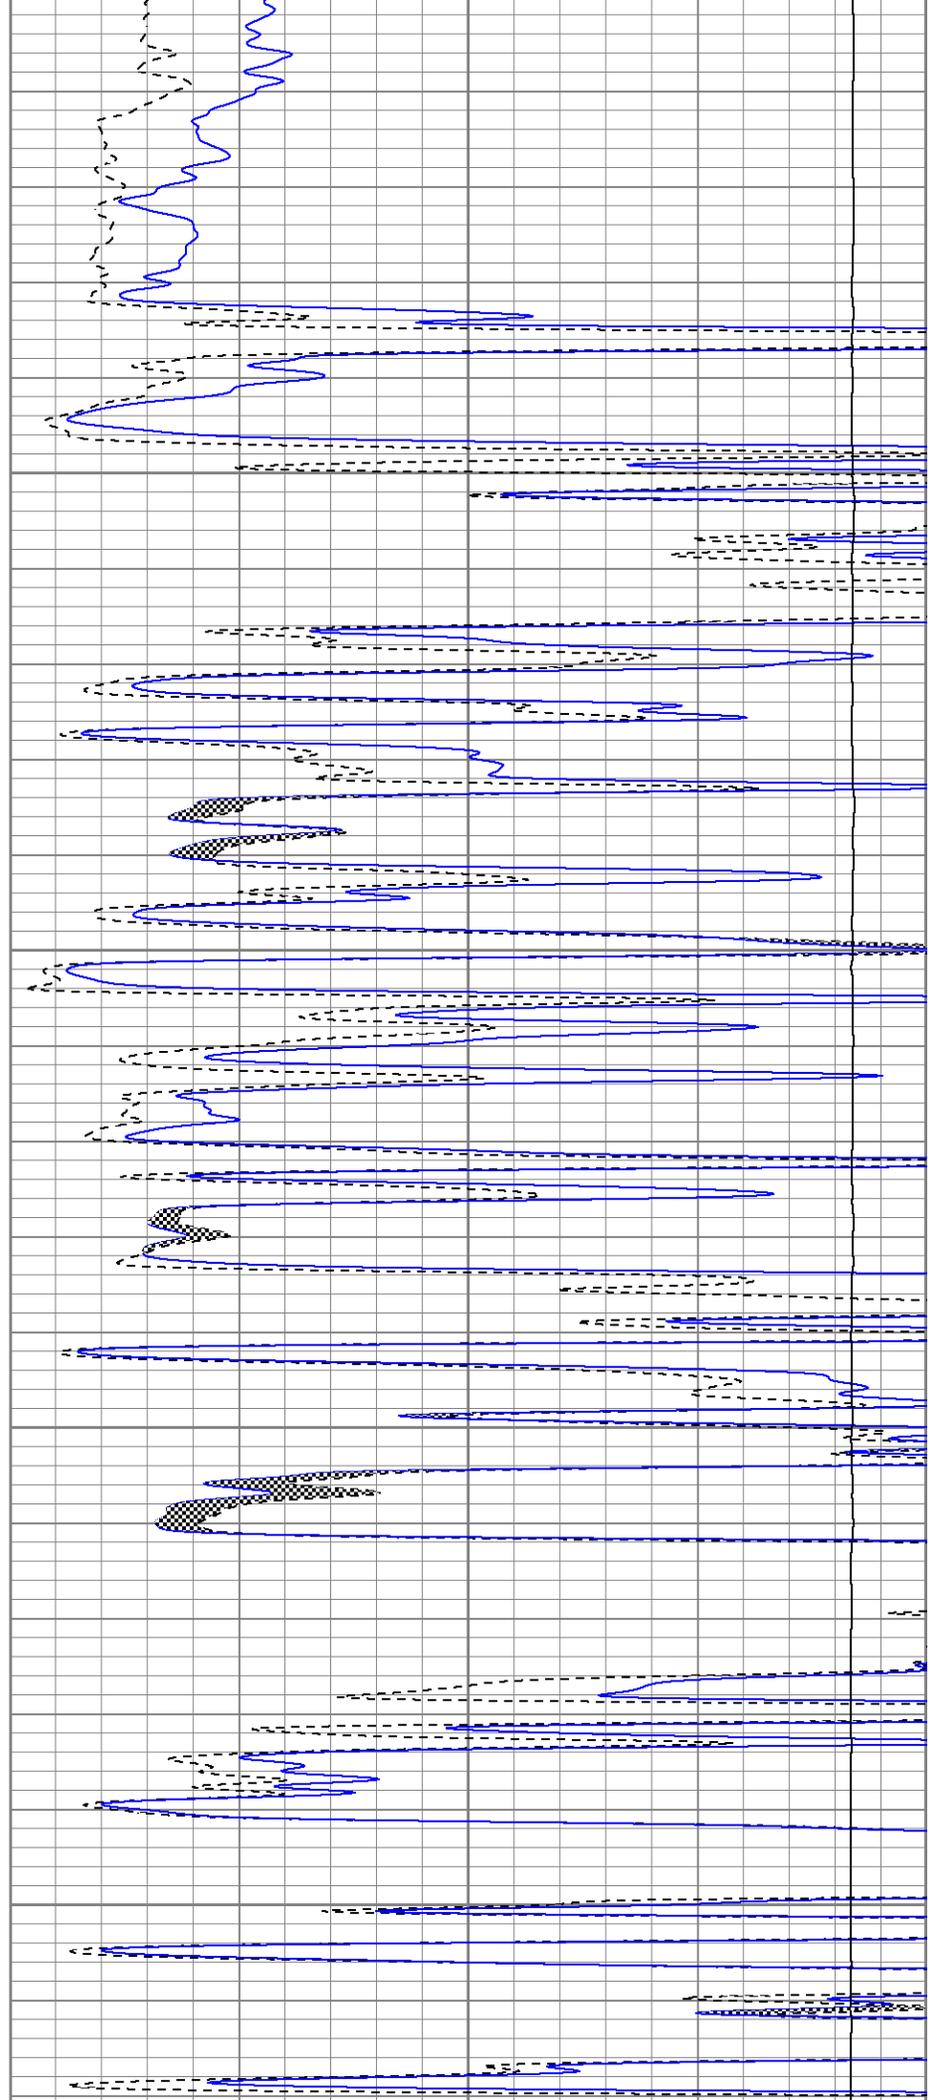

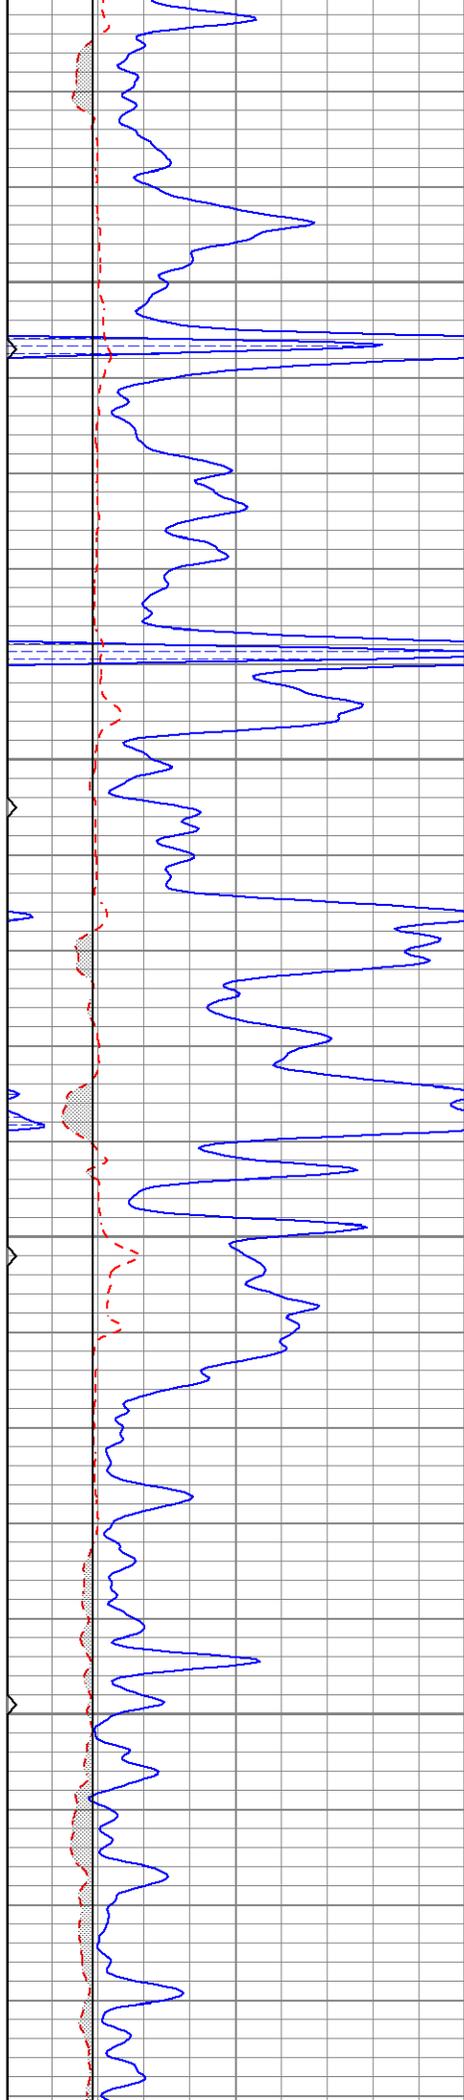



3250

3300

3350

3400

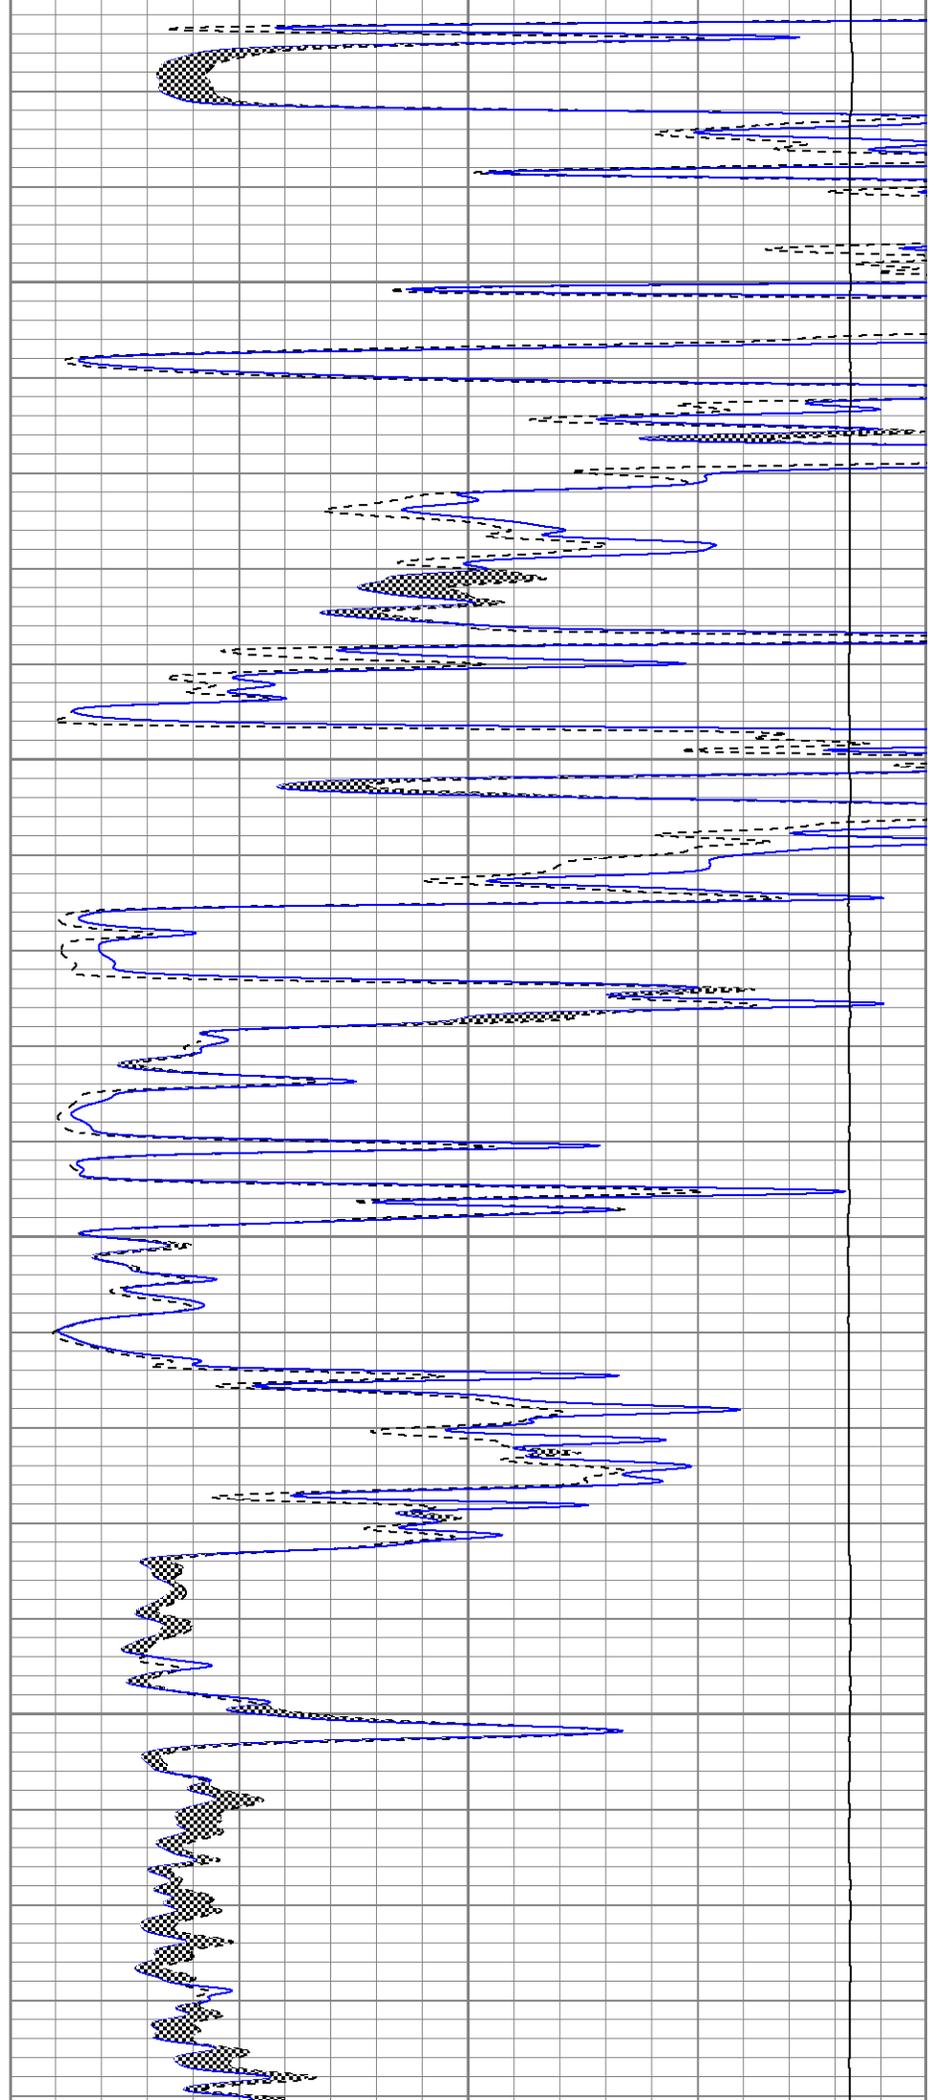


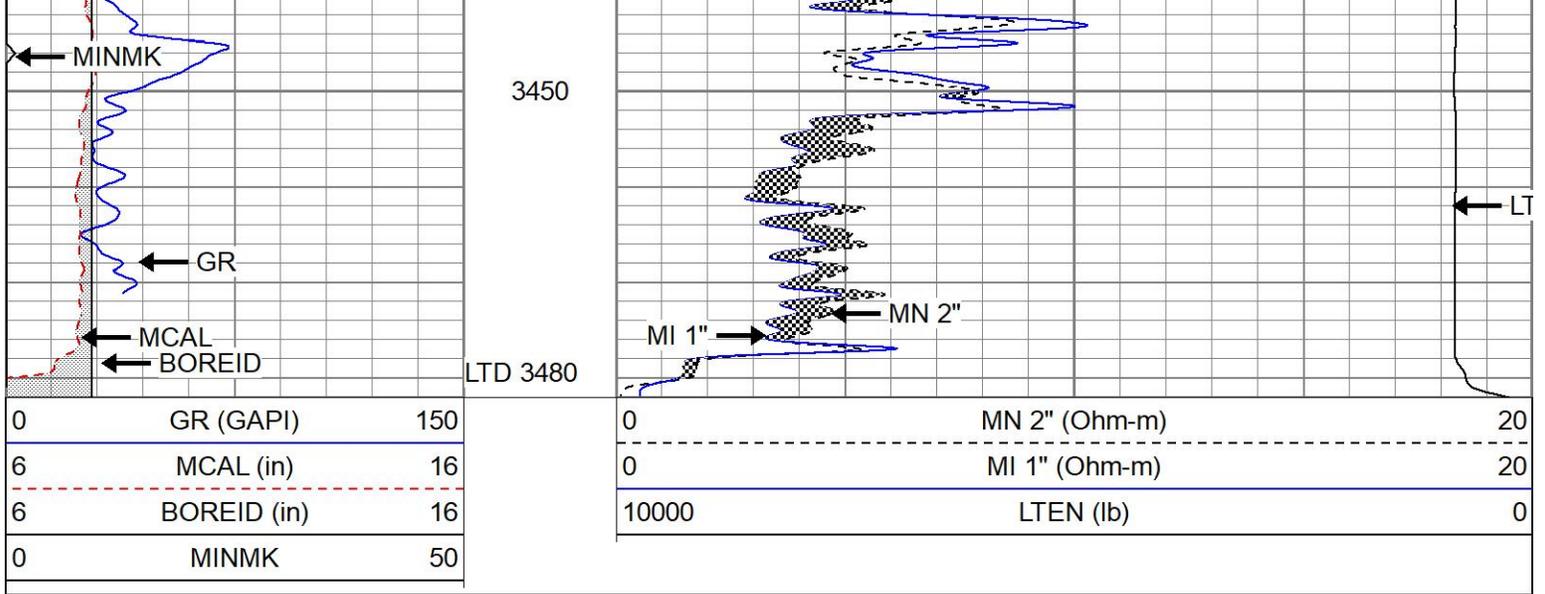


REPEAT SECTION

Database File pplovemetender#1oh.db
 Dataset Pathname pass4
 Presentation Format kml
 Dataset Creation Sat Jul 16 06:51:51 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	0	MN 2" (Ohm-m)	20
6	MCAL (in)	16	0	MI 1" (Ohm-m)	20
6	BOREID (in)	16	10000	LTEN (lb)	0
0	MINMK	50			

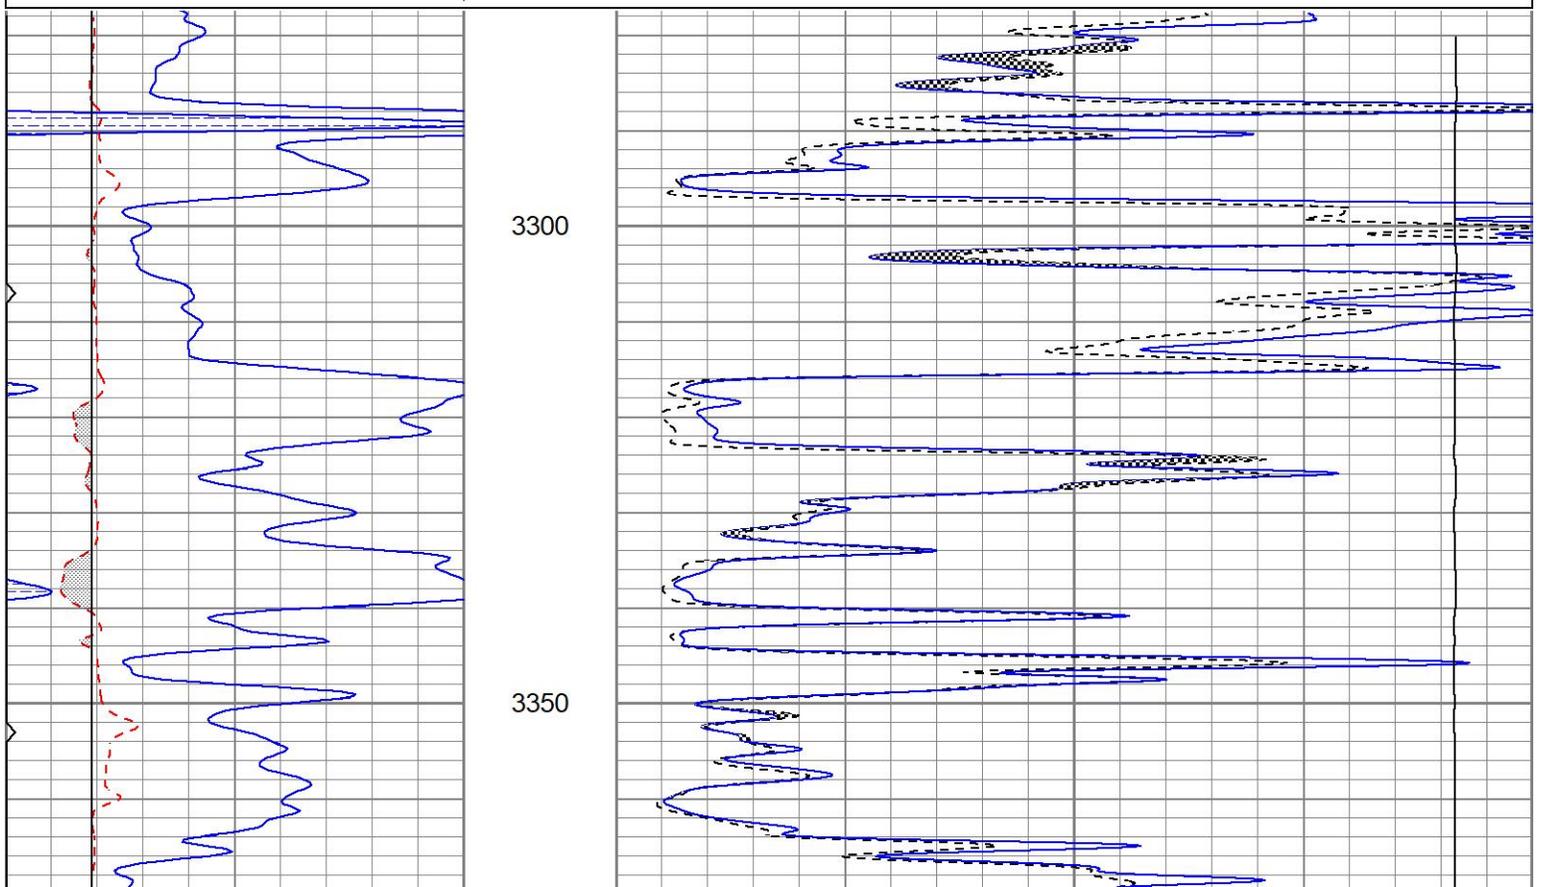

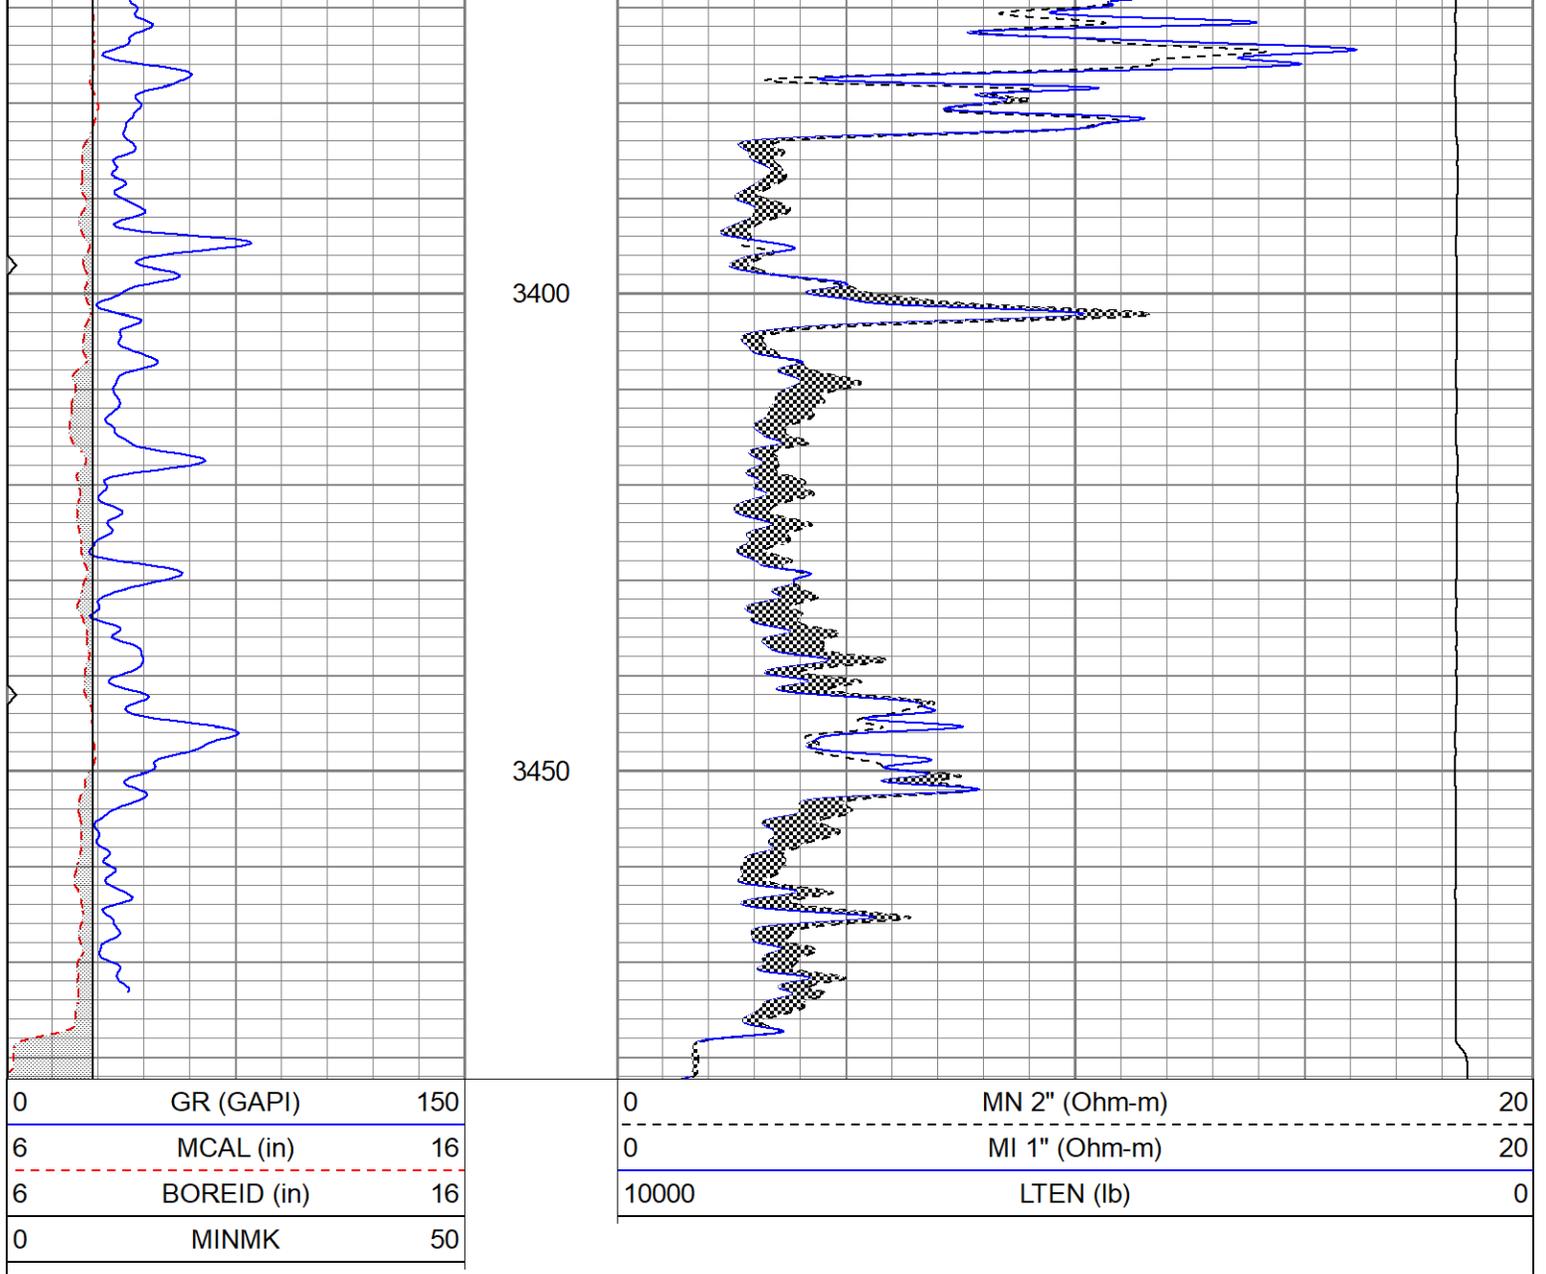

Calibration Report

Database File pplovemetender#1oh.db
 Dataset Pathname pass4
 Dataset Creation Sat Jul 16 06:51:51 2022

Microlog Calibration Report

Serial-Model: 1600-Pengo
 Performed: Sat Jul 16 06:50:16 2022

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	-0.0050	0.4849	V	0.0000	10.0000	Ohm-m	20.4107	0.1021
Inverse	-0.0345	0.6454	V	0.0000	10.0000	Ohm-m	14.7074	0.5075
Caliper	3.2319	6.4483	V	8.0000	15.0000	in	2.1364	0.9662

Gamma Ray Calibration Report

Serial Number: 2001
 Tool Model: OH
 Performed: Wed Jun 15 13:37:15 2022

Calibrator Value: 1.0 GAPI

Calibrator value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.8200	GAPI/cps