



MICRO LOG

Company PALOMINO PETROLEUM, INC.

Well GARDEN PARTY #1

Field POTT NORTHEAST

County FINNEY State KANSAS

Location: API #: 15-055-22563-0000

630' FNL & 643' FWL
SE - NW - NW - NW

SEC 19 TWP 23S RGE 33W

Permanent Datum GROUND LEVEL Elevation 2909
Log Measured From KELLY BUSHING 11' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL
DIL

Elevation

K.B. 2920
D.F. 2918
G.L. 2909

Date 7/17/22

Run Number TWO

Depth Driller 4740

Depth Logger 4740

Bottom Logged Interval 4738

Top Log Interval 3600

Casing Driller 8 5/8" @ 353'

Casing Logger 353

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.3/57

pH / Fluid Loss 10.0/8.8

Source of Sample FLOWLINE

Rm @ Meas. Temp .950 @ 77F

Rmf @ Meas. Temp .713 @ 77F

Rmc @ Meas. Temp 1.14 @ 77F

Source of Rmf / Rmc MEASURED

Rm @ BHT .595 @ 123F

Time Circulation Stopped 4.5 HOURS

Time Logger on Bottom 4.45 A.M.

Maximum Recorded Temperature 123F

Equipment Number 8916

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By RYAN SEIB

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
HUGOTON, KS., (HWY 50 & BIG LOWE RD.) 3N. ON "BIG LOWE RD.", 1/2E., S. INTO




MAIN SECTION

Database File	6713ddn.db
Dataset Pathname	pass6.3
Presentation Format	_micro
Dataset Creation	Sun Jul 17 05:38:43 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

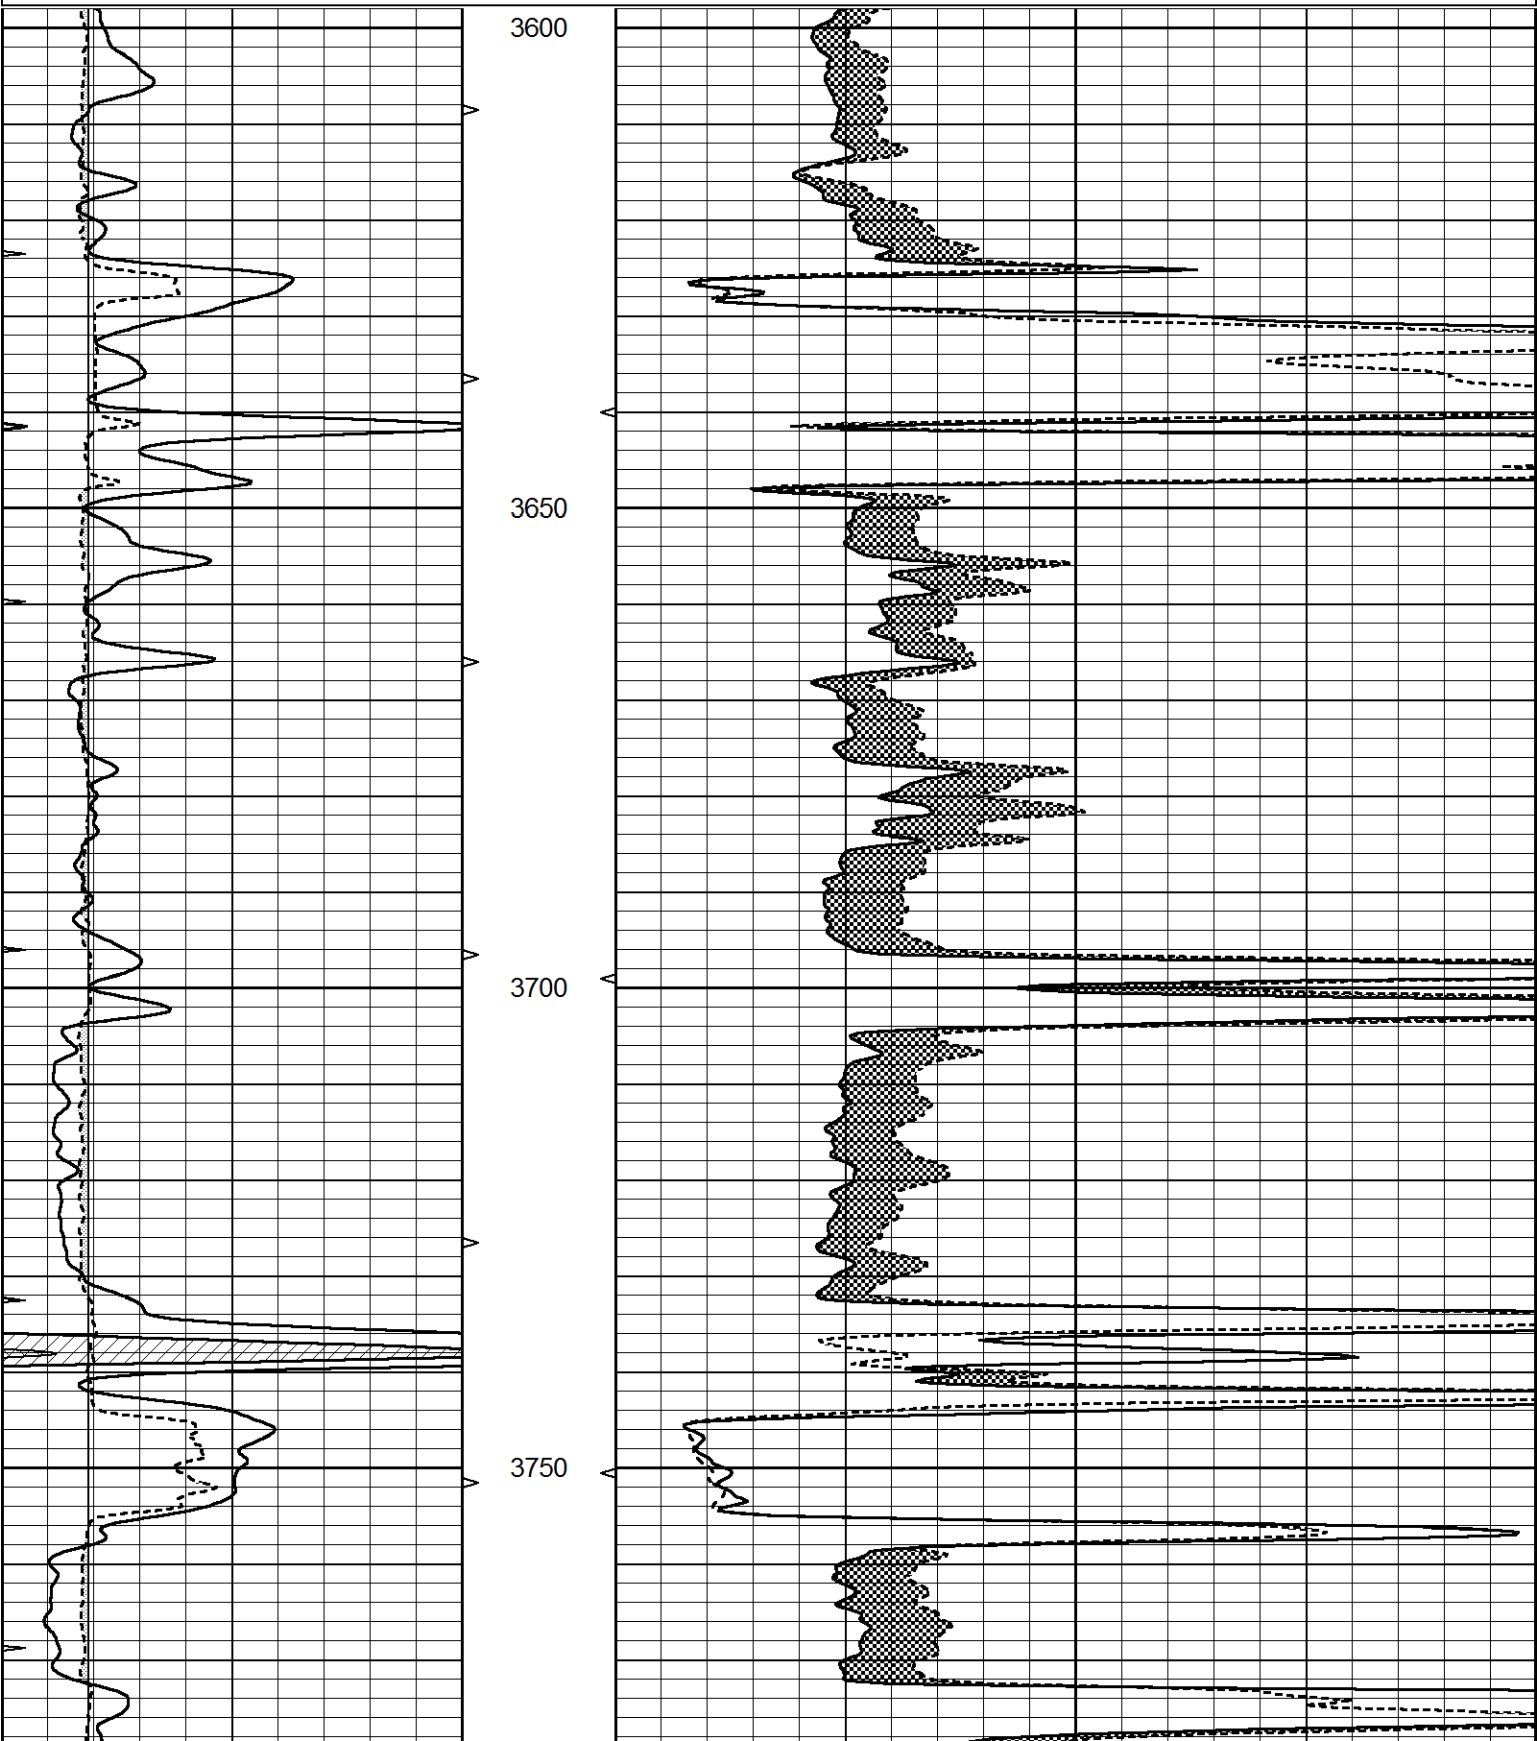

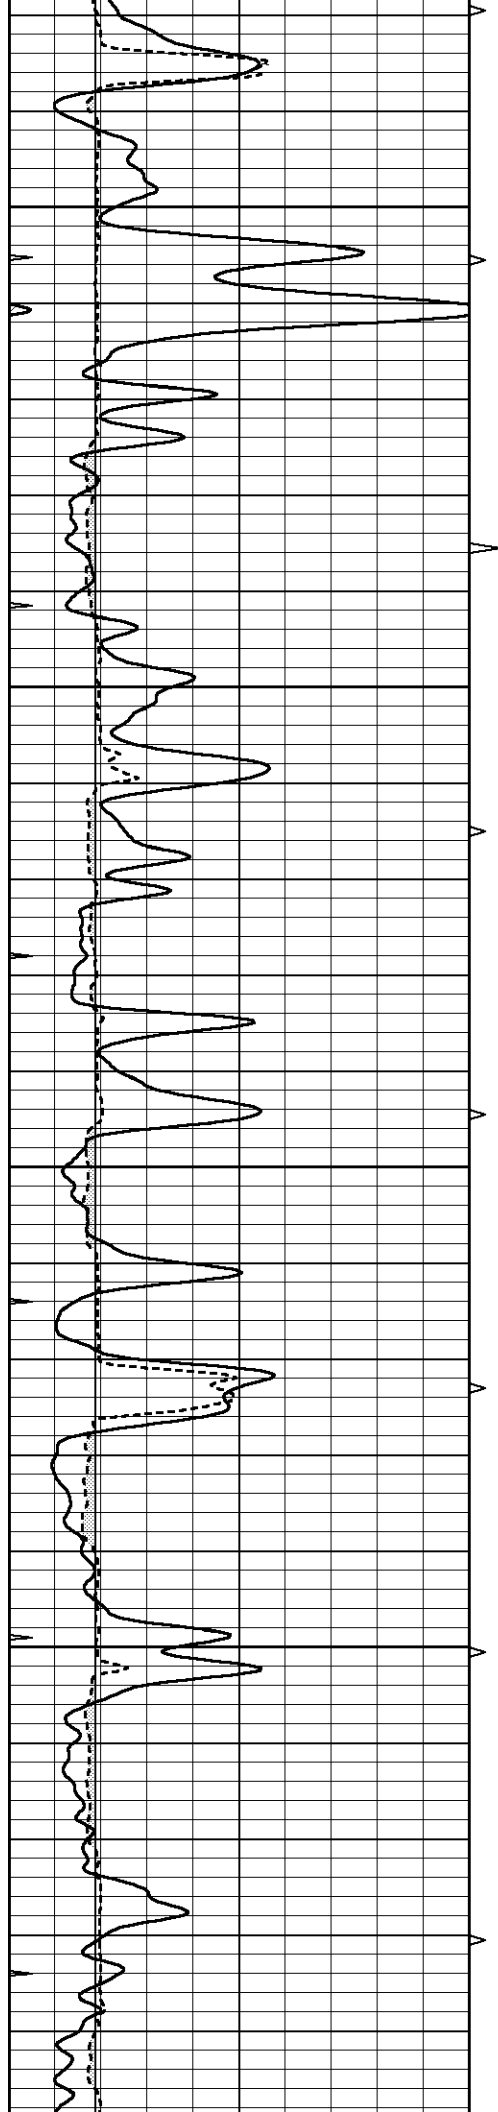



3800

3850

3900

3950

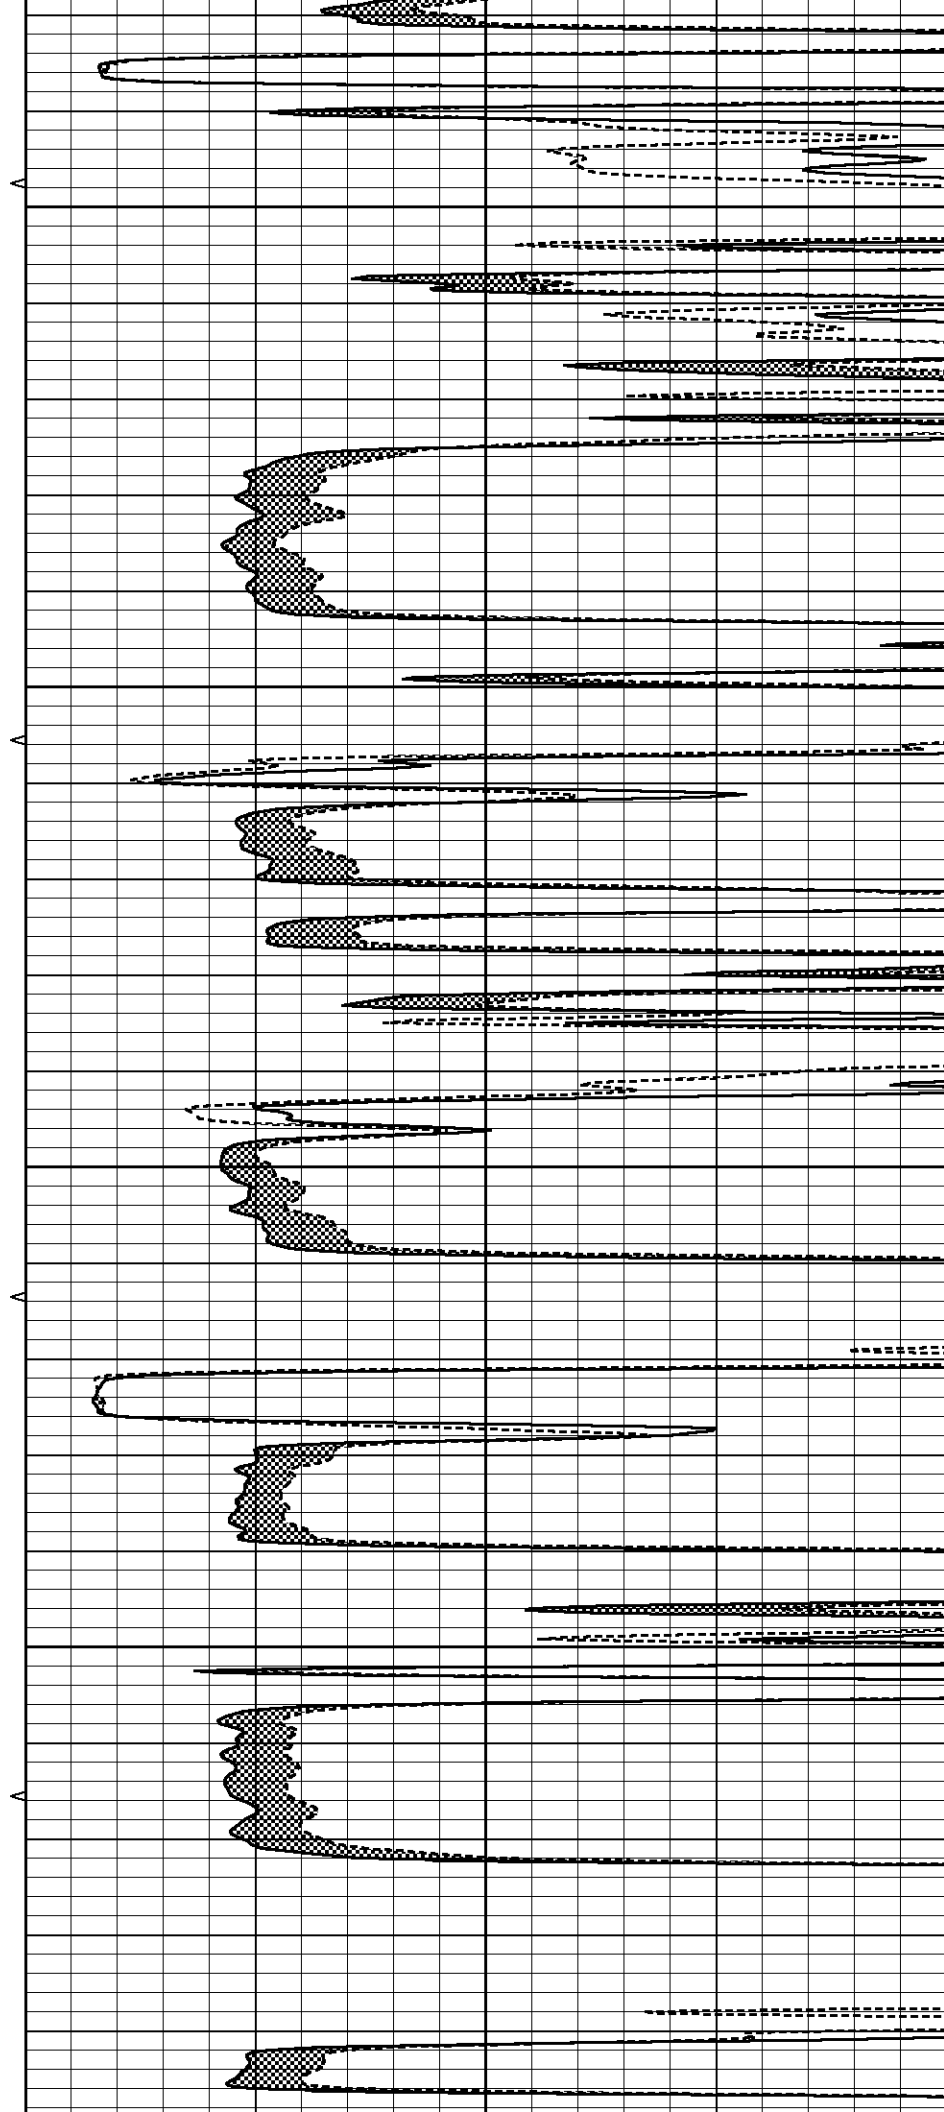

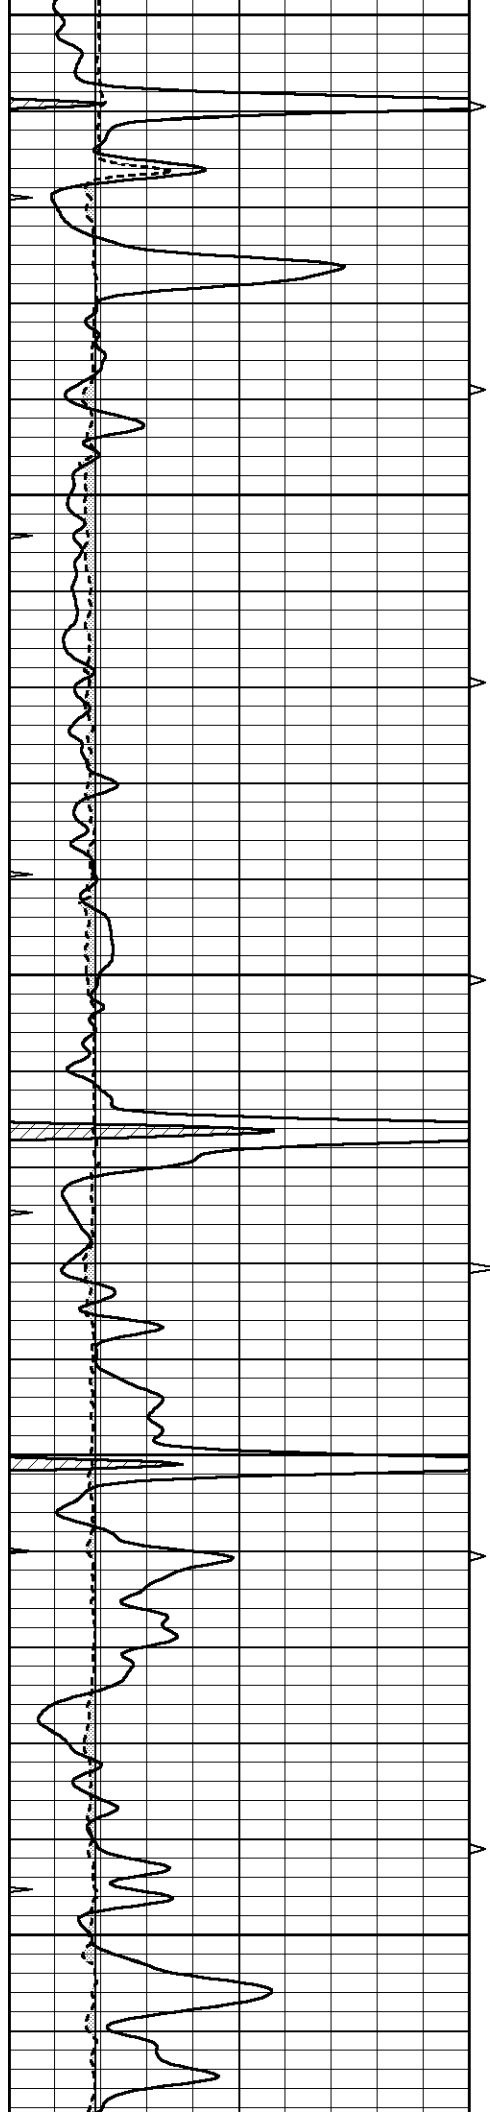


4000


4050

4100

4150

4200

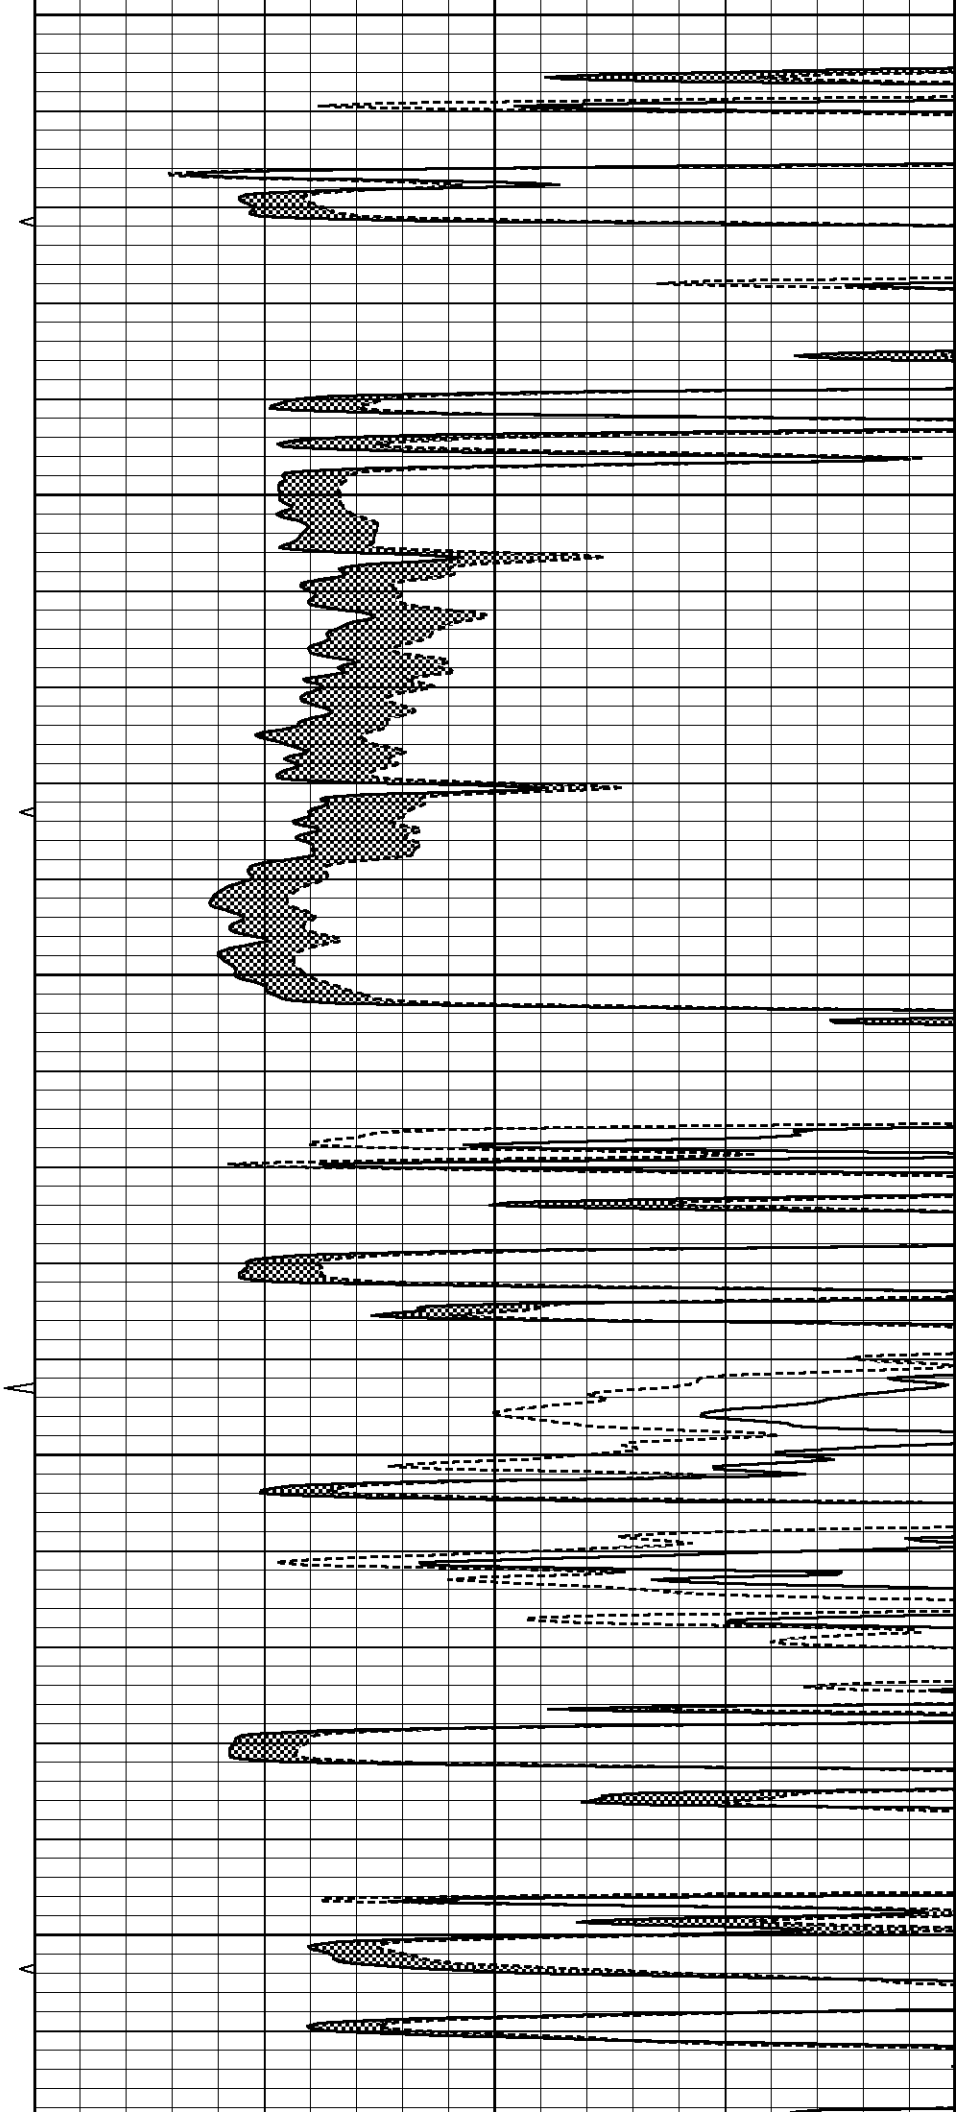

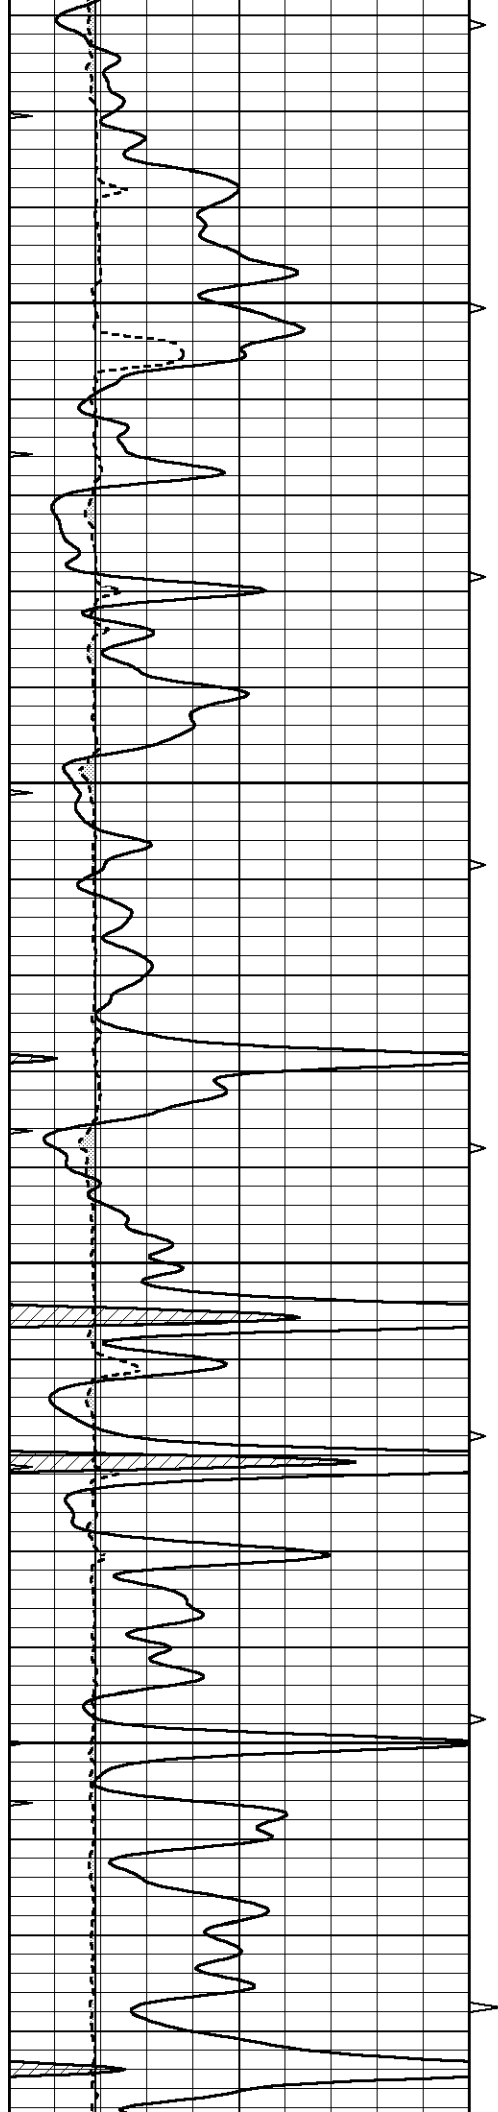



4250


4300

4350

4400

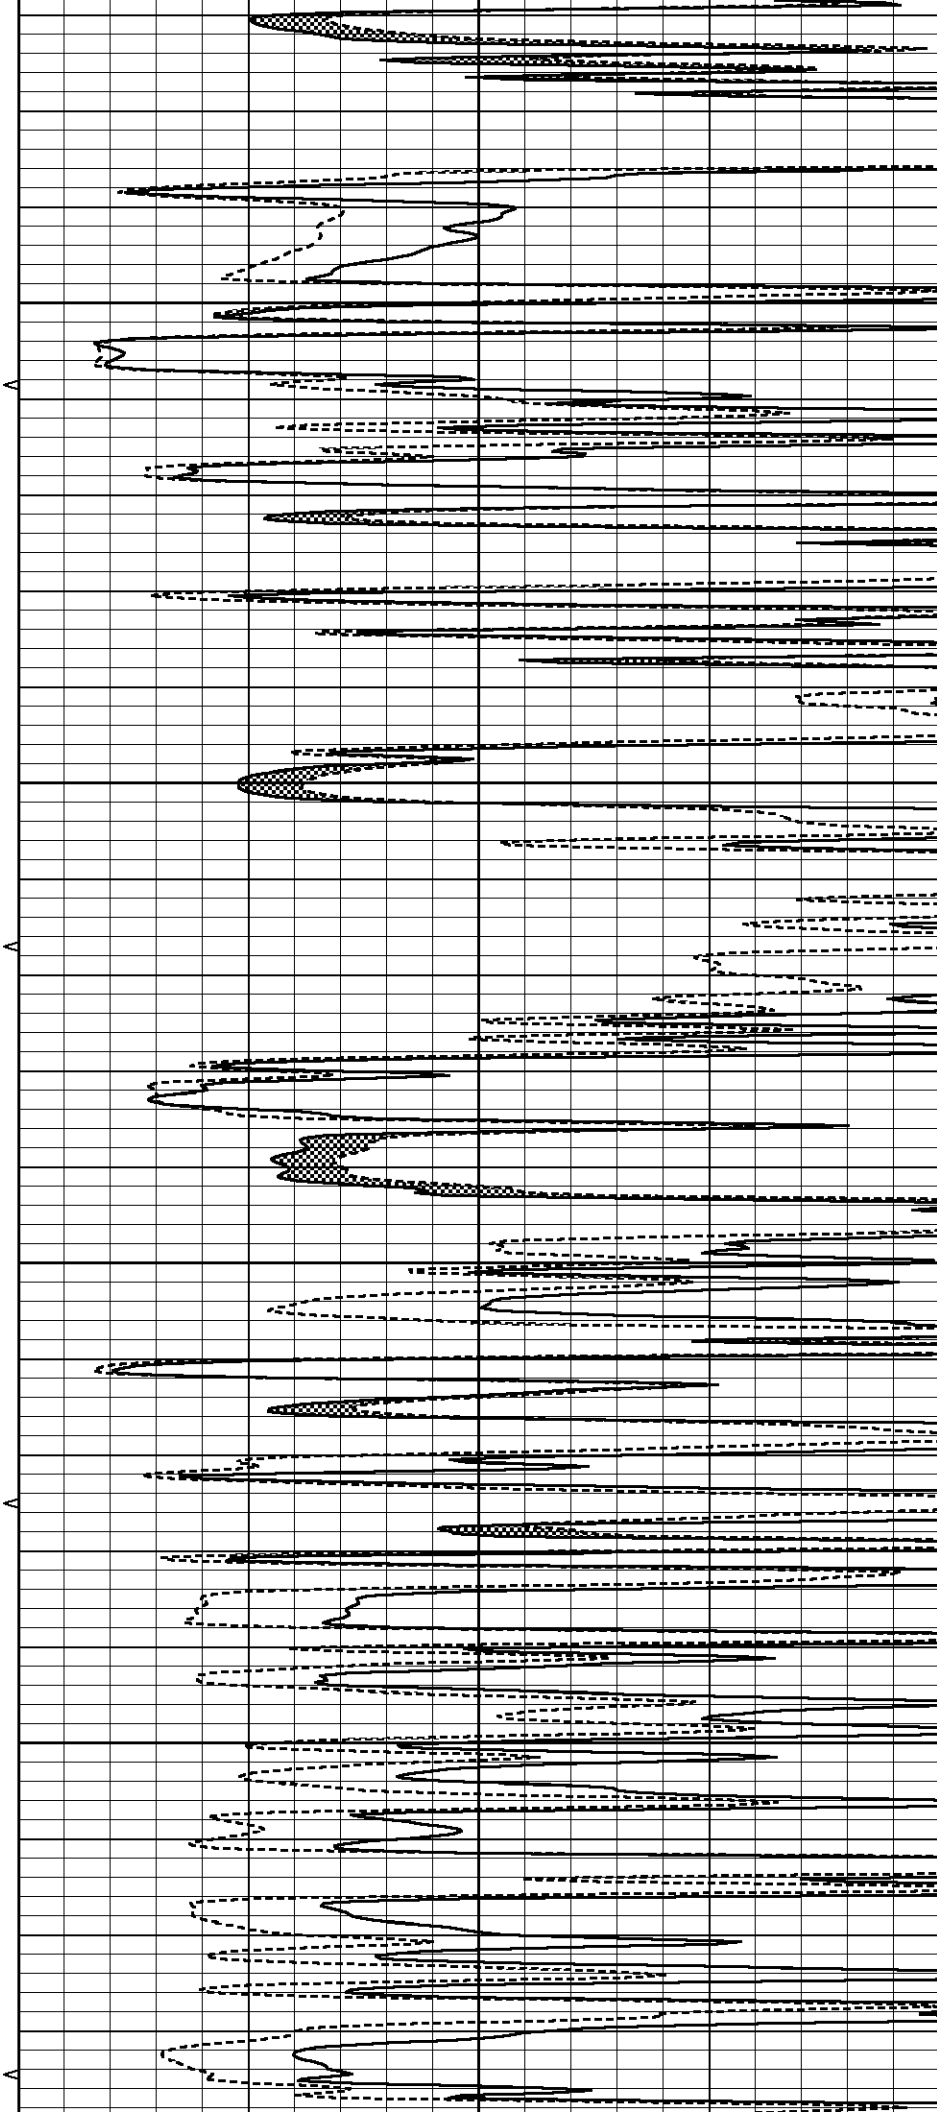

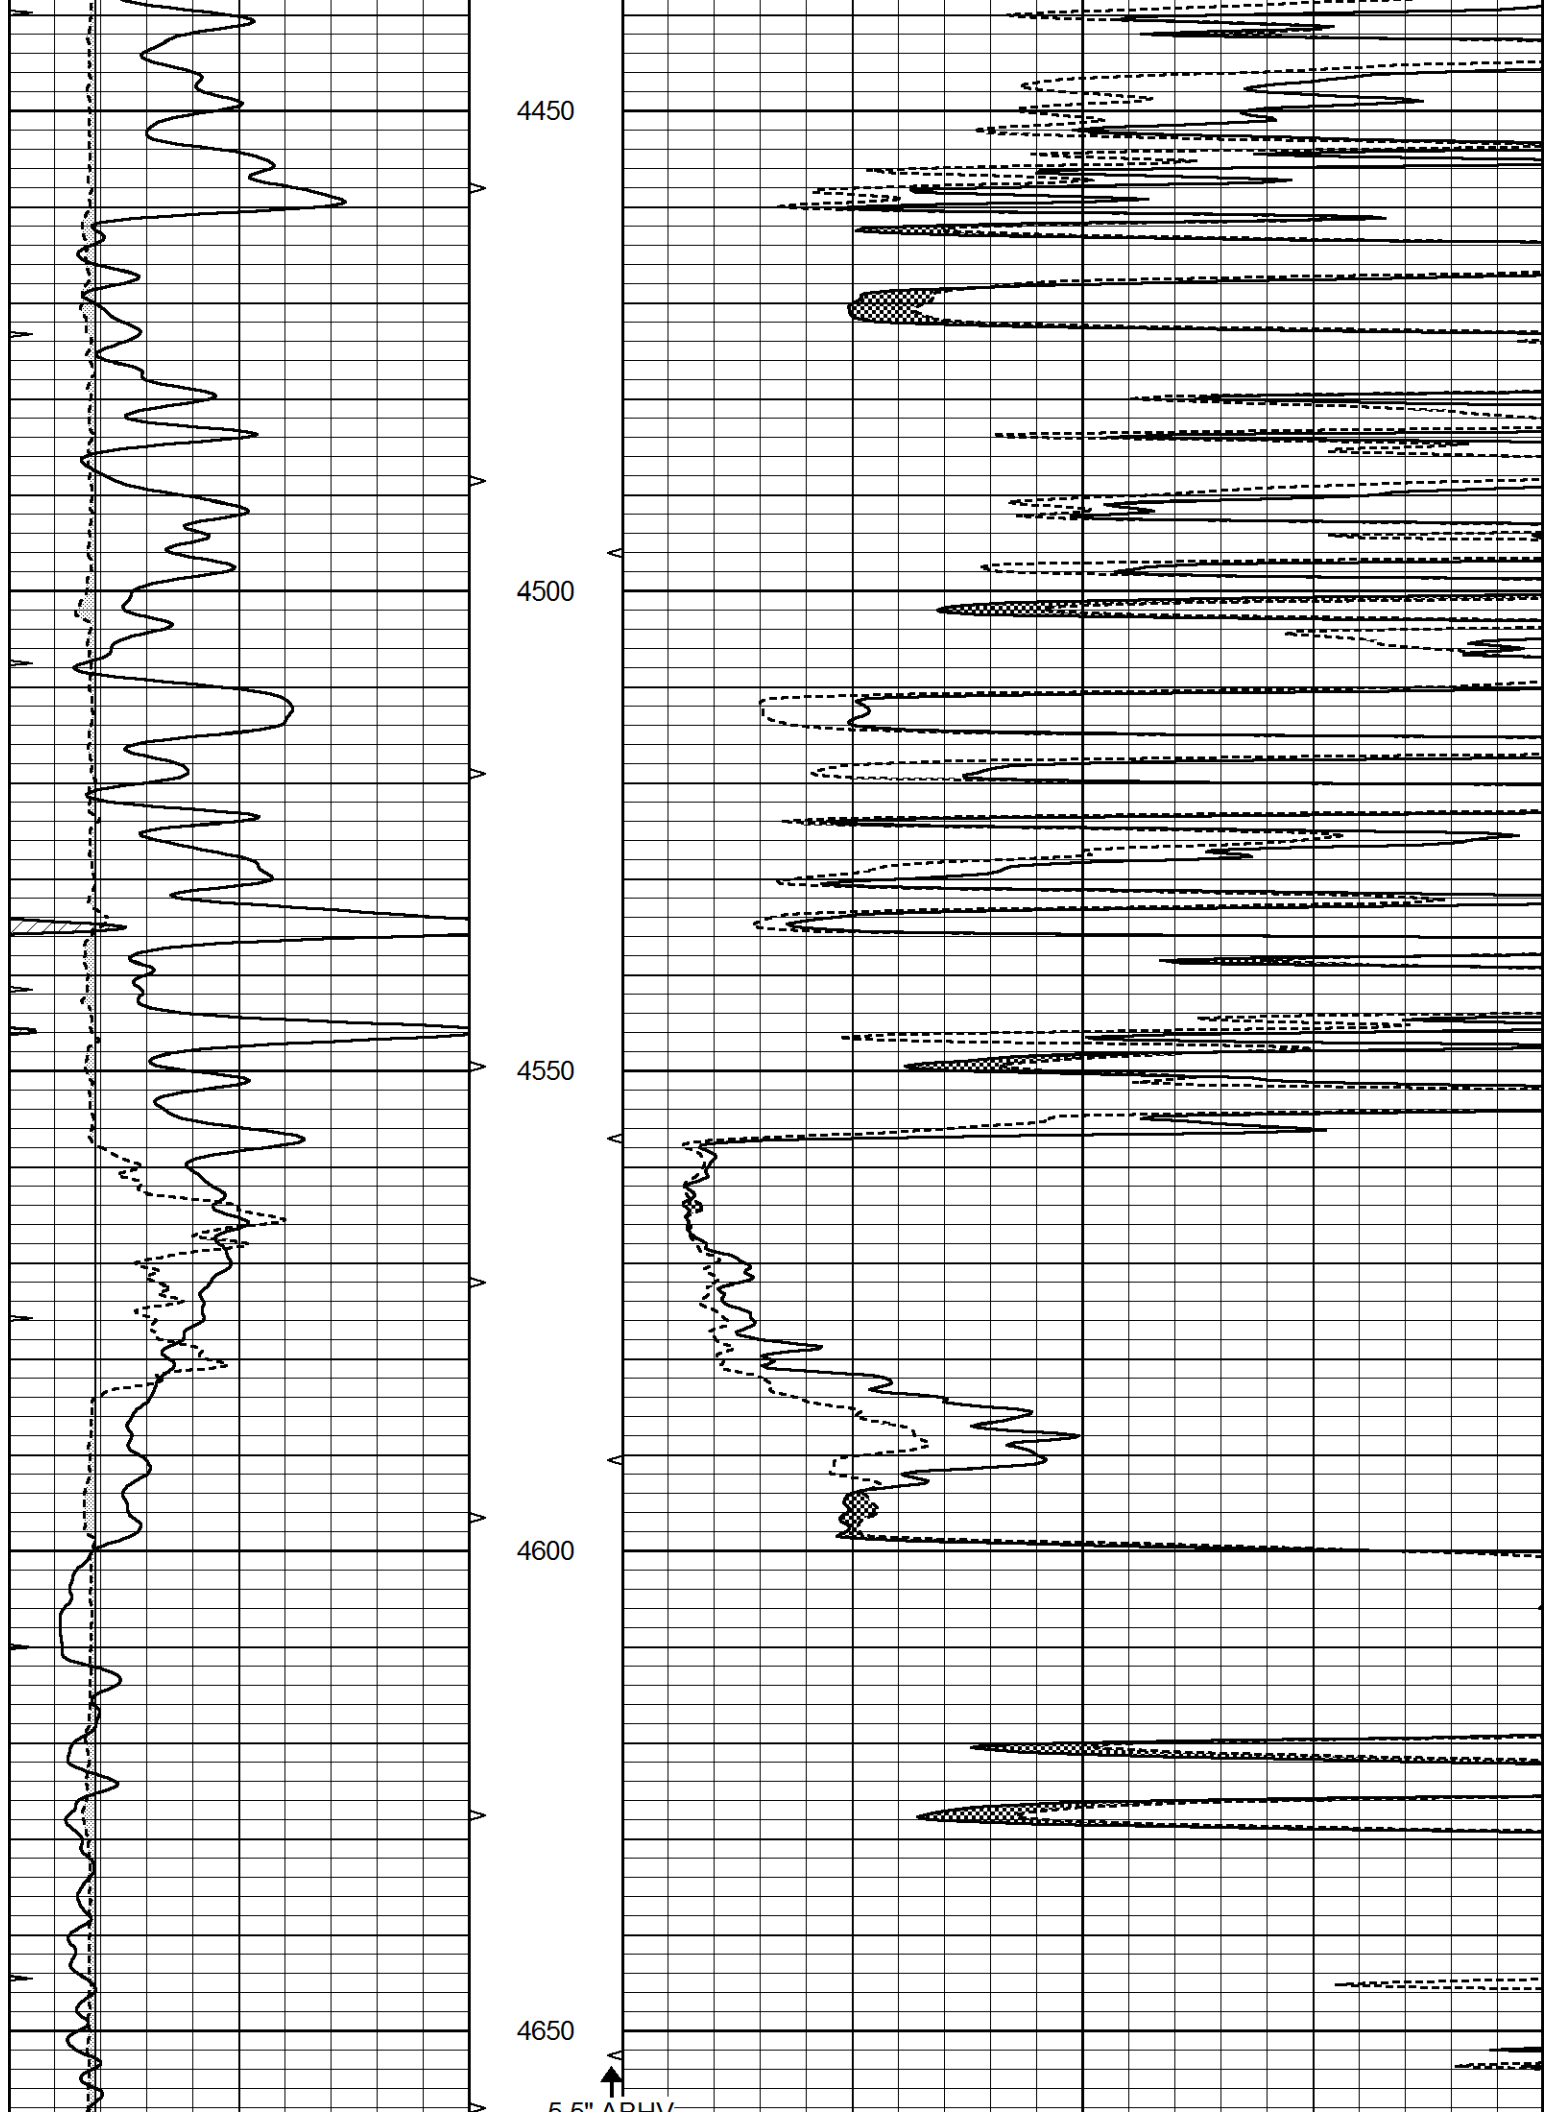


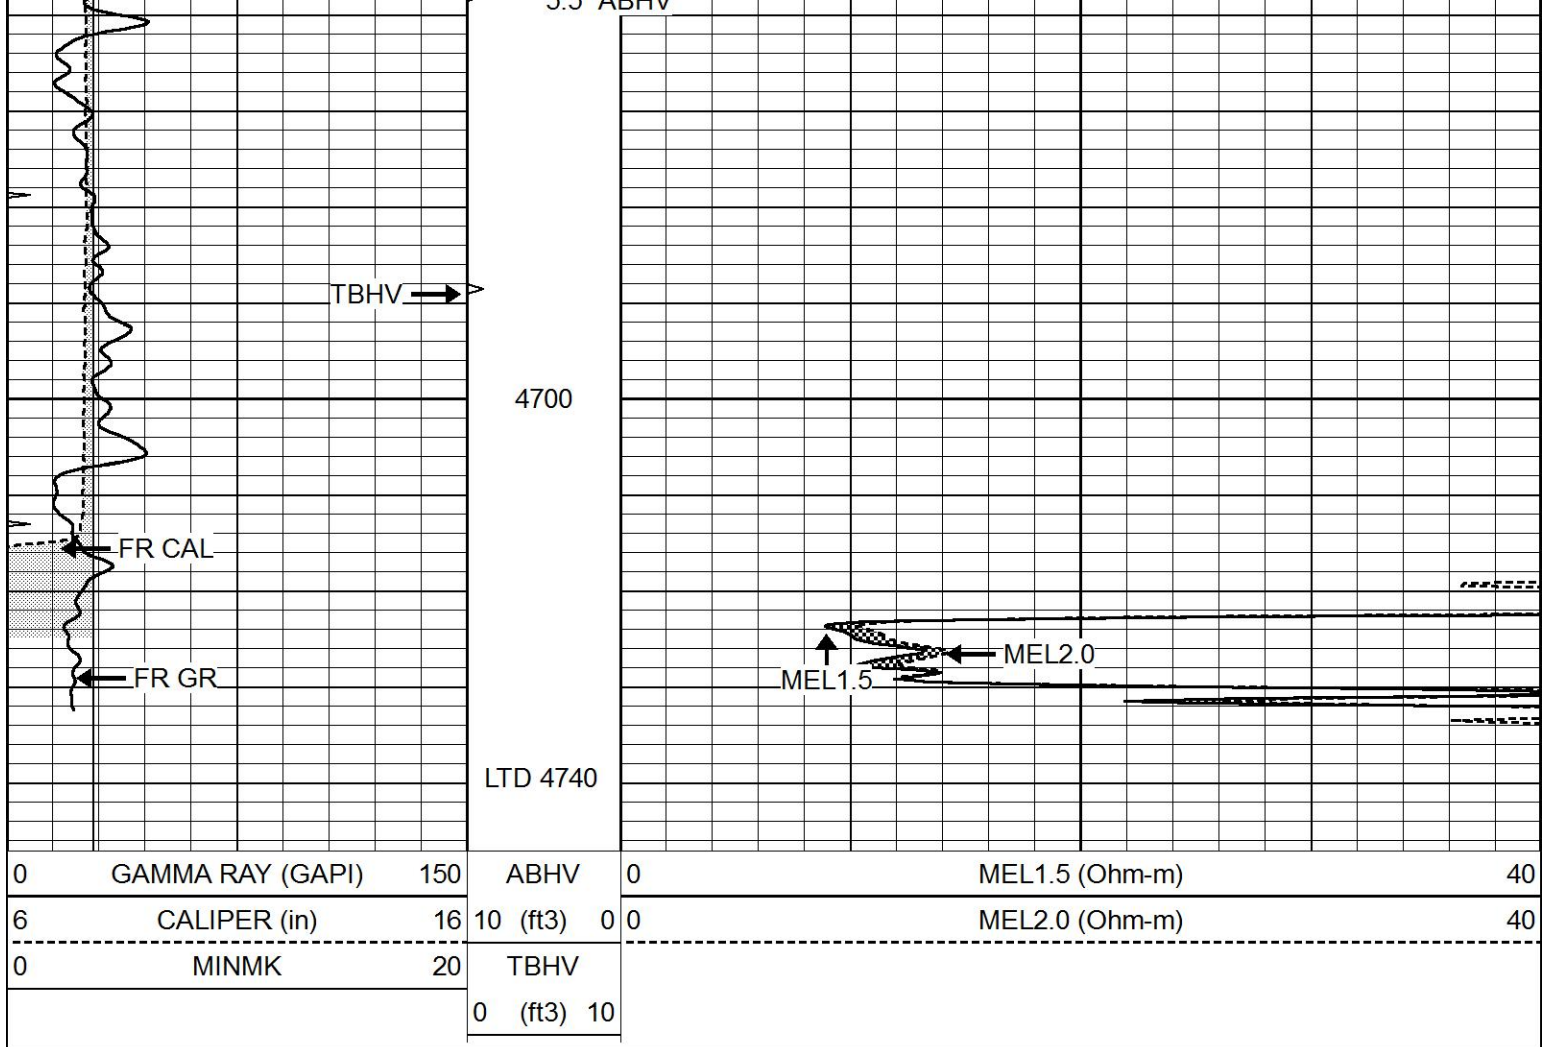


REPEAT SECTION

Database File 6713ddn.db
 Dataset Pathname pass5.2
 Presentation Format _micro
 Dataset Creation Sun Jul 17 05:41:22 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

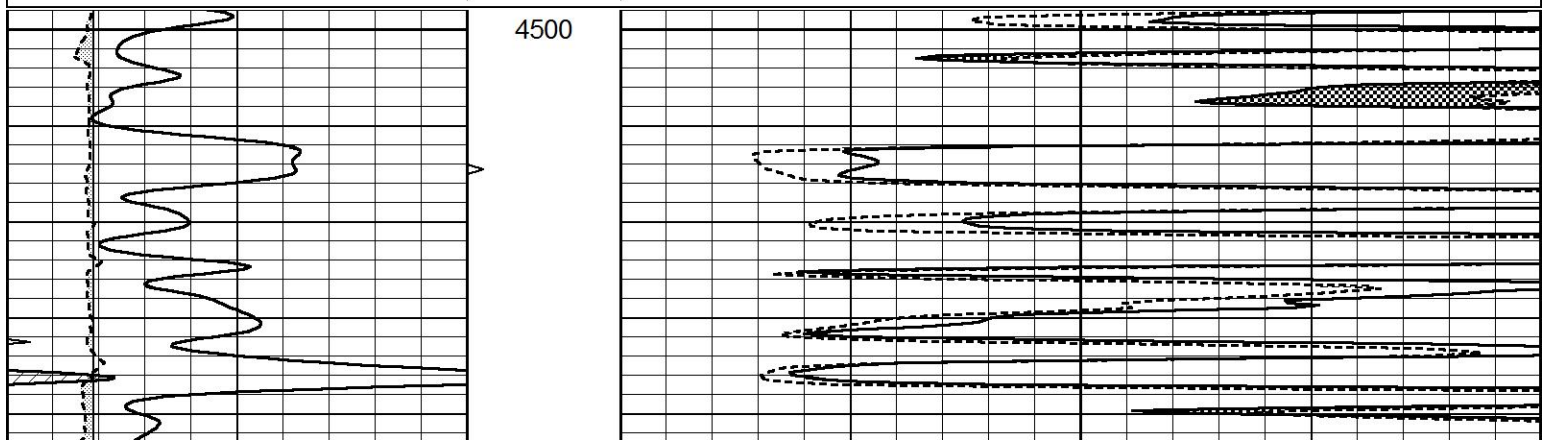

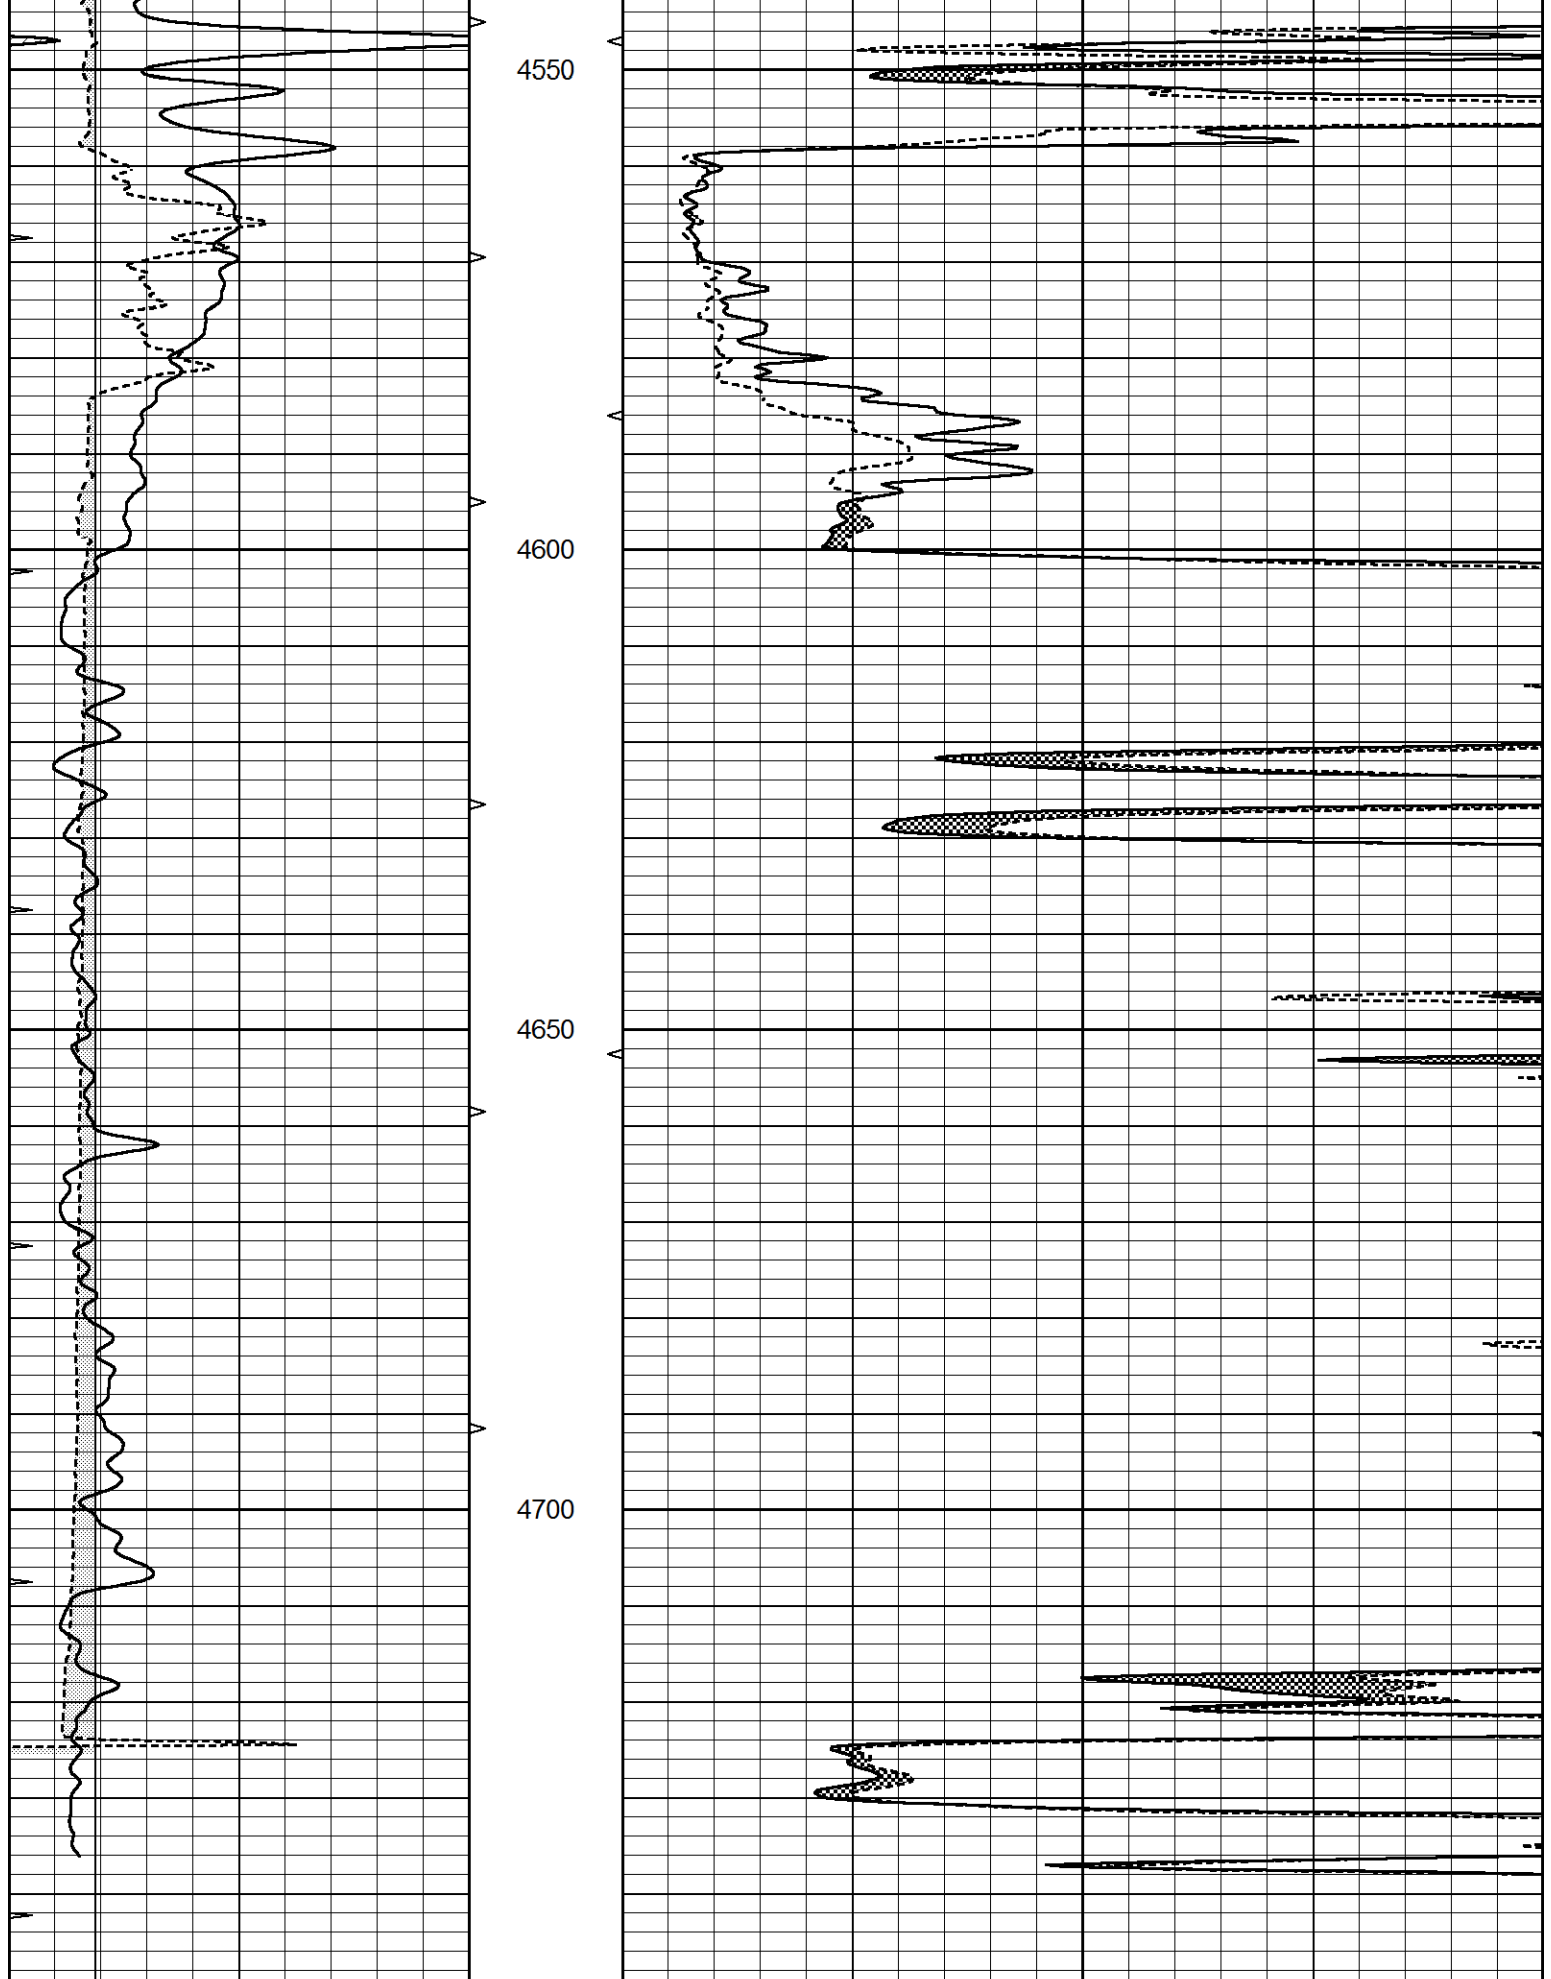

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			

Calibration Report

Database File 6713ddn.db
 Dataset Pathname pass6.3
 Dataset Creation Sun Jul 17 05:38:43 2022

MICRO Calibration Report

Serial Number: MICRO6
 Tool Model: PROBE
 Performed: Sun Jul 17 04:55:34 2022

Caliper Calibration: Gain=4.324 Offset=3.027

	Low Cal	High Cal
References	8.000	16.000
Readings	1.150	3.000

1.5" Calibration: Gain=46.000 Offset=0.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.002	0.624

2" Calibration: Gain=46.000 Offset=0.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.006	0.468

Gamma Ray Calibration Report

Serial Number: GR5
 Tool Model: OPEN
 Performed: Sun Jul 03 15:33:05 2022

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 1.0 cps

Sensitivity: 0.5600 GAPI/cps