



MICRO LOG

Company	RJM COMPANY	Location:	API # : 15-159-22885-0000	Other Services CDL/CNL DIL
Well	TIM #1	Permanent Datum	330' FSL & 1100' FWL E/2 - SE - SW - SW	Elevation K.B. 1768 D.F. 1766 G.L. 1758
Field	WILDCAT	Log Measured From	SEC 7 TWP 18S RGE 10W	
County	RICE	Drilling Measured From	GROUND LEVEL Elevation 1758 KELLY BUSHING 10' A.G.L. KELLY BUSHING	
State	KANSAS			
Date	7/11/22			
Run Number	TWO			
Depth Driller	3810			
Depth Logger	3808			
Bottom Logged Interval	3806			
Top Log Interval	2700			
Casing Driller	8 5/8"@347'			
Casing Logger	347			
Bit Size	7 7/8"			
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES:7.000 PPM		
Density / Viscosity	9.8/51			
pH / Fluid Loss	9.0/9.2			
Source of Sample	FLOWLINE			
Rm @ Meas. Temp	.700@82F			
Rmf @ Meas. Temp	.525@82F			
Rmc @ Meas. Temp	.840@82F			
Source of Rmf / Rmc	MEASURED			
Rm @ BHT	.504@114F			
Time Circulation Stopped	4 HOURS			
Time Logger on Bottom	5.15 P.M.			
Maximum Recorded Temperature	114F			
Equipment Number	8916			
Location	HAYS, KANSAS			
Recorded By	JEFF LUEBBERS			
Witnessed By	JIM MUSGROVE			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
CLAFLIN, KS., 3E. ON HWY 4 TO COUNTY LINE, 2S., 1/2E., S. INTO




MAIN SECTION

Database File	6709pe.db
Dataset Pathname	pass7.1
Presentation Format	_micro
Dataset Creation	Mon Jul 11 16:58:32 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

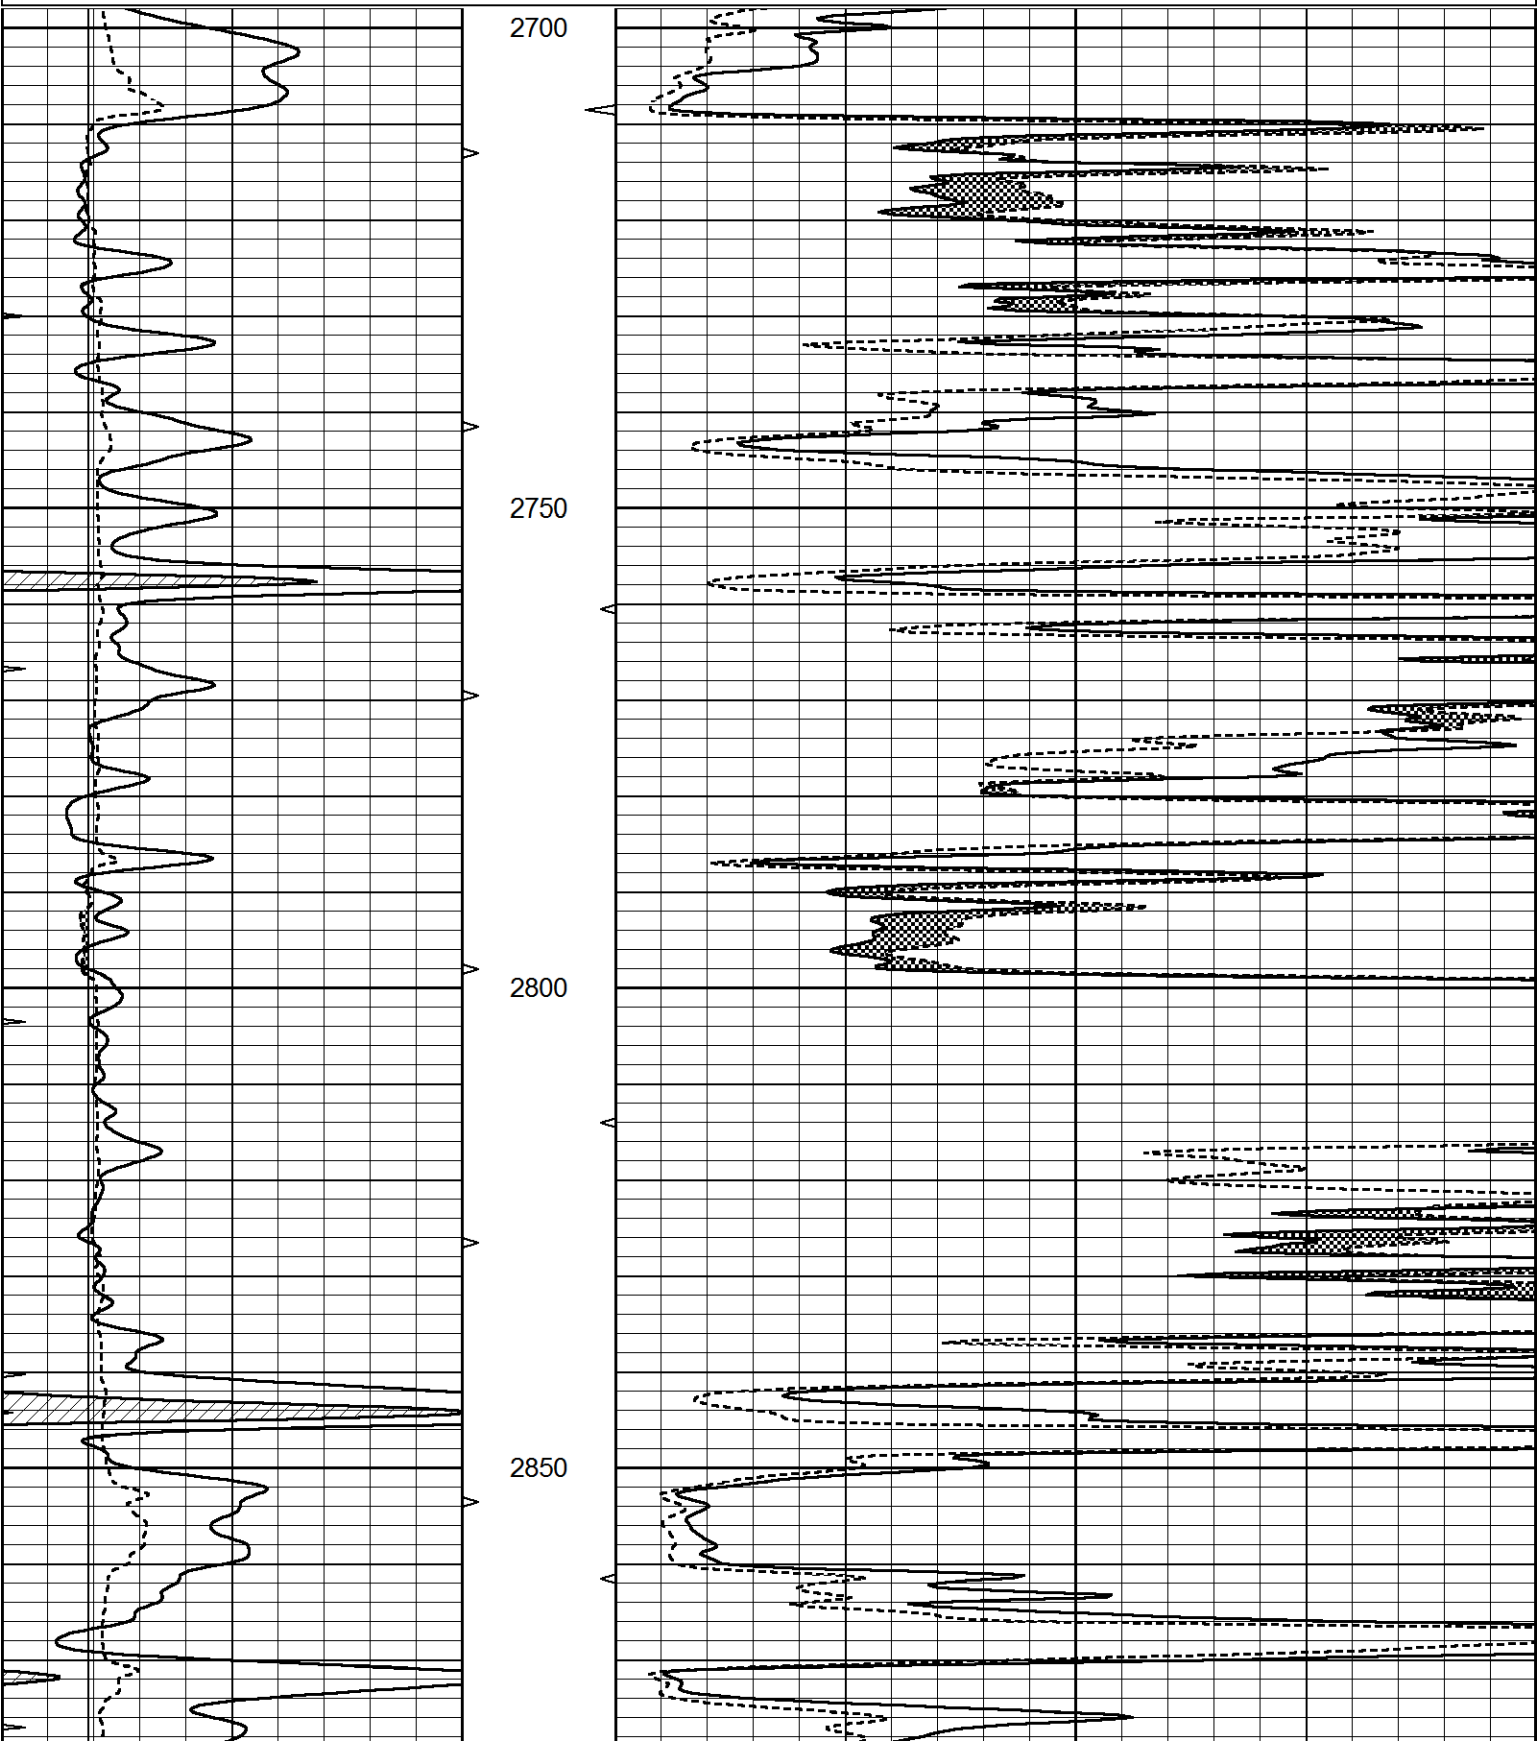

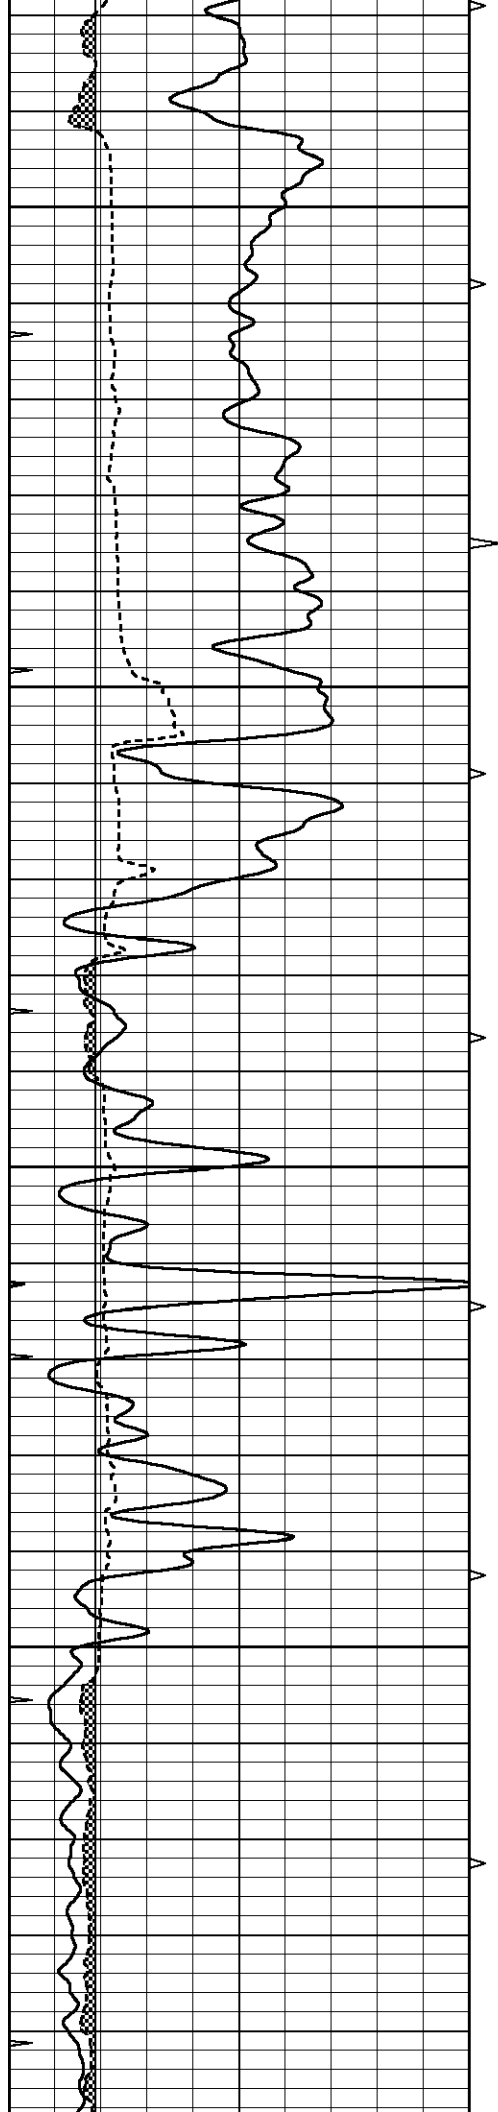



2900


2950

3000

3050

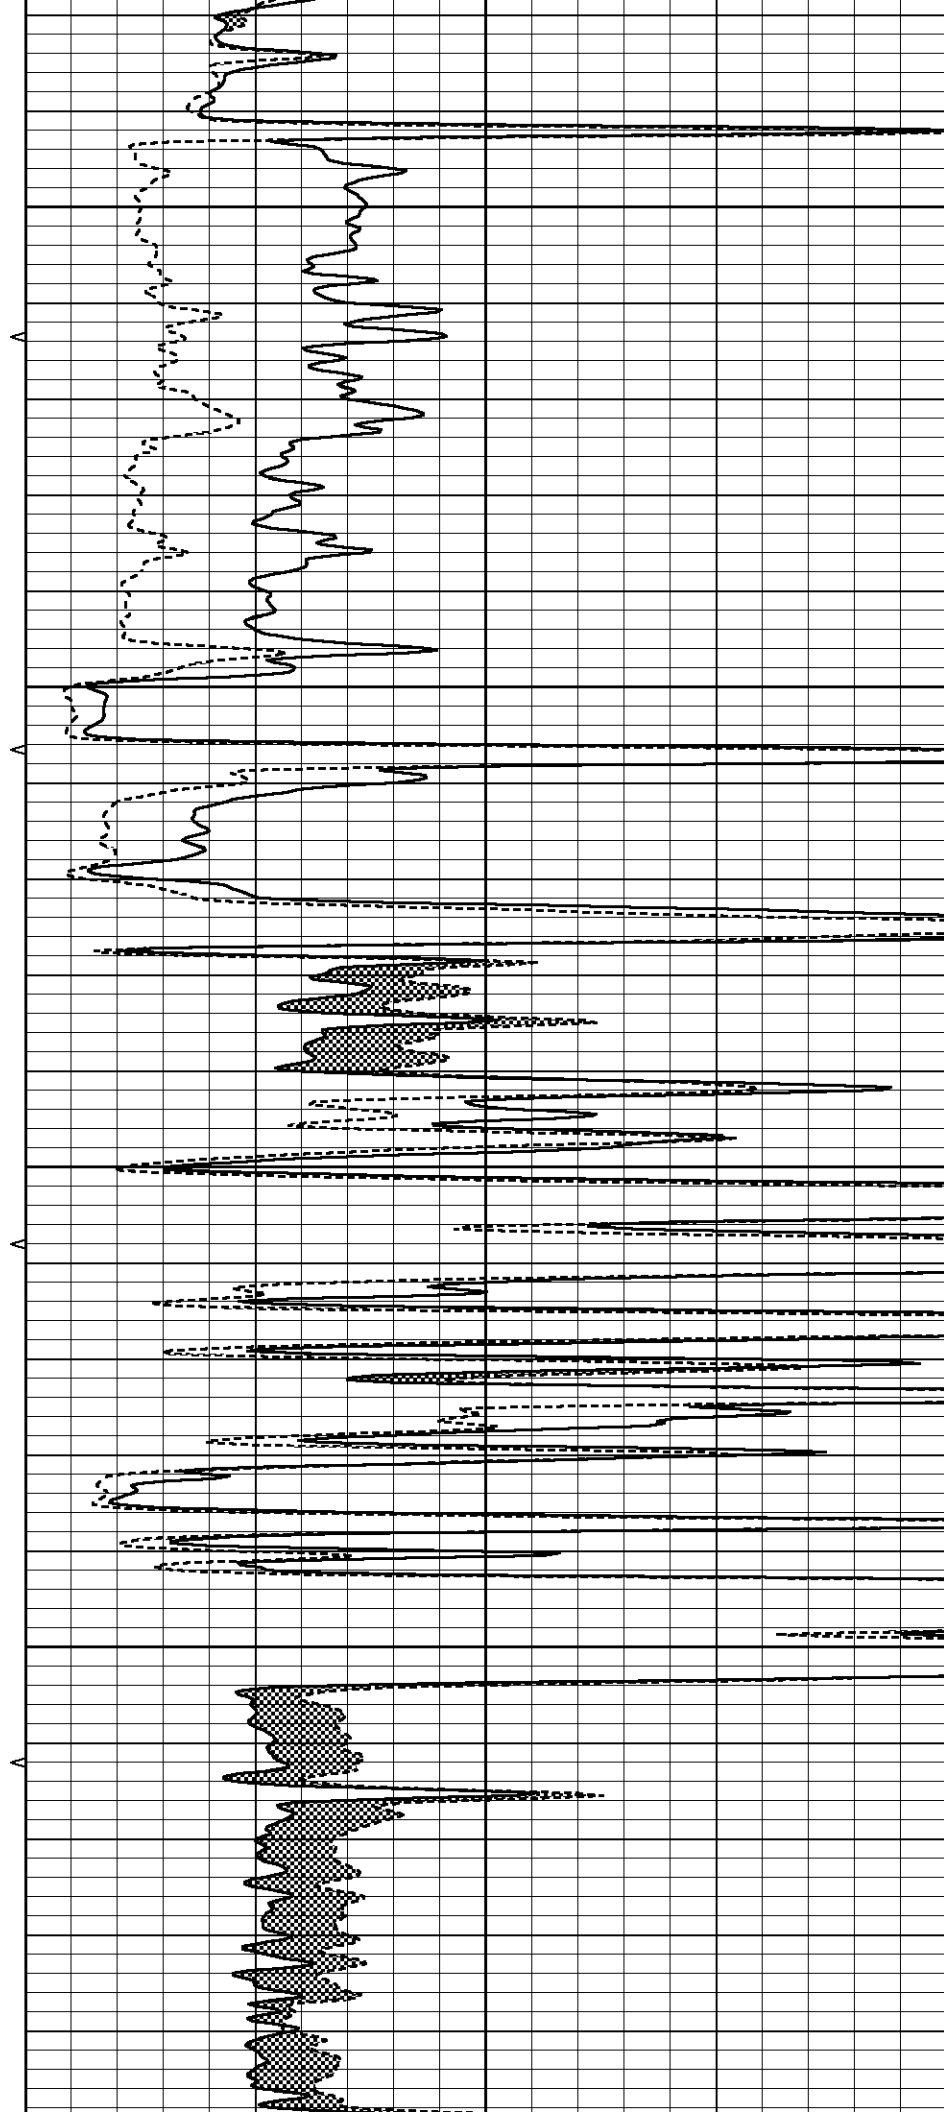

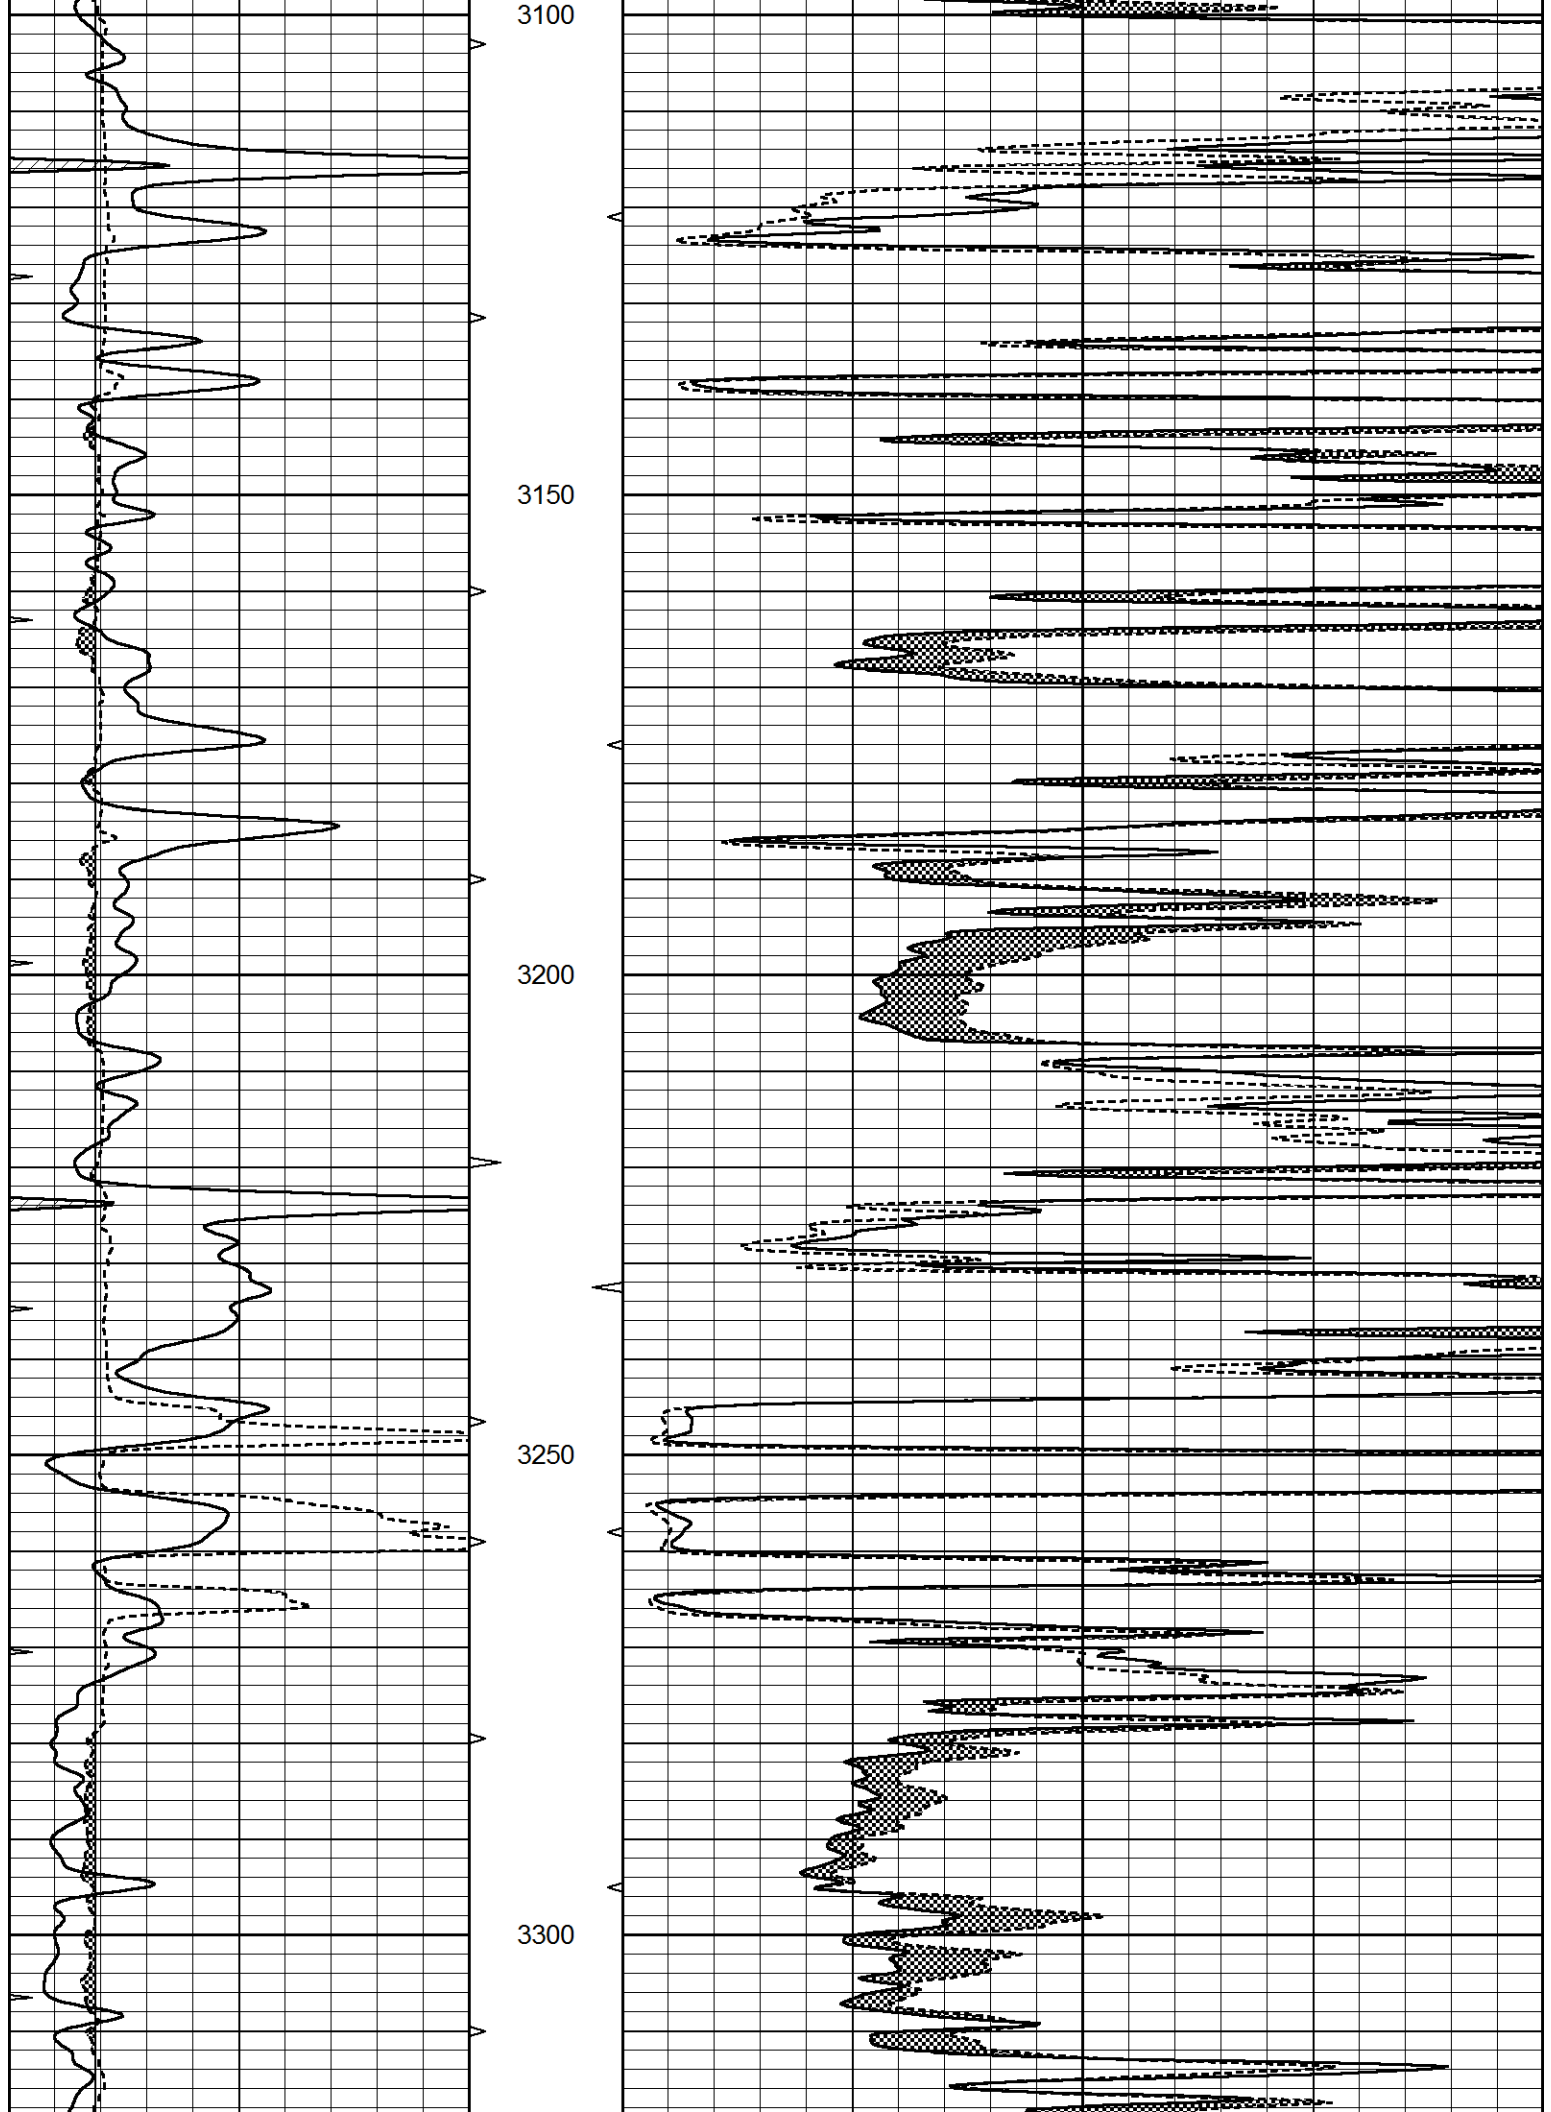

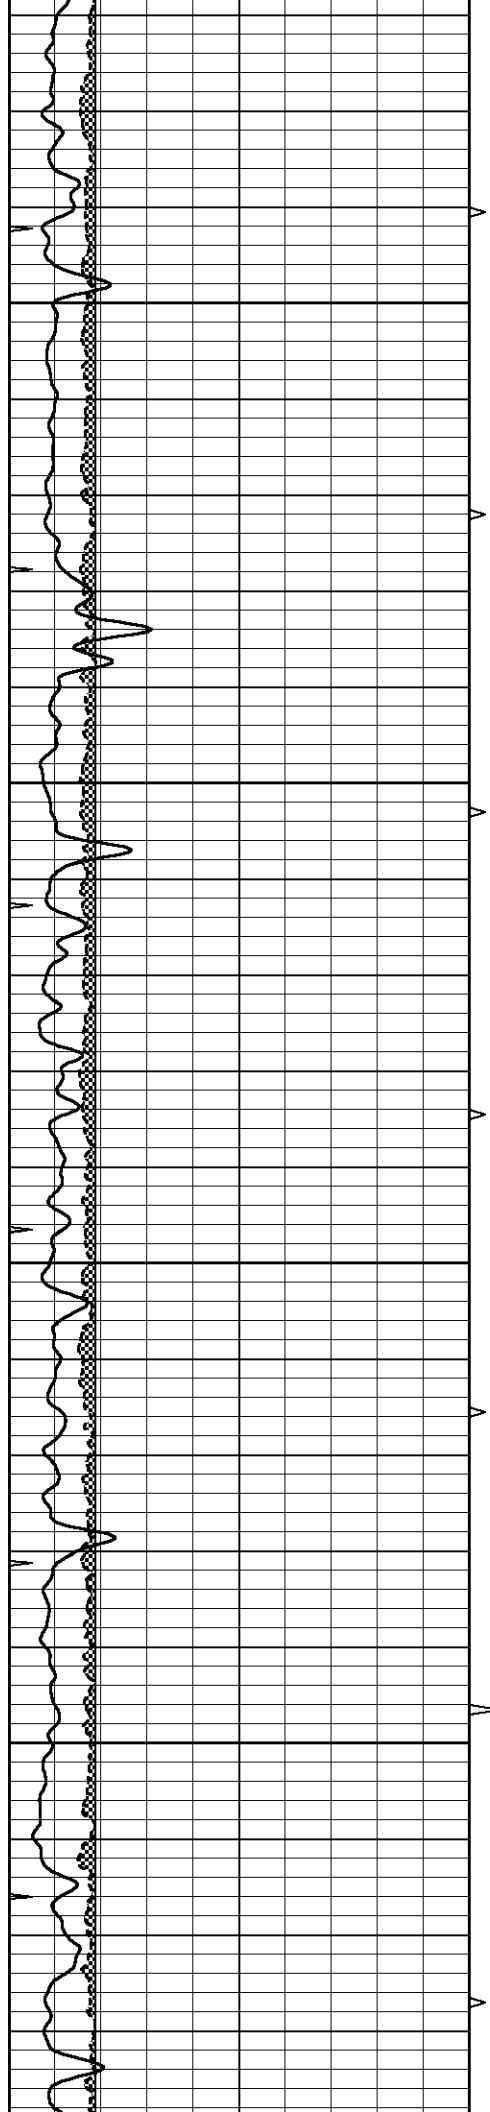



3350


3400

3450

3500


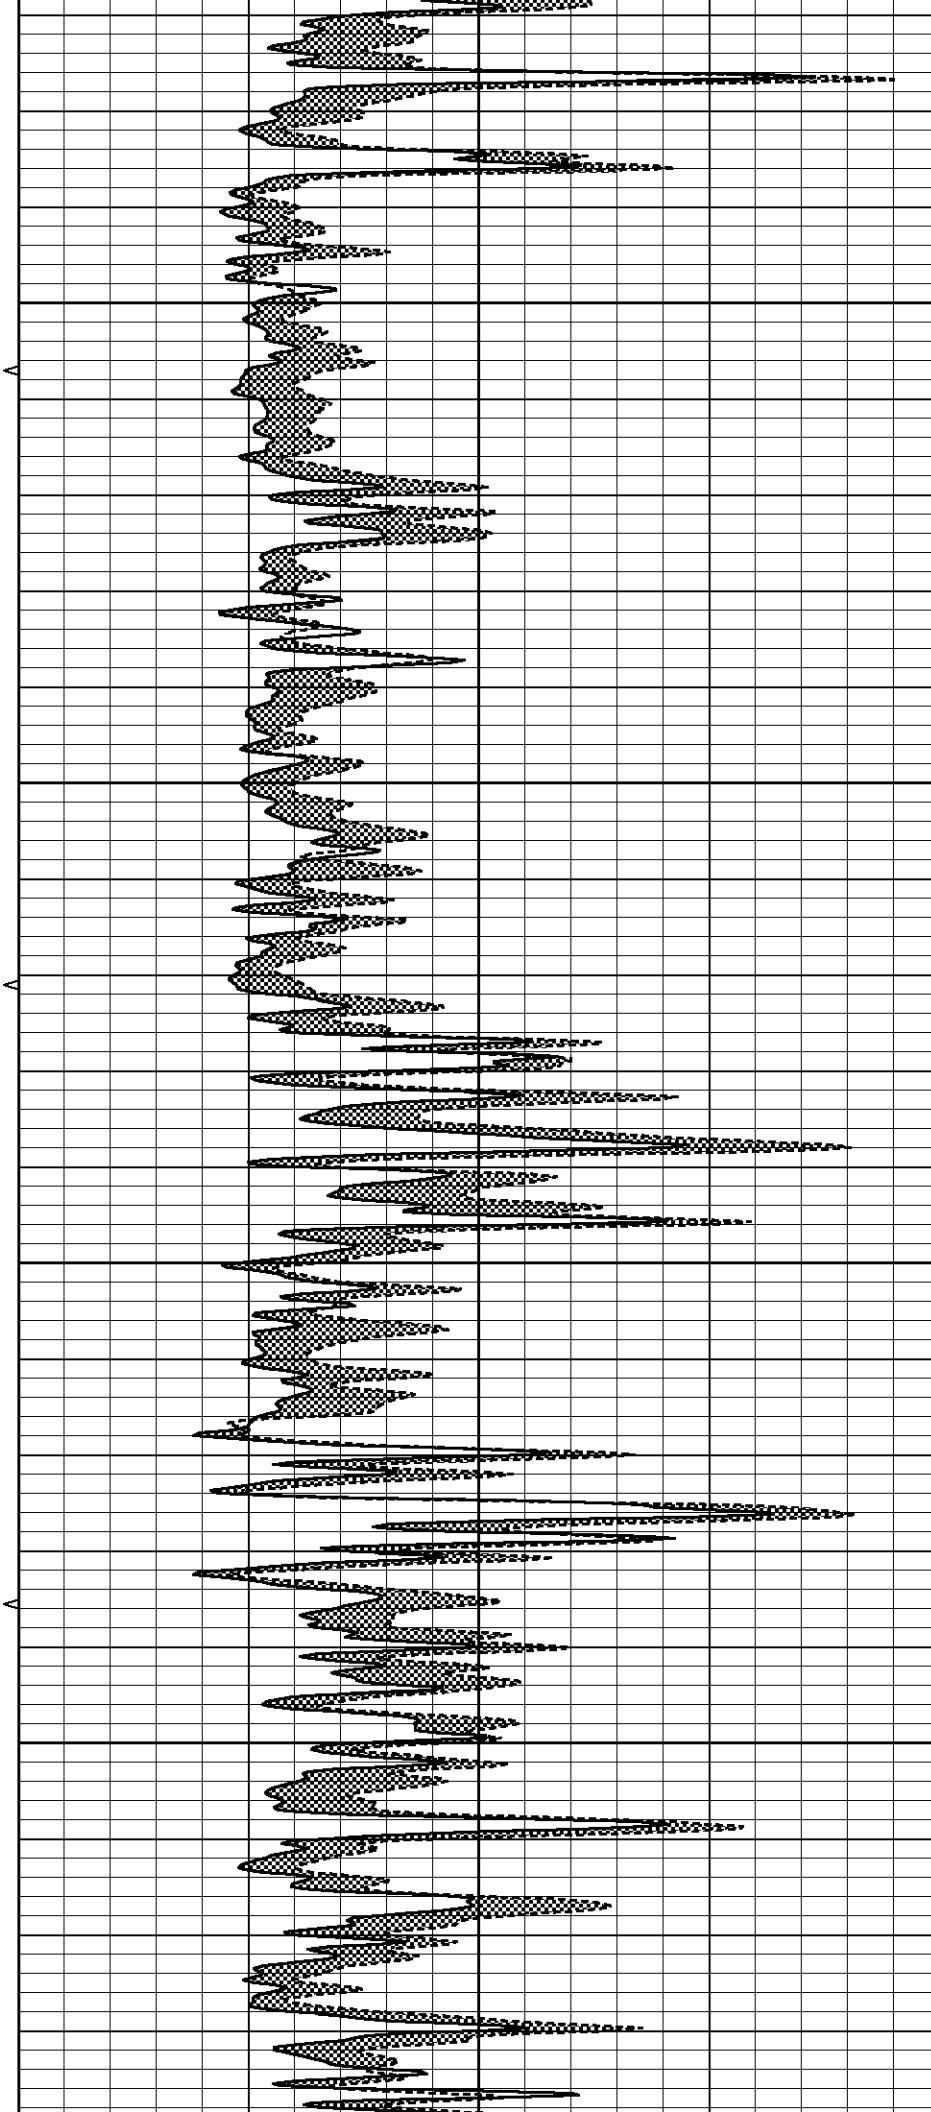


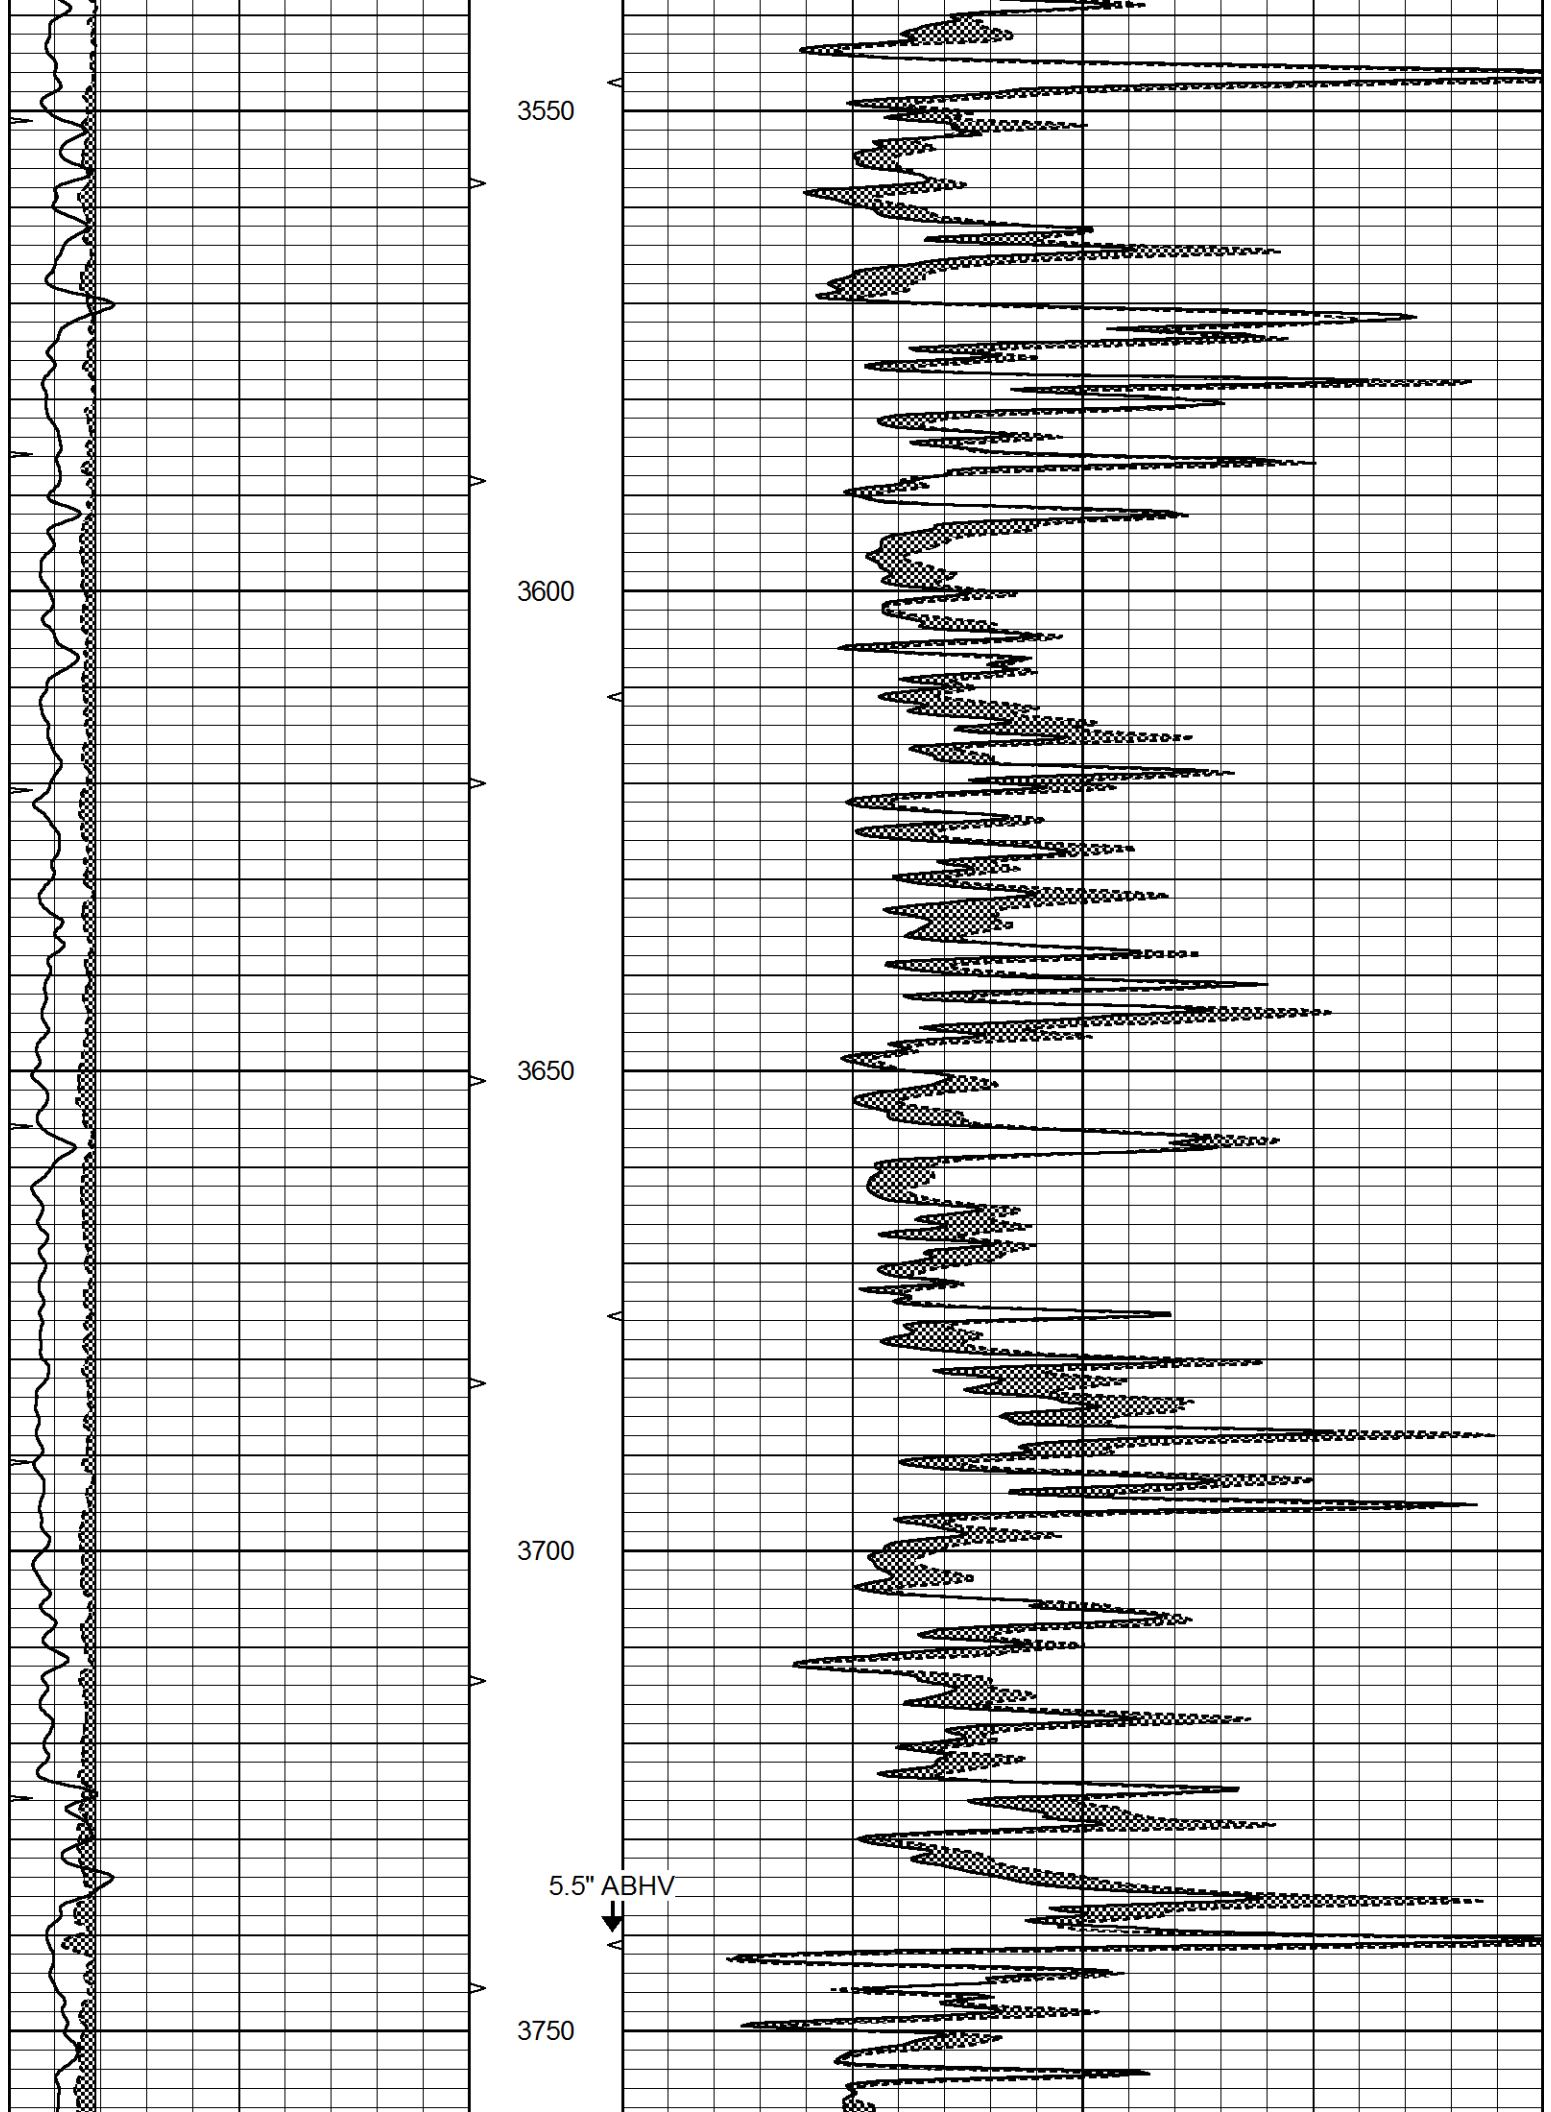


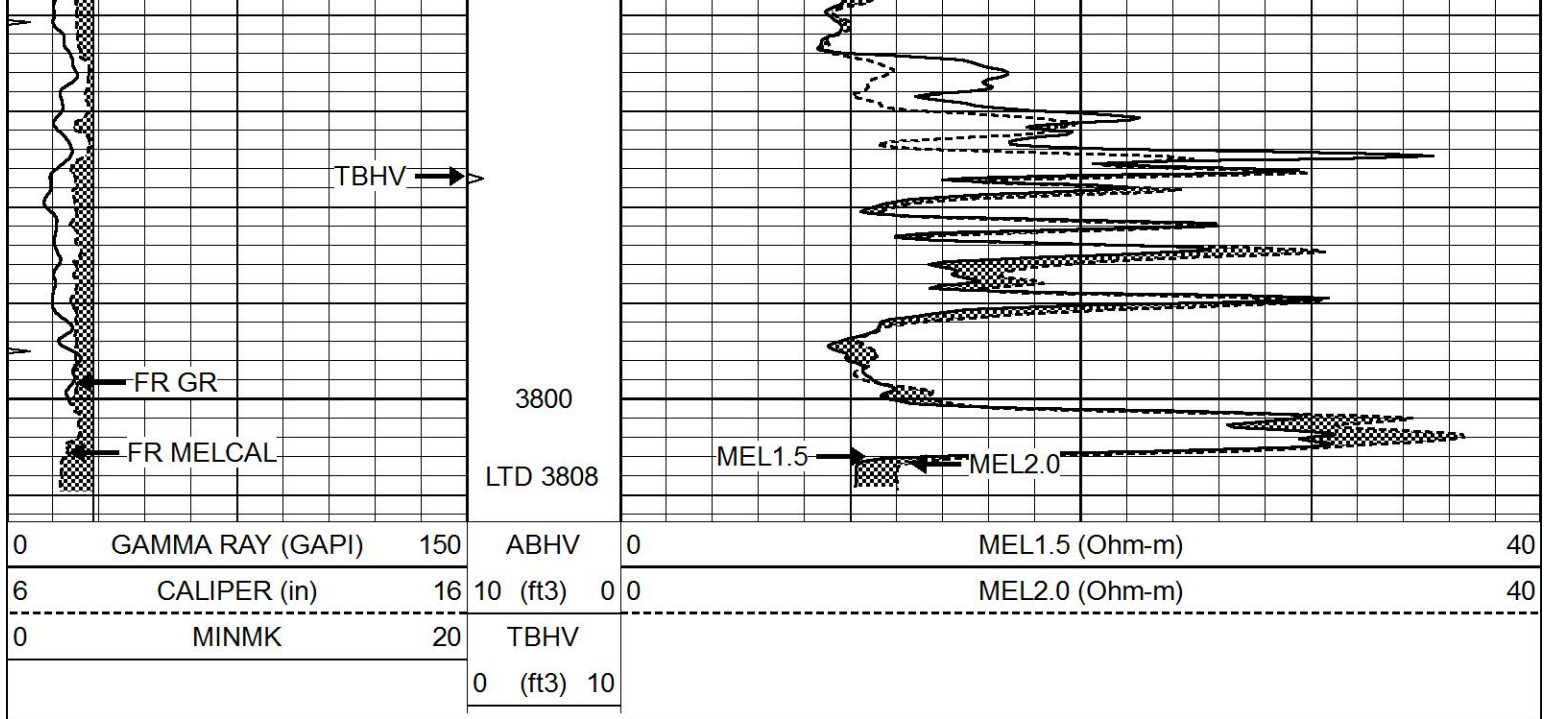

REPEAT SECTION

Database File 6709pe.db
 Dataset Pathname pass6.1
 Presentation Format _micro
 Dataset Creation Mon Jul 11 16:46:54 2022
 Charted by Depth in Feet scaled 1:240

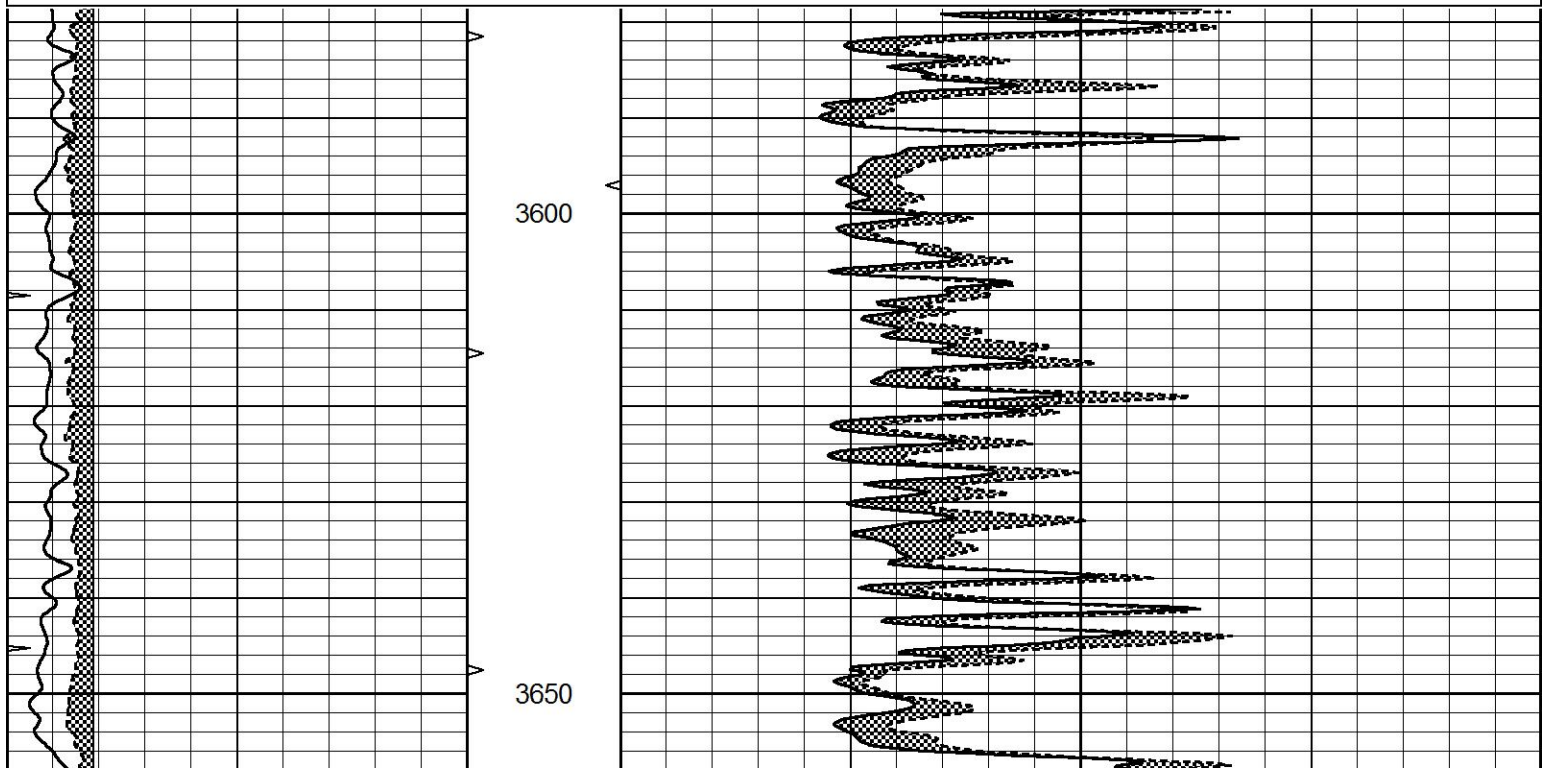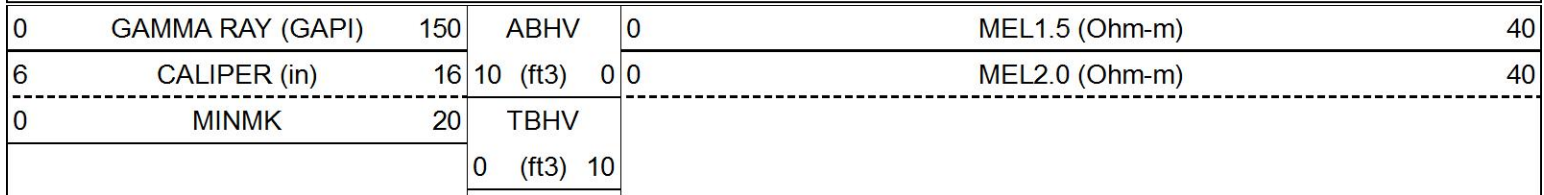

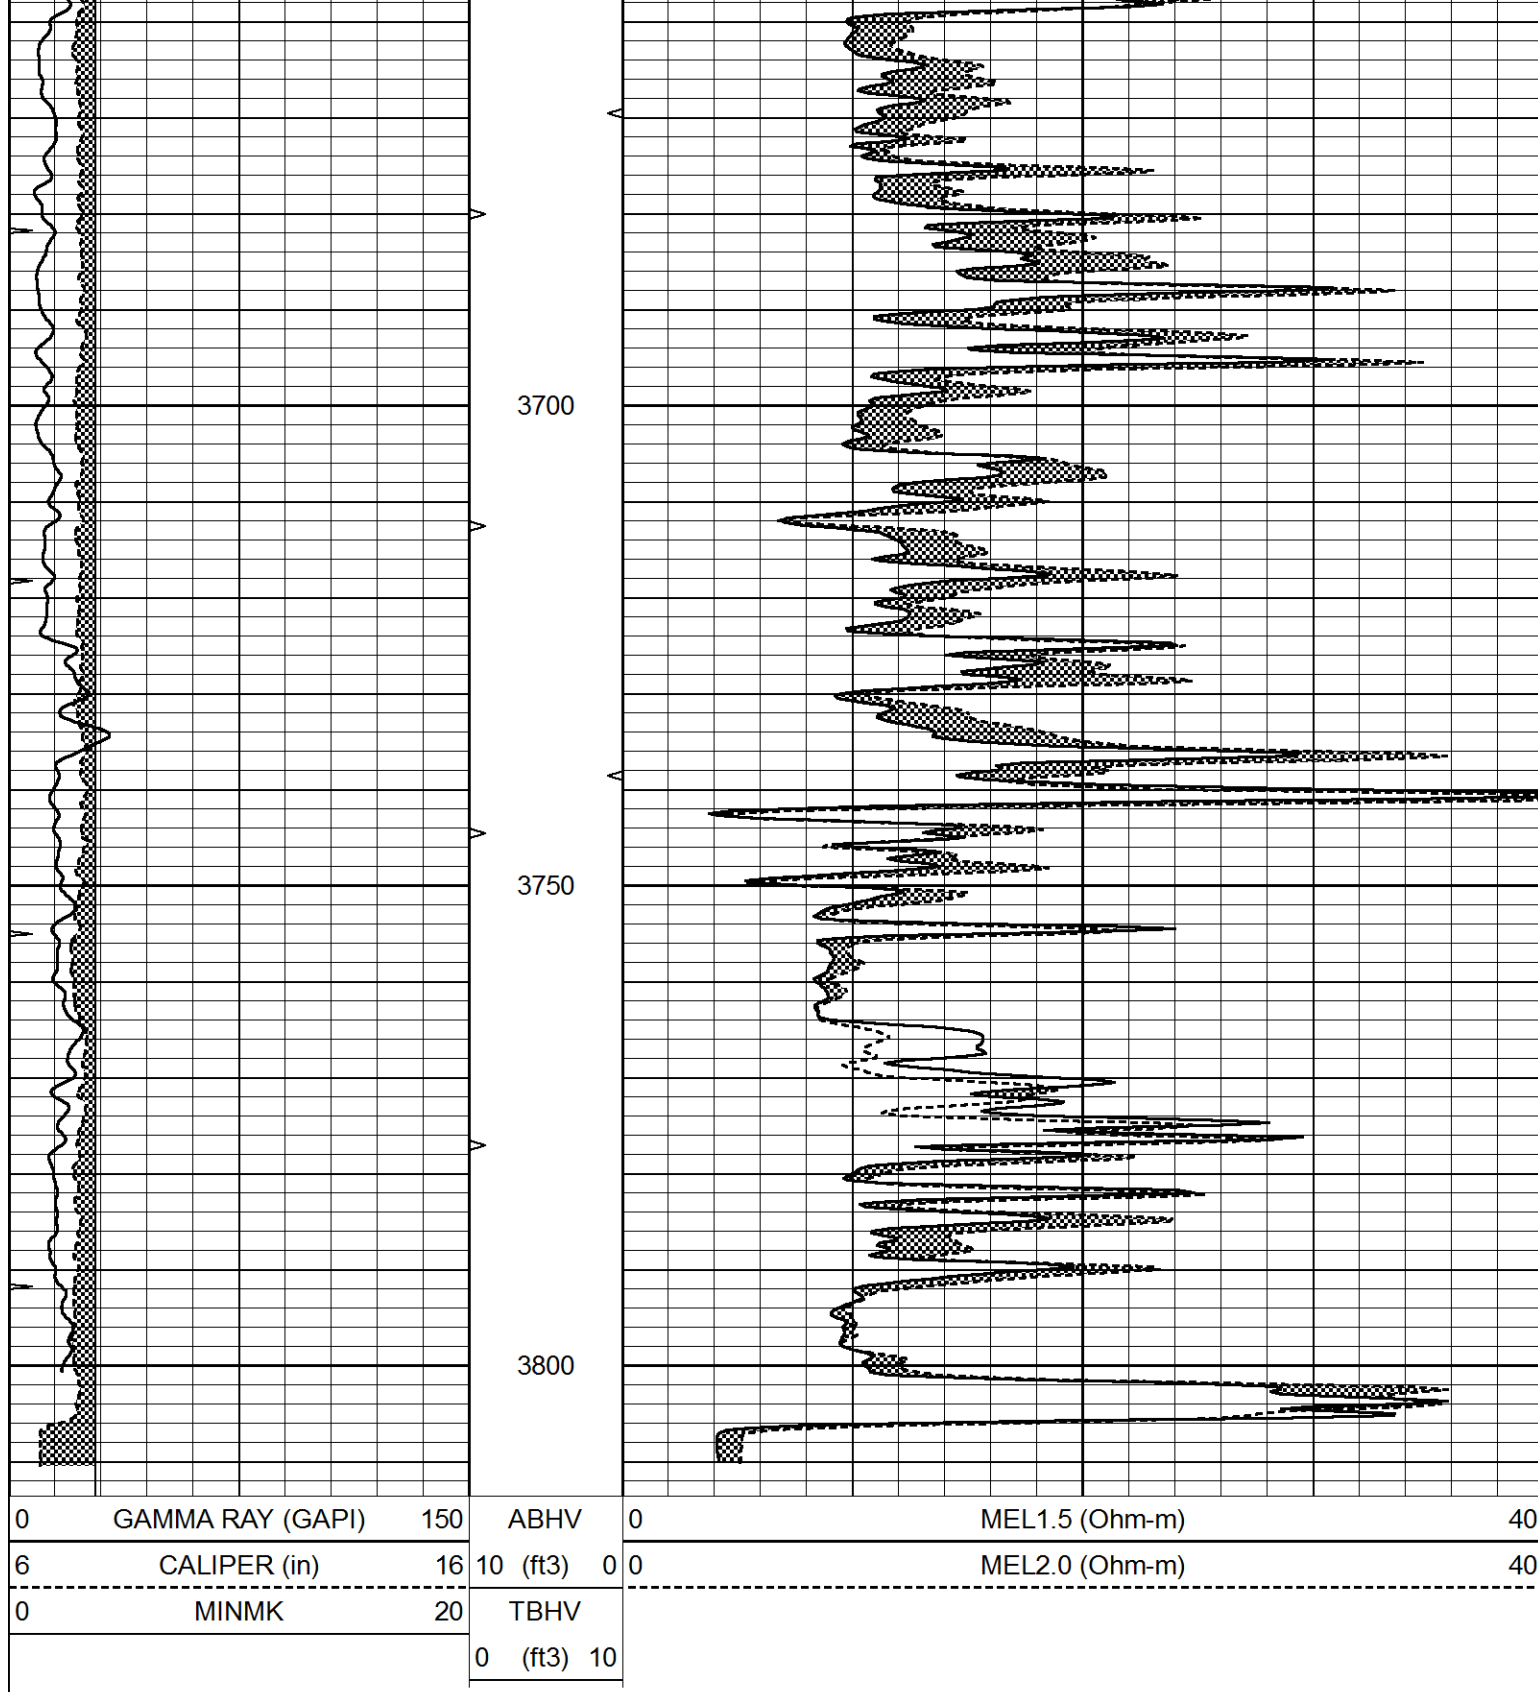

Calibration Report

Database File 6709pe.db
 Dataset Pathname pass7.1
 Dataset Creation Mon Jul 11 16:58:32 2022

MICRO Calibration Report

Serial Number: MICRO6
 Tool Model: PROBE
 Performed: Fri Jul 08 09:29:14 2022

Calibration Offset: 1.571 Offset: 0.000

Caliper Calibration:	Gain=4.571	Offset=2.286
References	Low Cal 8.000	High Cal 16.000
Readings	1.250	3.000
1.5" Calibration:	Gain=46.000	Offset=0.000
References	Low Cal 0.000	High Cal 20.000
Readings	0.002	0.624
2" Calibration:	Gain=50.000	Offset=-1.000
References	Low Cal 0.000	High Cal 20.000
Readings	0.006	0.468
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Sun Jul 03 15:33:05 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5600	GAPI/cps