

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-151-20819-00-00  
Spot: SWSWSE Sec/Twnshp/Rge: 8-26S-15W  
330 feet from S Section Line, 2310 feet from E Section Line  
Lease Name: JOHNSON Well #: 1  
County: PRATT Total Vertical Depth: 4615 feet

Operator License No.: 3959  
Op Name: SIROKY OIL MANAGEMENT  
Address: PO BOX 464  
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4446	1950	WITH 200 SX CMT
SURF	8.625	438		WITH 325 SX CMT

\$ 149.99

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/01/2007 9:45 AM  
Plug Co. License No.: 33093 Plug Co. Name: GENESIS WELL SERVICE, INC.  
Proposal Rcvd. from: BRIAN SIROKY Company: GENESIS WELL SERVICE, INC. Phone: (620) 770-0621

Proposed Plugging Method: SAND BACK TO 3988' & 4 SX CMT. PLUG AT 1000' WITH 10 SX GEL & 50 SX CMT. PLUG AT 460' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 03/01/2007 11:15 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 3980' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 2 3/8" TUBING. 1ST PLUG AT 1000' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 460' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 15 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4344	4352		
4038	4048		

INVOICED  
DATE 3-27-07  
INV. NO. 2007061515

Remarks: USED 60/40 POZMIX 6% GEL BY JET STAR.

Plugged through: TBG

District: 01

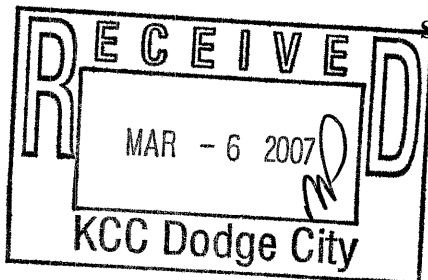

Signed

*Stephen J Pfeifer*

RECEIVED  
KANSAS CORPORATION COMMISSION  
MAR 19 2007  
CONSERVATION DIVISION  
WICHITA, KS

Form CP-2/3

*PKT*