

MICRO LOG

Company TREK AEC, LLC.
Well DUDREY #8-36
Field UNNAMED
County PRATT State KANSAS

Location: API #: 15-151-22549-0000
330' FNL & 2131' FWL
W2 - NE - SE - NW
SEC 36 TWP 29S RGE 12W
Permanent Datum GROUND LEVEL Elevation 1859
Log Measured From KELLY BUSHING 8' A.G.L.
Drilling Measured From KELLY BUSHING
Other Services
CDL/CNL/PE
DIL/SON
Elevation
K.B. 1867
D.F. 1865
G.L. 1859

Date	7/18/22		
Run Number	TWO		
Depth Driller	4825		
Depth Logger	4828		
Bottom Logged Interval	4812		
Top Log Interval	2600		
Casing Driller	8 5/8" @ 435		
Casing Logger	435		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2.000 PPM	
Density / Viscosity	8.7/42		
pH / Fluid Loss	9.5/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.30 @ 90F		
Rmf @ Meas. Temp	.975 @ 90F		
Rmc @ Meas. Temp	1.56 @ 90F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.951 @ 123F		
Time Circulation Stopped	5 HOURS		
Time Logger on Bottom	8:30 P.M.		
Maximum Recorded Temperature	123F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	COLE ROBEN		
Witnessed By	DAVID BARKER		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:


SOUTH OF SAWYER, KANSAS 7 MILES ON HIGHWAY 42, FOLLOW CURVE SOUTH 1 MILE THEN WEST ONE MILE, SOUTH INTO

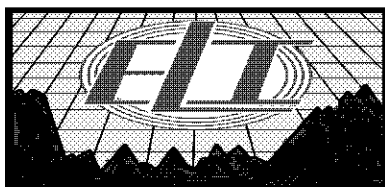


MAIN SECTION

Database File	6759pe.db
Dataset Pathname	pass9MICRO
Presentation Format	_micro
Dataset Creation	Mon Jul 18 22:58:38 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

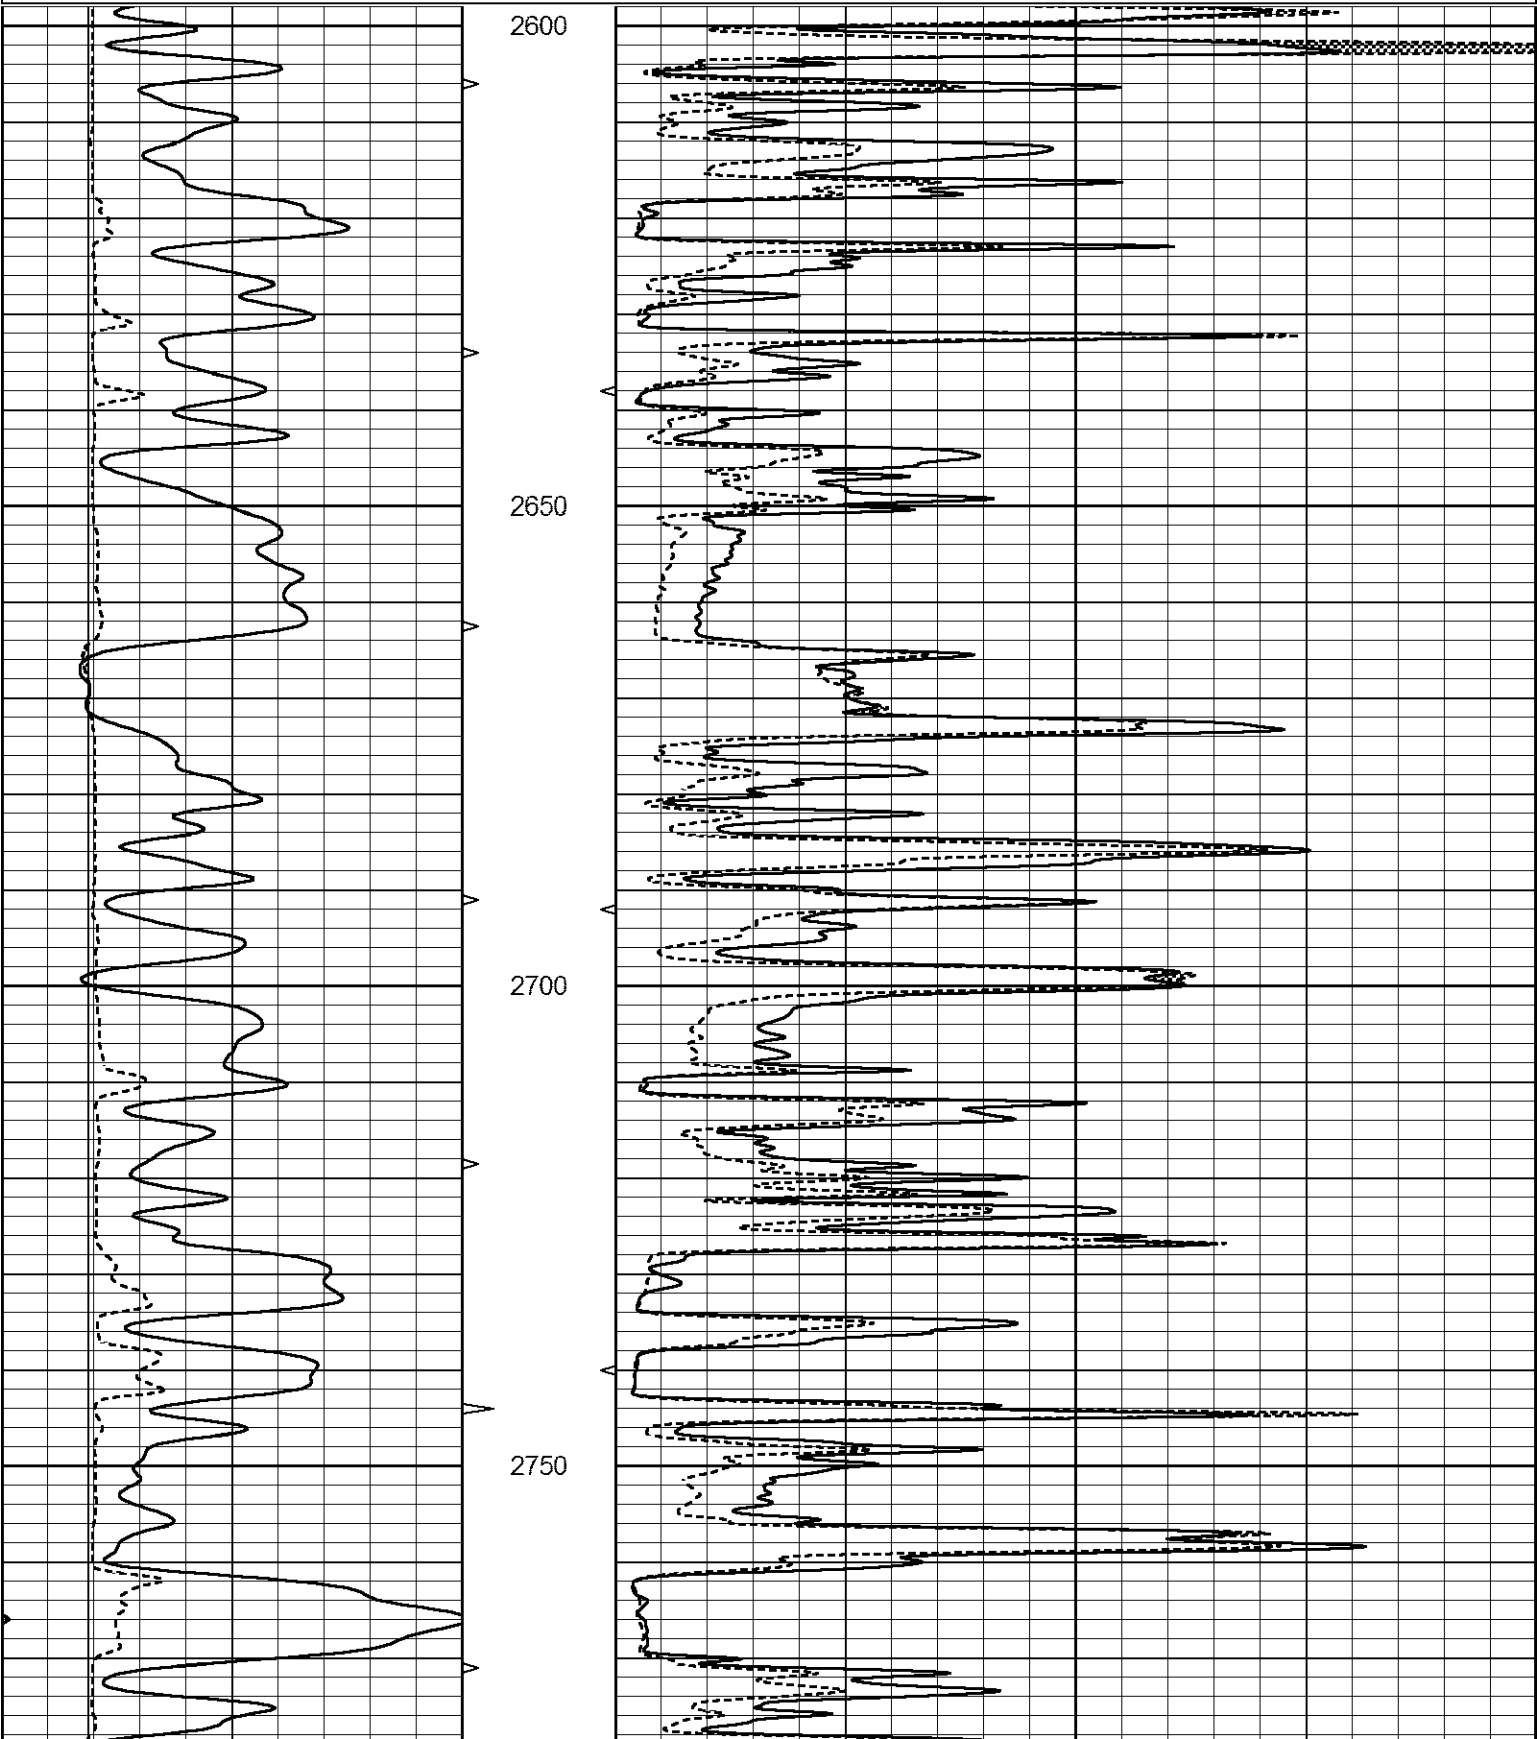

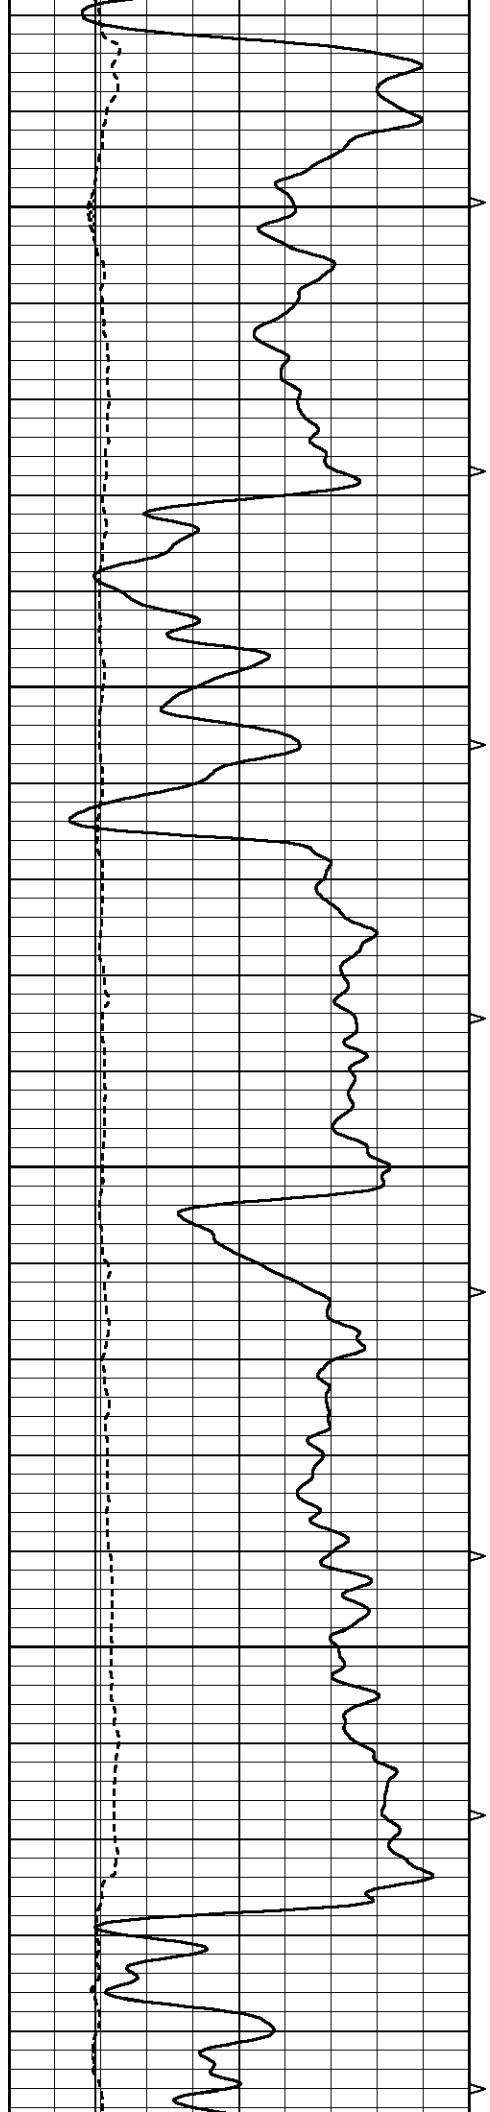



2800

2850

2900

2950

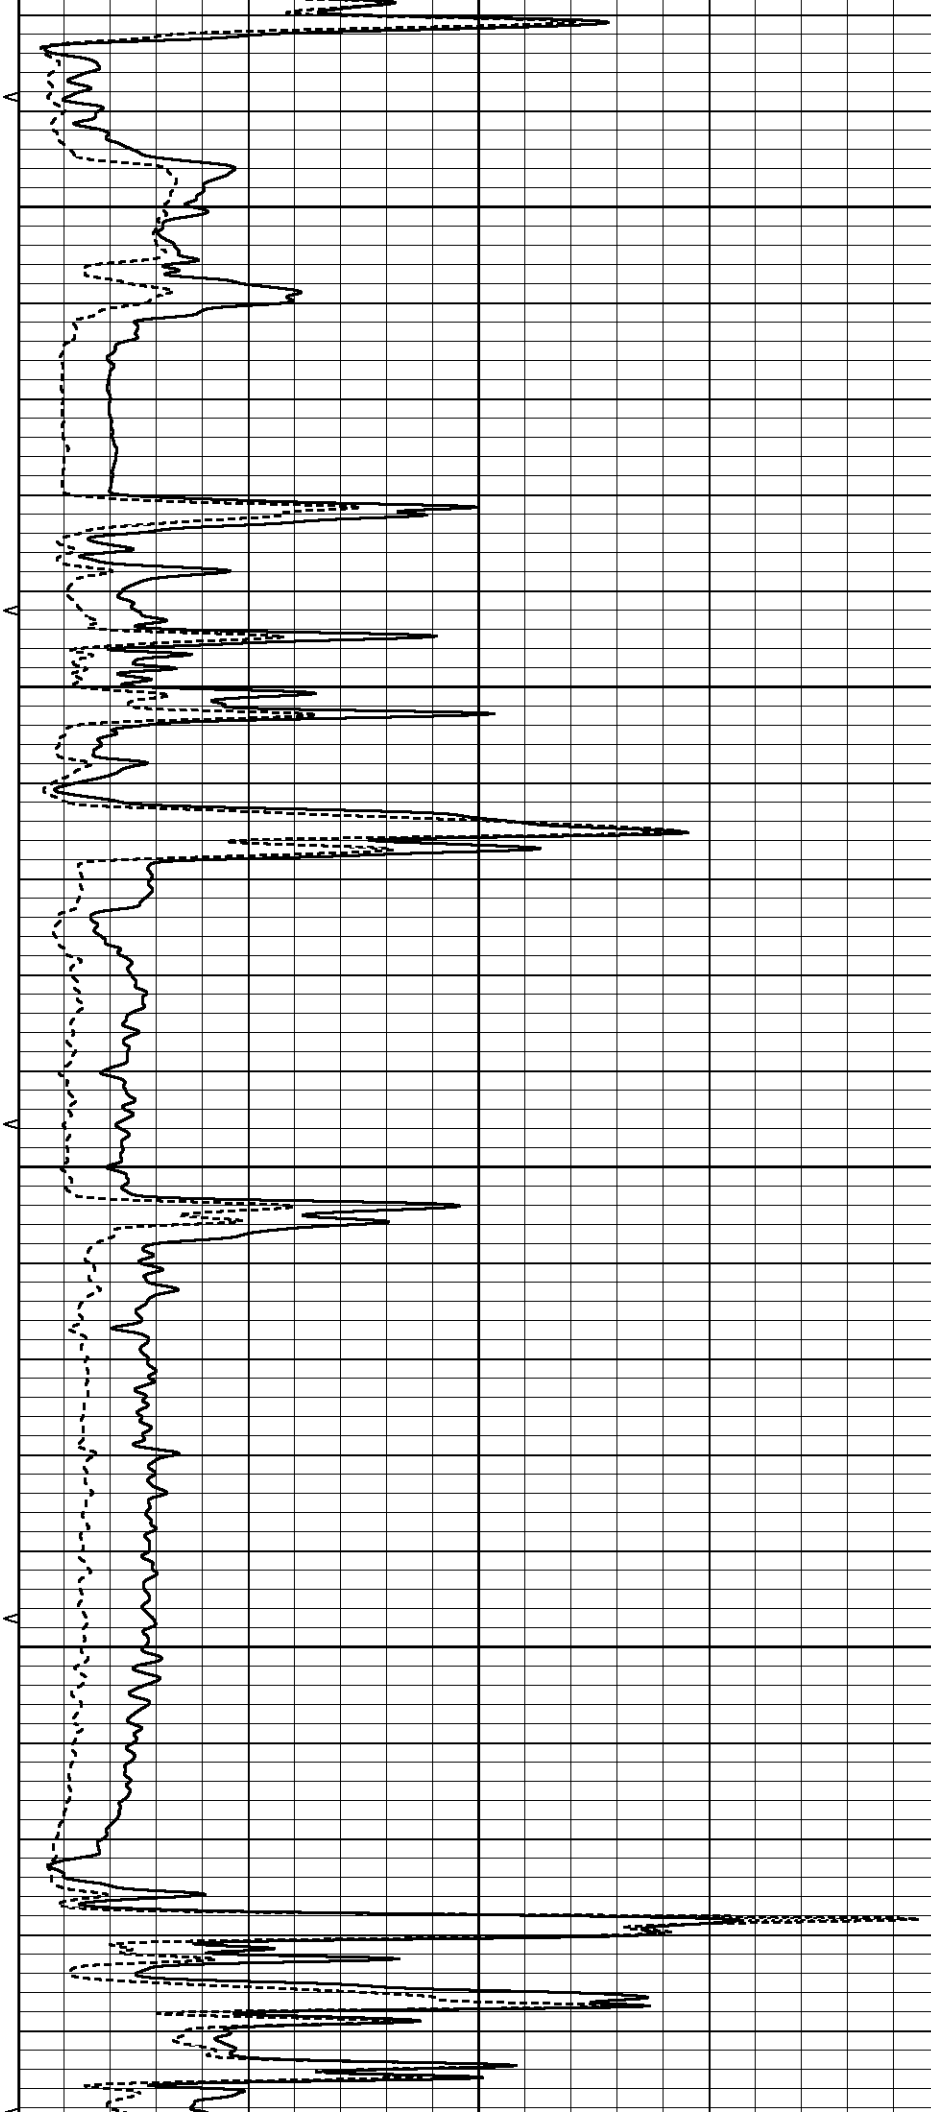

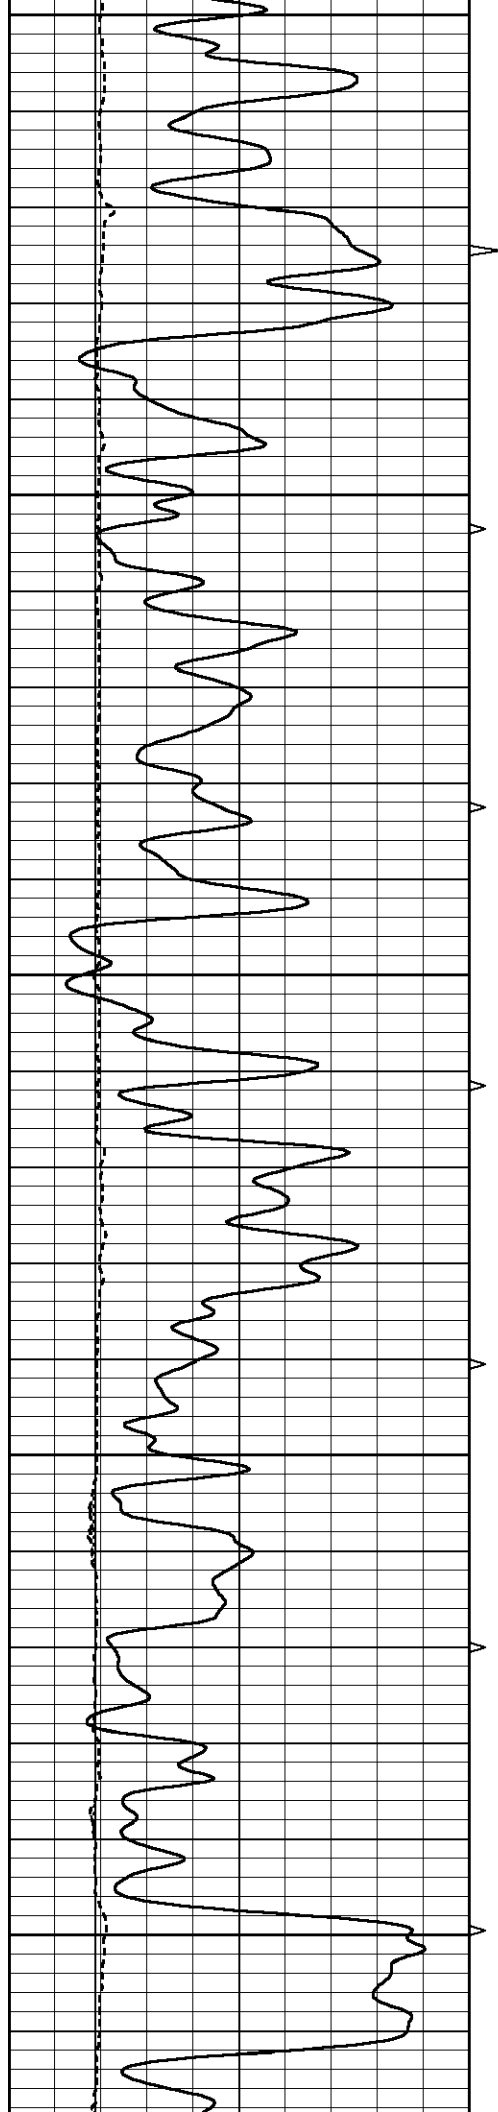


3000


3050

3100

3150

3200

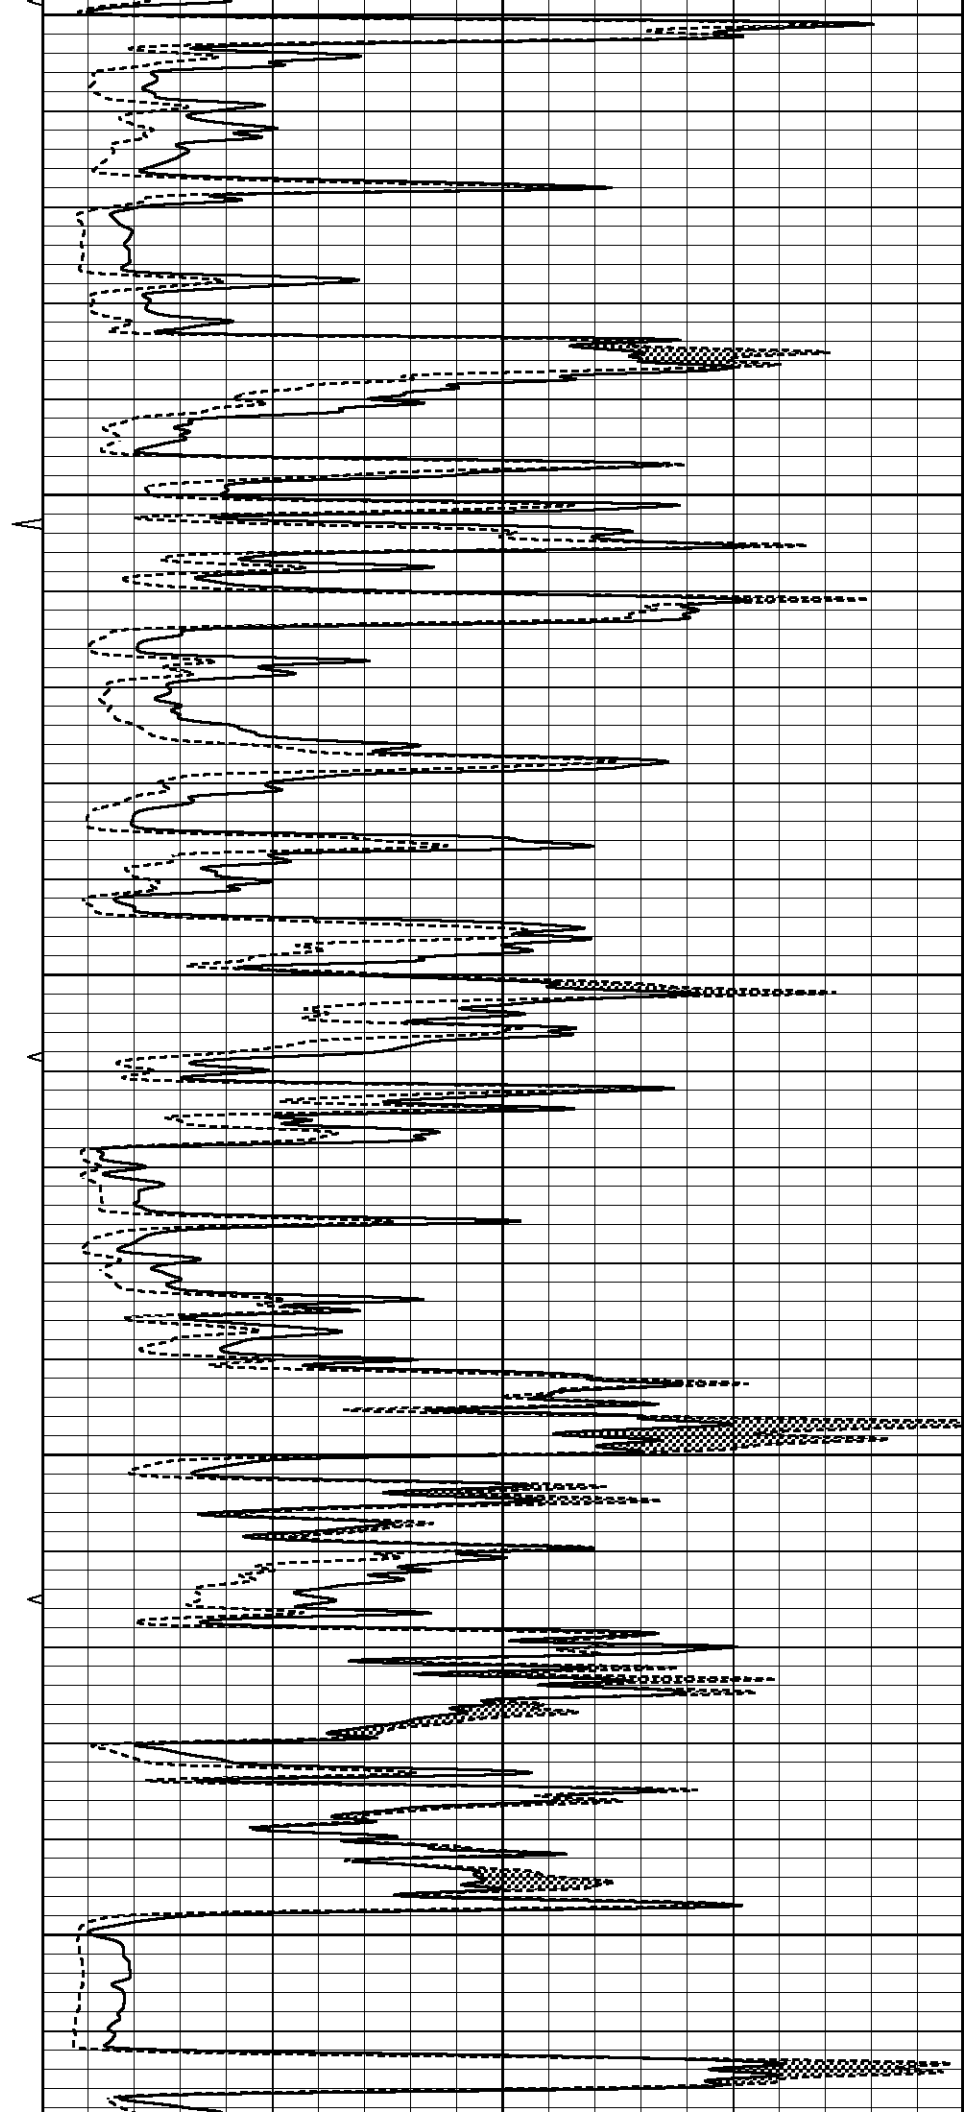

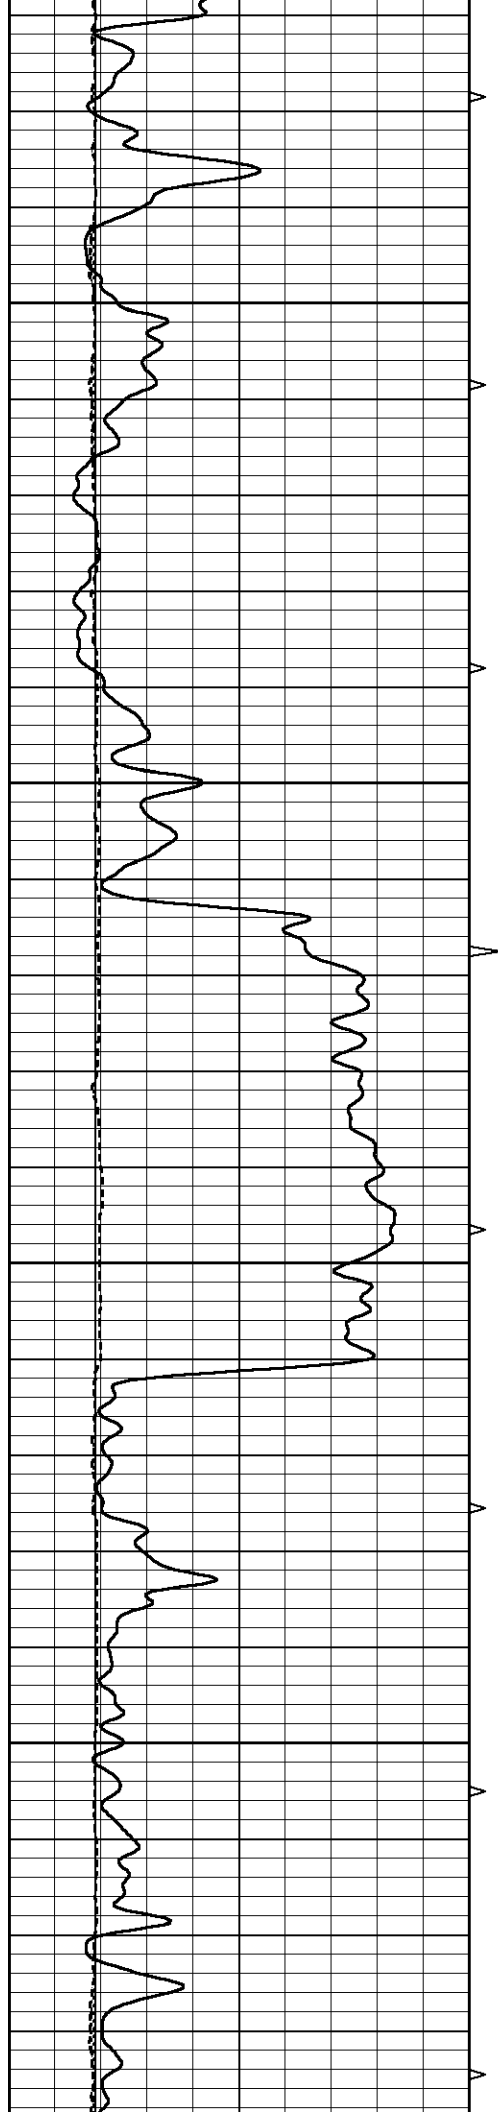




3250


3300

3350

3400

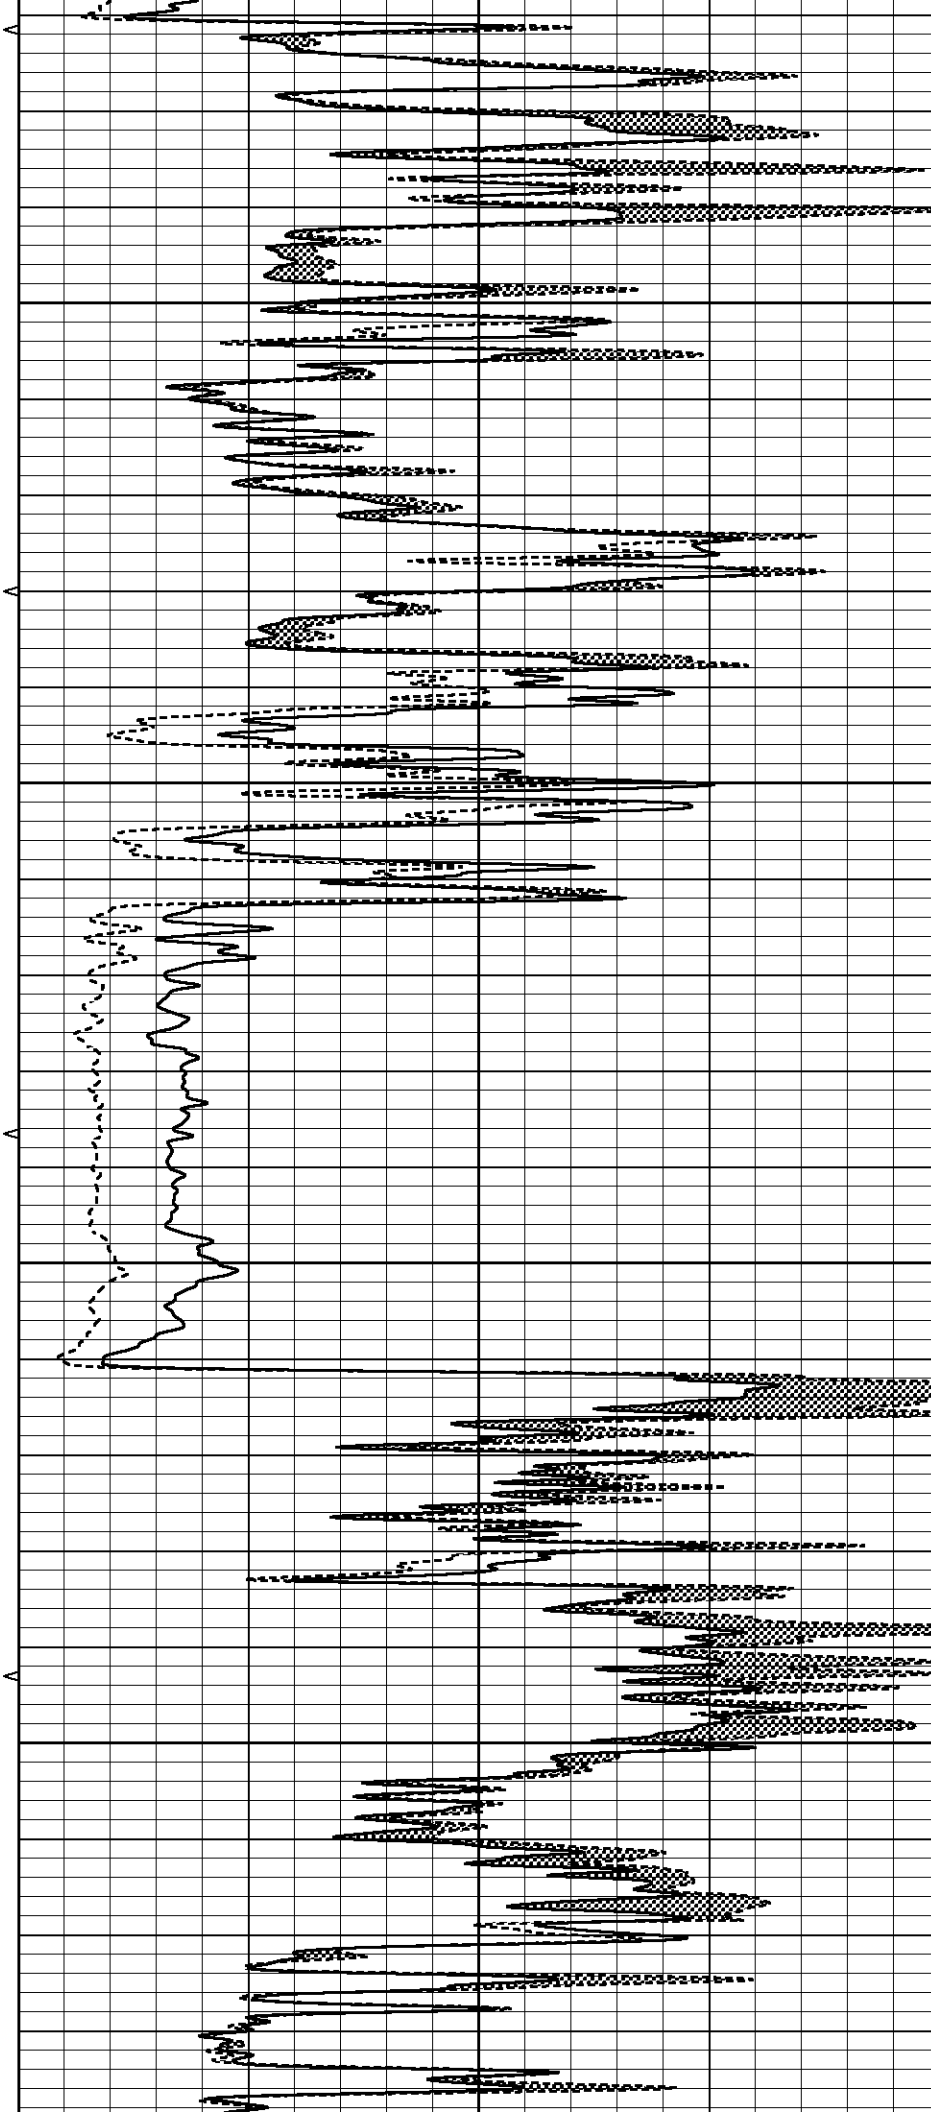

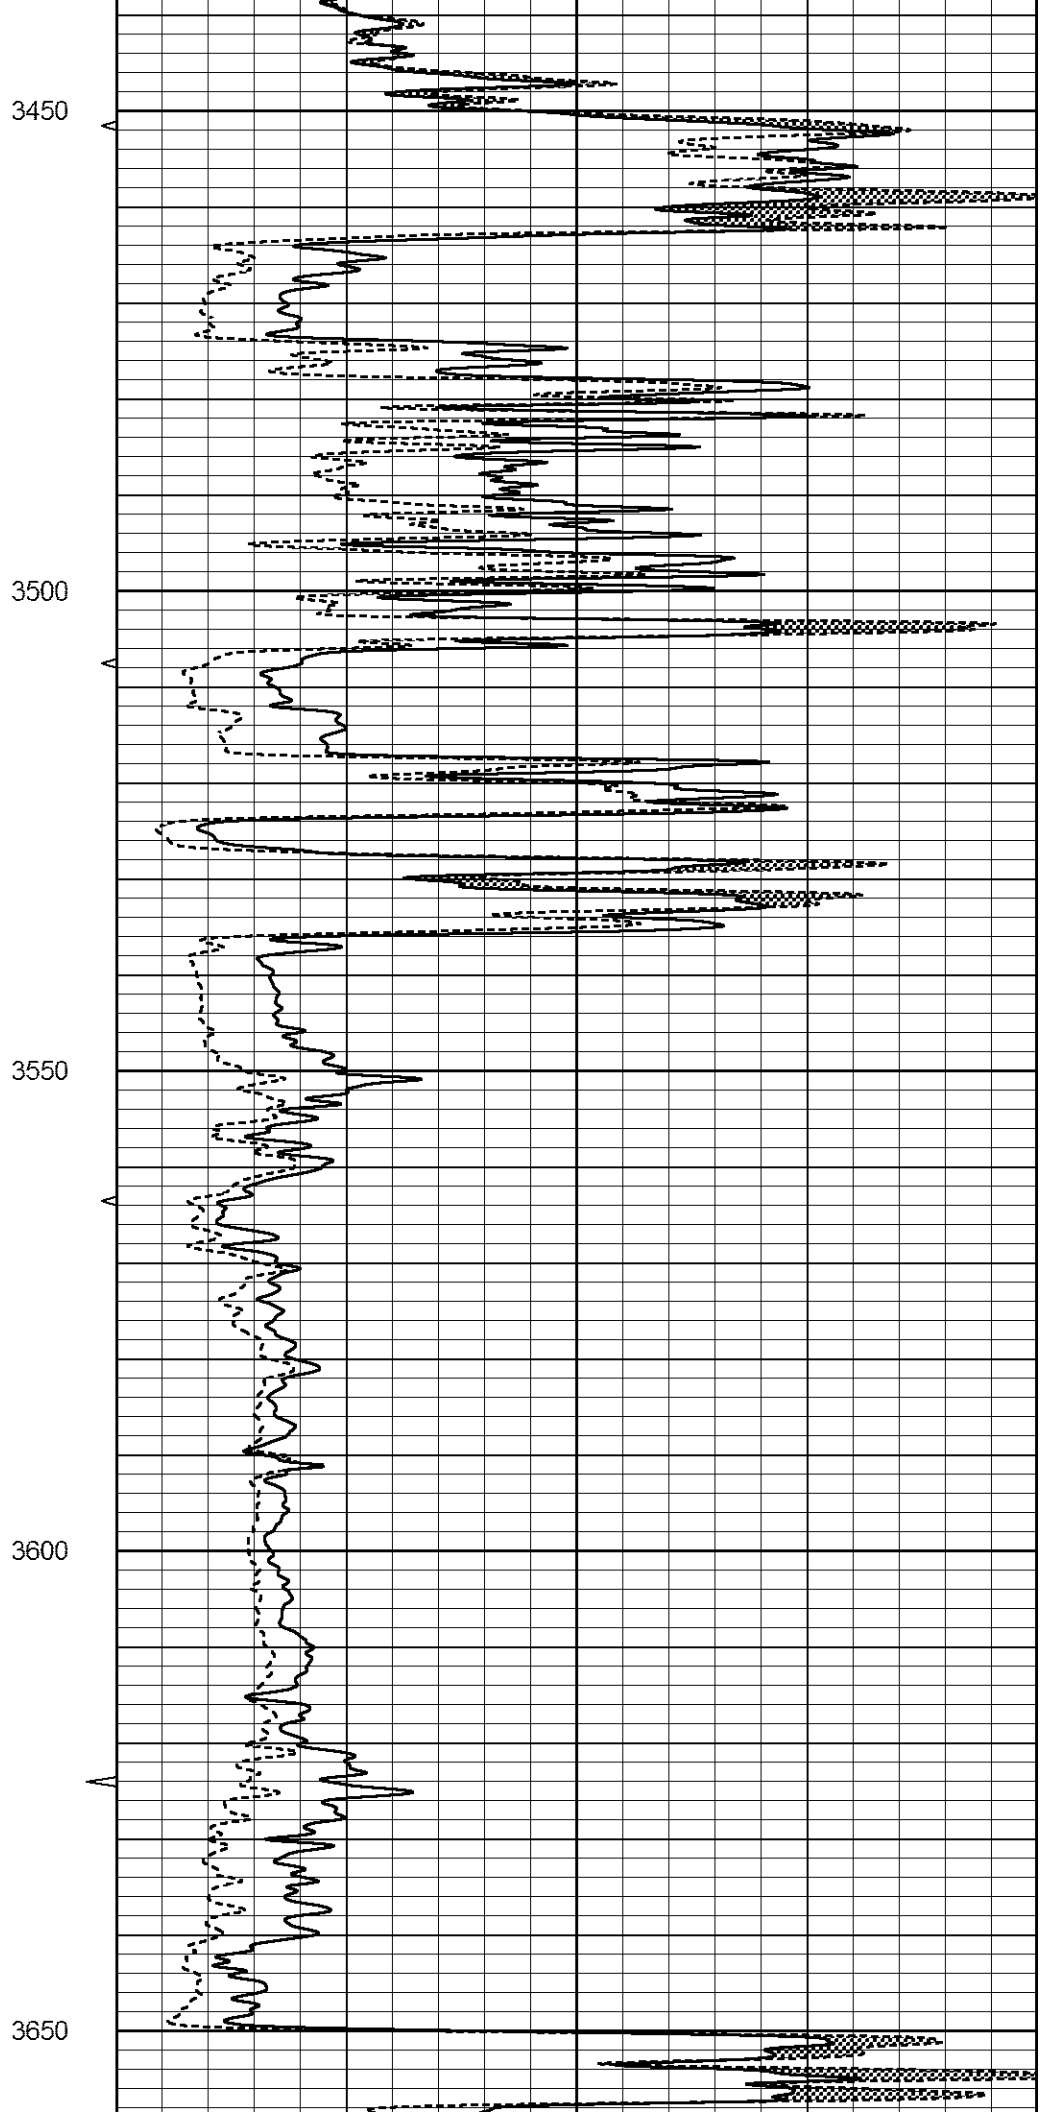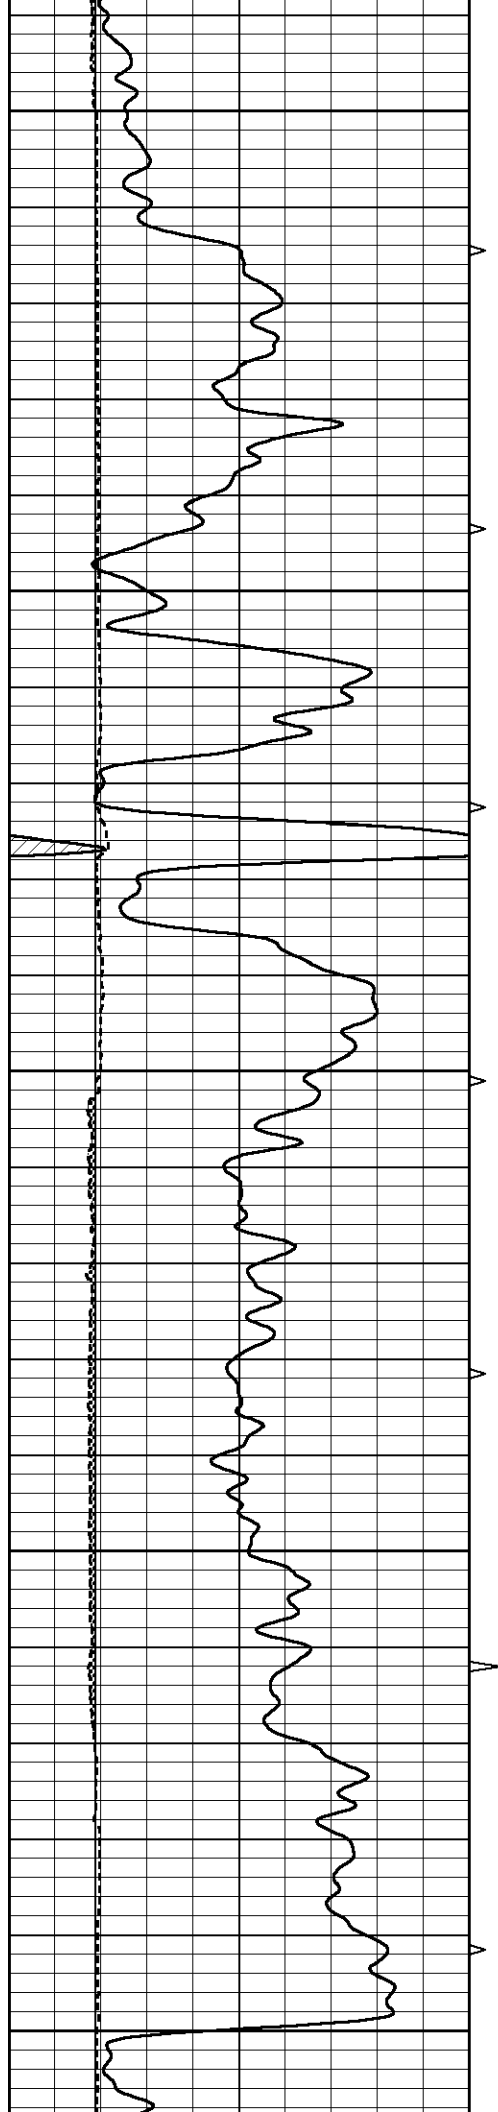

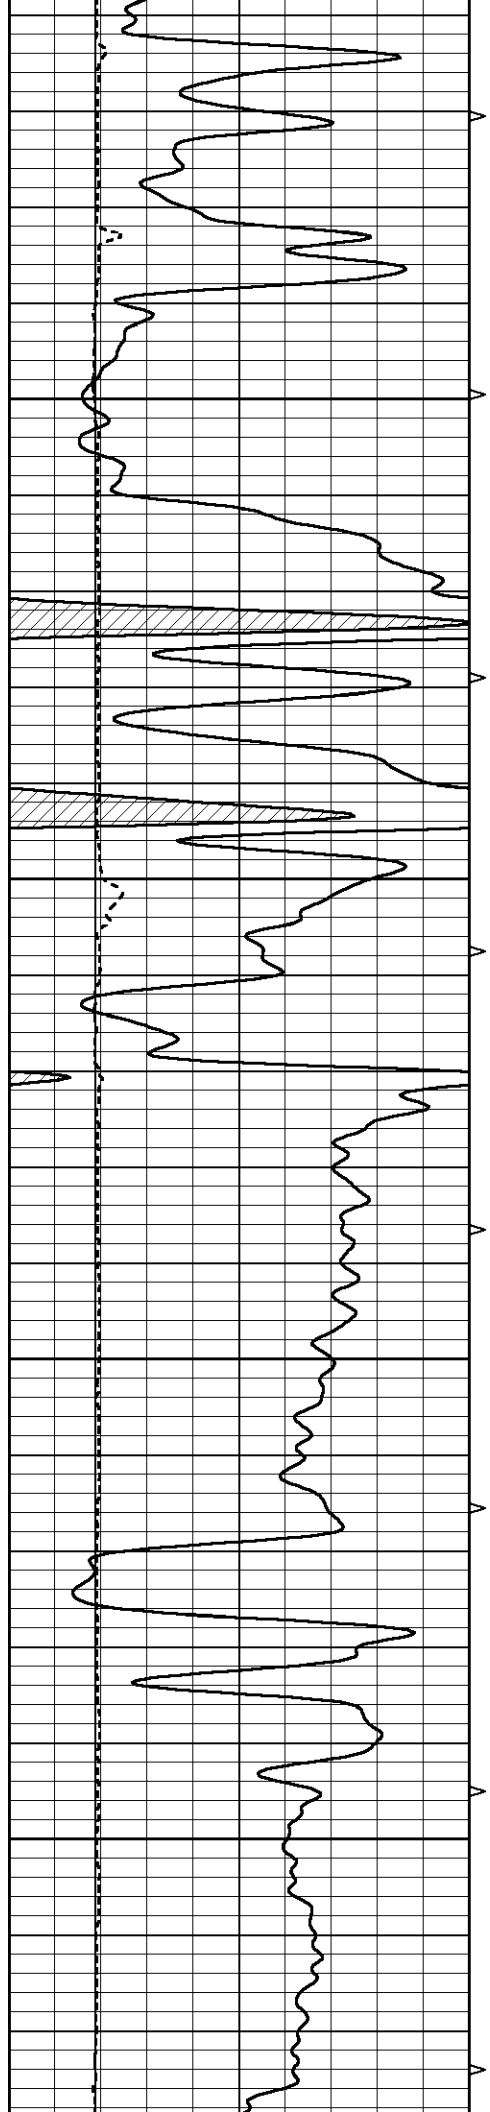



3700


3750

3800

3850

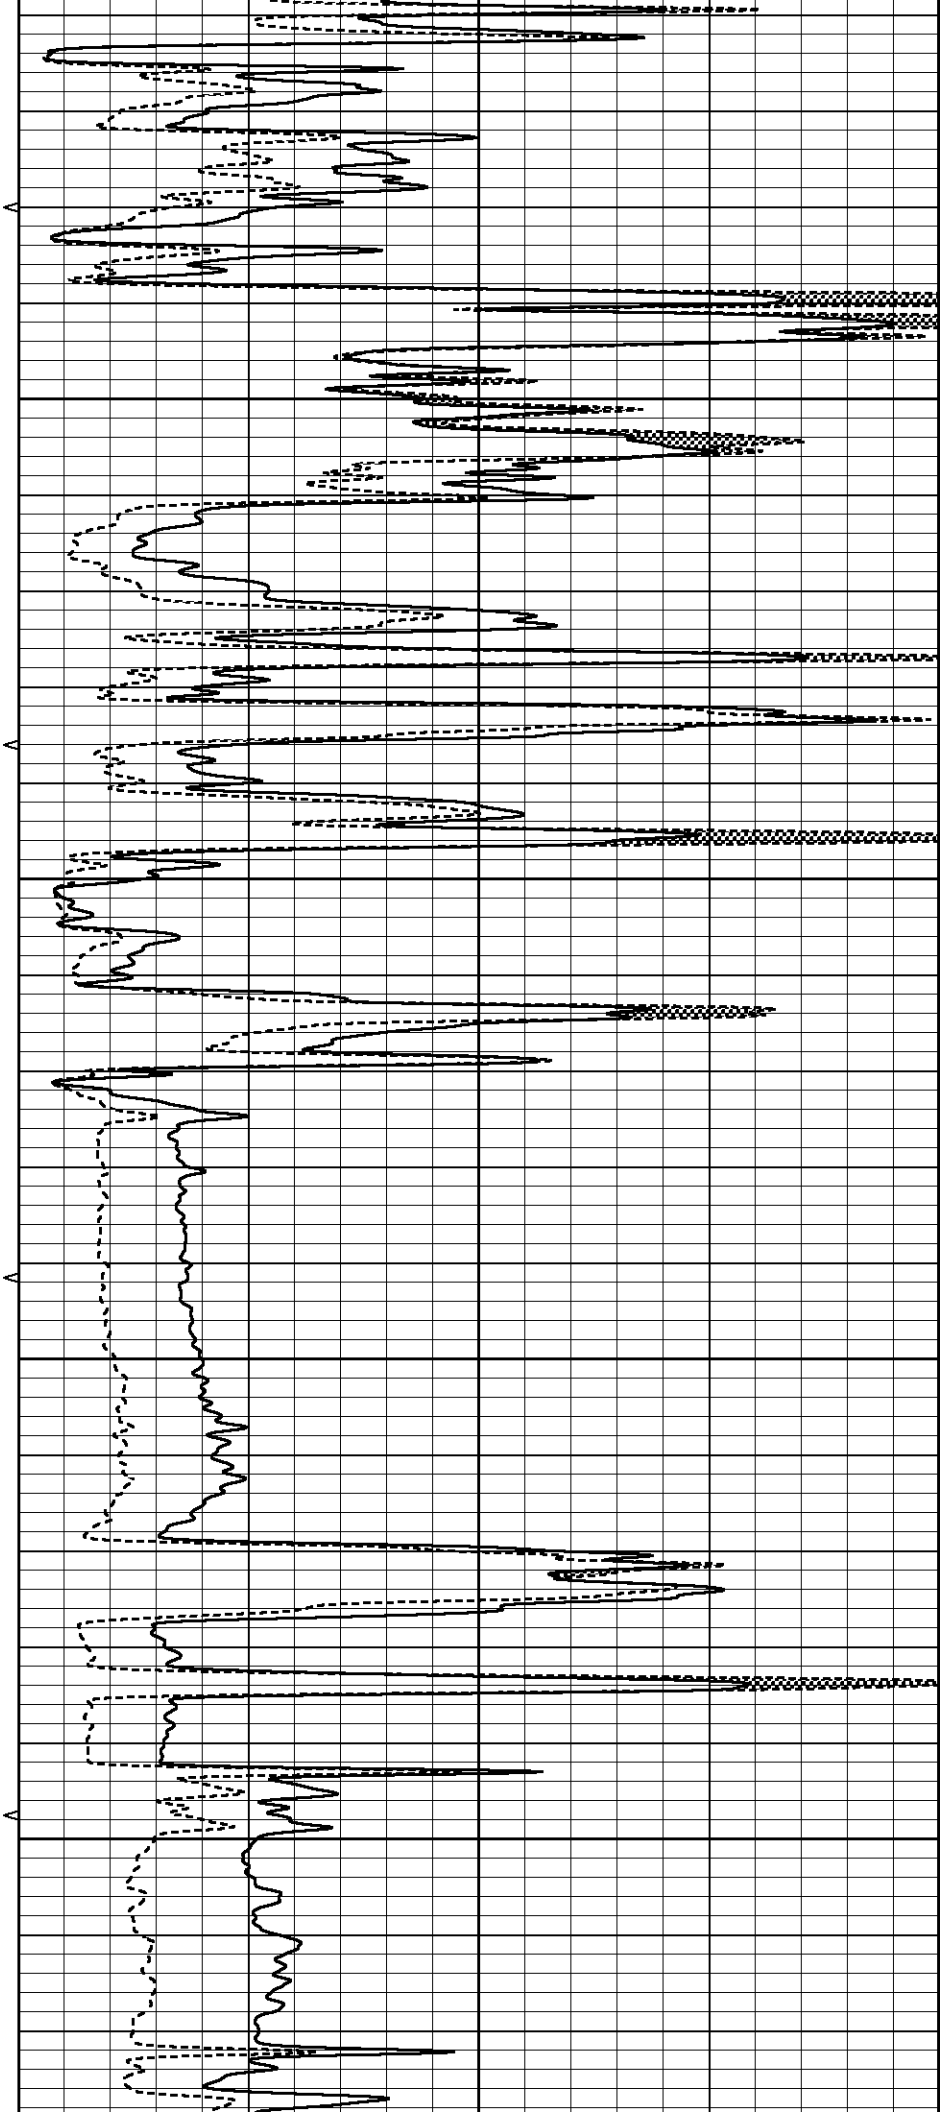

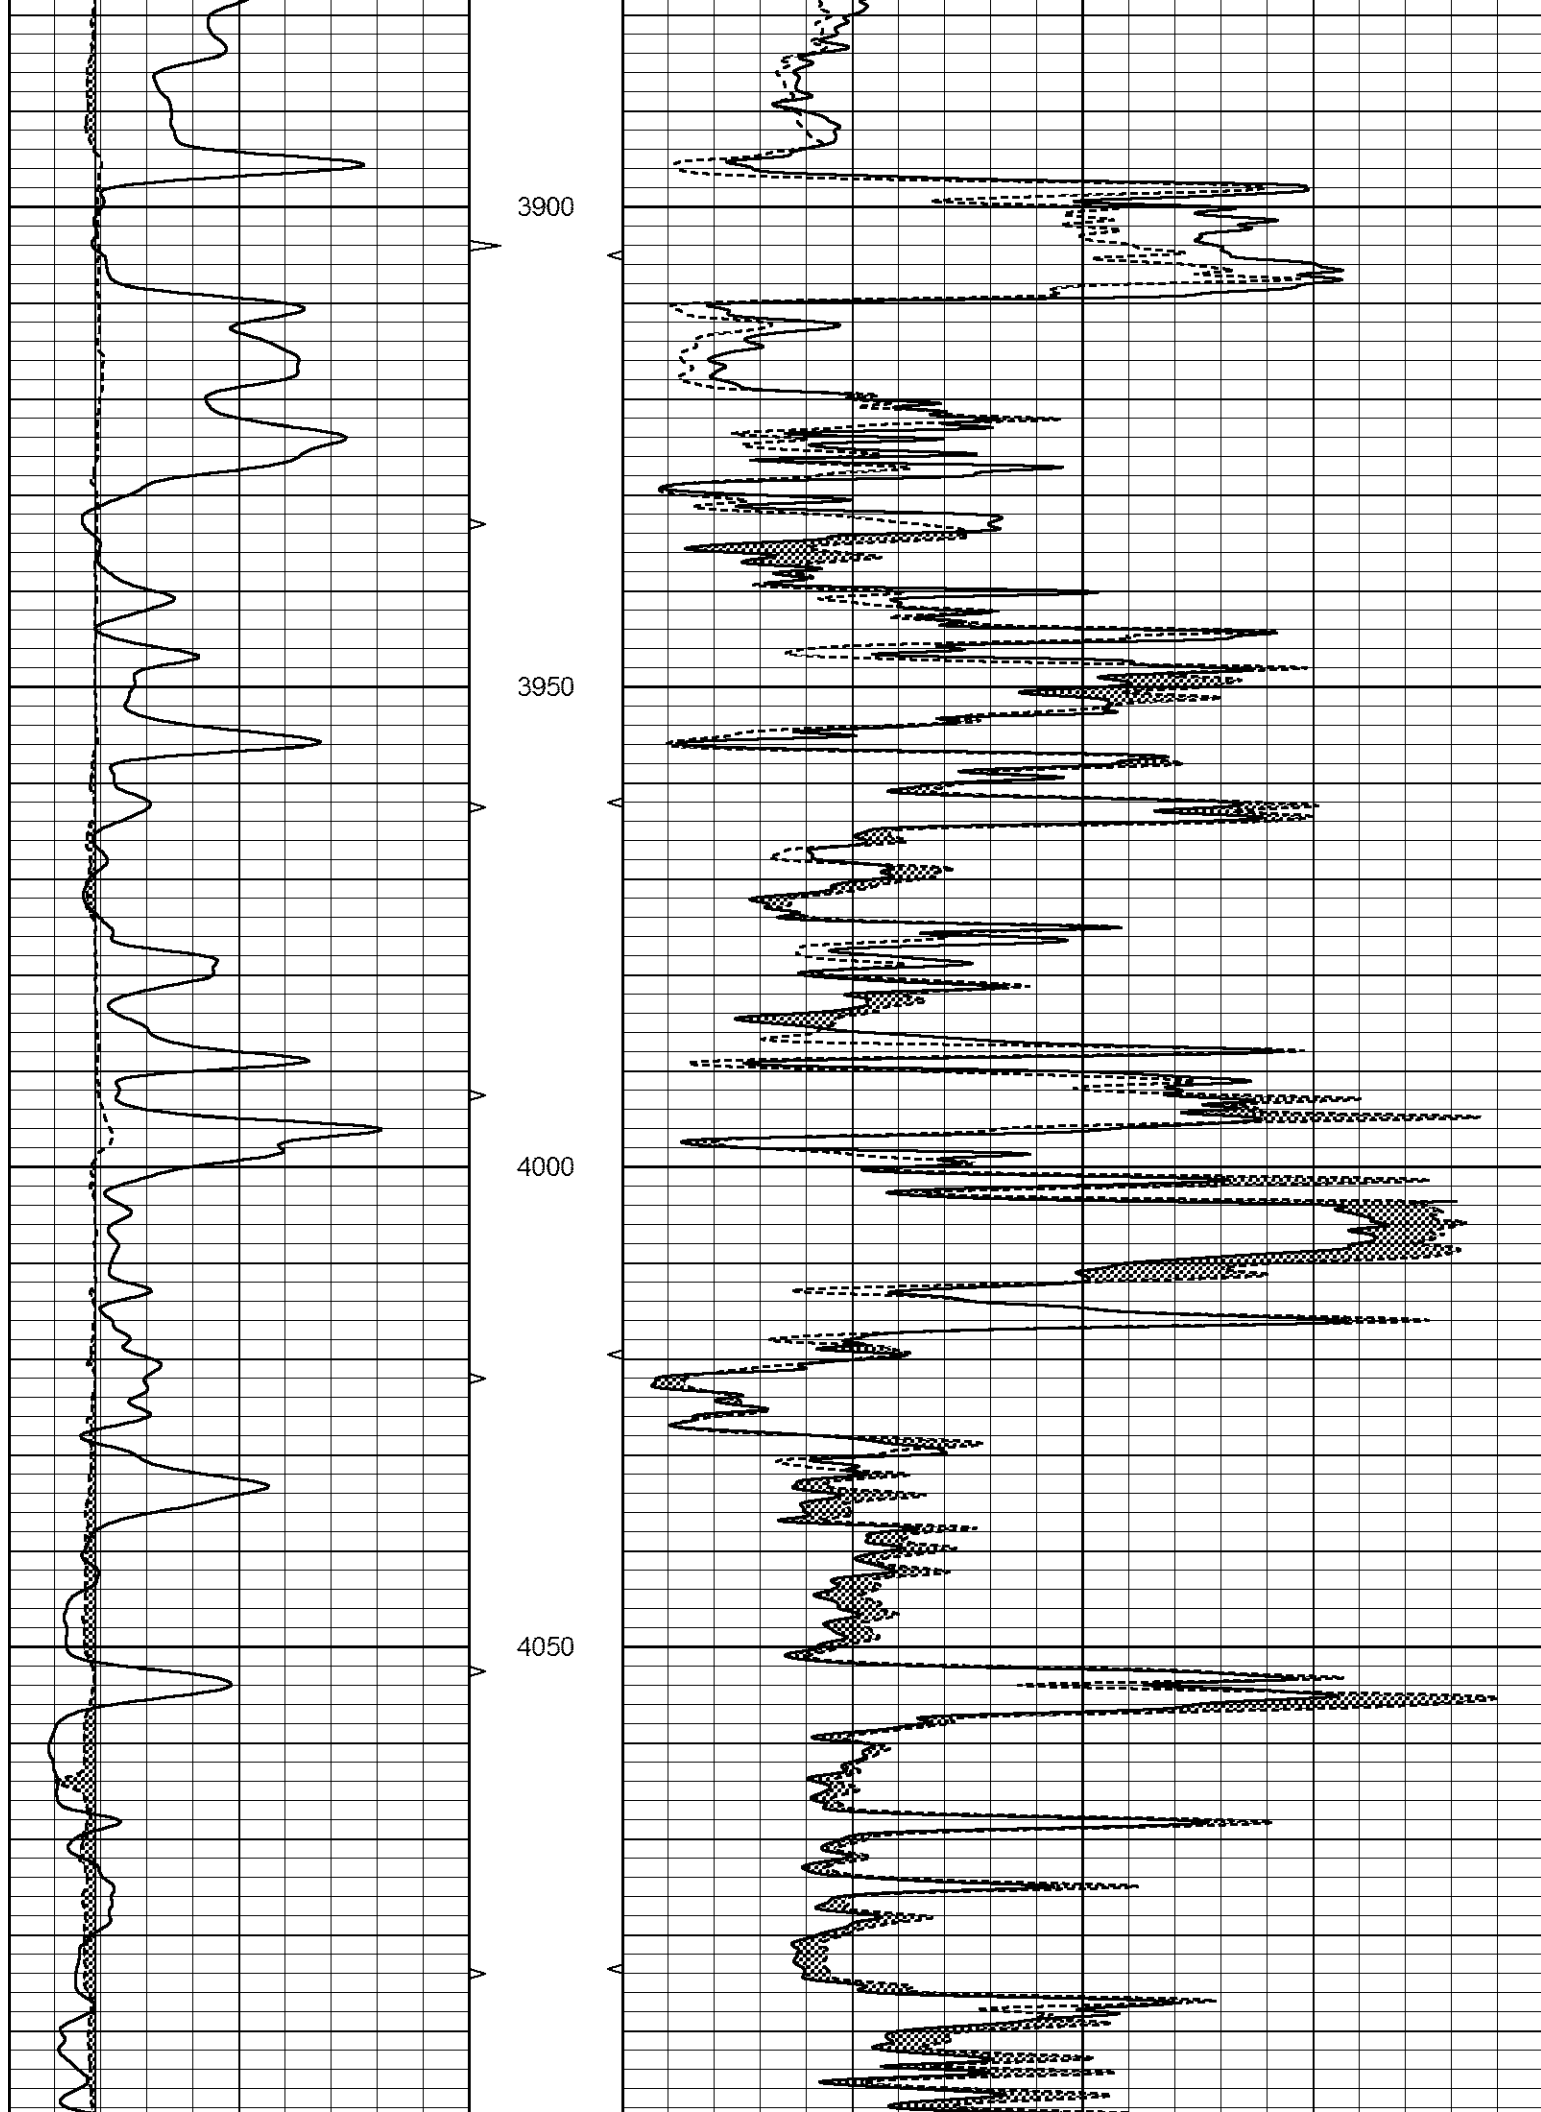

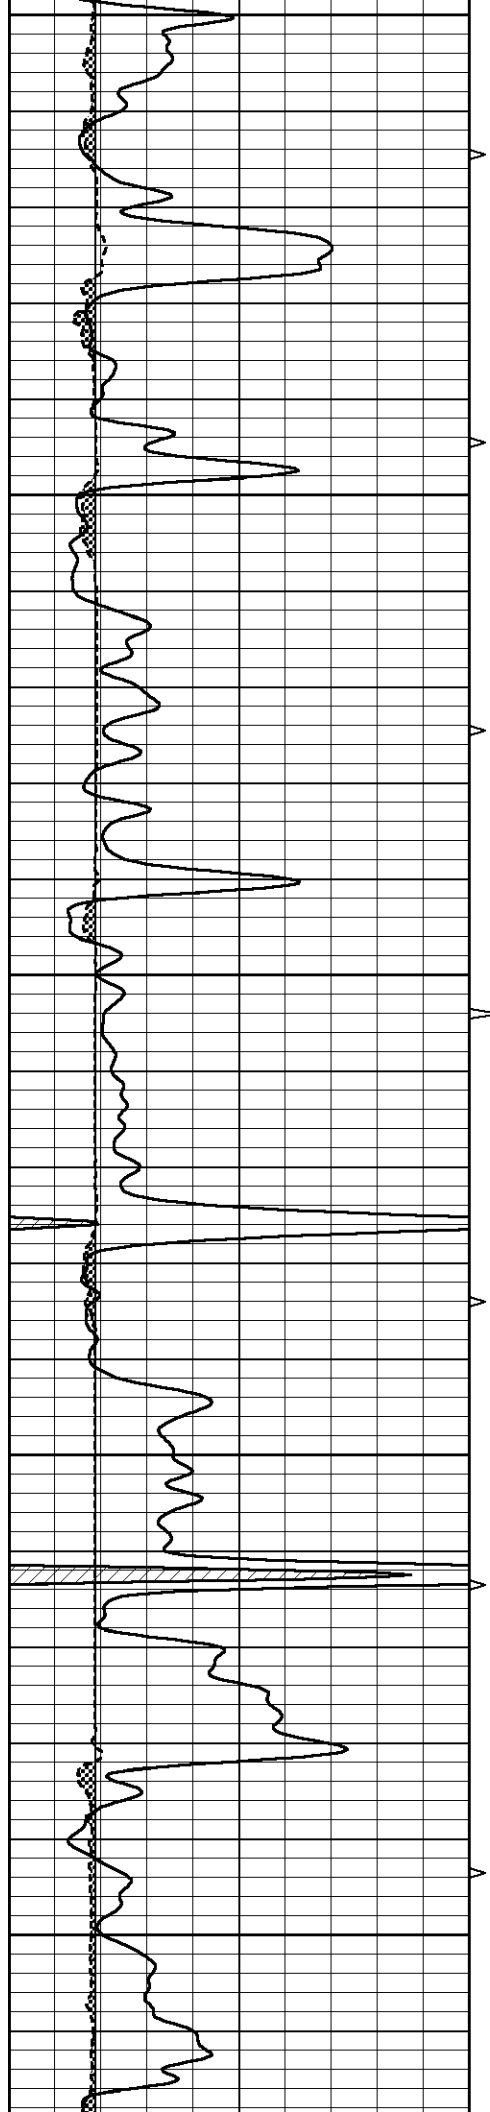


4100


4150

4200

4250

4300

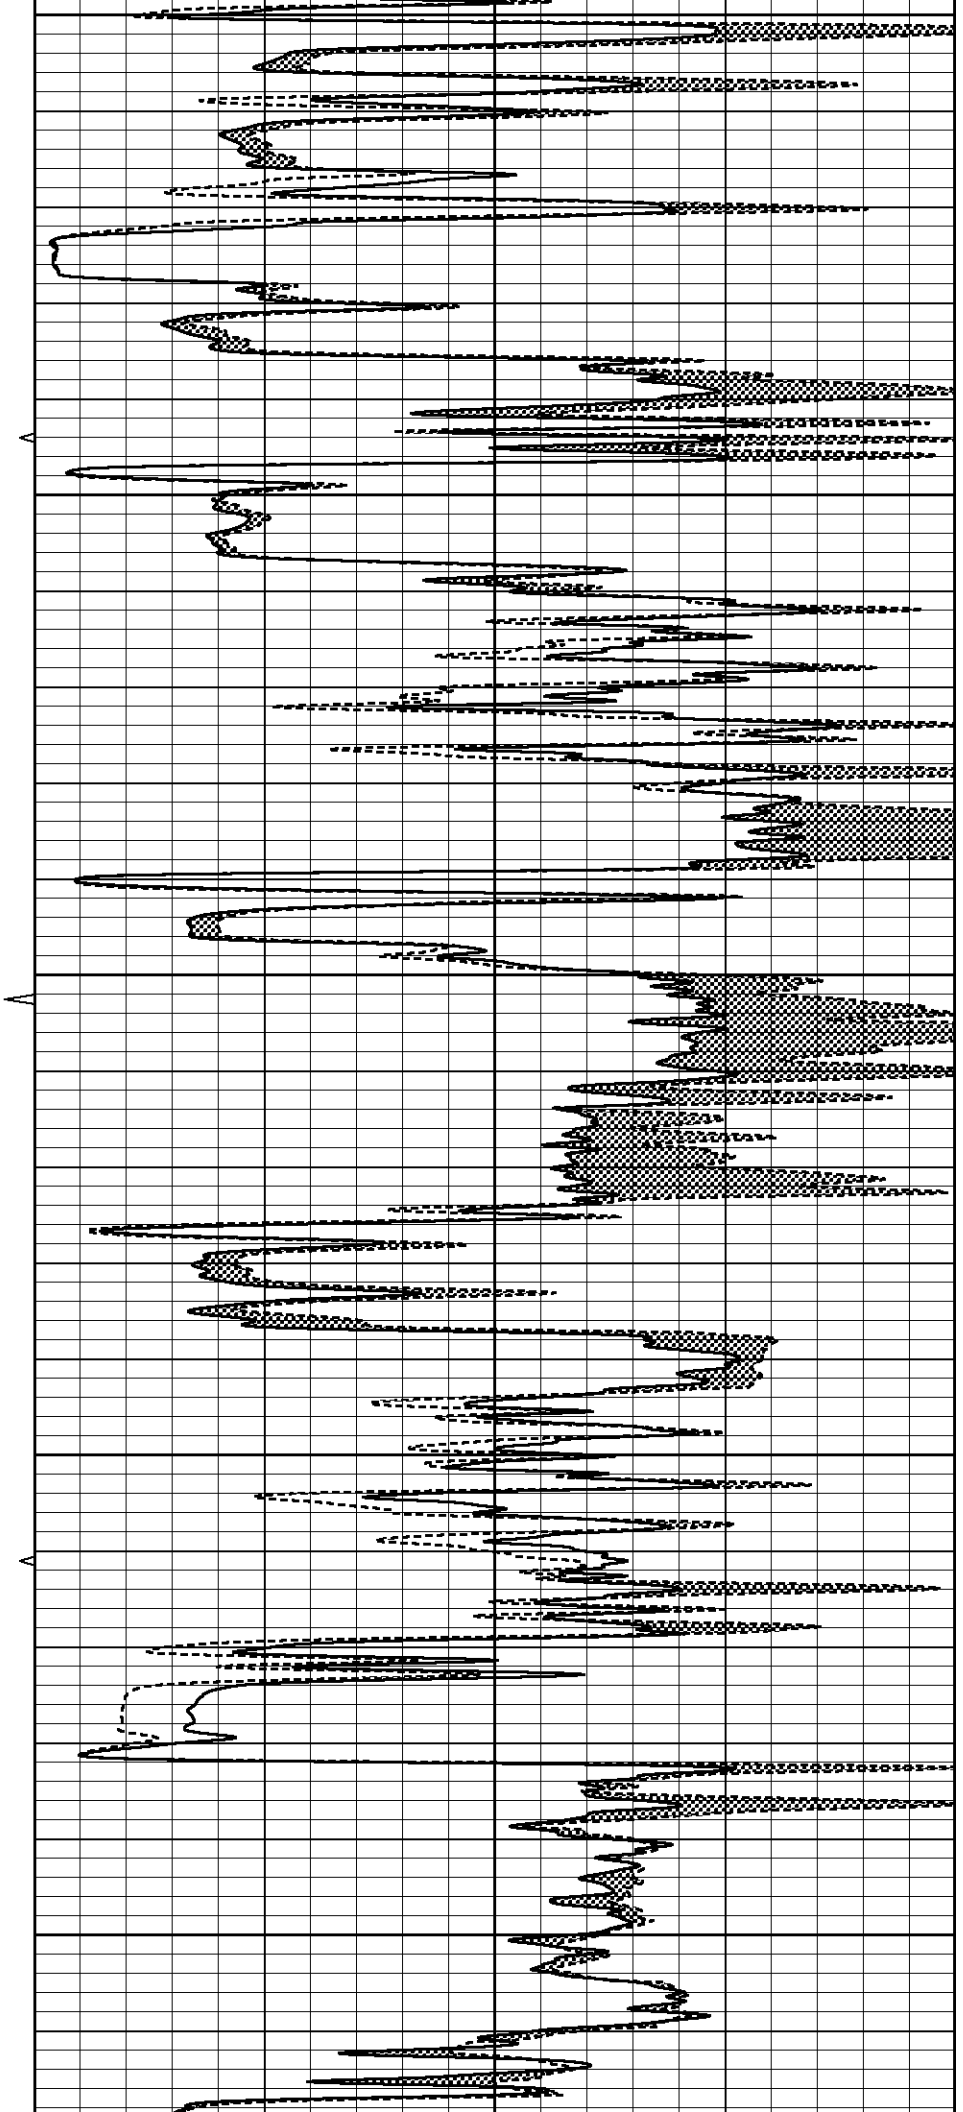

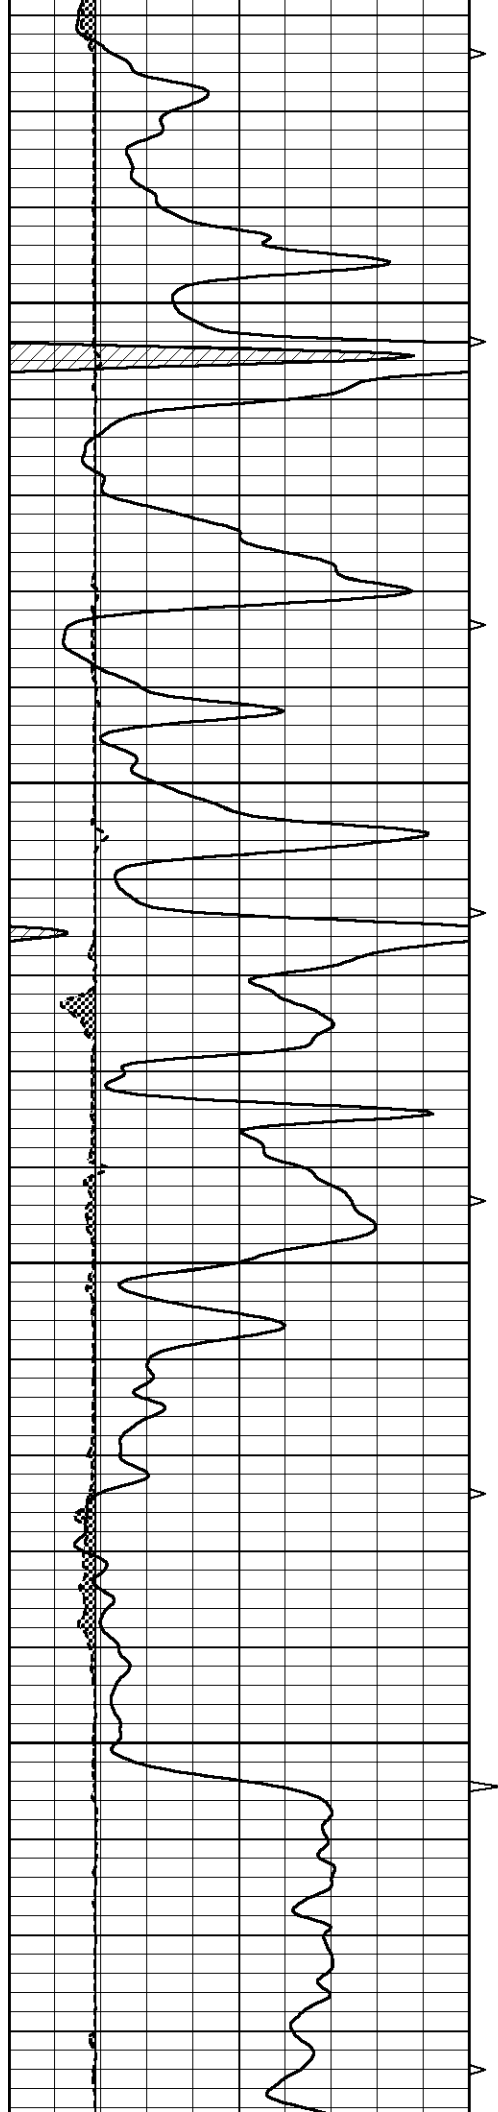



4350



4400

4450

4500

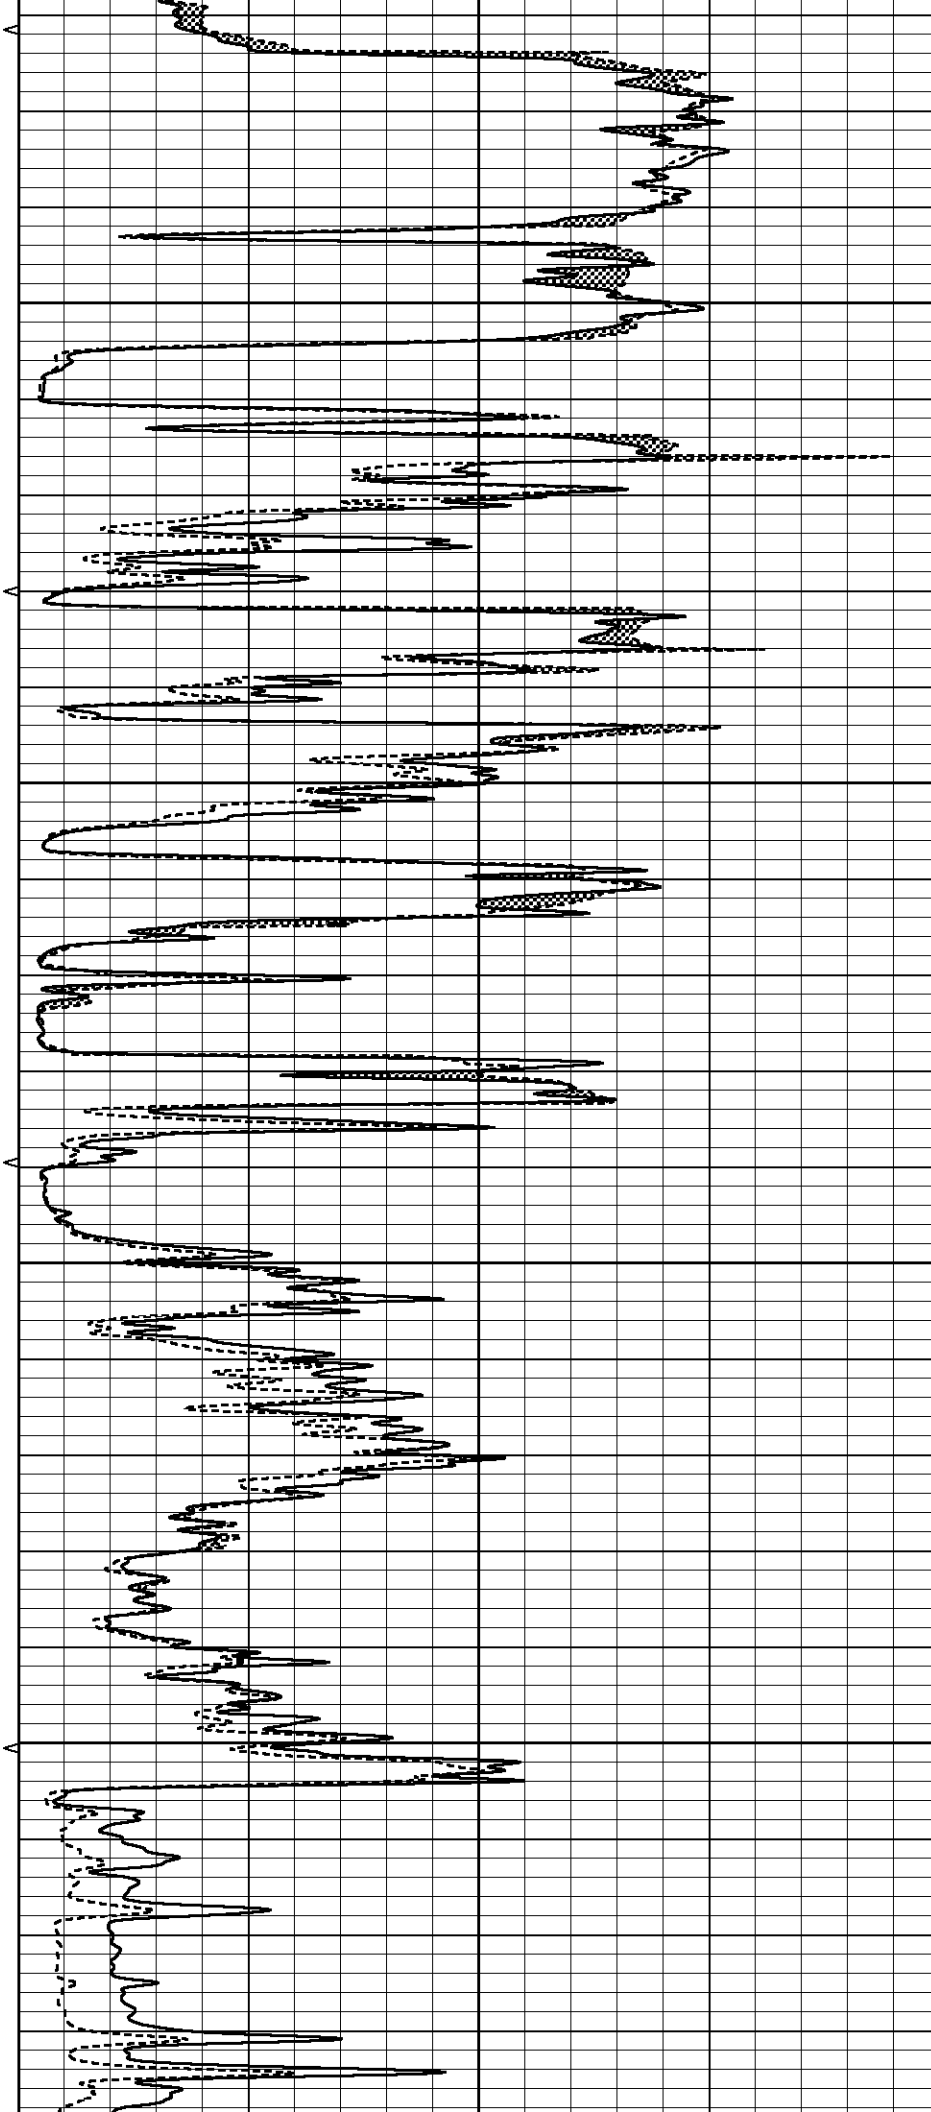

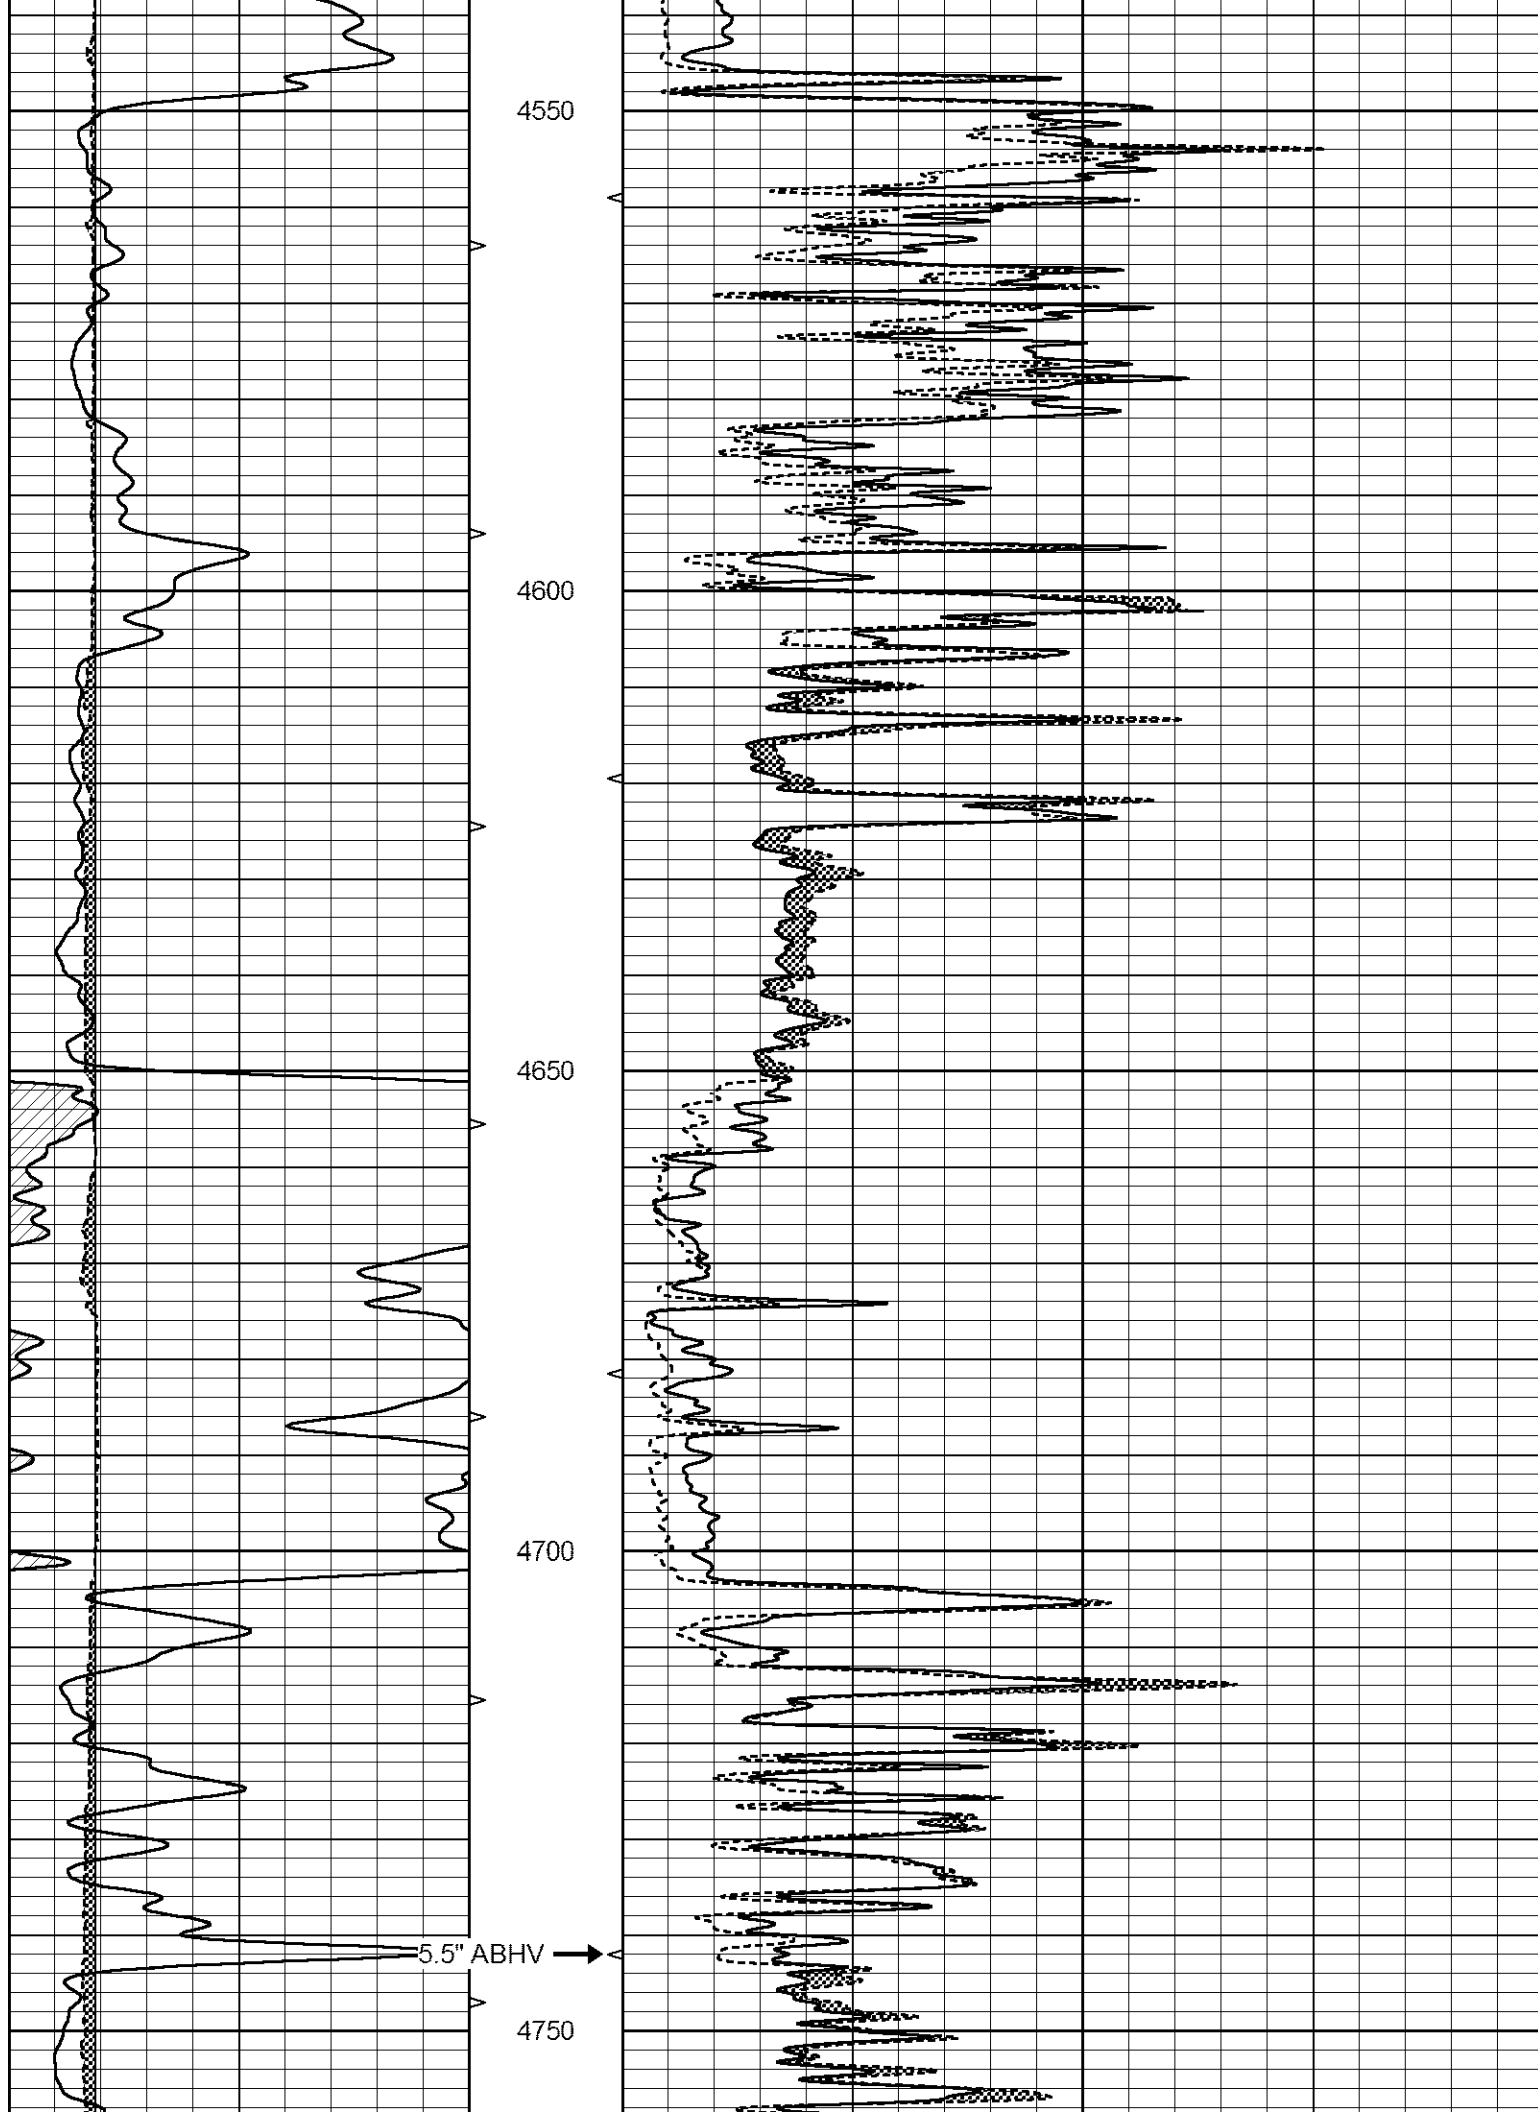


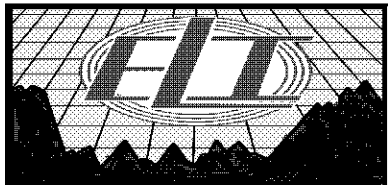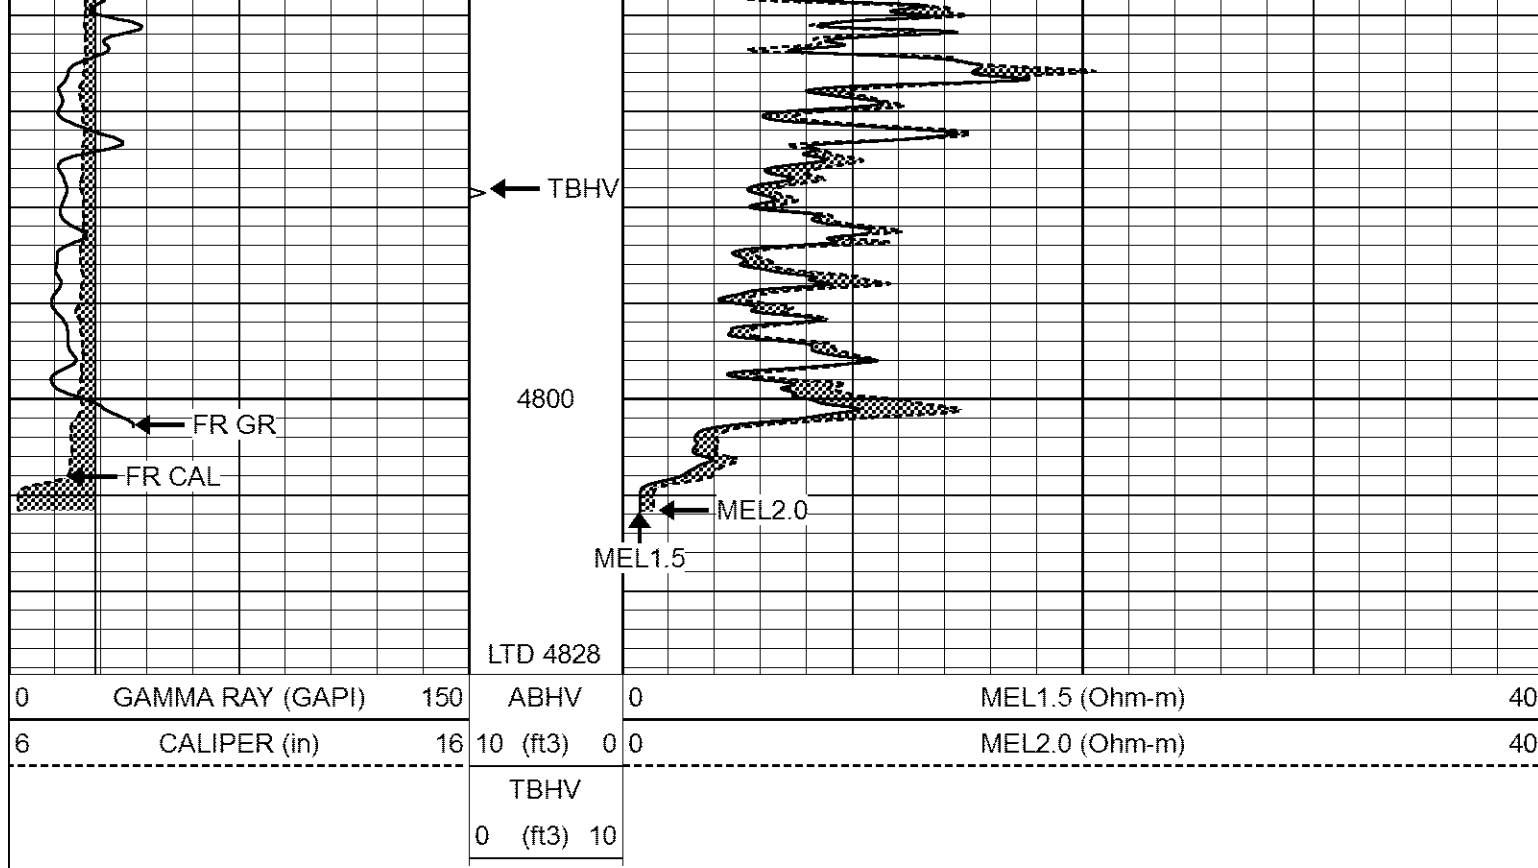


REPEAT SECTION

Database File 6759pe.db
 Dataset Pathname pass8R
 Presentation Format _micro
 Dataset Creation Mon Jul 18 23:03:22 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

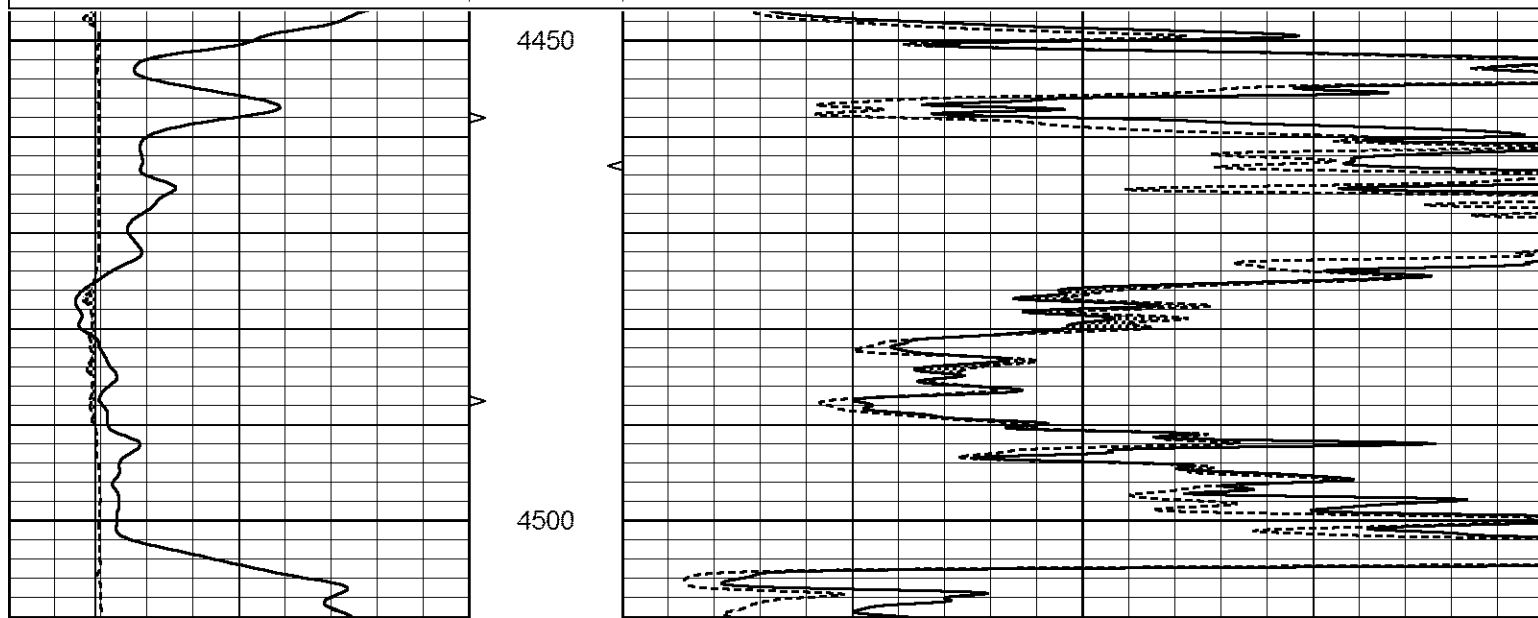

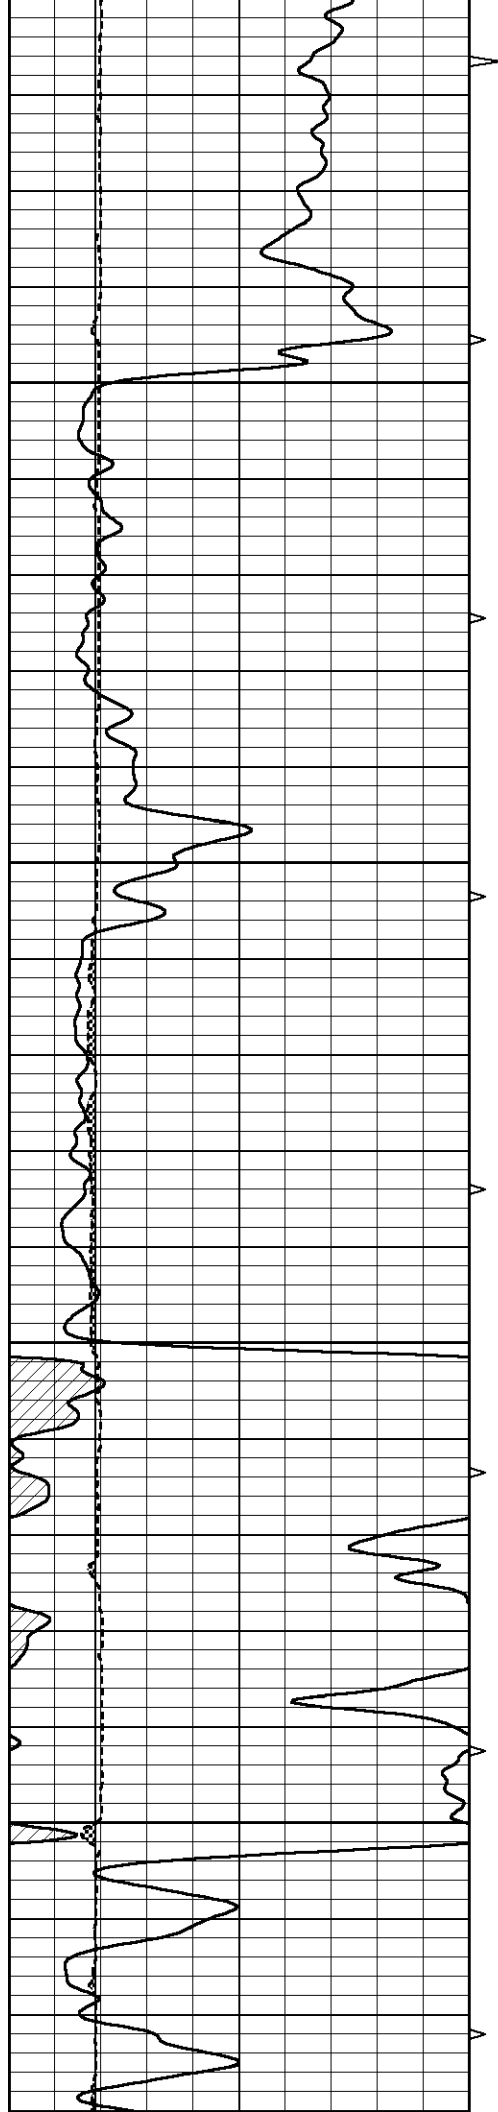



4550

4600

4650

4700

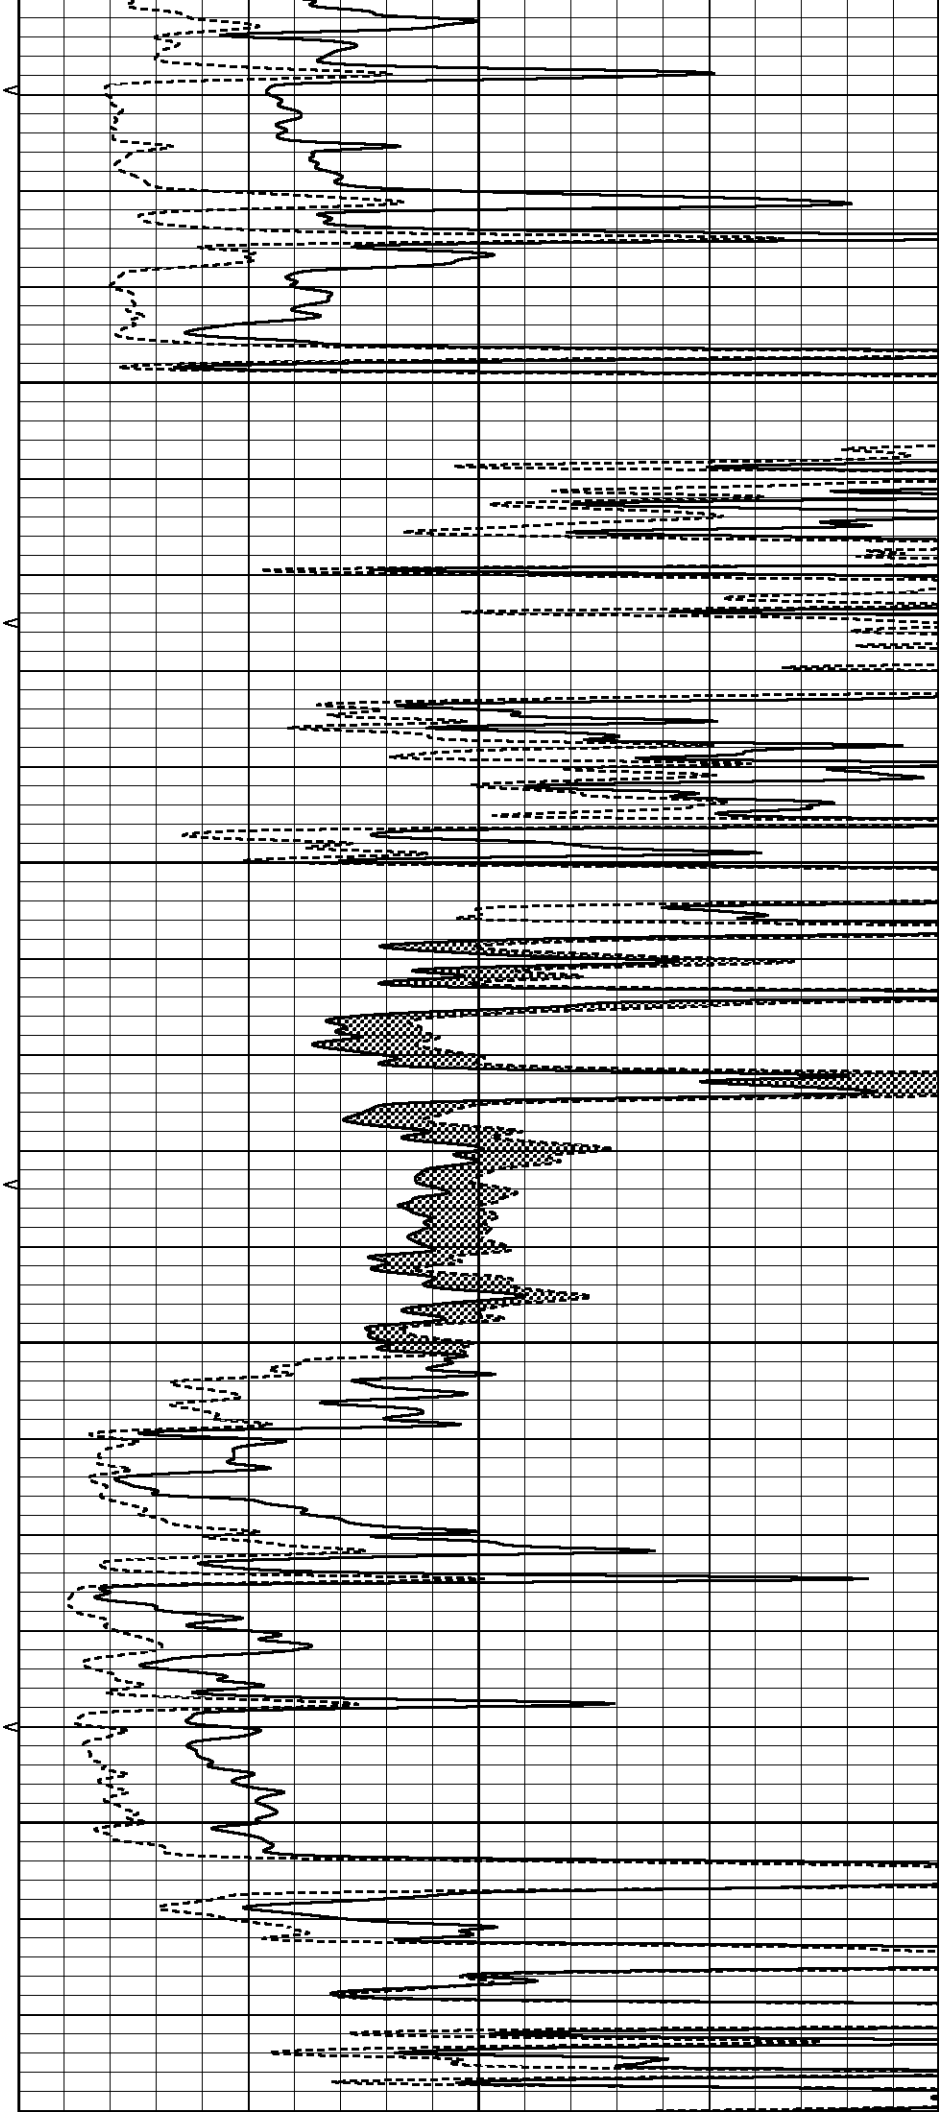

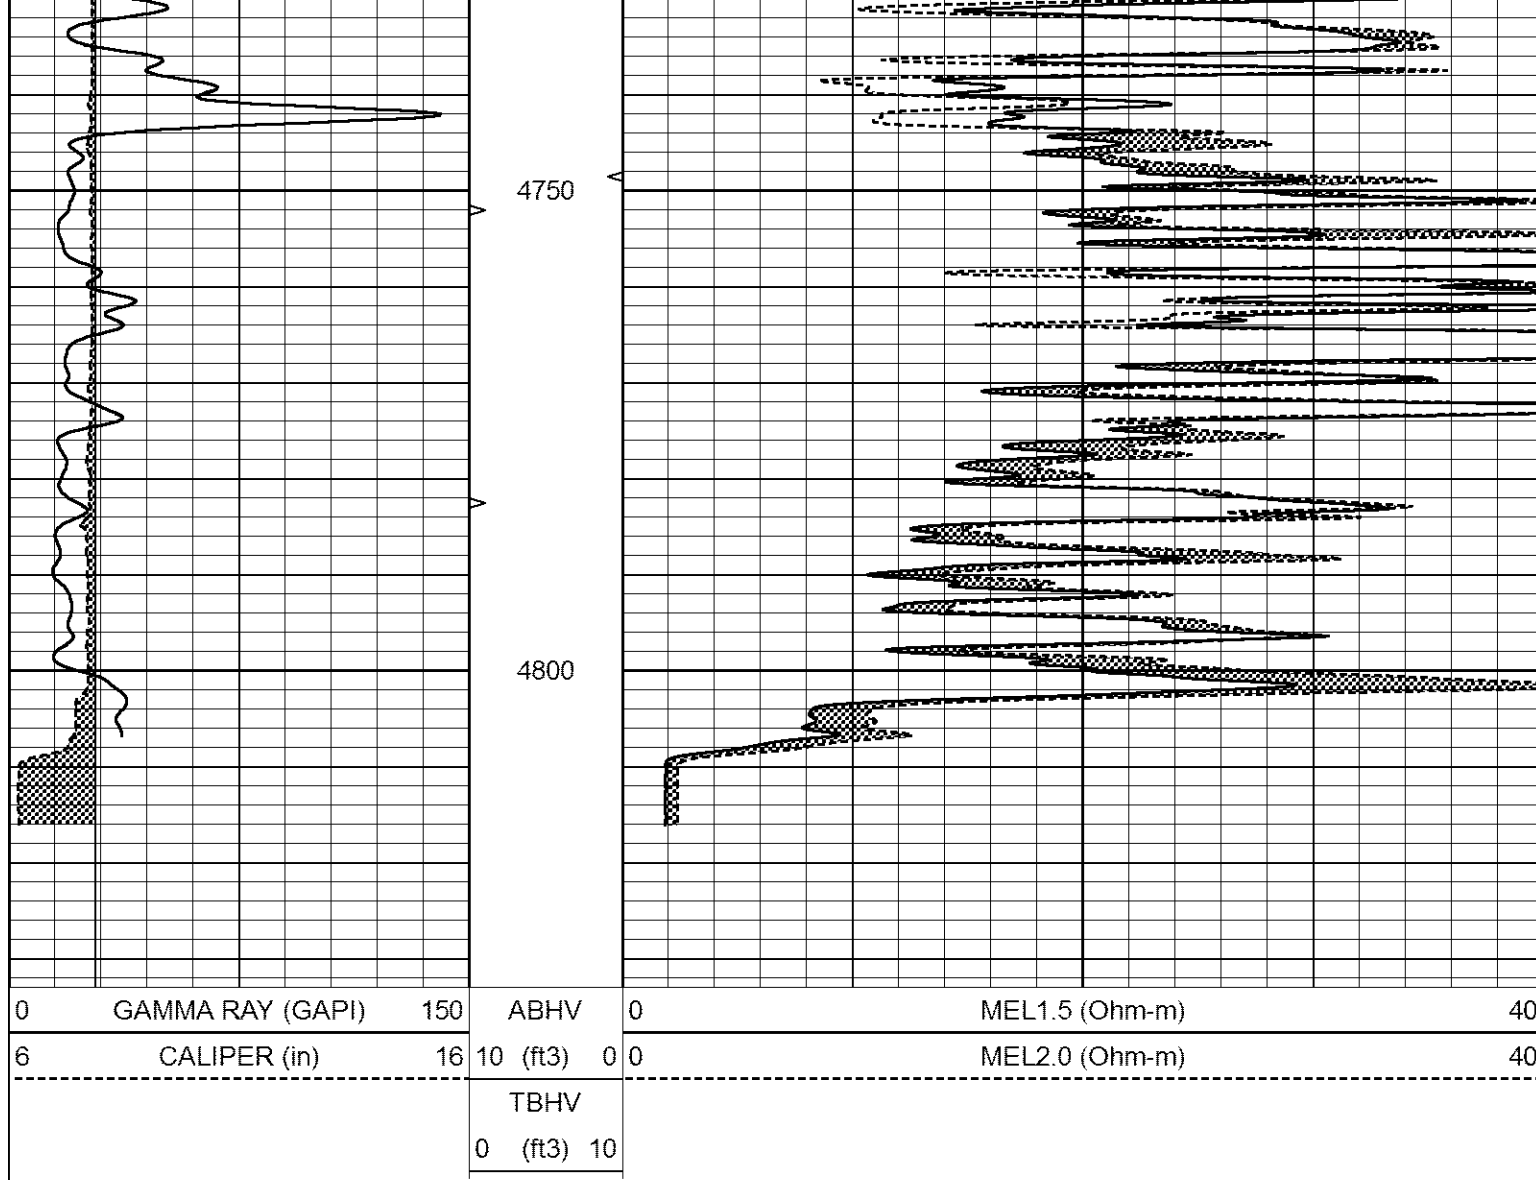

Calibration Report			
Database File	6759pe.db		
Dataset Pathname	pass9MICRO		
Dataset Creation	Mon Jul 18 22:58:38 2022		
MICRO_USR Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeL		
Performed:	Tue Dec 21 16:59:08 2021		
Caliper Calibration:	Gain=4.500	Offset=0.650	
References	Low Cal	High Cal	
Readings	8.000	14.000	
	1.451	3.049	
1.5" Calibration:	Gain=19.250	Offset=-0.200	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.843	
2" Calibration:	Gain=16.500	Offset=0.100	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.021	0.810	

Microlog Calibration Report								
Serial-Model: Performed:			070911-ProbeL Sat May 14 04:48:25 2022					
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000
Gamma Ray Calibration Report								
Serial Number:			070558					
Tool Model:			Probe1					
Performed:			Sat Jul 02 05:55:58 2022					
Calibrator Value:			1.0	GAPI				
Background Reading:			0.0	cps				
Calibrator Reading:			1.0	cps				
Sensitivity:			0.2600	GAPI/cps				