

15-163-30197-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County, Sec. 5 Twp. 9S Rge. (E) 19 (W)

Location as "NE/CNW/SW" or footage from lines SE NE NE

Lease Owner Pickrell Drilling Company

Lease Name Ondrasek Well No. 1

Office Address 705 Fourth National Bank Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed September 11, 19 66

Application for plugging filed September 11, 19 66

Application for plugging approved September 11, 19 66


Plugging commenced September 11, 19 66

Plugging completed September 11, 19 66

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

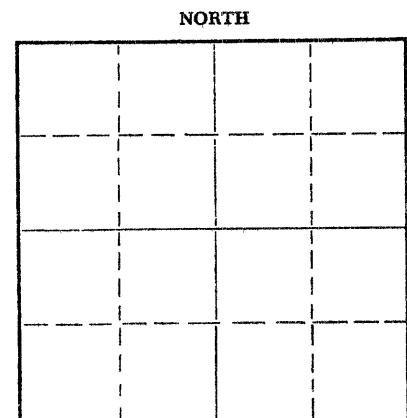

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo F. Massey, Hays, Kansas

Producing formation Depth to top Bottom Total Depth of Well 3507 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	208'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud to 500'. Set plug. Cemented with 25 sacks cement. Heavy mud to 200'. Set plug. Cemented with 20 sacks cement. Heavy mud to 40'. Set plug. Cemented with 8 sacks cement, to bottom of cellar. Plugged rat hole with 2 sacks cement.

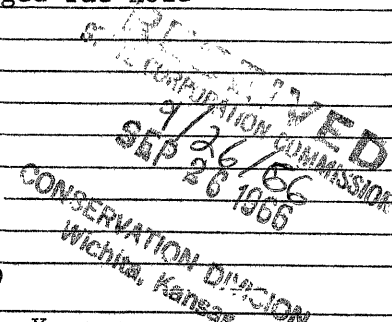

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pickrell Drilling Company

Address 705 Fourth National Bank Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.


C. W. SEBITS (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God

(Signature) C. W. Sebits
705 Fourth Nat'l Bank Bldg., Wichita, Kansas
(Address)

Subscribed and sworn to before me this 20th day of September, 19 66

My commission expires May 10, 1970

L. M. Whiting, Notary Public.

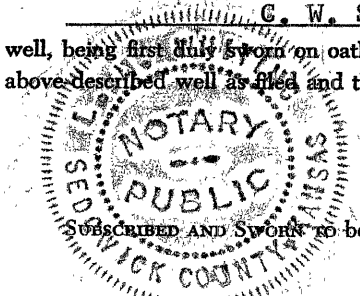

ROTARY DRILLING LOG

COMPANY: Pickrell Drilling Company
705 Fourth National Bank Bldg.
Wichita, Kansas

Rotary Drilling Commenced 9/4/66

LOCATION: Ondrasek No. 1
SE NE NE Section 5-9S-19W
Rooks County, Kansas

Rotary Drilling Completed 9/11/66

CONTRACTOR: **PICKRELL DRILLING COMPANY**
Wichita, Kansas

CASING RECORD: (8 Jts.) 8 5/8" surface casing set at 208' with 140 sacks cement.
Circulated. Completed 6:30 PM, September 4, 1966. No oil string
run. D. & A

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

40	Sandy Clay	<u>C. F. S.</u>
860	Shale & Shells	3230
1470	Sand & Shale	3250
3115	Shale & Lime	3285
3330	Lime	3300
3415	Kansas City	3323
3475	Lime & Shale	3330
3507	Arbuckle, R.T.D.	3378
		3400
		3438
		3472
		3480
		3483
		3491
		3507

Slope Tests

2000
2500
3000
3500

S. L. M.
3112

RECEIVED
S. L. M. CORPORATION COMMISSIONER
9/26/66
SEP 26 1966
CONSERVATION DIVISION
Wichita, Kansas

The undersigned, C. W. SEBITS, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY

By C. W. SEBITS, Attorney-in-Fact

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.:

On this 20th day of September, 19 66, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. SEBITS, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last/above written.

My commission expires: May 10, 1970

L. M. Whiting
L. M. Whiting, Notary Public

