DUAL INDUCTION LOG

Company PALOMINO PETROLEUM
Well Happy Gilmore #1
Field Miner Northeast
County Ness State KS

Company PALOMINO PETROLEUM
Well Happy Gilmore #1
Field Miner Northeast
County Ness
State KS

Location: API # : 15 135 26183

2310' FNL & 2310' FWL

SEC 29 TWP 17S RGE 23W

Other Services
CDNL
ML

Elevation
K.B. 2420'
D.F. 2419'
G.L. 2412'

Permanent Datum Ground Level Elevation 2412'
Log Measured From KB 8' AGL
Drilling Measured From KB

Date	8/04/22		
Run Number	One		
Depth Driller	4555'		
Depth Logger	4552'		
Bottom Logged Interval	4550'		
Top Log Interval	Surface		
Casing Driller	8 5/8" @ 222'		
Casing Logger	222'		
Bit Size	7 7/8"		
Type Fluid in Hole	Chemical		
Density / Viscosity	9.3/74		
pH / Fluid Loss	9.5/10.8		
Source of Sample	Pit		
Rm @ Meas. Temp	1.3@80degf		
Rmf @ Meas. Temp	1.04@80degf		
Rmc @ Meas. Temp	1.7@80degf		
Source of Rmf / Rmc	Calculated		
Rm @ BHT	.9@115degf		
Time Circulation Stopped	9:30 A.M.		
Time Logger on Bottom	12:00 PM		
Maximum Recorded Temperature	115degf		
Equipment Number	T605		
Location	Hays, KS		
Recorded By	C.Patterson		
Witnessed By	Keaton Jones		

<<< Fold Here >>>

Comments

Ness City, KS intrsection Hwy. 96 & Hwy 283 North 6.2 mi.
(Just 200 yards South of golf coarse) East to South to East into Location off Hwy

Thank You for using Gemini Wireline LLC
785-625-1182

MAIN PASS

Database File	pphappygilmore#1oh.db
Dataset Pathname	pass2.1
Presentation Format	kdillinn
Dataset Creation	Thu Aug 04 13:25:44 2022
Charted by	Depth in Feet scaled 1:600

0	GR (GAPI)	150
-100	SP (mV)	100

1000	CILD (mmho/m)	0
10000	LTEN (lb)	0
0	RILD (Ohm-m)	50
0	RLL3 (Ohm-m)	50
50	RILD x 10 (Ohm-m)	500
50	RLL3 x 10 (Ohm-m)	500

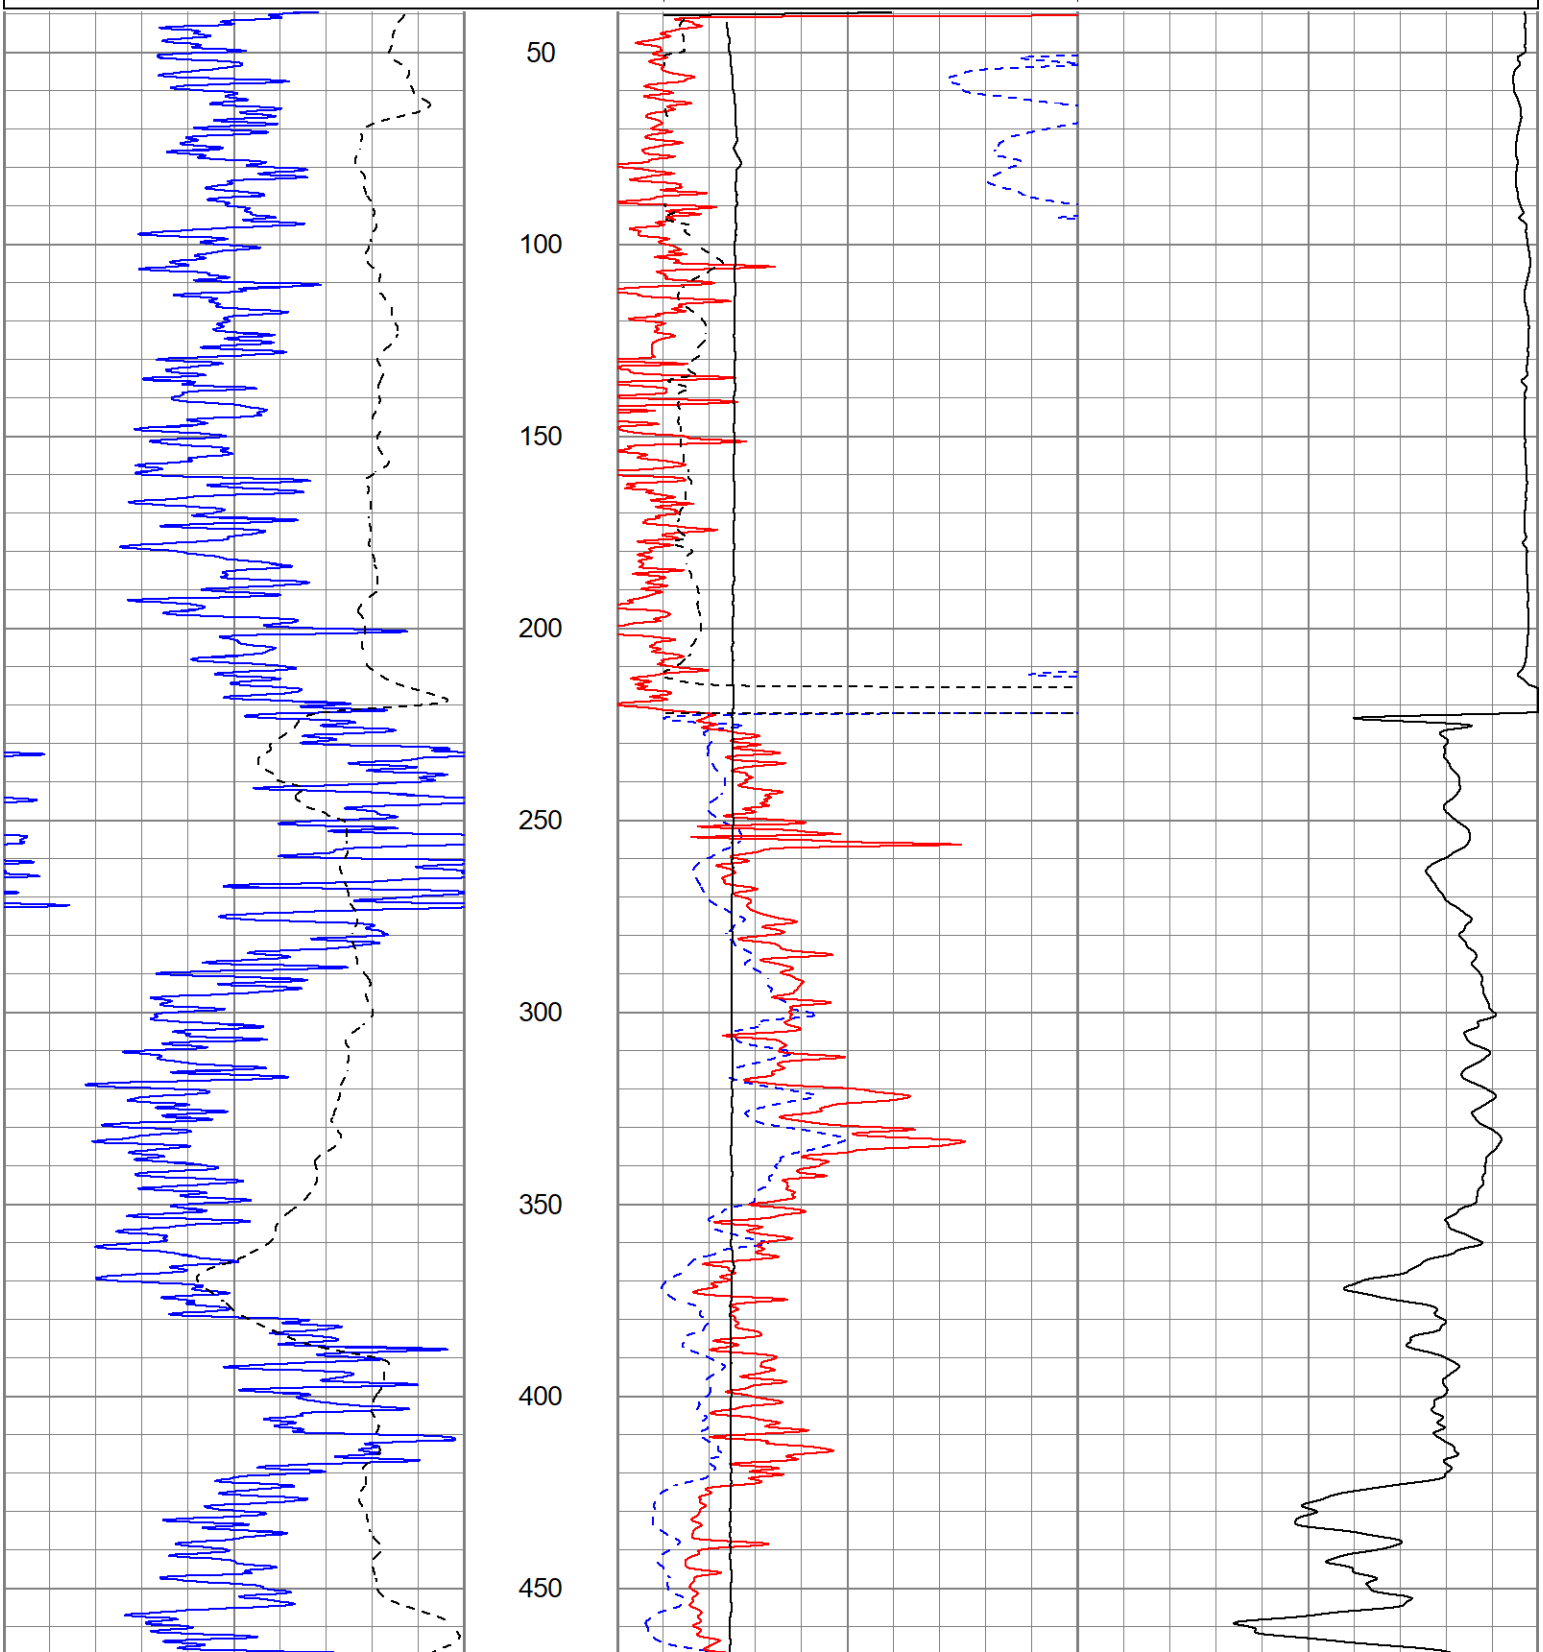

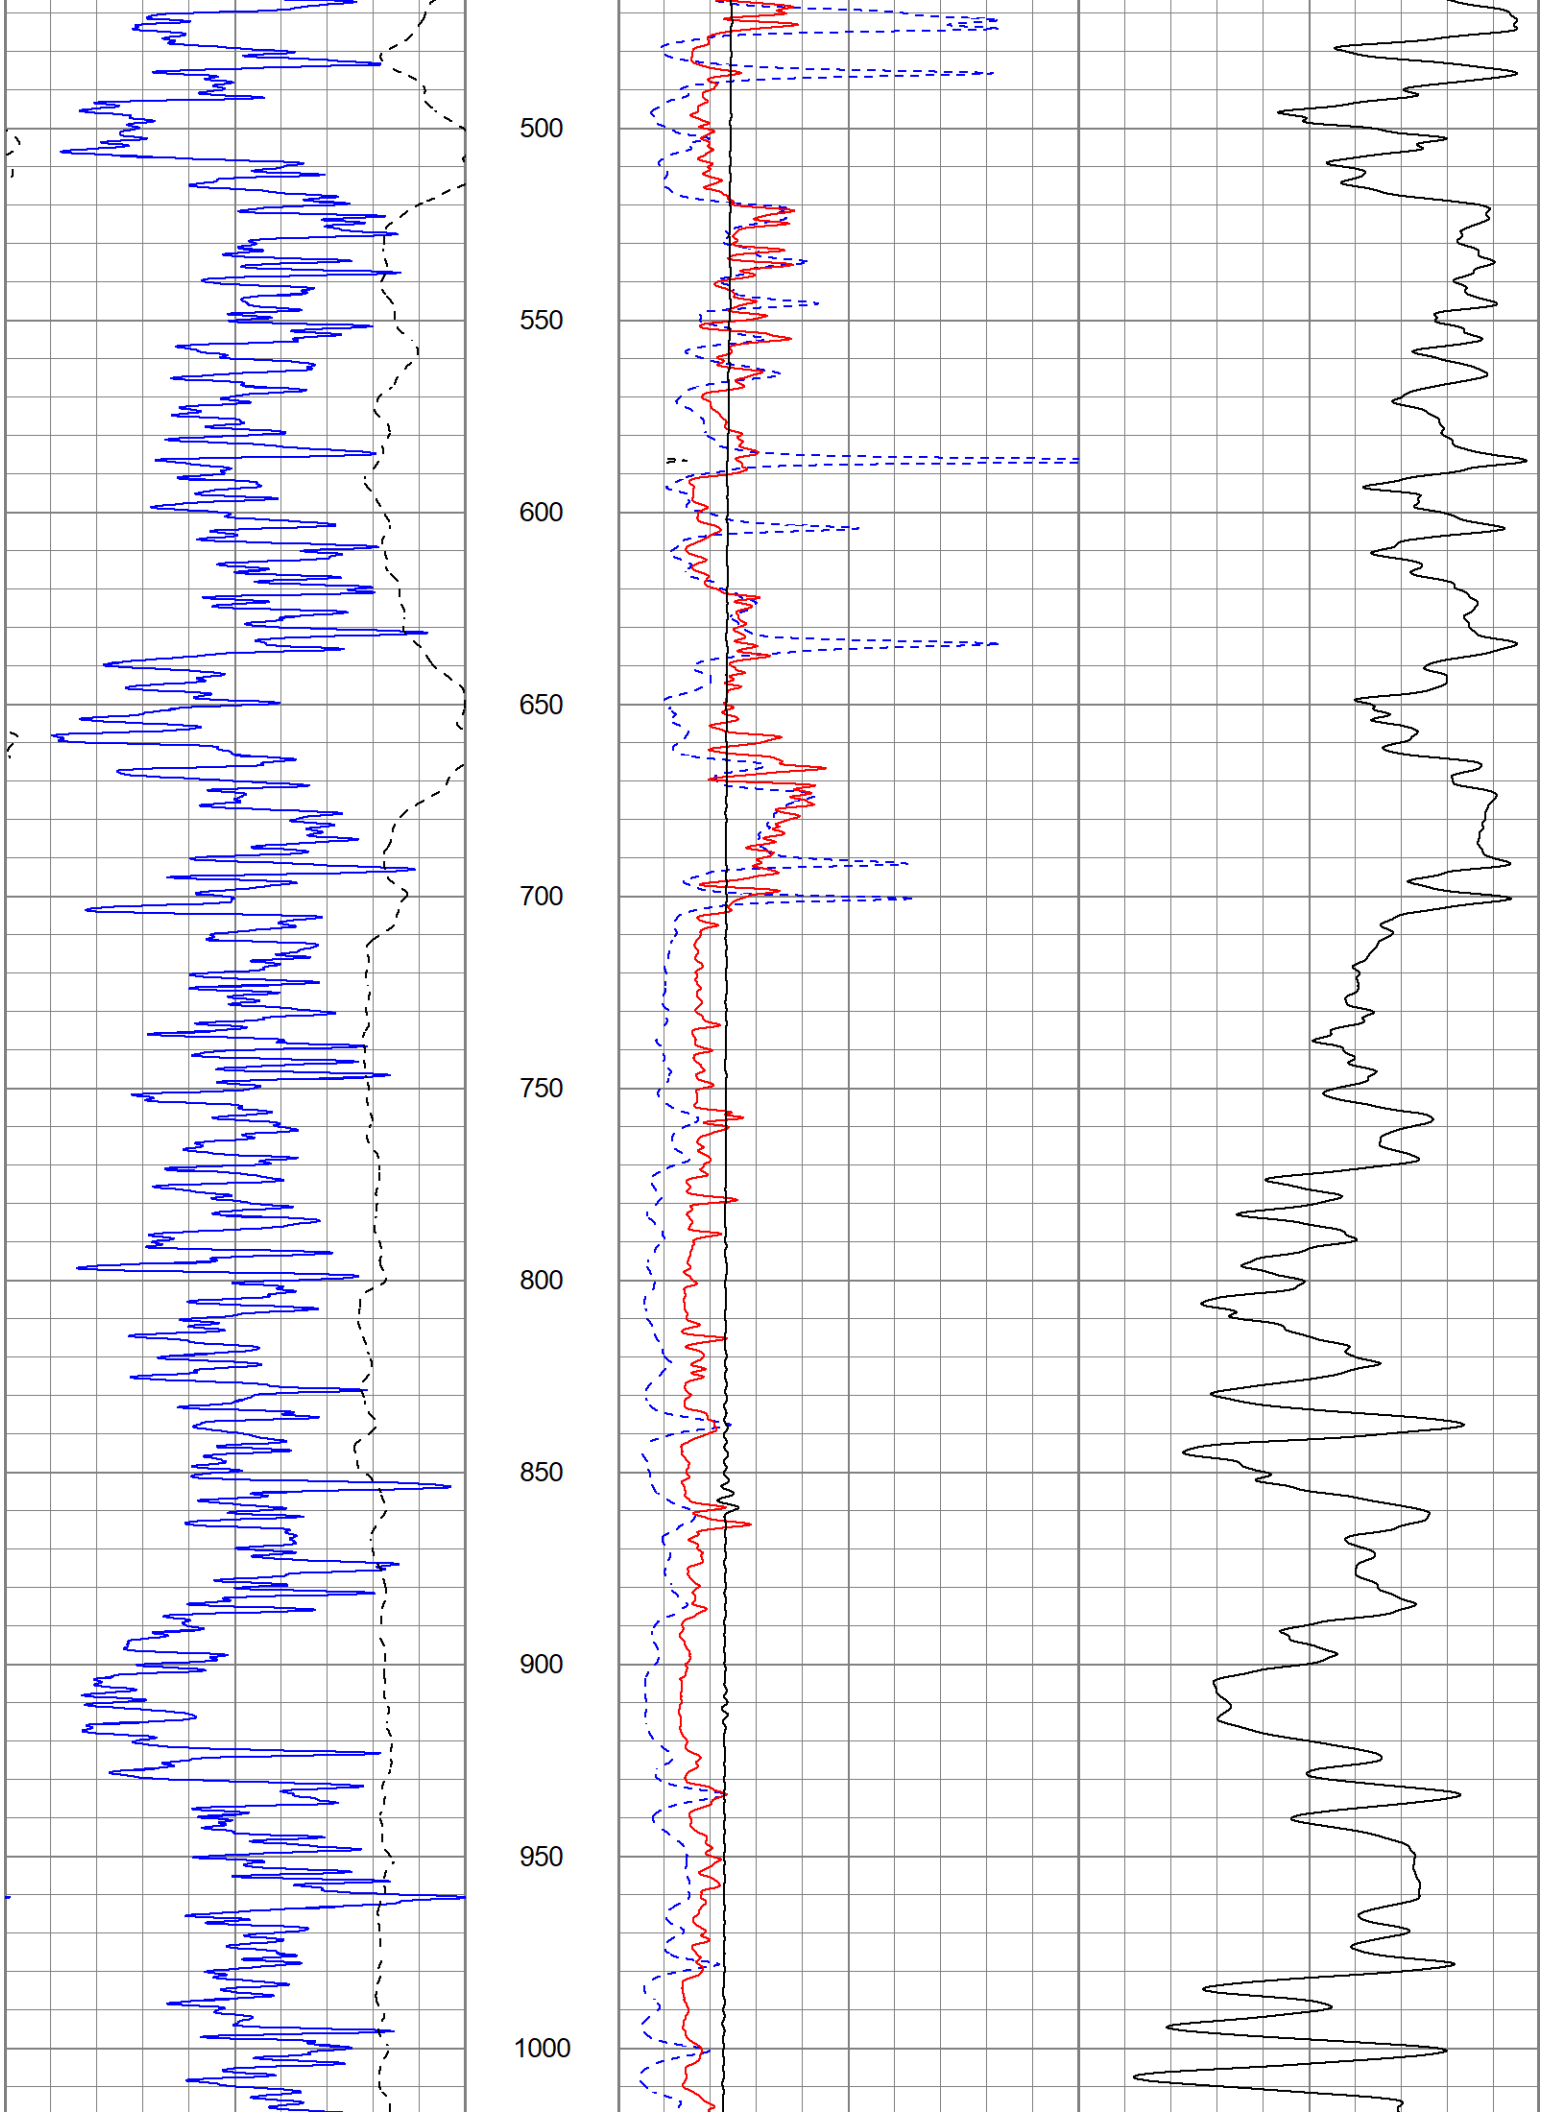
500
550
600
650
700
750
800
850
900
950
1000

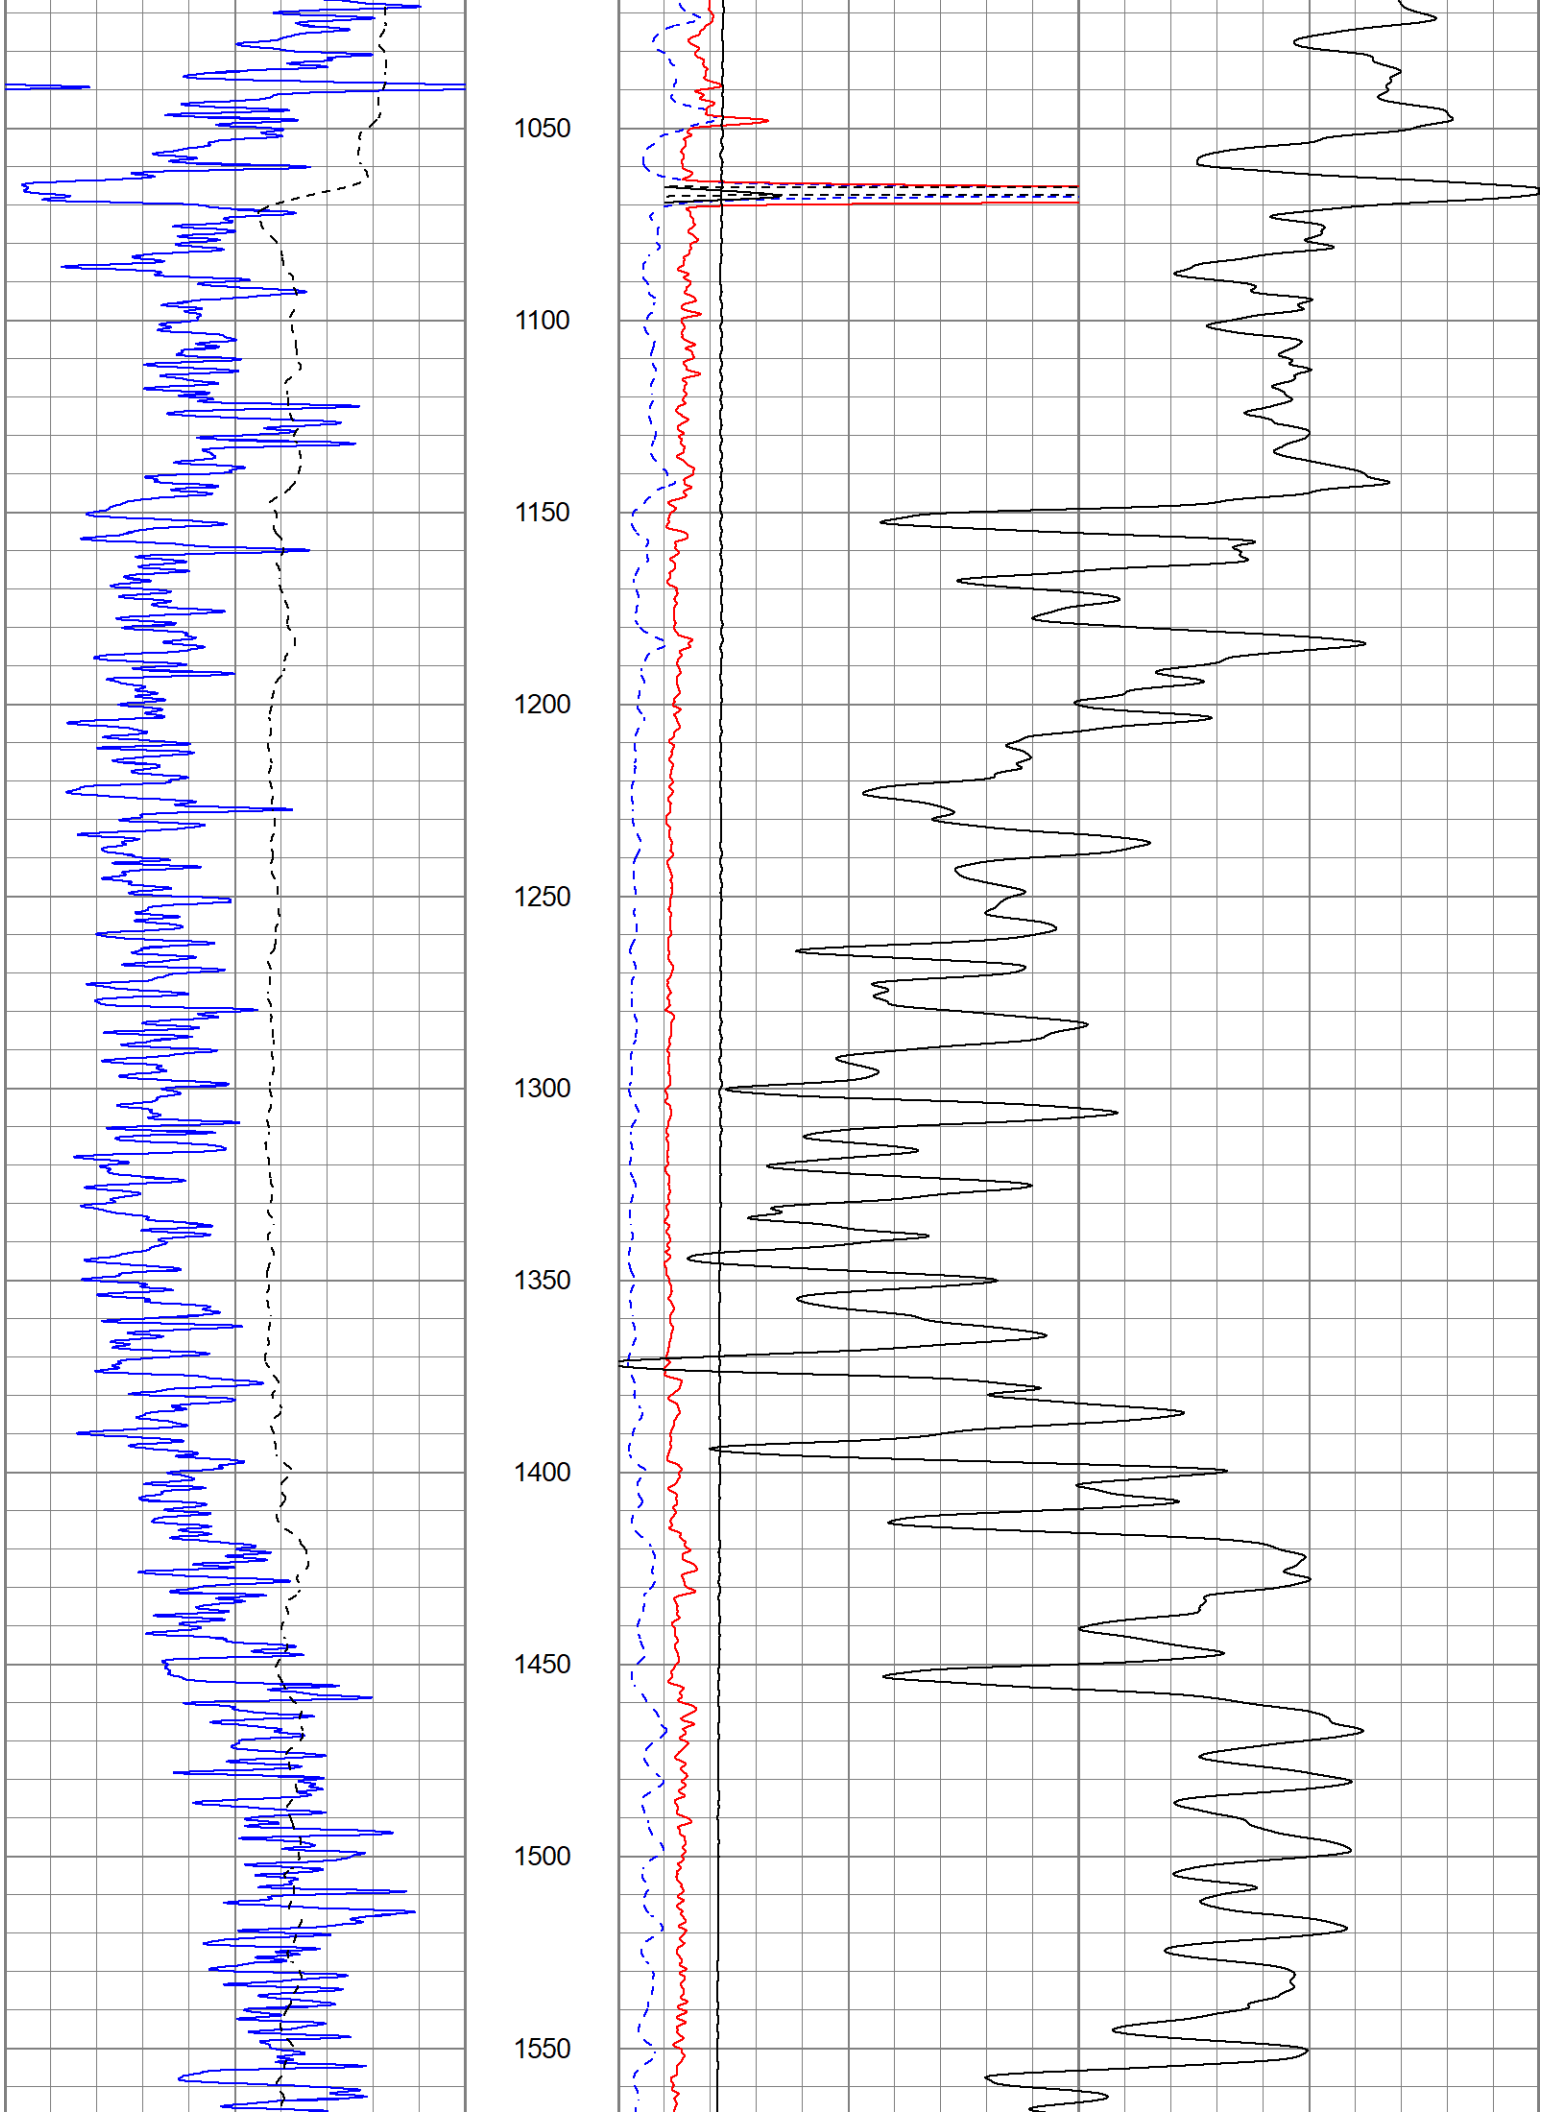
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500
1550

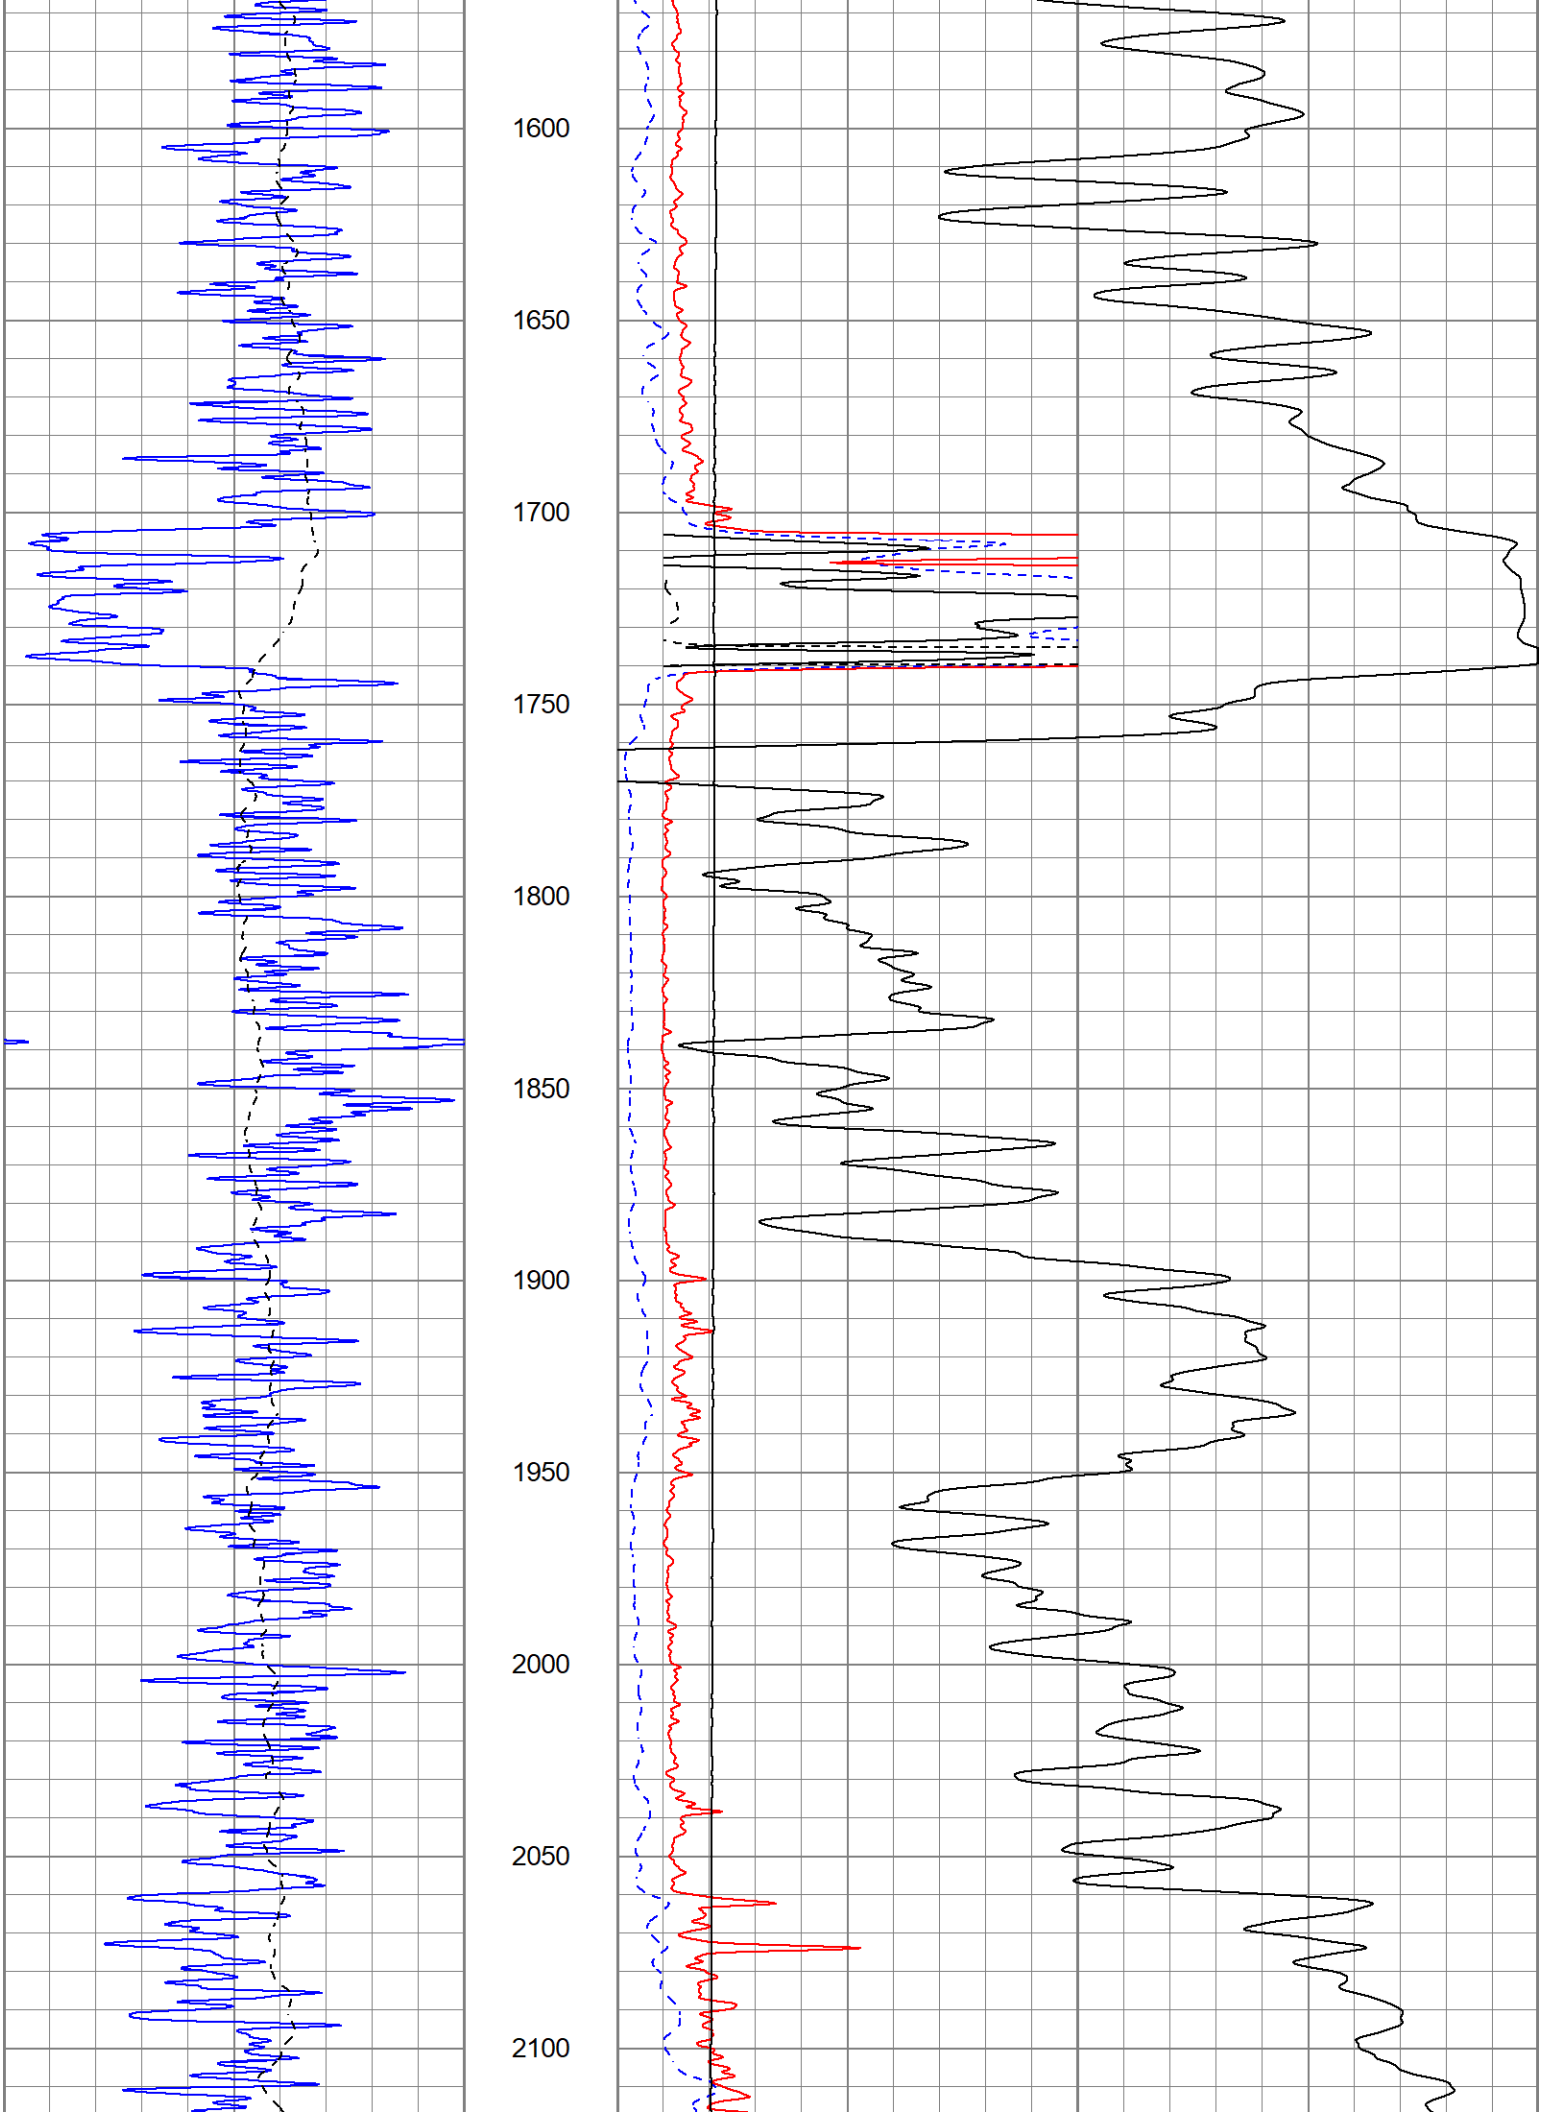
1600
1650
1700
1750
1800
1850
1900
1950
2000
2050
2100

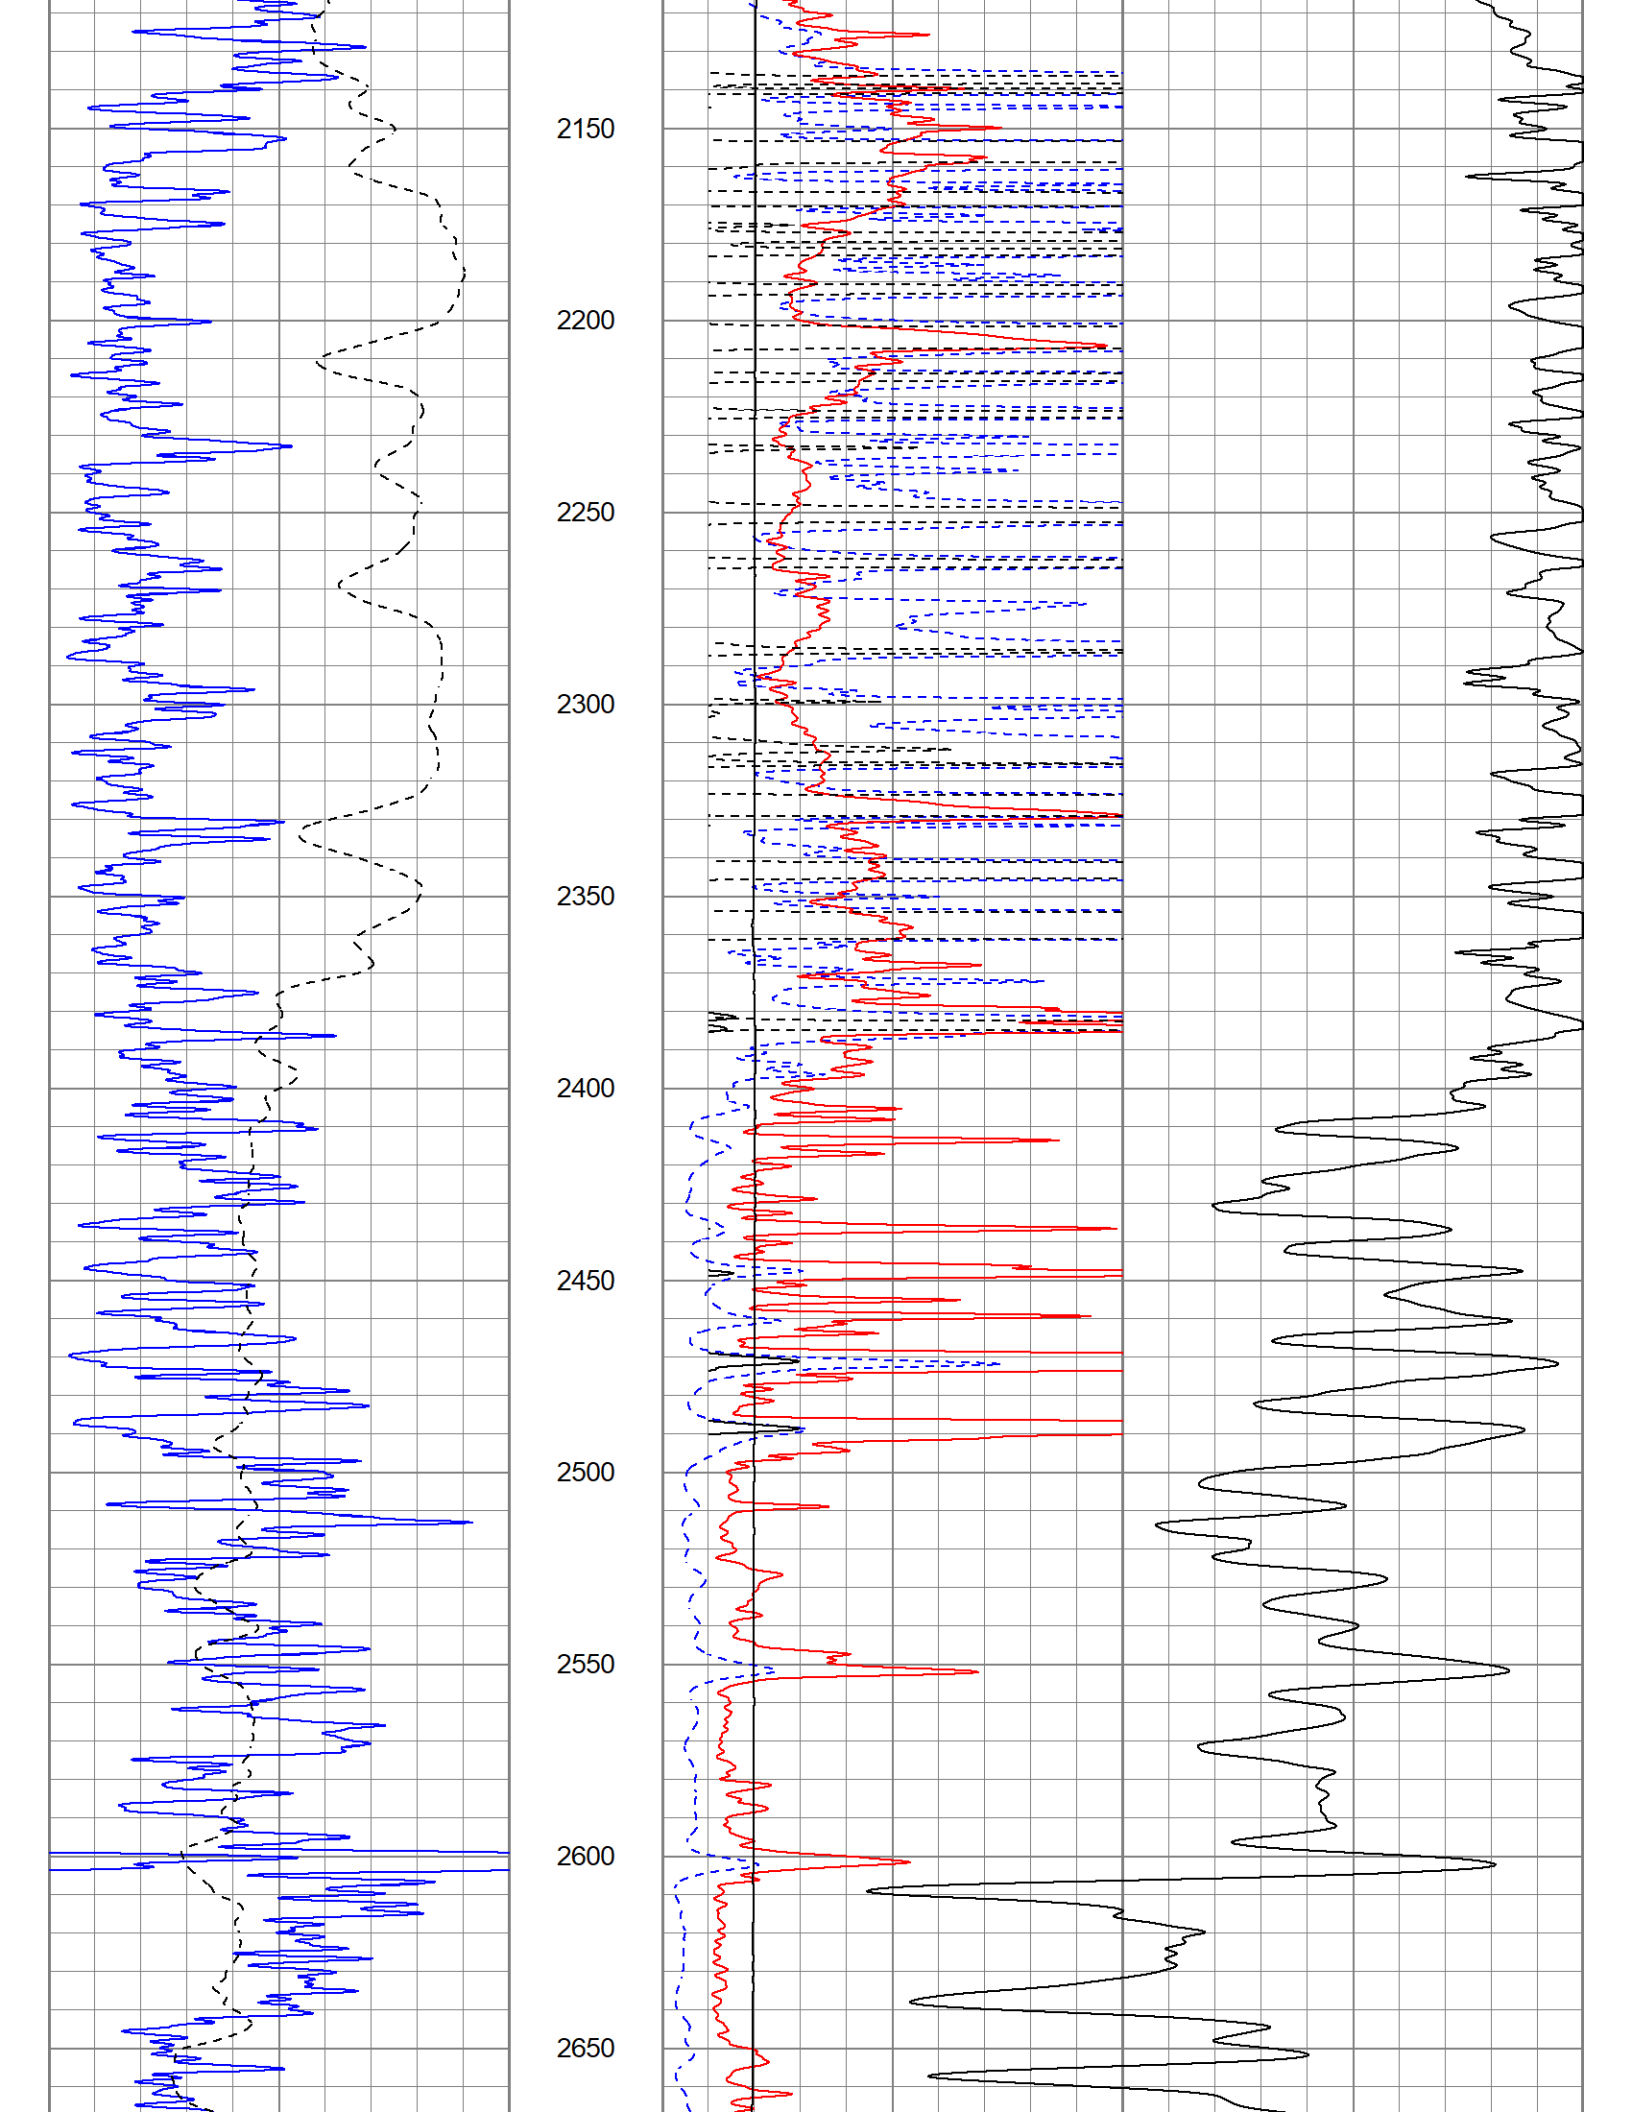
2150
2200
2250
2300
2350
2400
2450
2500
2550
2600
2650

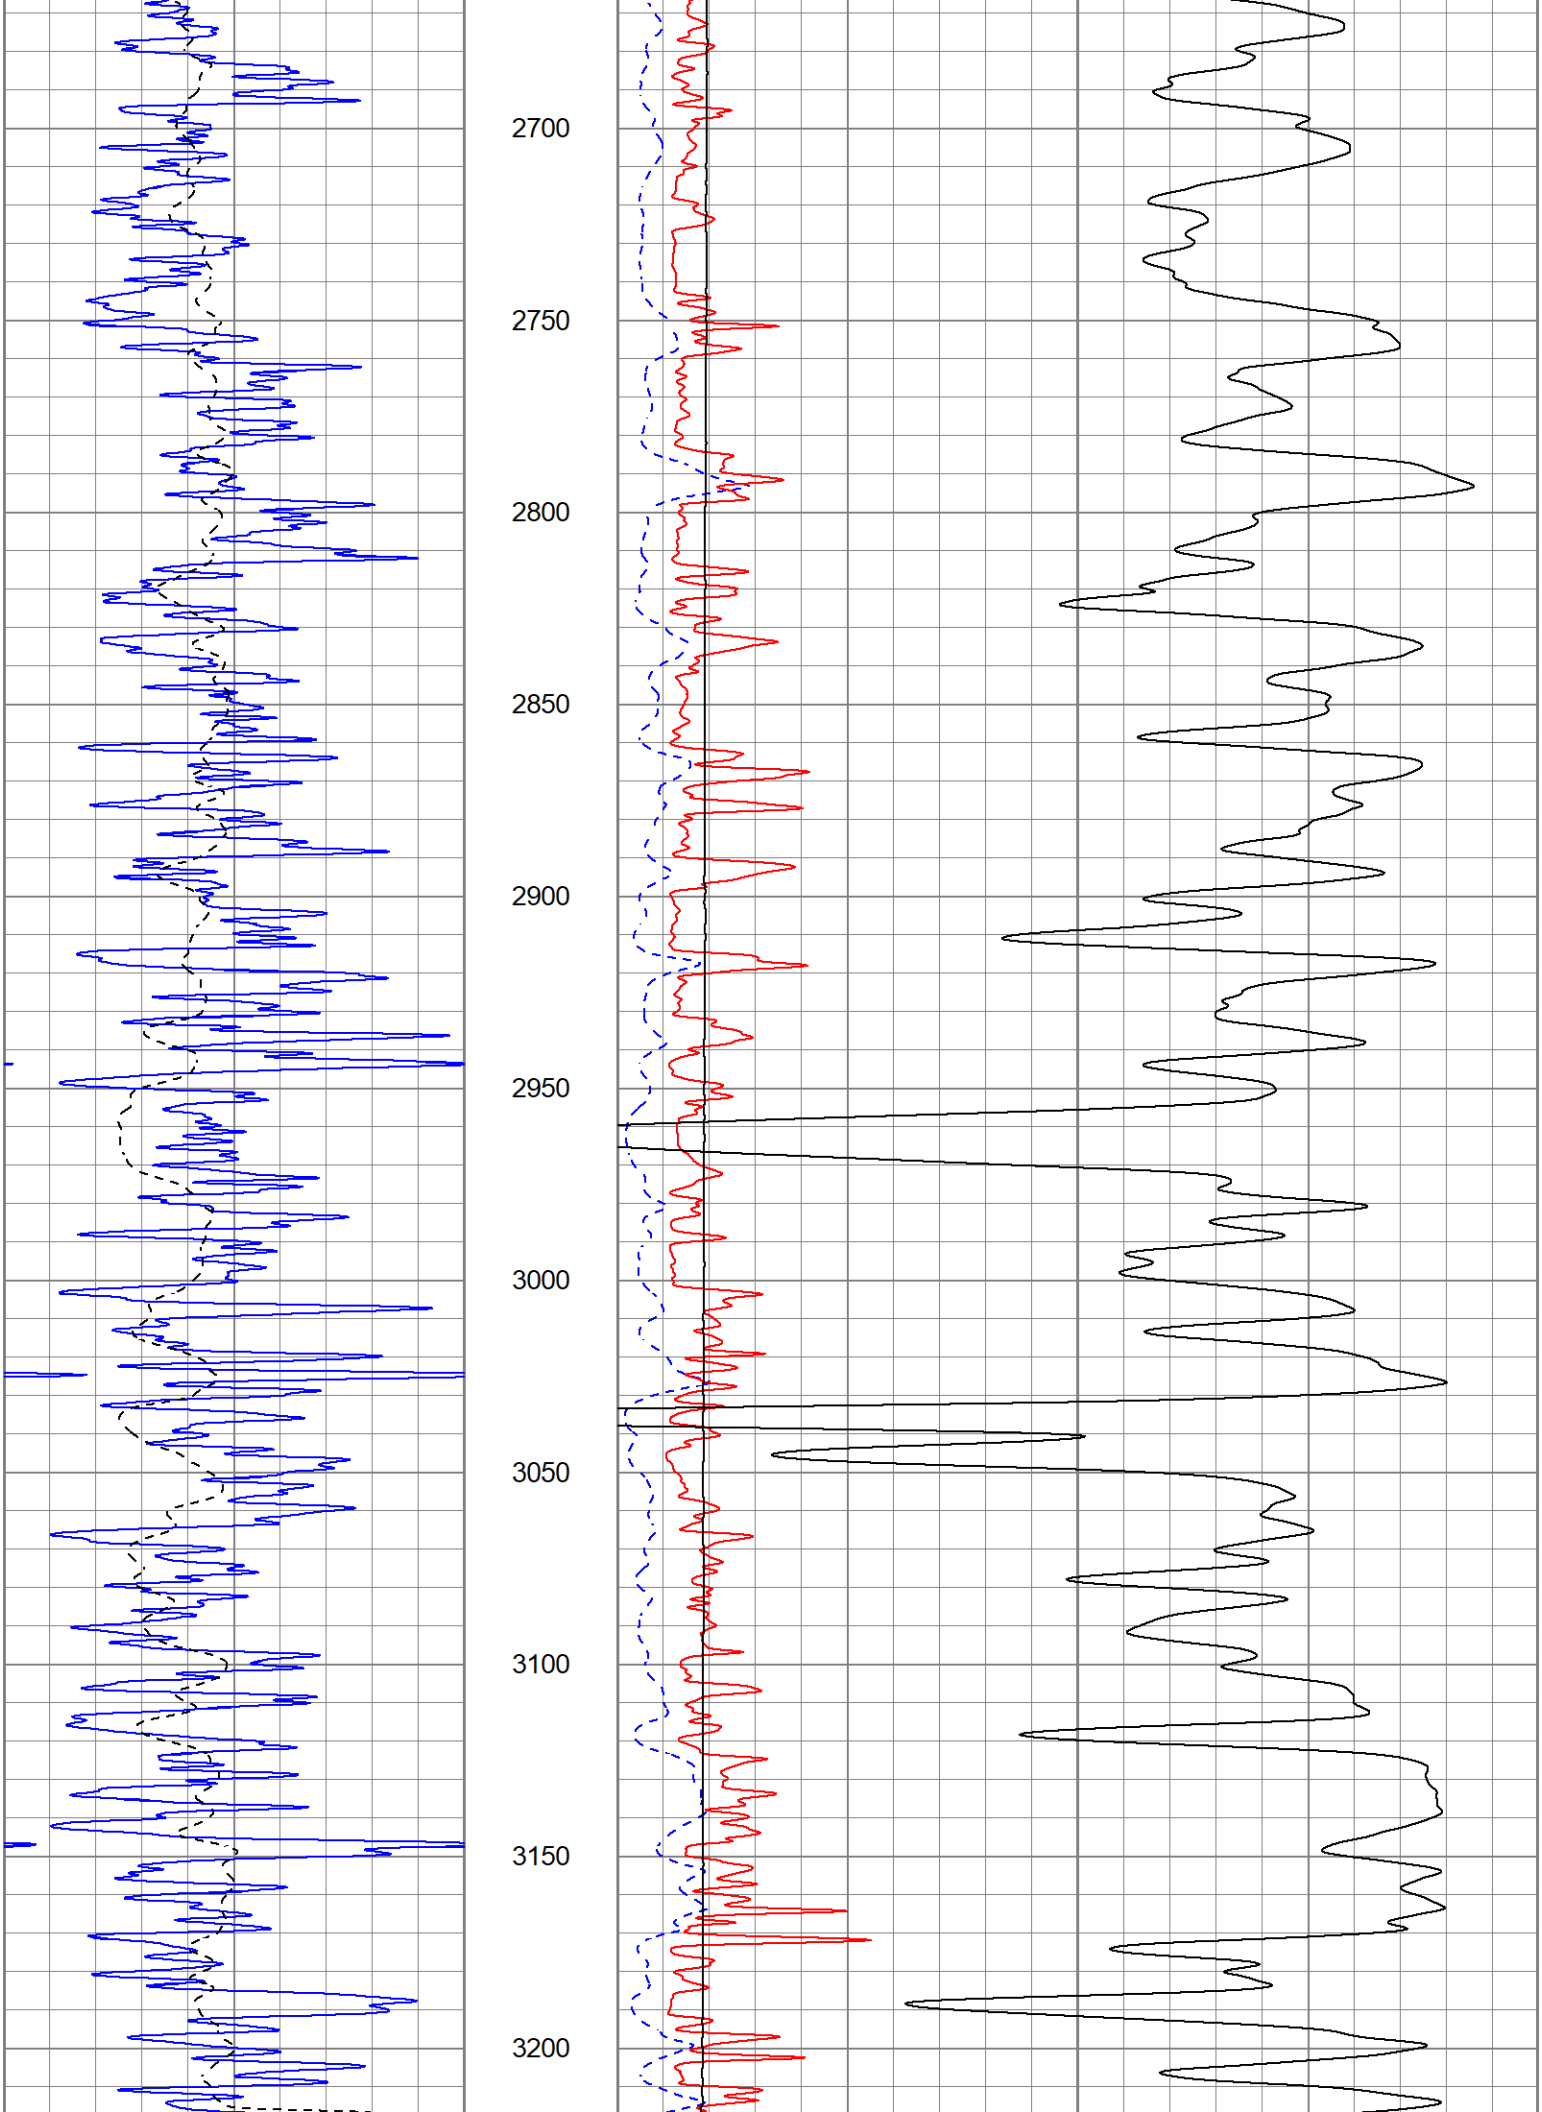
2700
2750
2800
2850
2900
2950
3000
3050
3100
3150
3200

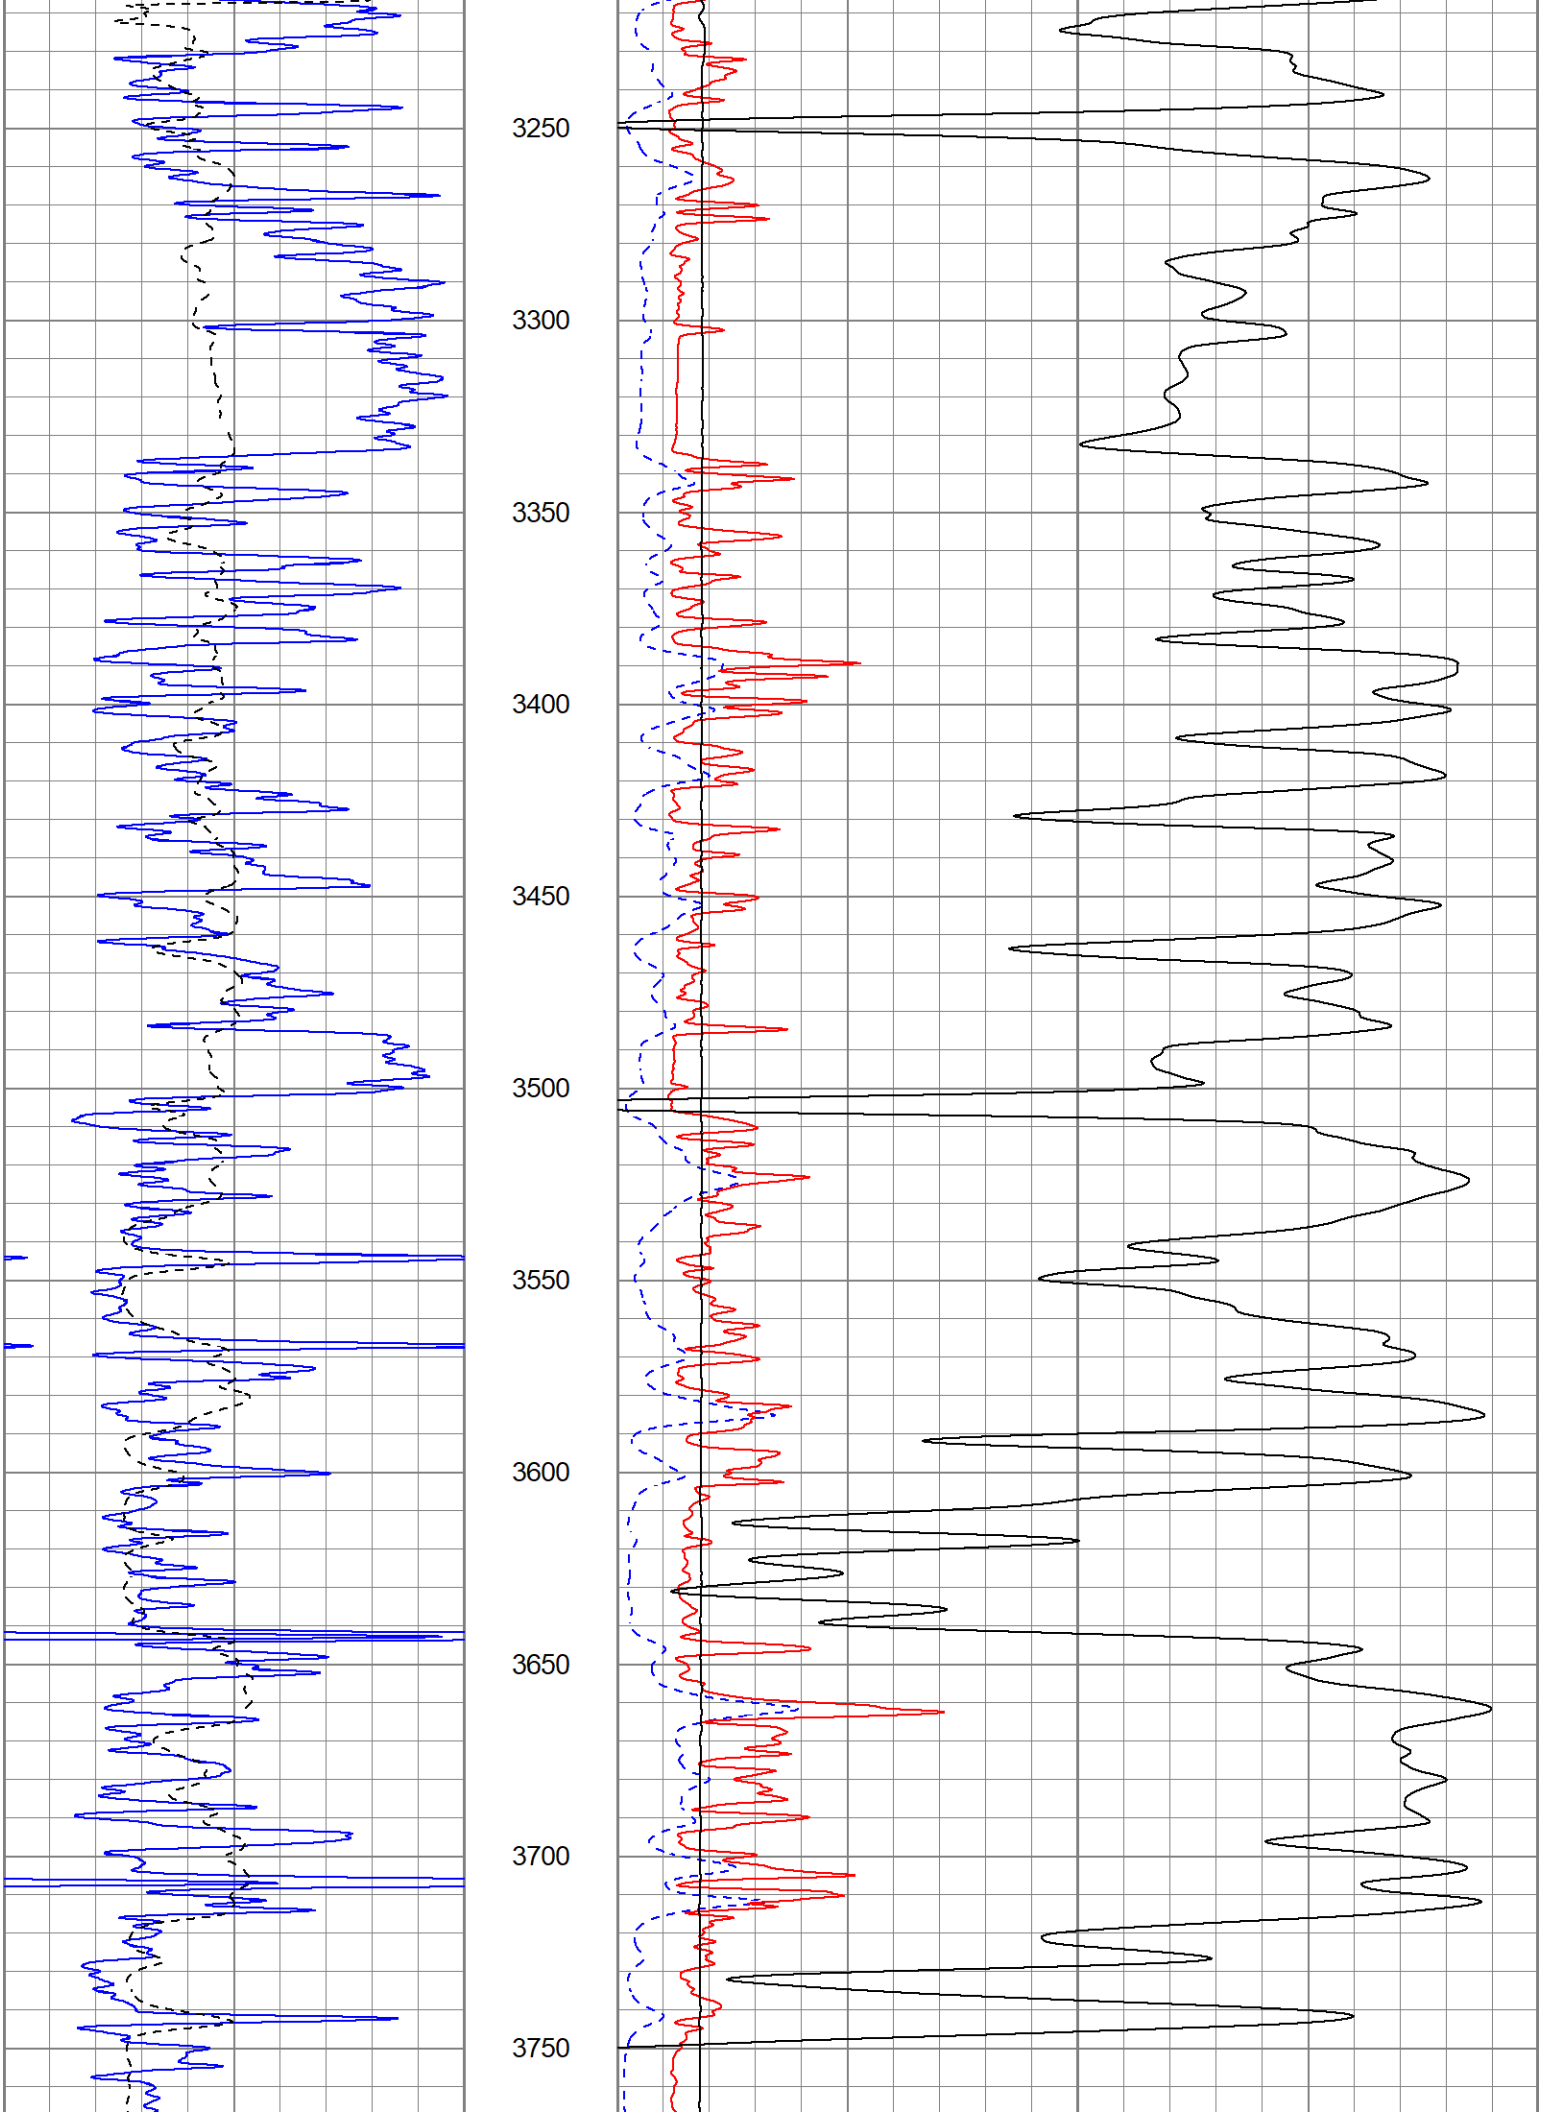
3250
3300
3350
3400
3450
3500
3550
3600
3650
3700
3750

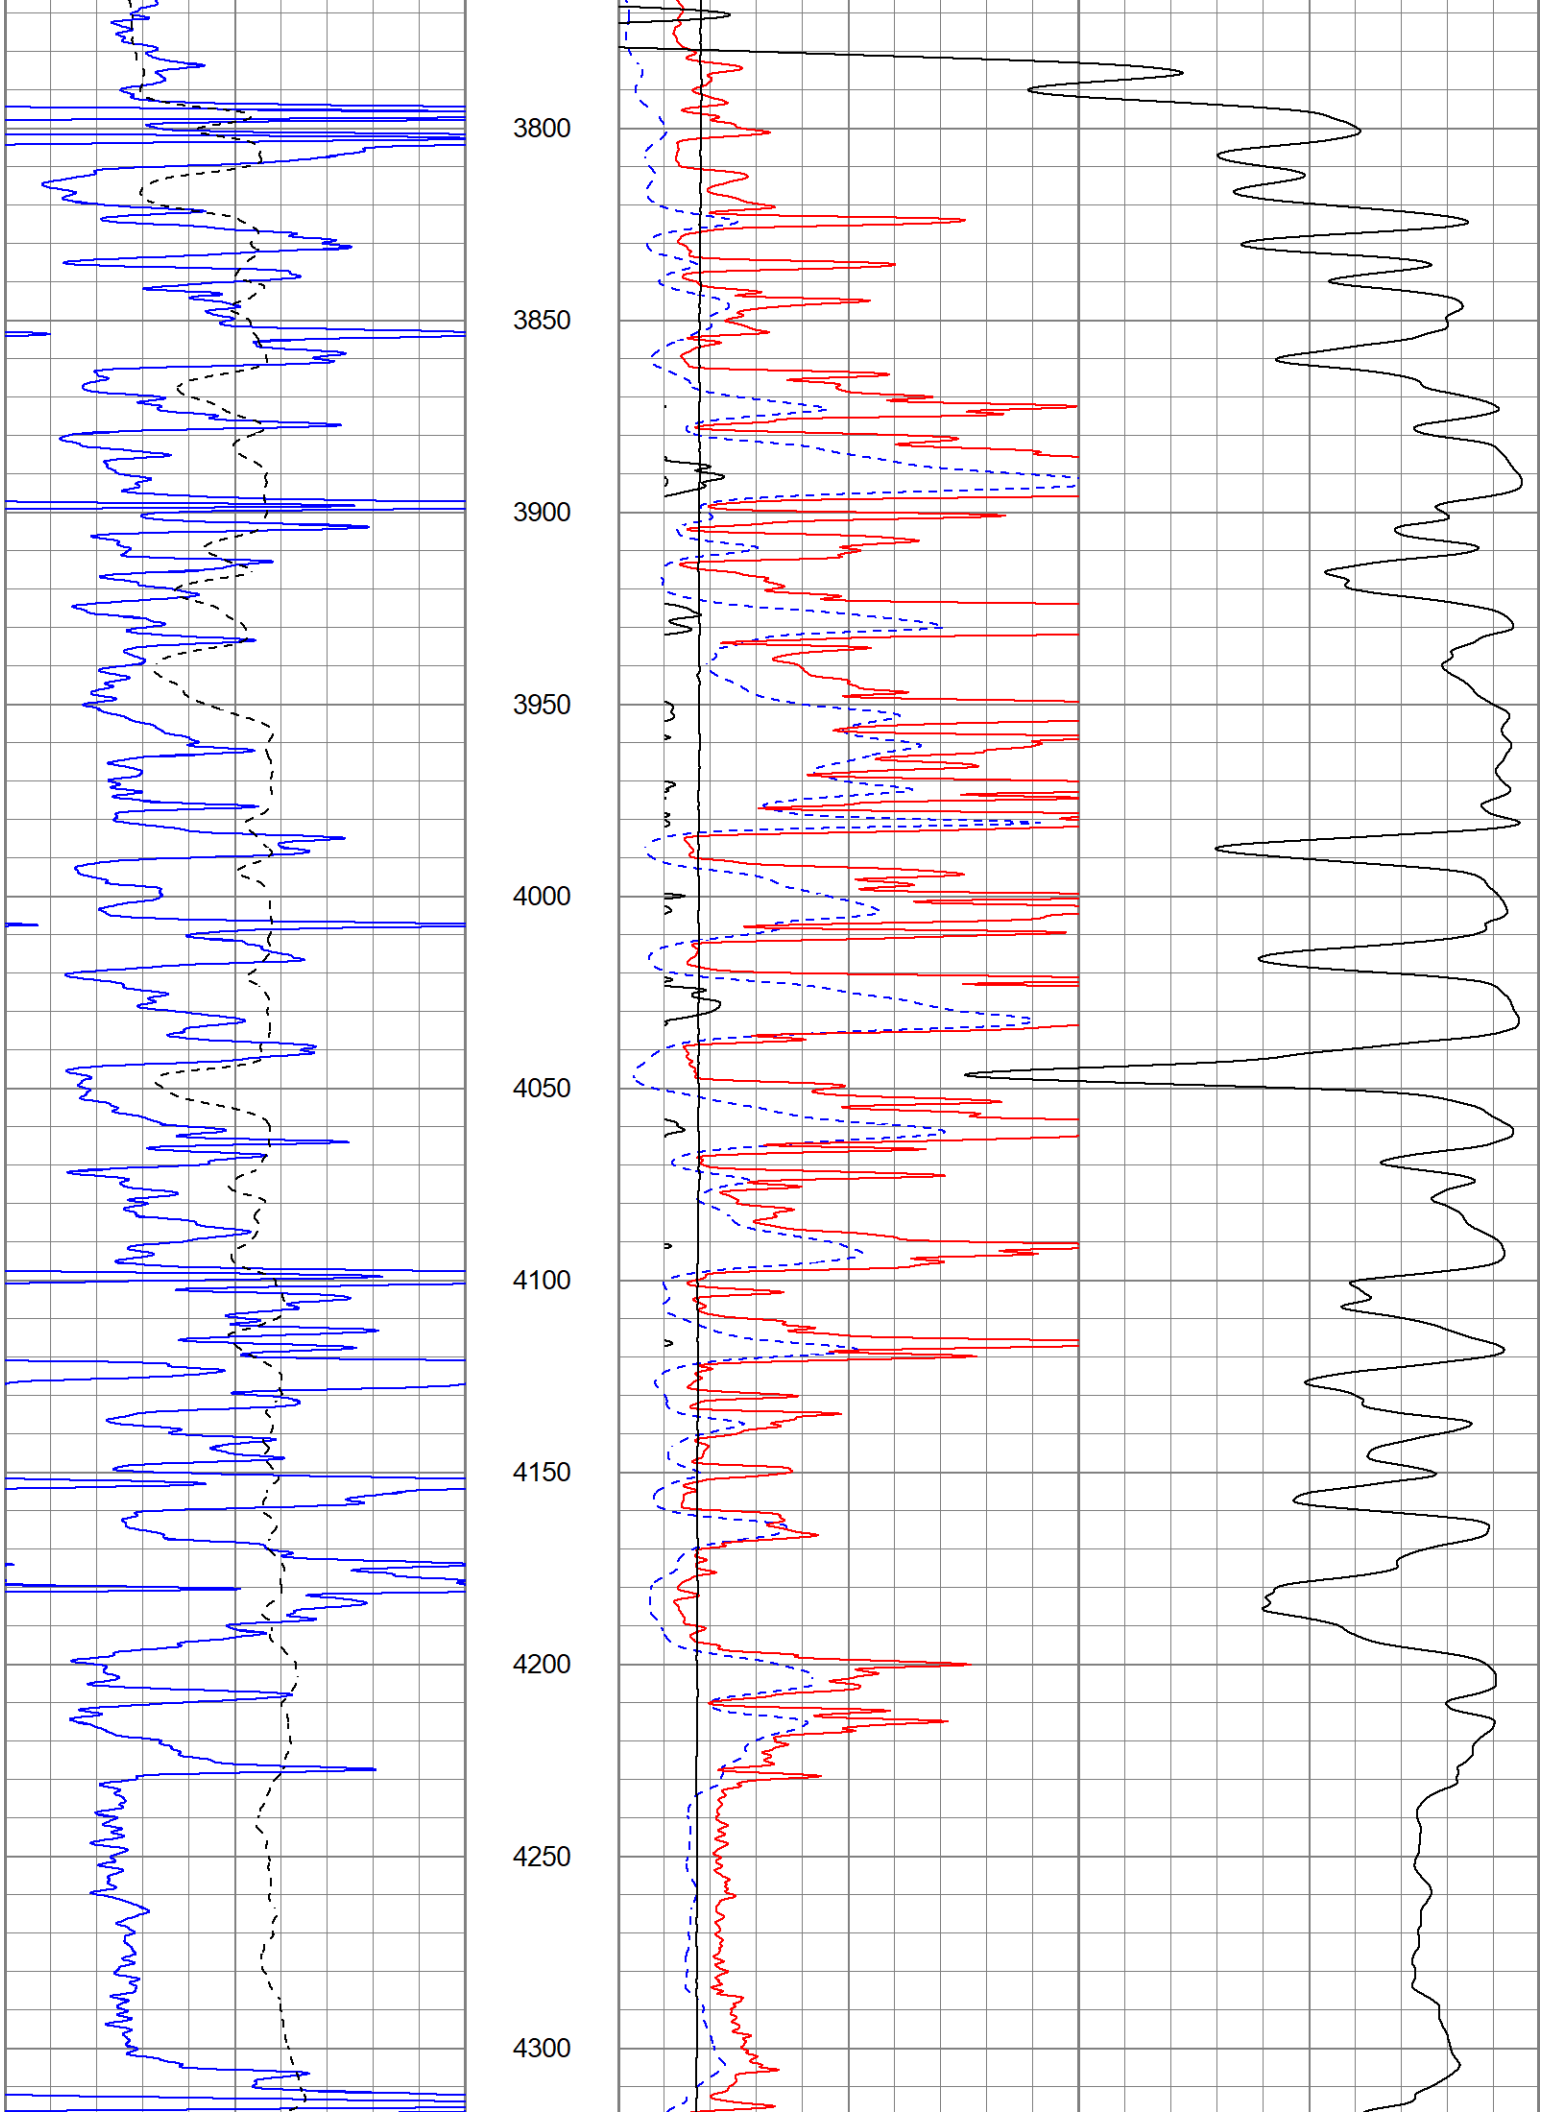
3800
3850
3900
3950
4000
4050
4100
4150
4200
4250
4300

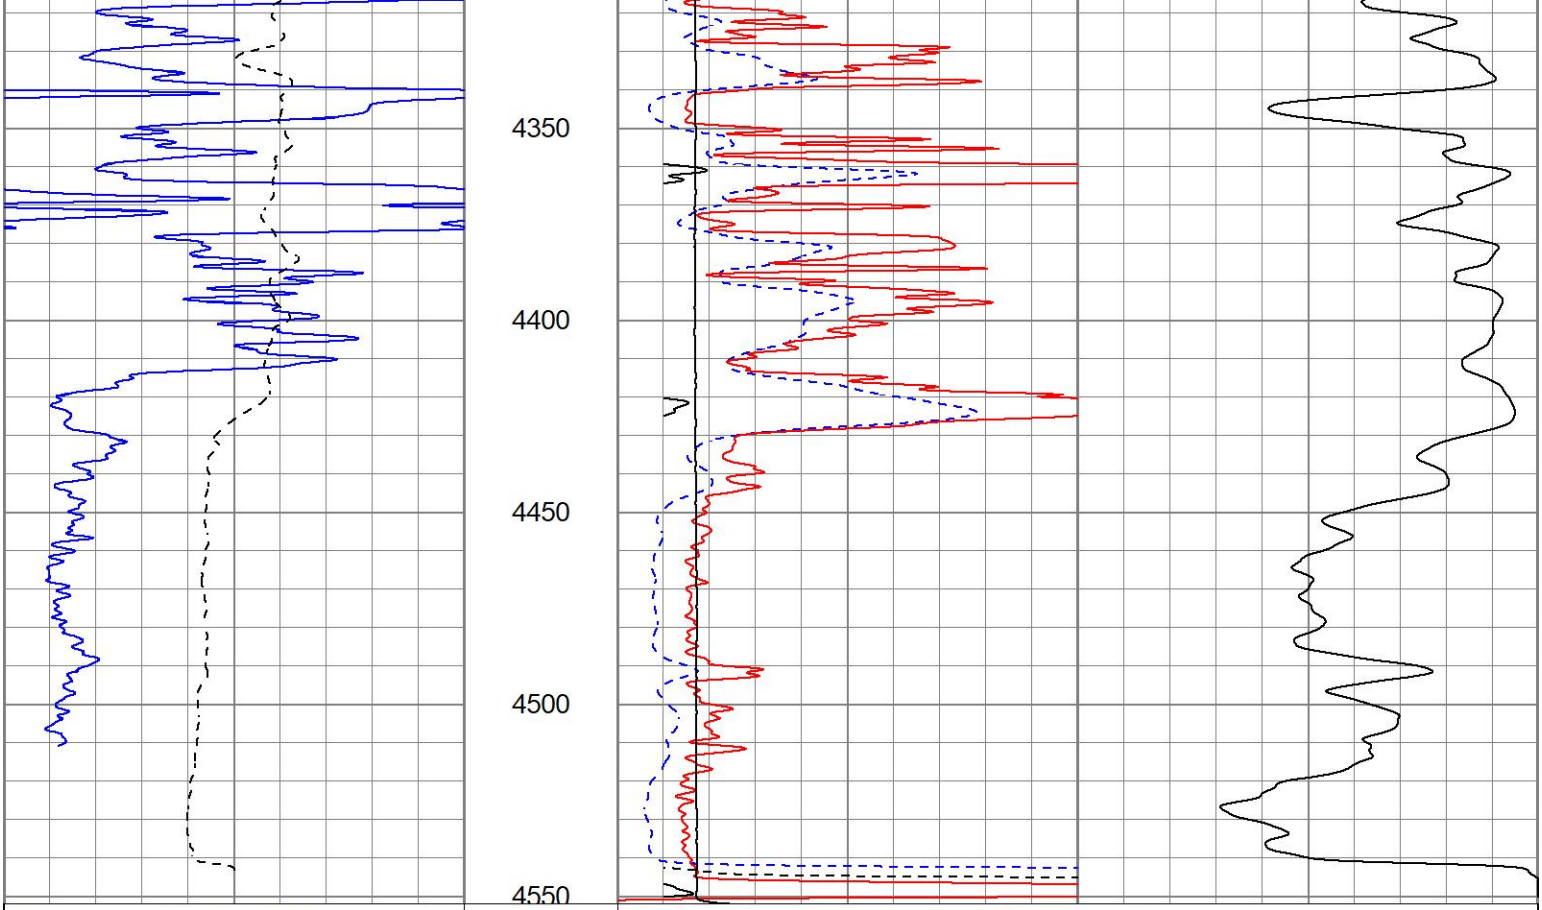

0	GR (GAPI)	150
-100	SP (mV)	100

1000	CILD (mmho/m)	0
10000	LTEN (lb)	0
0	RILD (Ohm-m)	50
0	RLL3 (Ohm-m)	50
50	RILD x 10 (Ohm-m)	500
50	RLL3 x 10 (Ohm-m)	500

MAIN PASS

Database File	pphappygilmore#1oh.db
Dataset Pathname	pass2.1
Presentation Format	kdil
Dataset Creation	Thu Aug 04 13:25:44 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150
-100	SP (mV)	100

0.2	RILD (Ohm-m)	2000
0.2	RLL3 (Ohm-m)	2000
0.2	RILM (Ohm-m)	2000

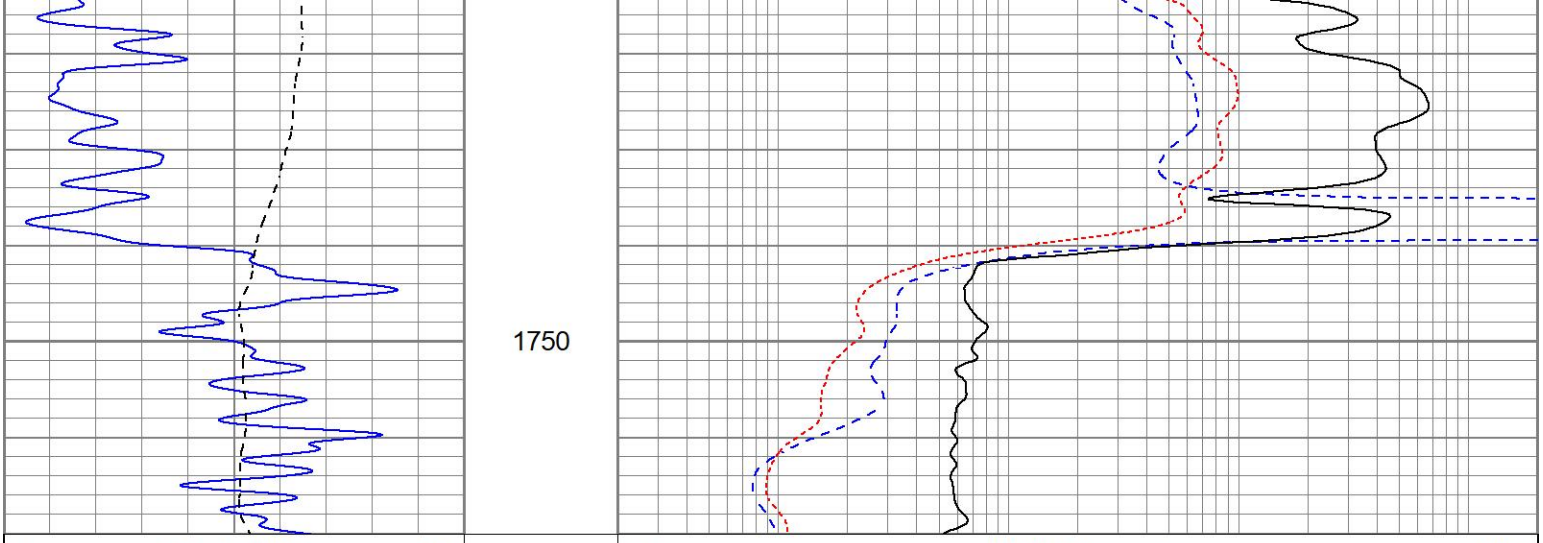

MAIN PASS

Database File	pphappygilmore#1oh.db
Dataset Pathname	pass2.1
Presentation Format	kdil
Dataset Creation	Thu Aug 04 13:25:44 2022
Charted by	Depth in Feet scaled 1:240

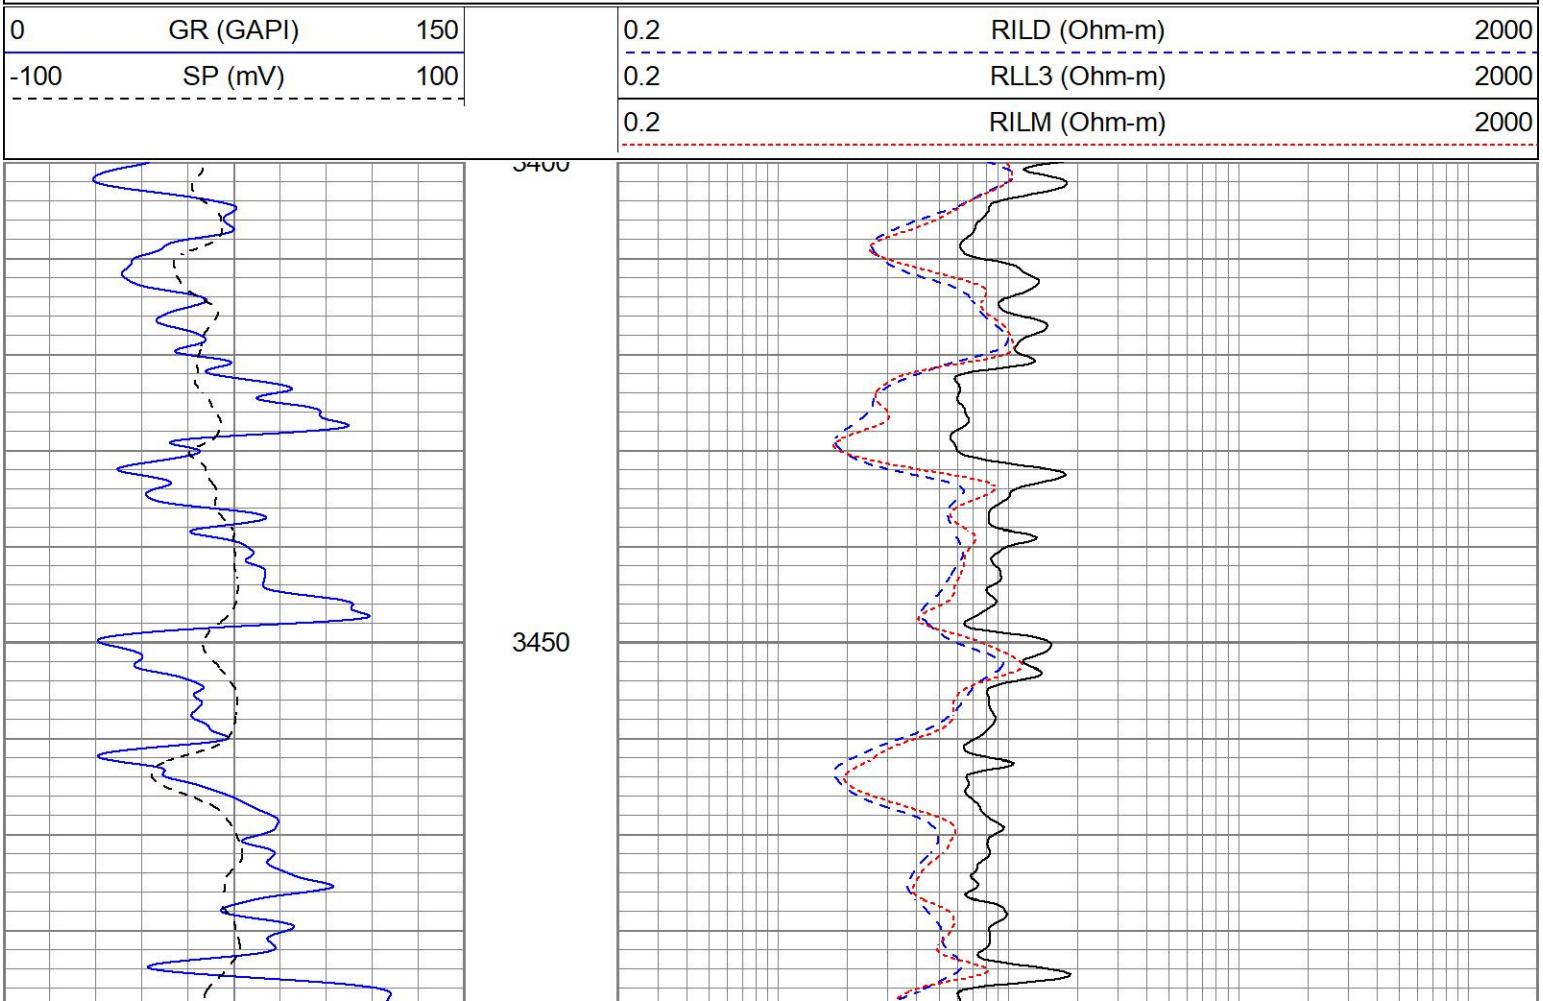

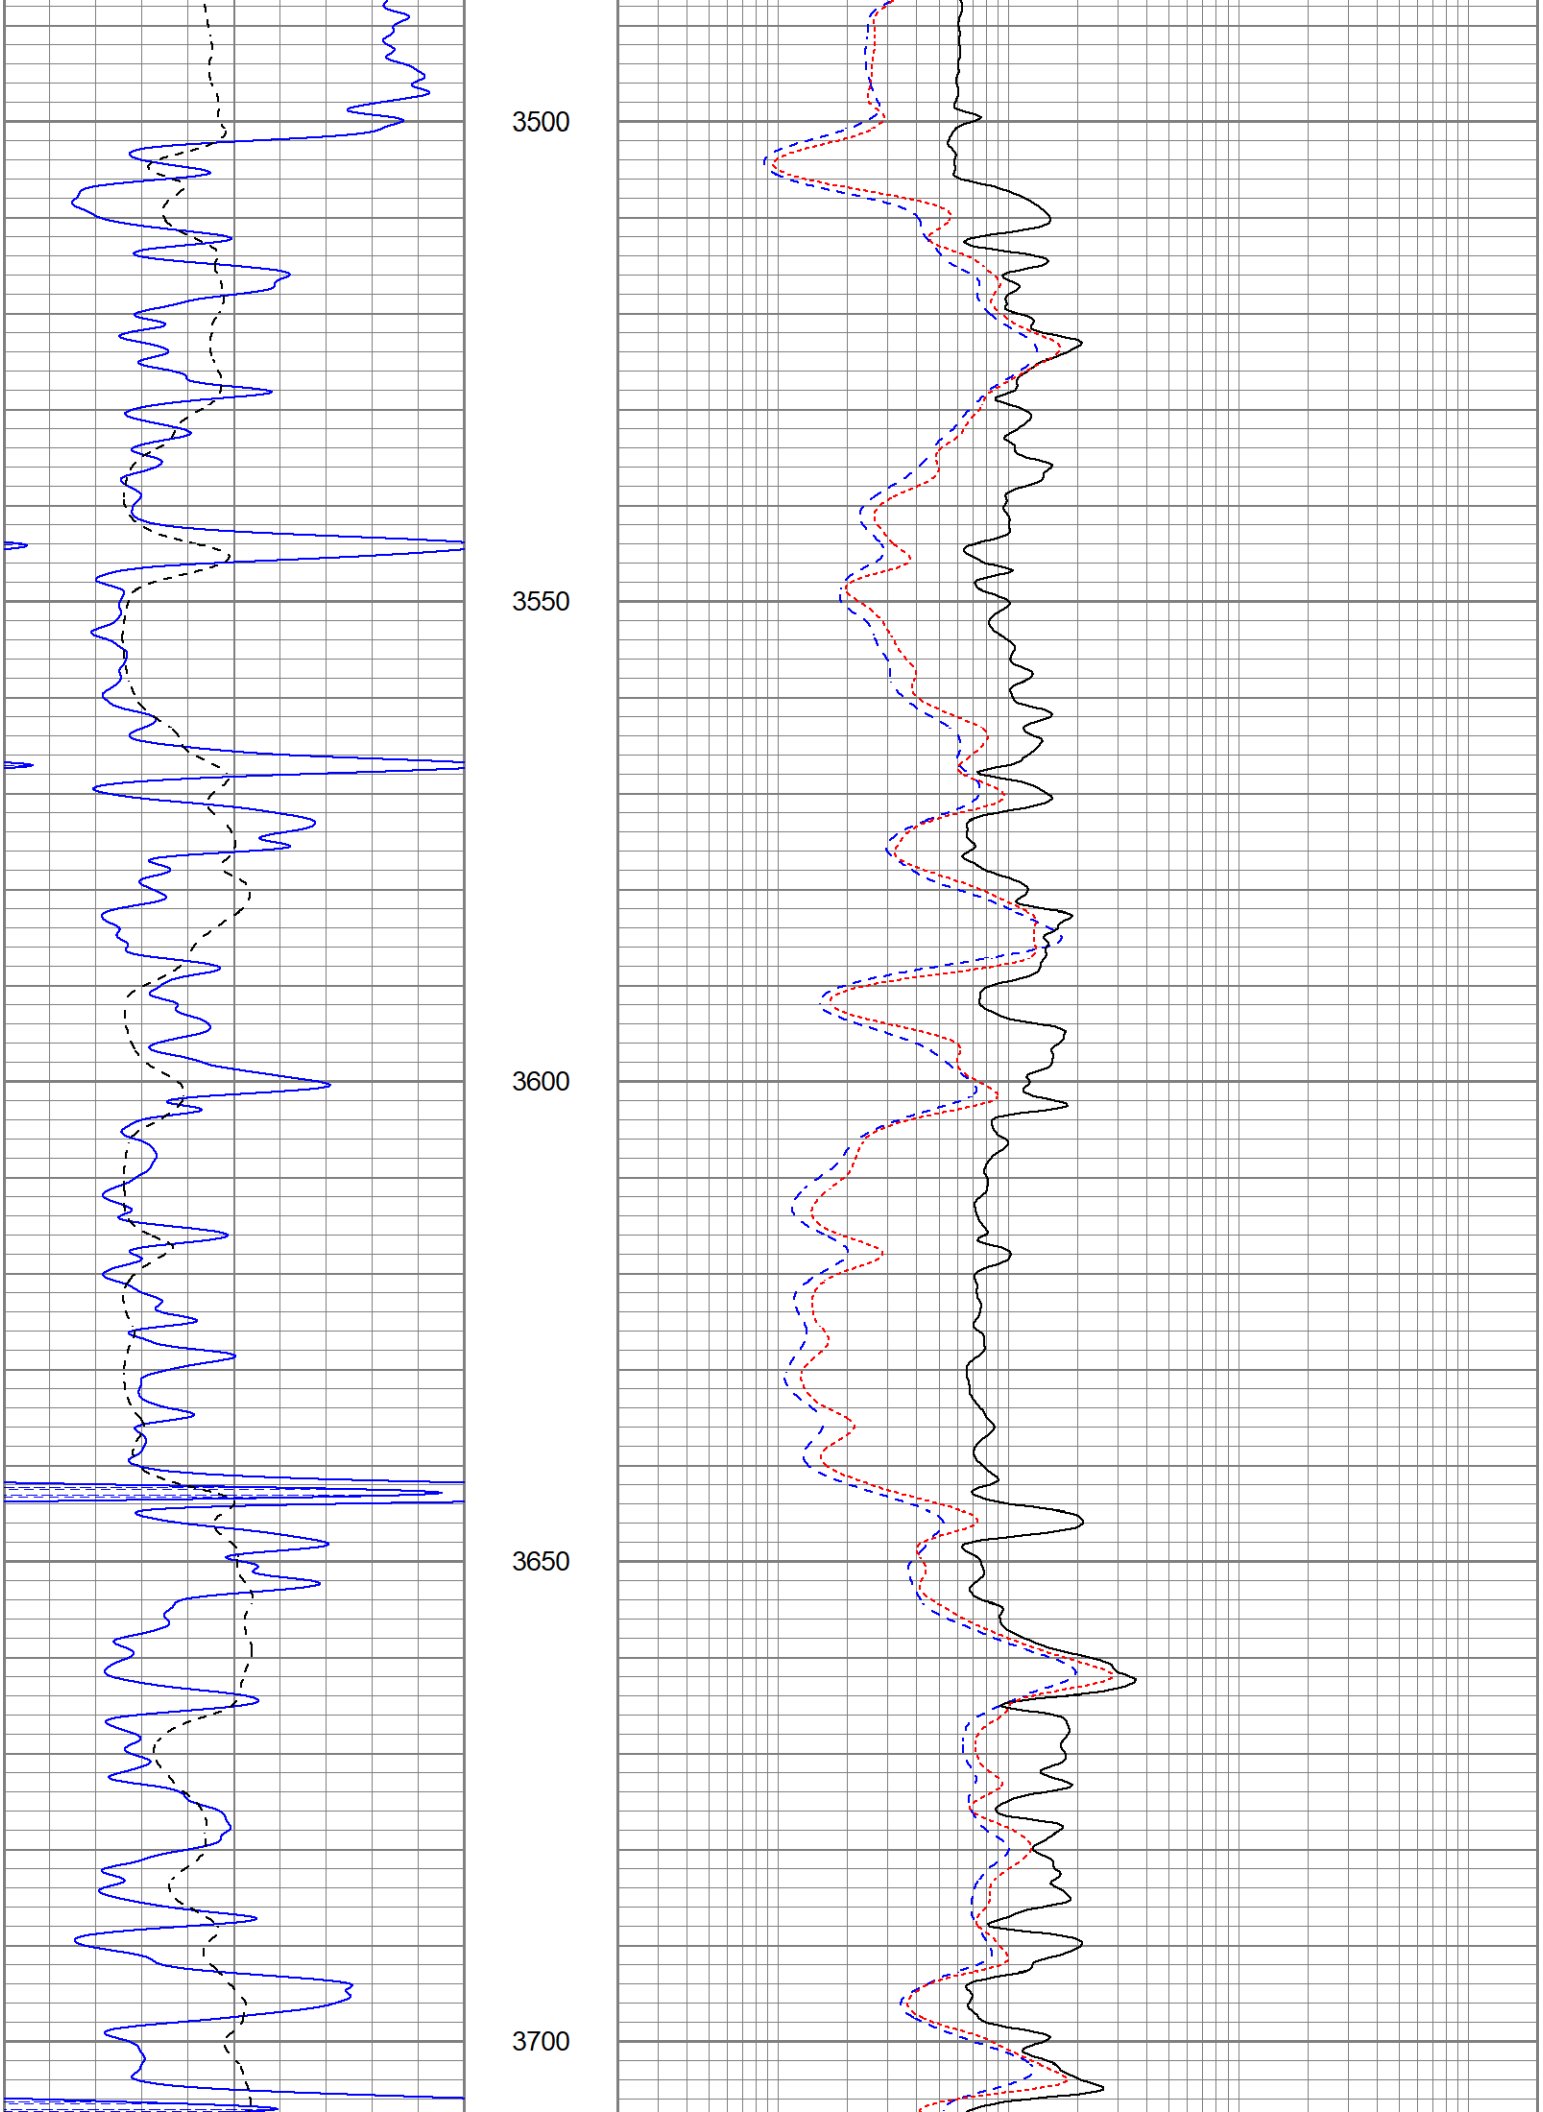
3500
3550
3600
3650
3700

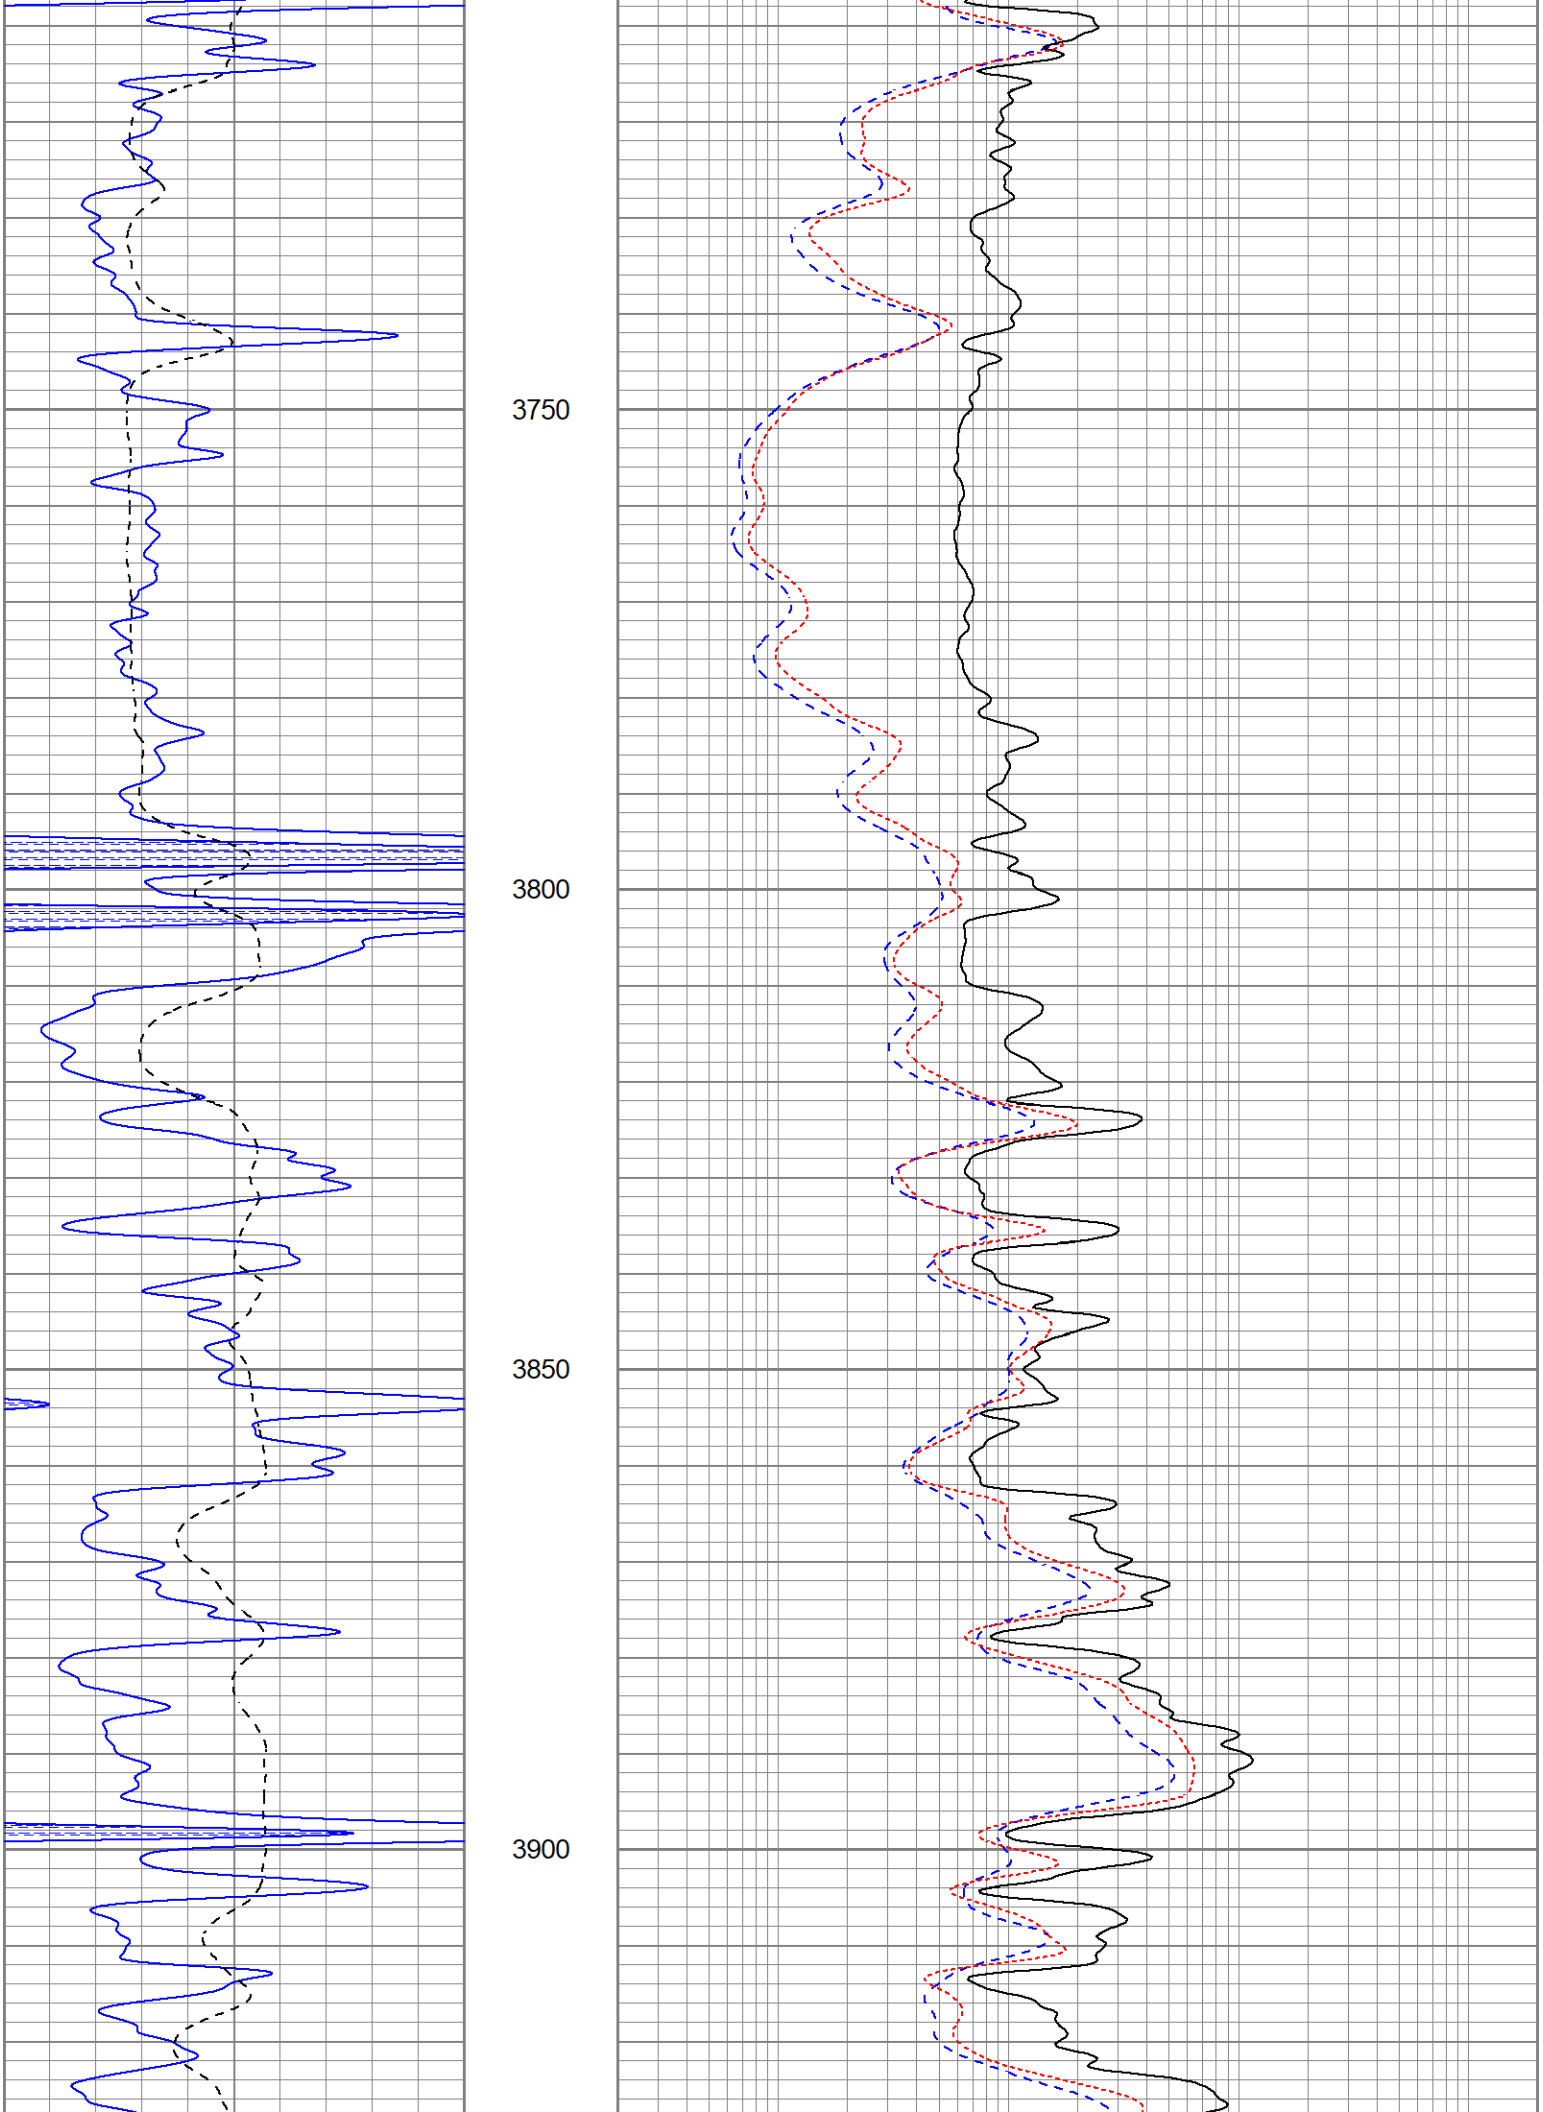
3750
3800
3850
3900

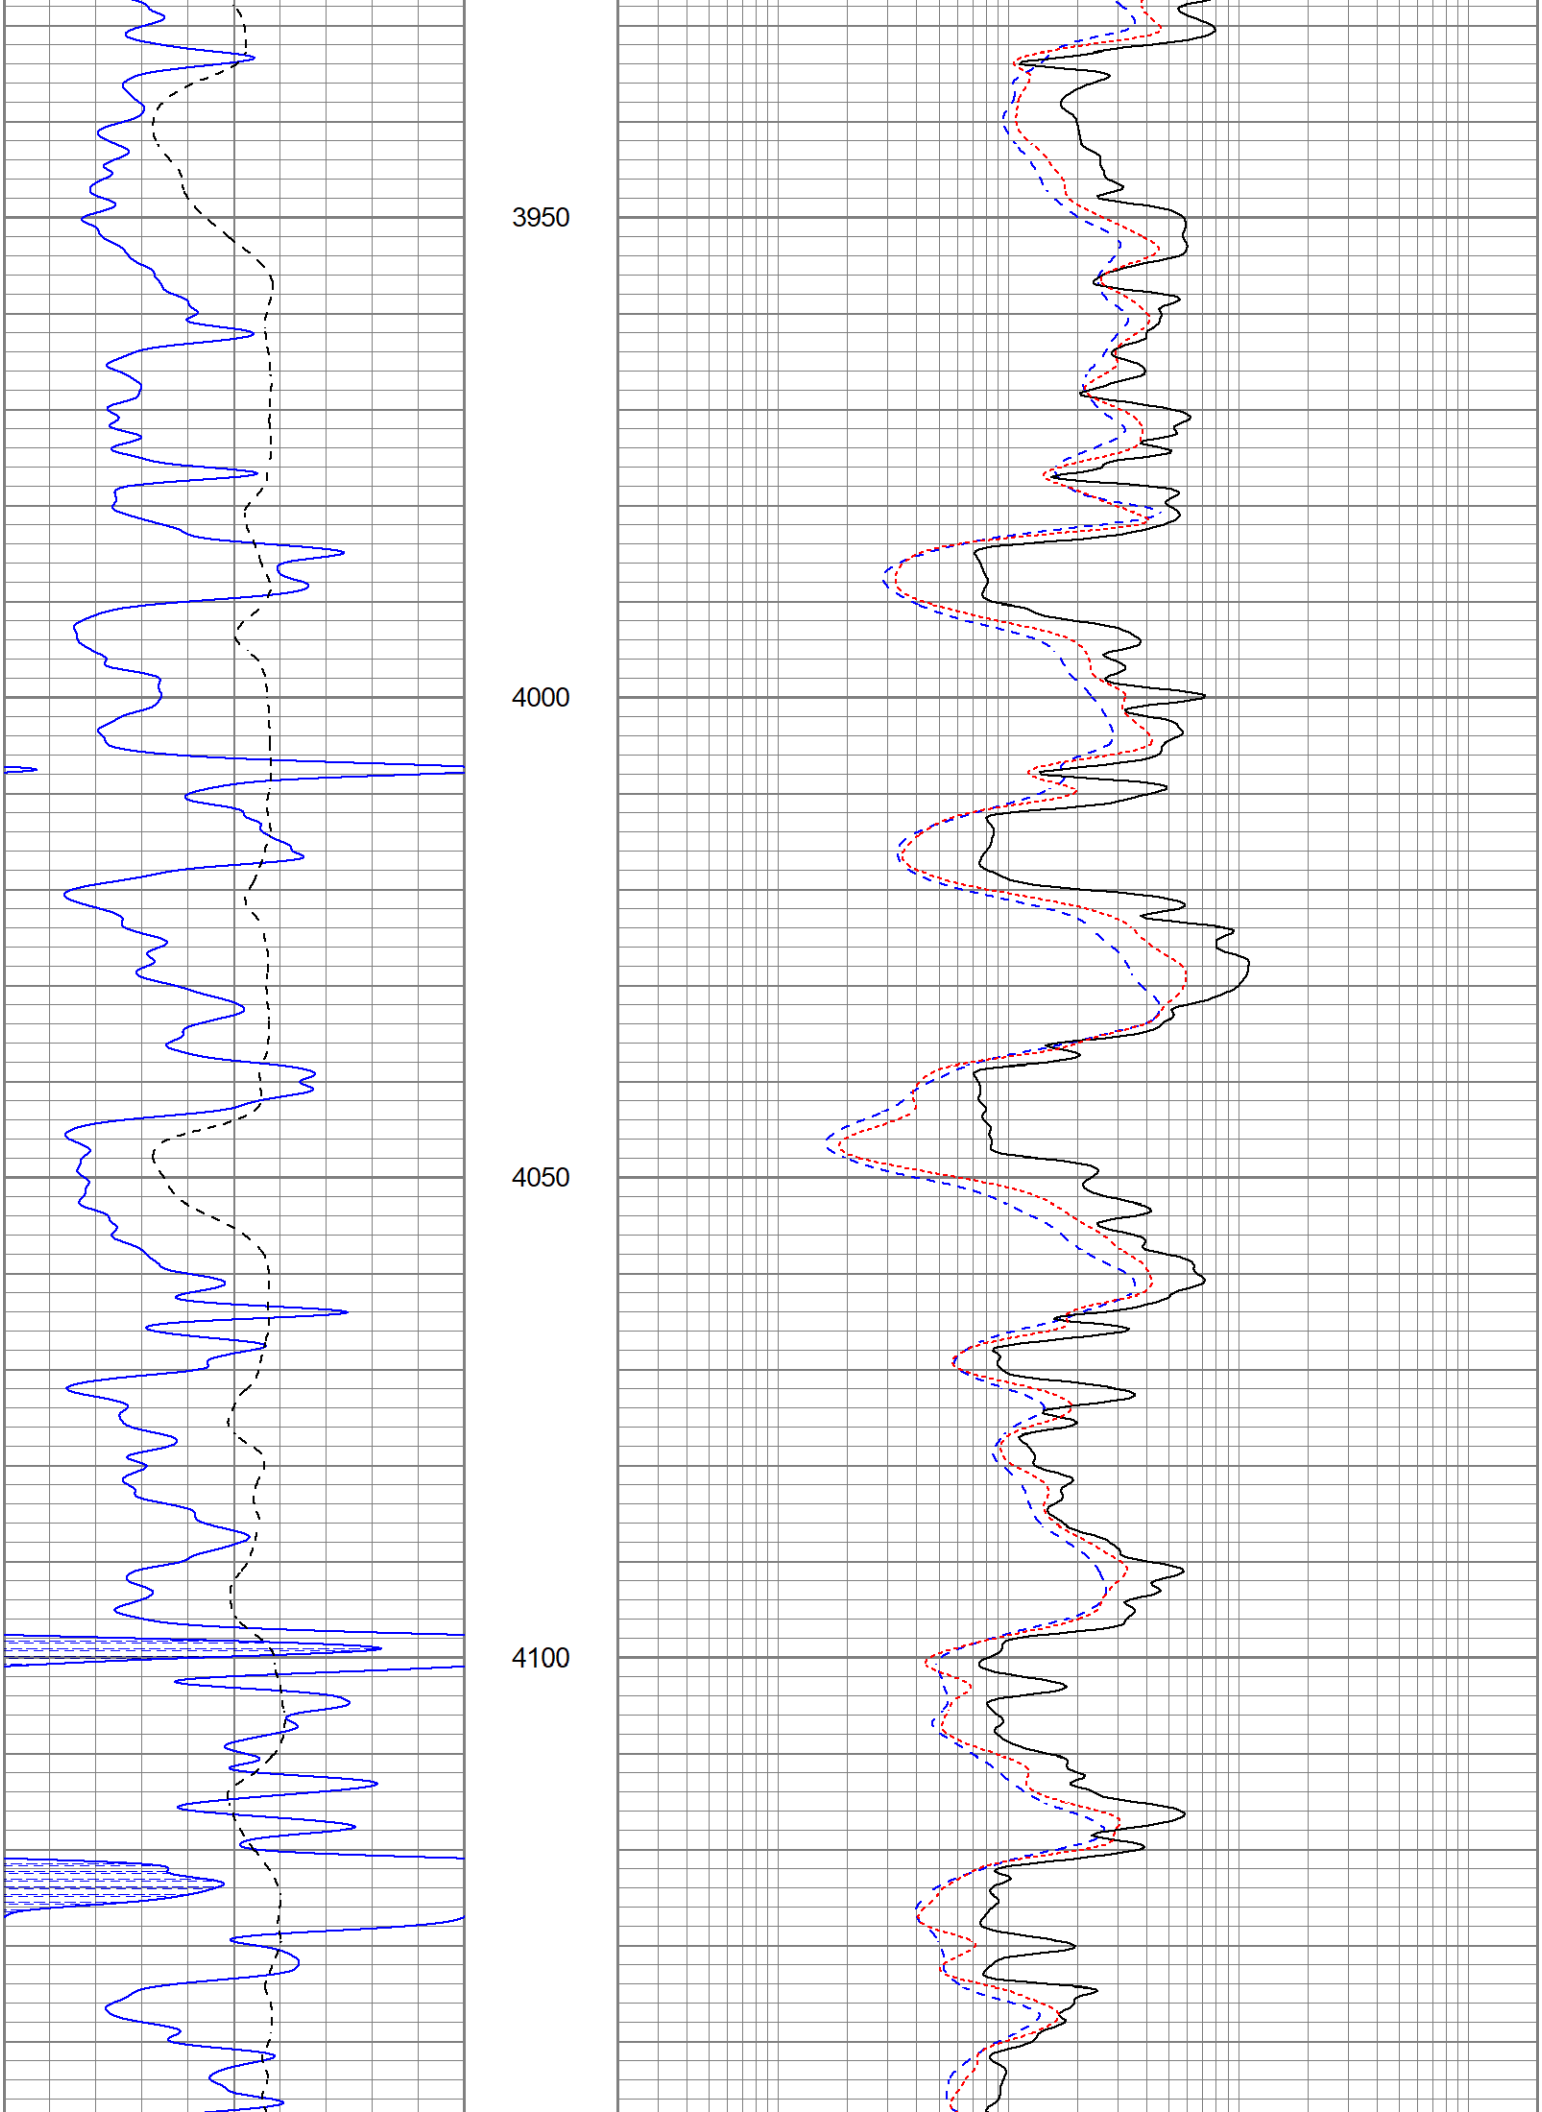
3950
4000
4050
4100

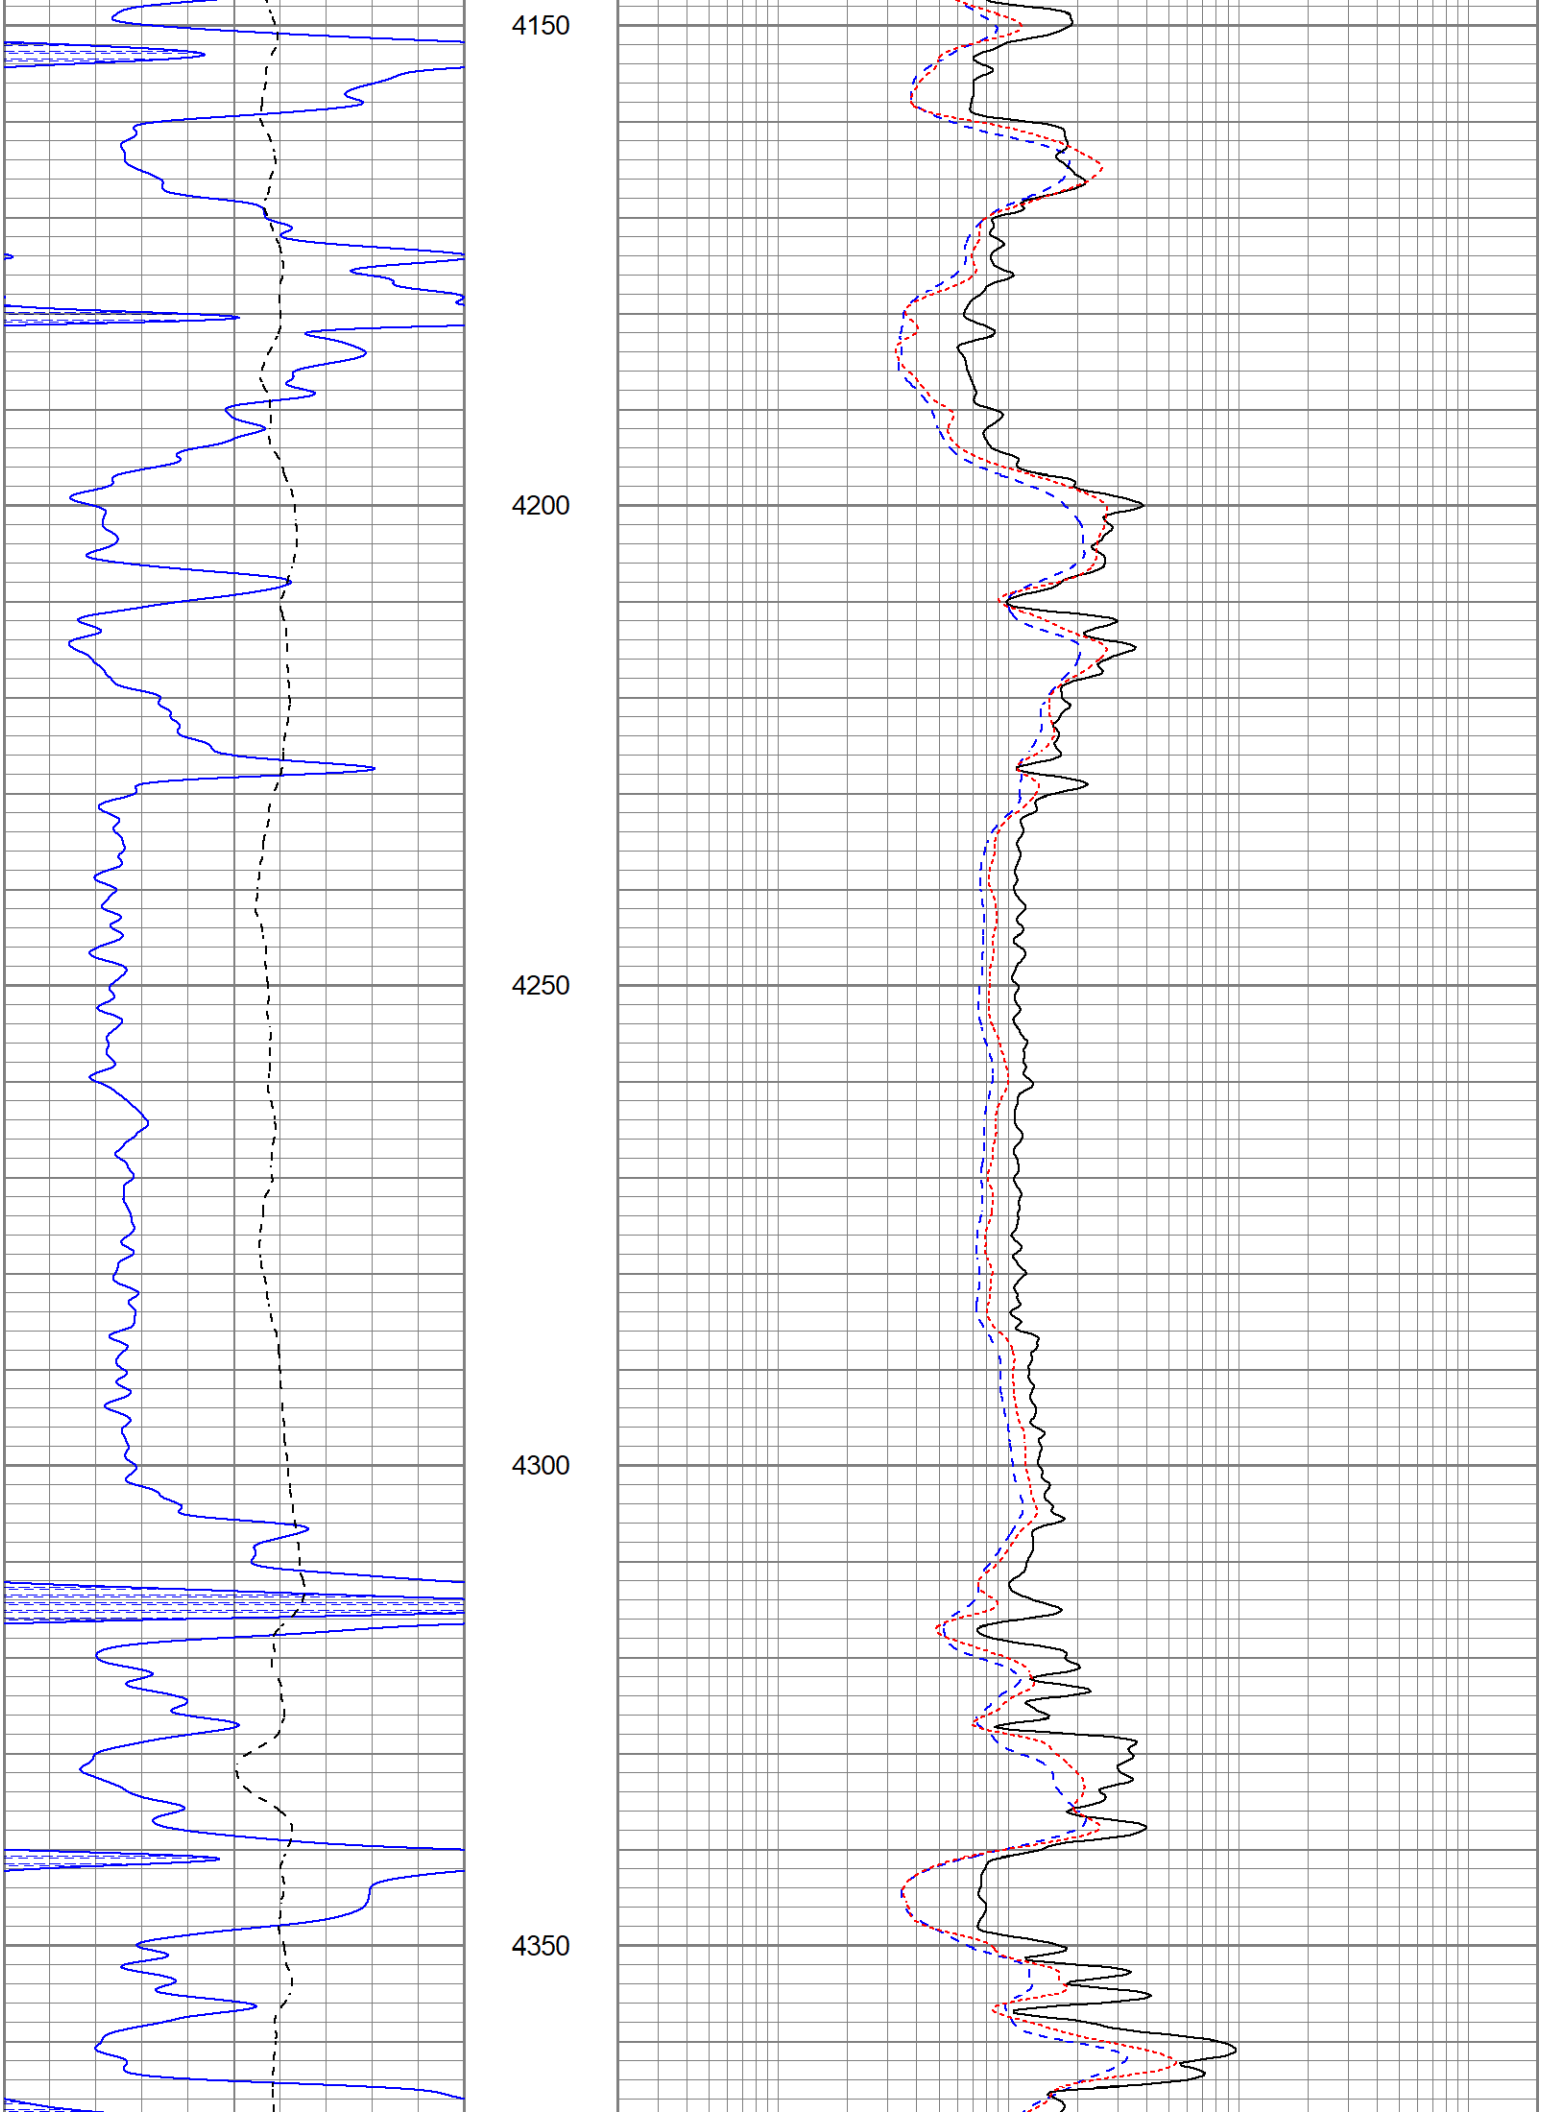
4150
4200
4250
4300
4350

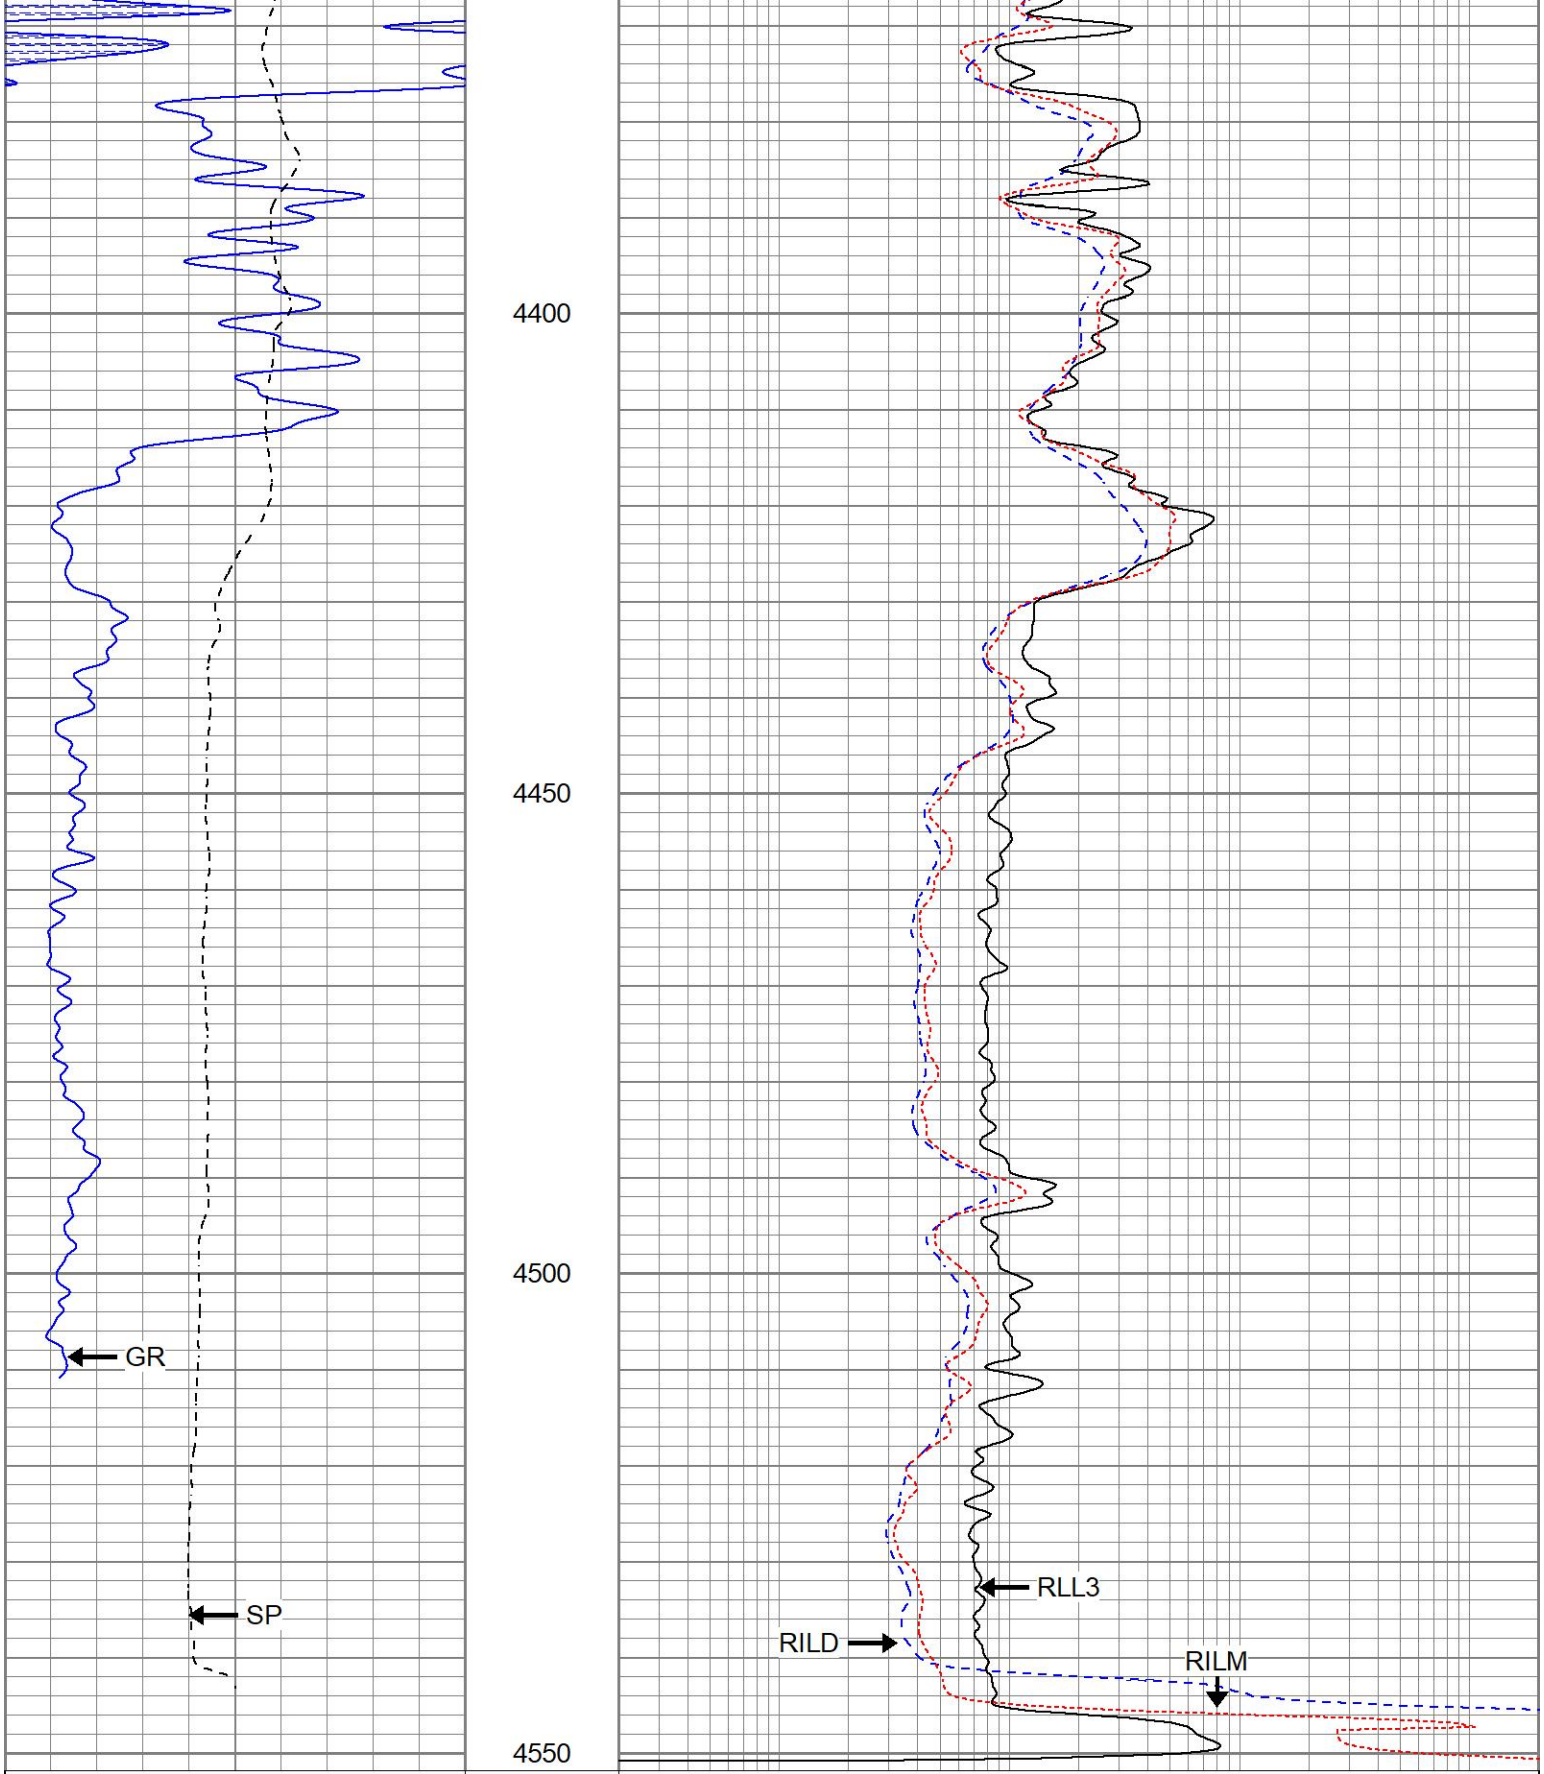

GEMINI WIRELINE

REPEAT SECTION

Database File	pphappygilmore#1oh.db
Dataset Pathname	pass1.1
Presentation Format	kdil
Dataset Creation	Thu Aug 04 13:15:47 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150
-100	SP (mV)	100

0.2	RILD (Ohm-m)	2000
0.2	RLL3 (Ohm-m)	2000
0.2	RILM (Ohm-m)	2000

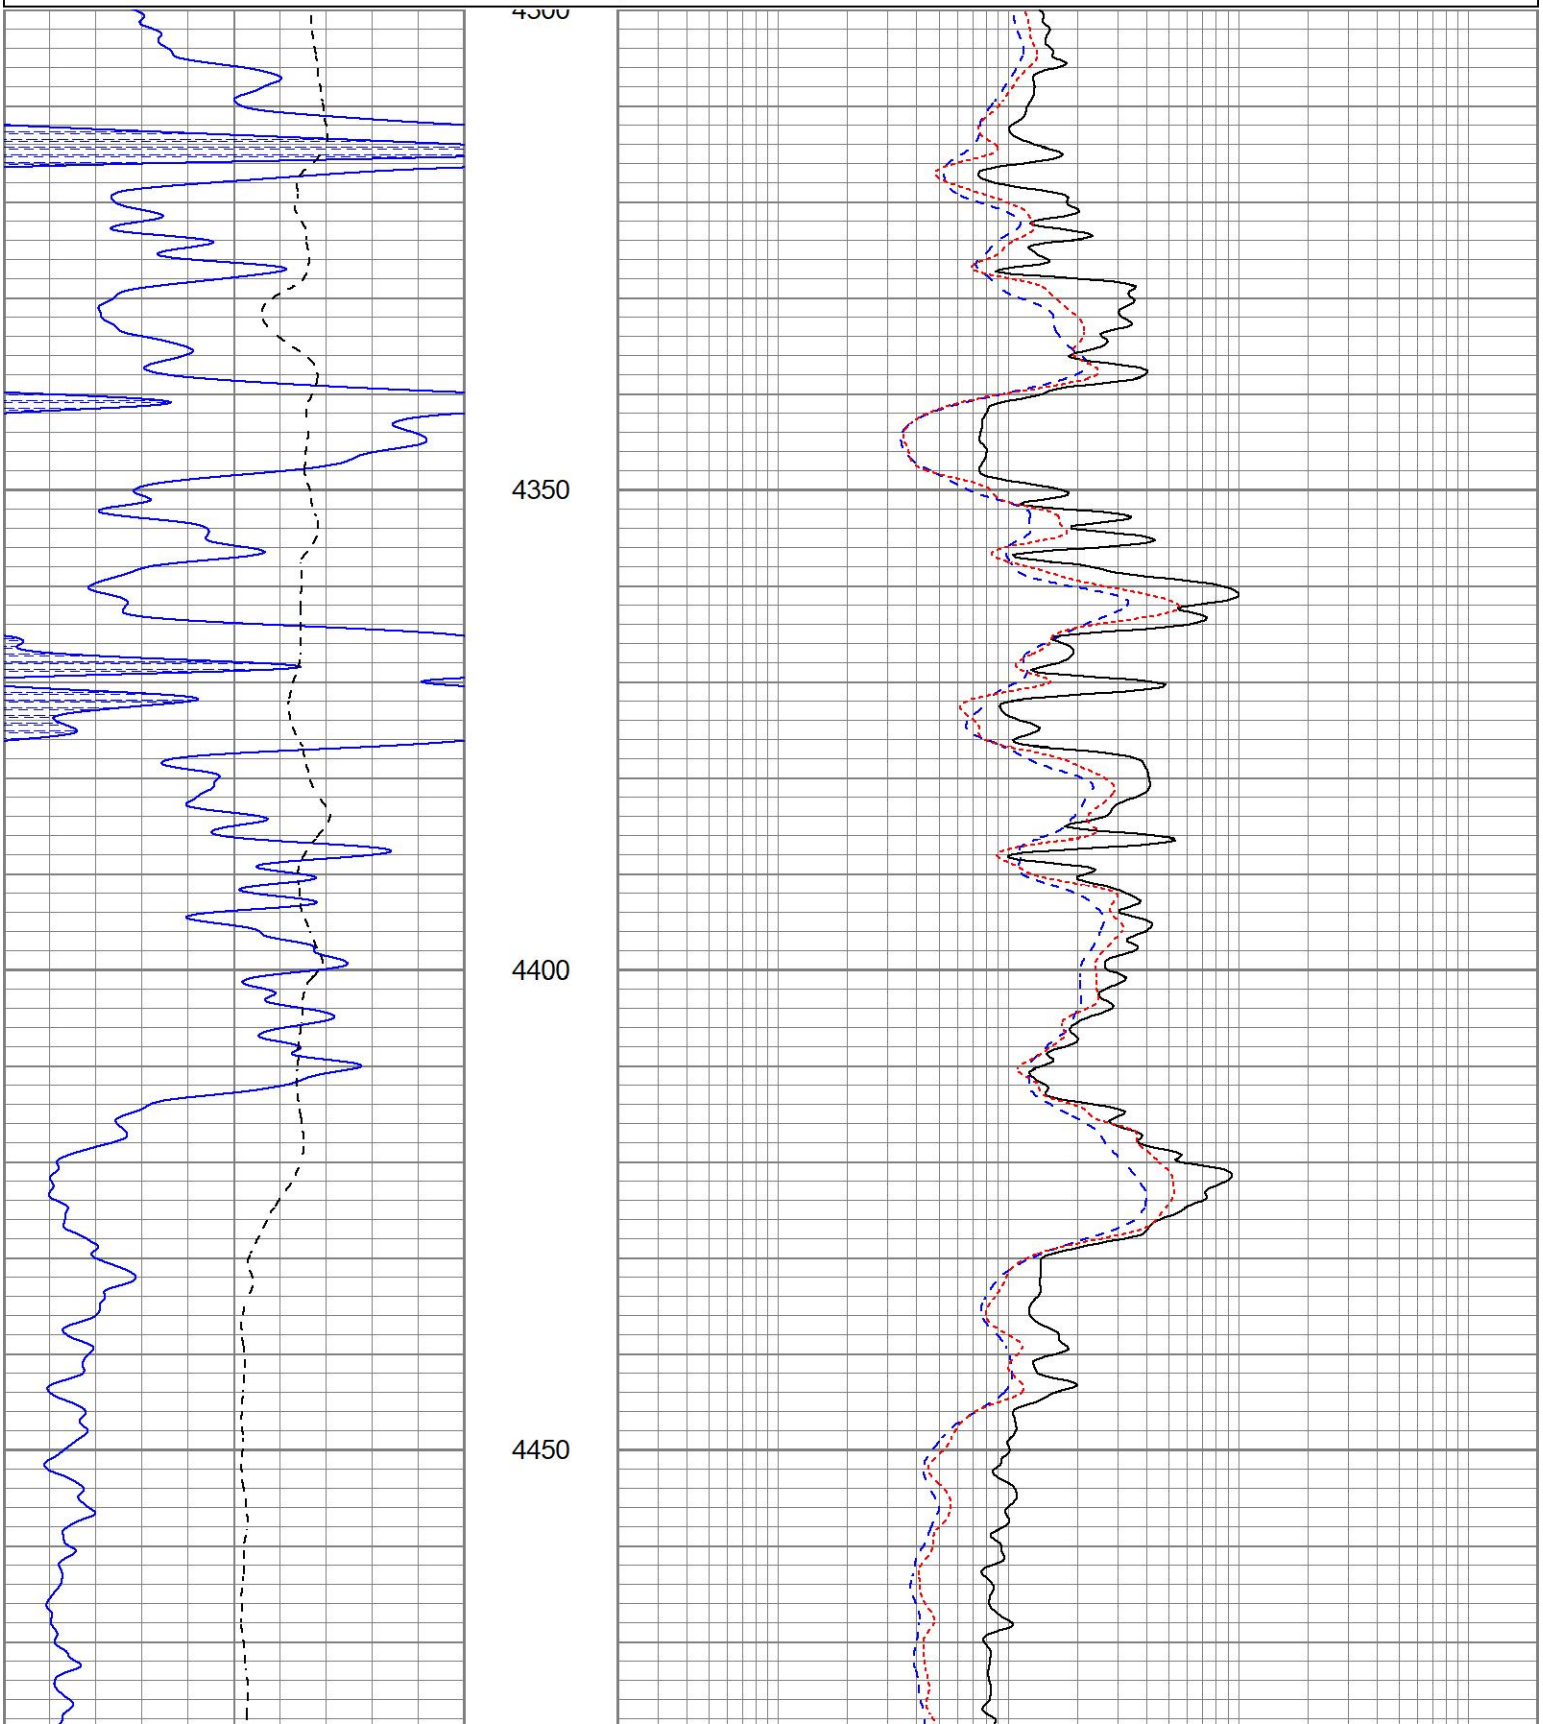

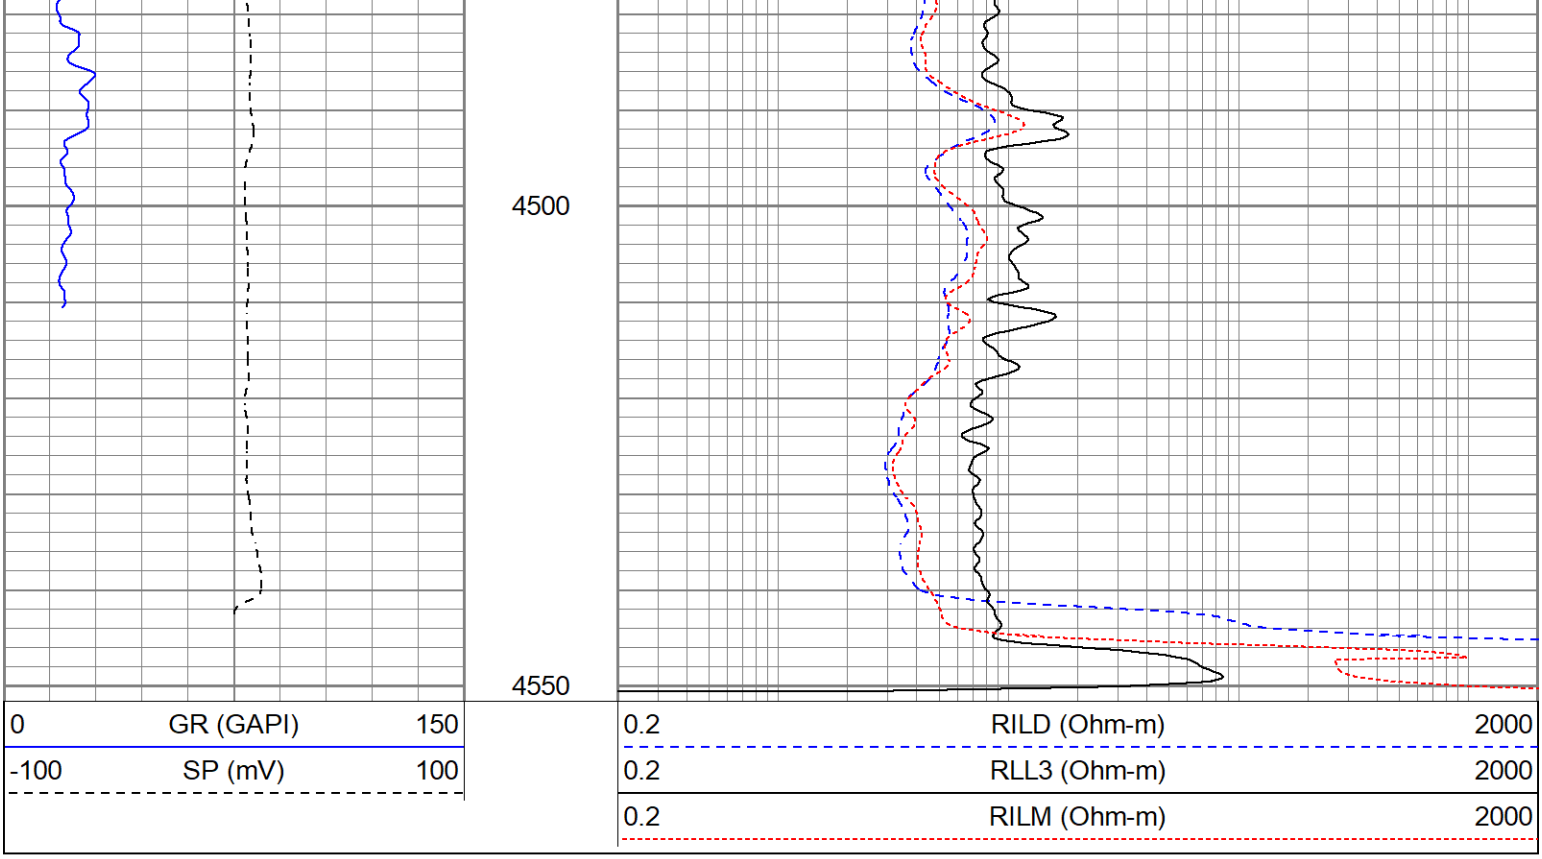

Calibration Report

Database File	pphappygilmore#1oh.db
Dataset Pathname	pass2.1
Dataset Creation	Thu Aug 04 13:25:44 2022

Dual Induction Calibration Report

Serial-Model:	1842-ADM
Surface Cal Performed:	Mon Sep 20 22:00:42 2021
Downhole Cal Performed:	Mon Sep 20 22:00:24 2021
After Survey Verification Performed:	Mon Sep 20 22:05:52 2021

Surface Calibration

	Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.018	0.672	V	0.000	350.000	mmho/m	535.475	-9.896
Medium	0.003	0.769	V	0.000	400.000	mmho/m	522.607	-1.745
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.018	0.672	V	0.000	350.000	mmho/m	535.240	-9.549
Medium	0.003	0.768	V	0.000	550.000	mmho/m	718.637	-2.088

Downhole Calibration

	Readings			References			Results	
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	-0.219	349.905	mmho/m	-0.343	349.810	mmho/m	1.000	-3.124
Medium	-0.118	399.722	mmho/m	-0.226	399.745	mmho/m	1.000	-3.108
Shallow	2.536	0.025	V	500.000	2.000	Ohm-m	200.000	-1.504

After Survey Verification

	Readings			Targets			Results	

Internal:	Readings Zero	Readings Cal		Targets Zero	Targets Cal		Results m'	Results b'
Deep	0.000	0.000	mmho/m	-0.219	349.905	mmho/m	1.000	-3.124
Medium	0.000	0.000	mmho/m	-0.118	399.722	mmho/m	1.000	-3.108
Shallow	0.000	0.000	Ohm-m	500.000	2.000	Ohm-m	1.000	0.000

Neutron Calibration Report

Serial Number:	AD5139	
Tool Model:	ADMY5139	
Performed:	(Not Performed)	
Calibrator Value:	1	NAPI
Calibrator Reading:	1	cps
Sensitivity:	1	NAPI/cps

Temperature Calibration Report

Serial Number:	WithMC			
Tool Model:	WMC			
Performed:	Fri Apr 19 12:15:04 2019			
	Reference		Reading	
Low Reference:	0.00	degF	0.00	degF
High Reference:	1.00	degF	1.00	degF
Gain:	1.00			
Offset:	0.00			
Delta Spacing	1			

Inclinometer Calibration Report

Performed: Wed May 5 19:20:48 2021

	Low Read.	High Read.	Low Ref.	High Ref.	
X Accelerometer	205.00	1843.00	-1.00	1.00	gee
Y Accelerometer	205.00	1843.00	-1.00	1.00	gee
Z Accelerometer					gee

Gamma Ray Calibration Report

Serial Number:	WithMC	
Tool Model:	WMC	
Performed:	Wed Jun 15 11:53:49 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	1.1000	GAPI/cps