

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County, Sec. 31 Twp. 9 Rge. 18 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SW NW SE

Lease Owner Grant Oil Company, et al

Lease Name Snee Well No. 1

Office Address 518 Board of Trade Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 12-14 1958

Application for plugging filed 12-14 1958

Application for plugging approved 12-14 1958


Plugging commenced 7:00 P.M. 12-14 1958

Plugging completed 9:30 P.M. 12-14 1958

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

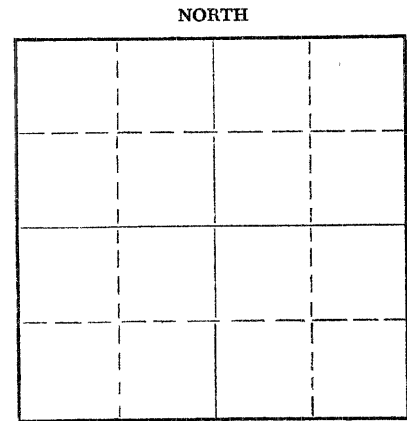

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3747 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	209	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy rotary mud to 550'. Set plug. Mixed 20 sacks cement by hand. Poured same through drill pipe.

Filled hole with heavy rotary mud to 180'. Set plug. Dumped in 1/3 sack hulls. Mixed 15 sacks cement by hand. Poured same through drill pipe.

Filled hole with heavy rotary mud to 40'. Set plug. Dumped in 1/3 sack hulls. Mixed 10 sacks cement by hand and filled hole to bottom of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor

Address

STATE OF Kansas, COUNTY OF Barton
S. C. Lingreen (employee of owner or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) S. C. Lingreen
Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 19th day of December 1958

My commission expires 6-25-59

Kenneth G. Fischer Notary Public.

PLUGGING
FILE SEC 31 T 9 R 18 W
BOOK PAGE 6 LINE 1

RECEIVED
STATE CORPORATION COMMISSION
12/20/58
DEC 20 1958
CONSERVATION DIVISION
Wichita, Kansas

15-163-00743-00-00


DRILLERS' LOG

Smee No. 1
Loc: SW NW SE
Sec: 31-9S-18W
Rooks County, Kansas
Company: Grant Oil Company, et al
Contractor: Honaker-Davis Drlg. Co.

Comm: 12- 3-58
Comp: 12-14-58
Rotary Total Depth: 3747'
Casing: 8-5/8" at 209'
D & A

0	30	Top Soil & Sand	
30	125	Sand & Clay	8 5/8" casing cemented at
125	219	Blue Shale	209' with 175 sacks cement
219	930	Shale & Shells	and 3 sacks calcium chloride.
930	1030	Sand	
1030	1275	Sand & Shale	
1275	1330	Sand	
1330	1619	Shale & Red Bed	
1619	1652	Anhydrite	
1652	2075	Shale & Shells	
2075	2230	Shale with Lime Streaks	
2230	3395	Lime & Shale	
3395	3628	Lime	
3628	3660	Lime & Chert	
3660	3705	Lime	
3705	3711	Core #1	
3711	3724½	Core #2	
3724½	3725½	Core #3	
3725½	3728	Lime & Chert	
3728	3737	Core #4	
3737	3747	Core #5	
3747		Total Rotary Depth	D & A

I certify that this is the true and correct copy of the above log to the best of my knowledge.



H. S. Forbes

Subscribed and sworn to before me this 19th day of December, 1958.



Kenneth G. Fischer, Notary Public

My commission expires: 6-25-59

PLUGGING
FILE SEC. 31 T 9 R 18W
BOOK PAGE 6 LINE 1

RECEIVED
STATE CORPORATION COMMISSION
12/20/58
DEC 20 1958
CONSERVATION DIVISION
Wichita, Kansas