


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

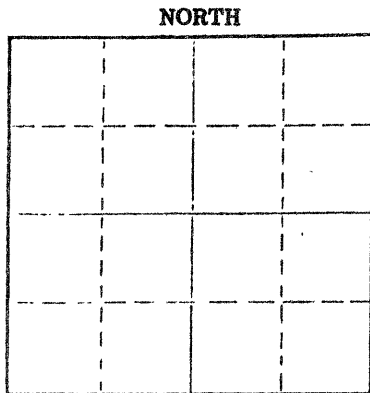

Locate well correctly on above Section Plat

Rooks \_\_\_\_\_ County. Sec. 31 Twp. 9 Rge. 18 (E) (W)  
Location as "NE/CNWxSWx" or footage from lines SE SW NW  
Lease Owner Myrlin Monroe  
Lease Name Mayhew #2 Well No. \_\_\_\_\_  
Office Address Plainville, Kansas 67663  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 6/2/75 19\_\_\_\_  
Plugging completed 6/5/75 19\_\_\_\_  
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3720 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	214	none
				5 1/2"	3714	1201'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole, pushed plug to 3150' and ran 20' sand and dumped 5 sacks cement. Loaded hole, shot pipe at 2809', checked hole, shot pipe at 1202', pulled 39 joints. Allied pumped 18 sacks gel, 3 sacks hulls, 70 sacks cement, 10 sacks gel. Turned plug loose and pumped 50 sacks cement.  
PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.  
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE  
NOEL J. KNIGHT, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight  
CHASE, KANSAS  
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of June 1975

My commission expires \_\_\_\_\_  
NOTARY PUBLIC  
**MARGARET MELCHER**  
Rice County, Ks.  
My Comm. Exp. Feb. 15, 1979

Margaret Melcher  
Notary Public.

6/11/75  
JUN 1 1975