



MICRO LOG

Company	PALOMINO PETROLEUM	Company	PALOMINO PETROLEUM
Well	CASABLANCA #2	Well	CASABLANCA #2
Field	UNNAMED	Field	UNNAMED
County	SCOTT	County	SCOTT
State	KS	State	KS
Location:	API # : 15 171 21288 2293' FSL & 339' FEL		
Permanent Datum	SEC 14 TWP 20S RGE 34W	Ground Level	Elevation 3002
Log Measured From	KB 11' AGL	Drilling Measured From	KB
		Other Services	CDNL DIL
		Elevation	K.B. 3013 D.F. 3011 G.L. 3002
Date	6/15/22		
Run Number	TWO		
Depth Driller	4910		
Depth Logger	4907		
Bottom Logged Interval	4905		
Top Log Interval	3700		
Casing Driller	8 5/8" @ 226'		
Casing Logger	226		
Bit Size	7 7/8"		
Type Fluid in Hole	Chemical		
Density / Viscosity	9.3/65		
pH / Fluid Loss	10.0/8.8		
Source of Sample	Pit		
Rm @ Meas. Temp	2.3@70degf		
Rmf @ Meas. Temp	1.73@70degf		
Rmc @ Meas. Temp	2.76@70degf		
Source of Rmf / Rmc	Calculated		
Rm @ BHT	1.34@120degf		
Time Circulation Stopped	9:00 A.M.		
Time Logger on Bottom	11:50 AM		
Maximum Recorded Temperature	120degf		
Equipment Number	T605		
Location	Hays, KS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	RYAN SEIB		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

SCOTT CITY SOUTH TO 40 RD., WEST TO FALCON RD ANOTHER HALF WEST SOUTH INTO.


Thank You for using Gemini Wireline LLC
785-625-1182




MAIN PASS

Database File	ppcasablanca#2oh.db
Dataset Pathname	pass5.1
Presentation Format	kml
Dataset Creation	Wed Jun 15 14:02:52 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	0	MN 2" (Ohm-m)	20
6	MCAL (in)	16	0	MI 1" (Ohm-m)	20
6	BOREID (in)	16	10000	LTEN (lb)	0
0	MINMK	50			

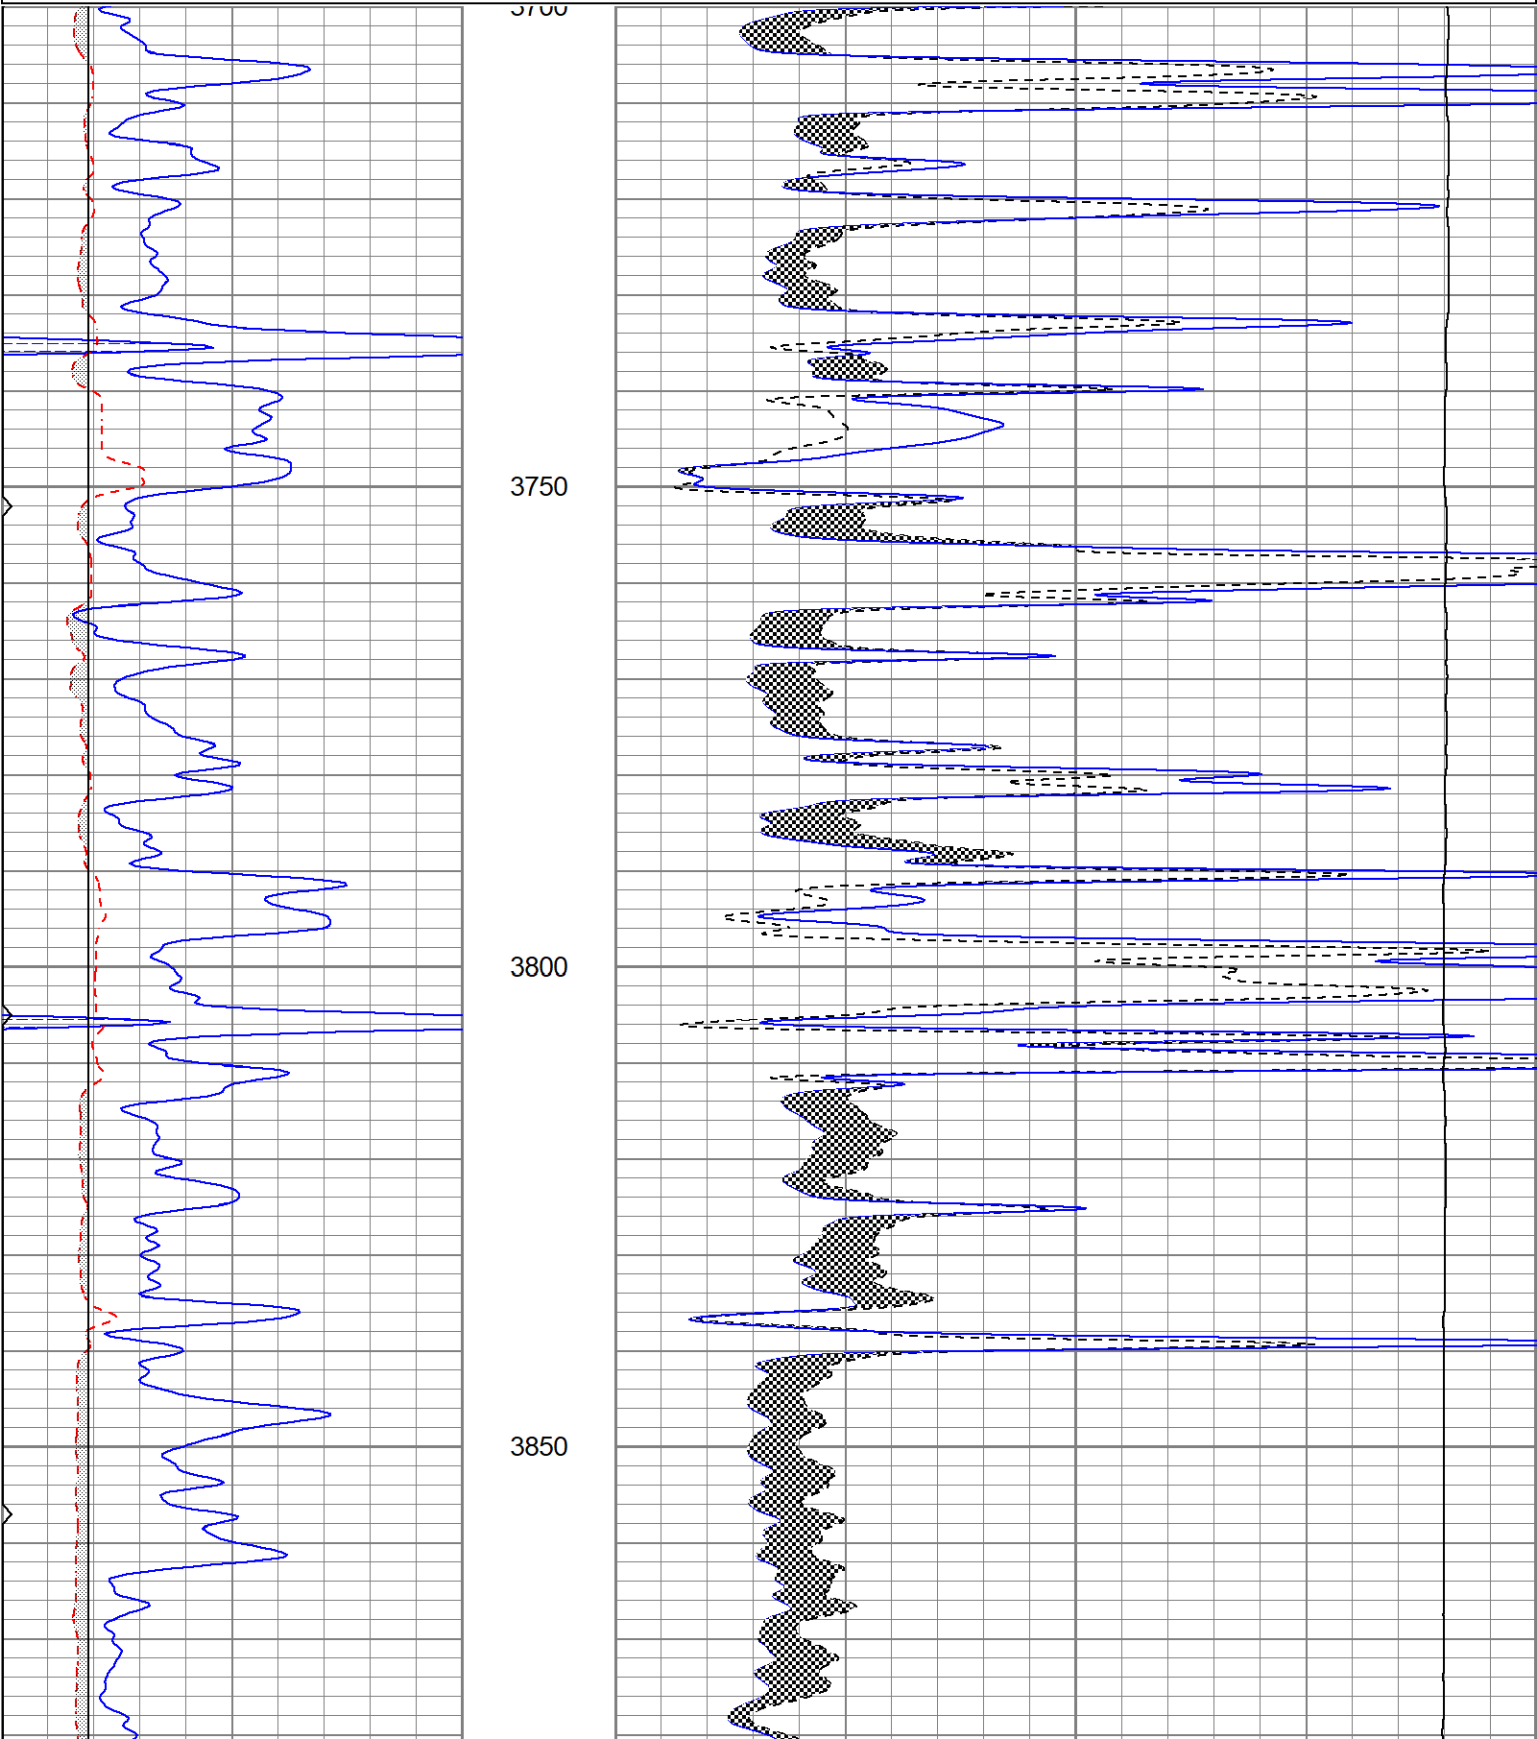

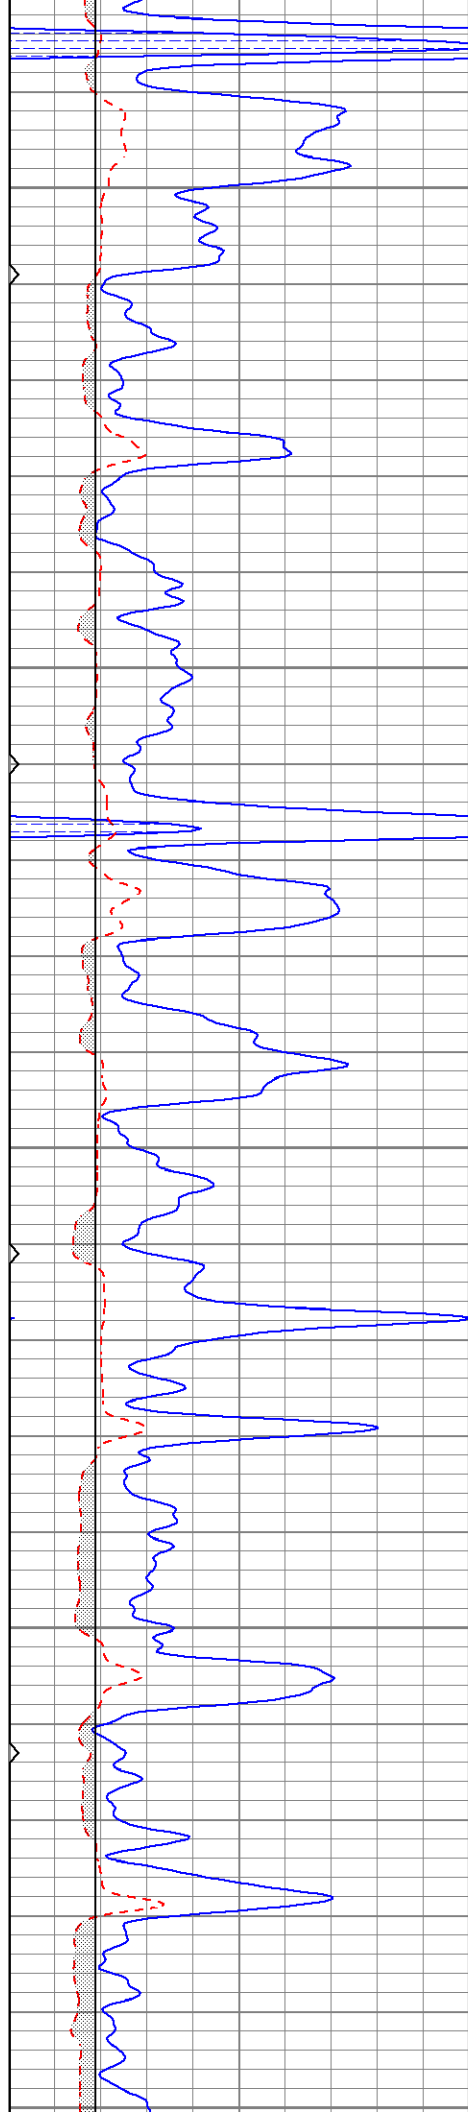


3900


3950

4000

4050

4100

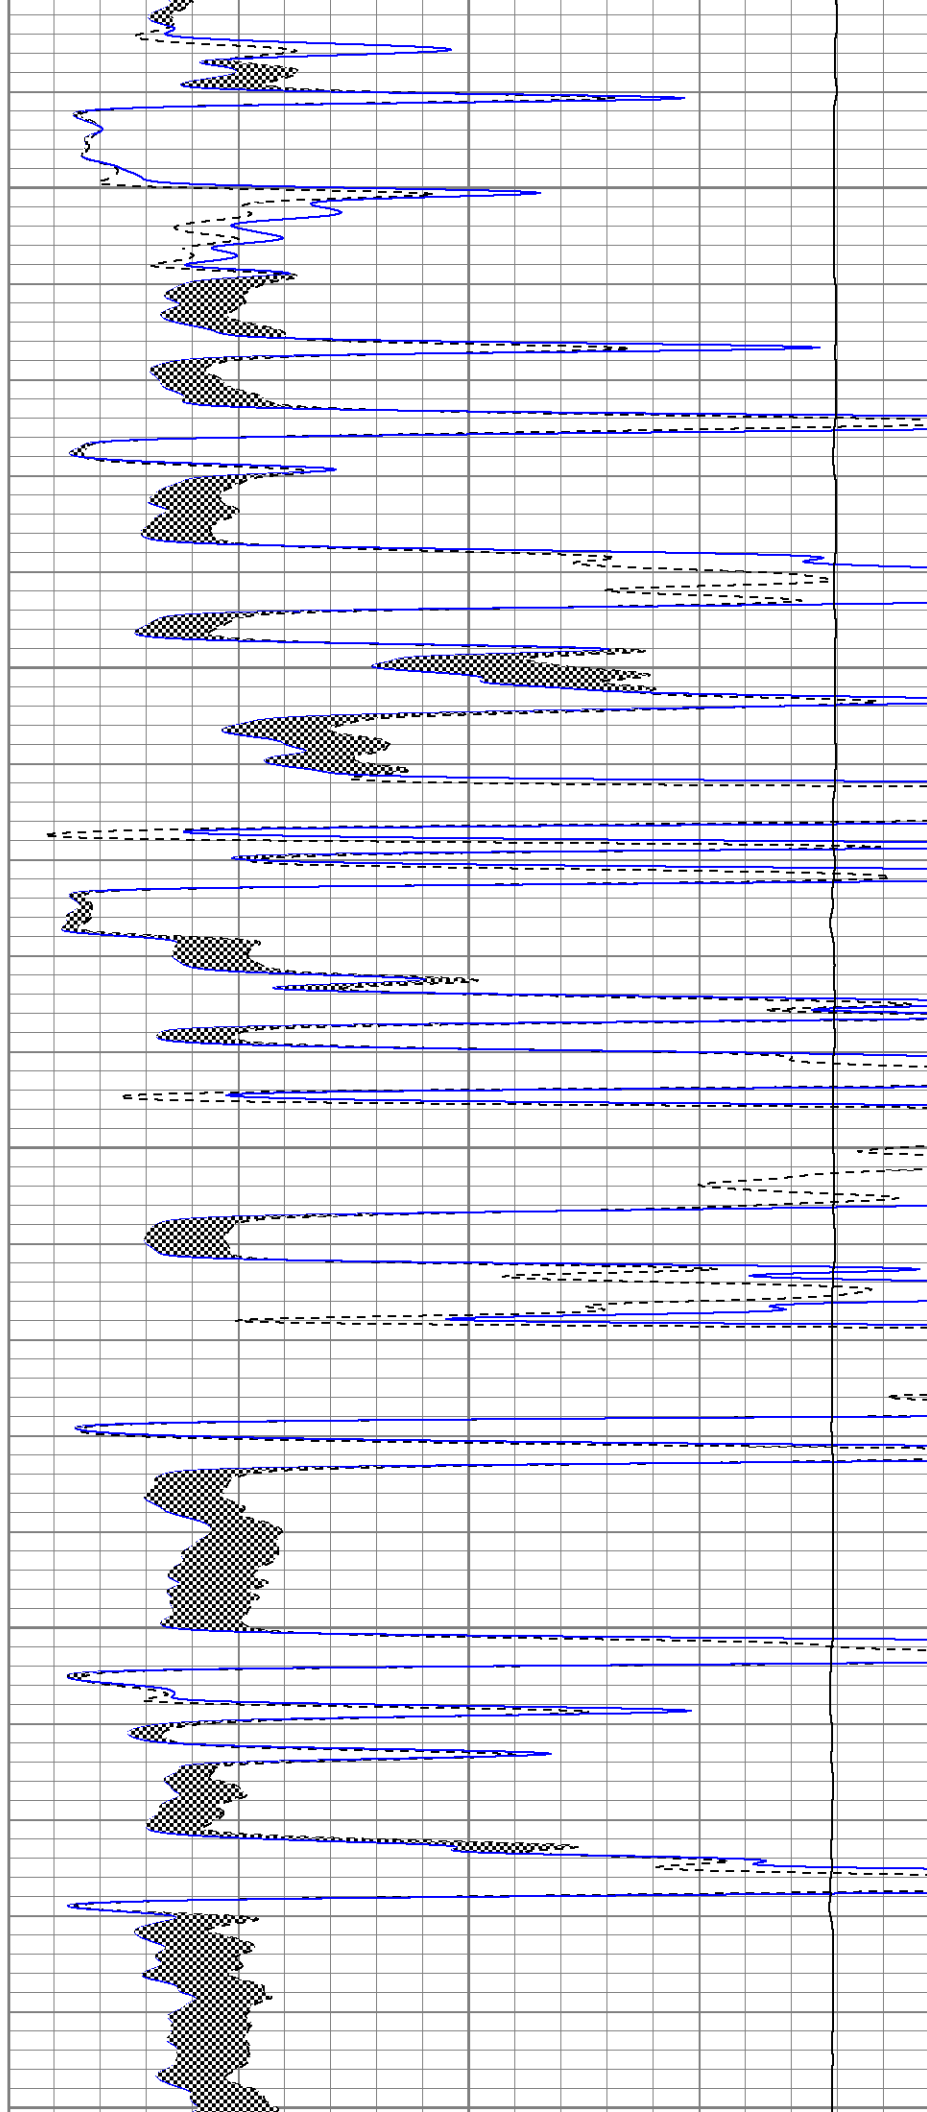

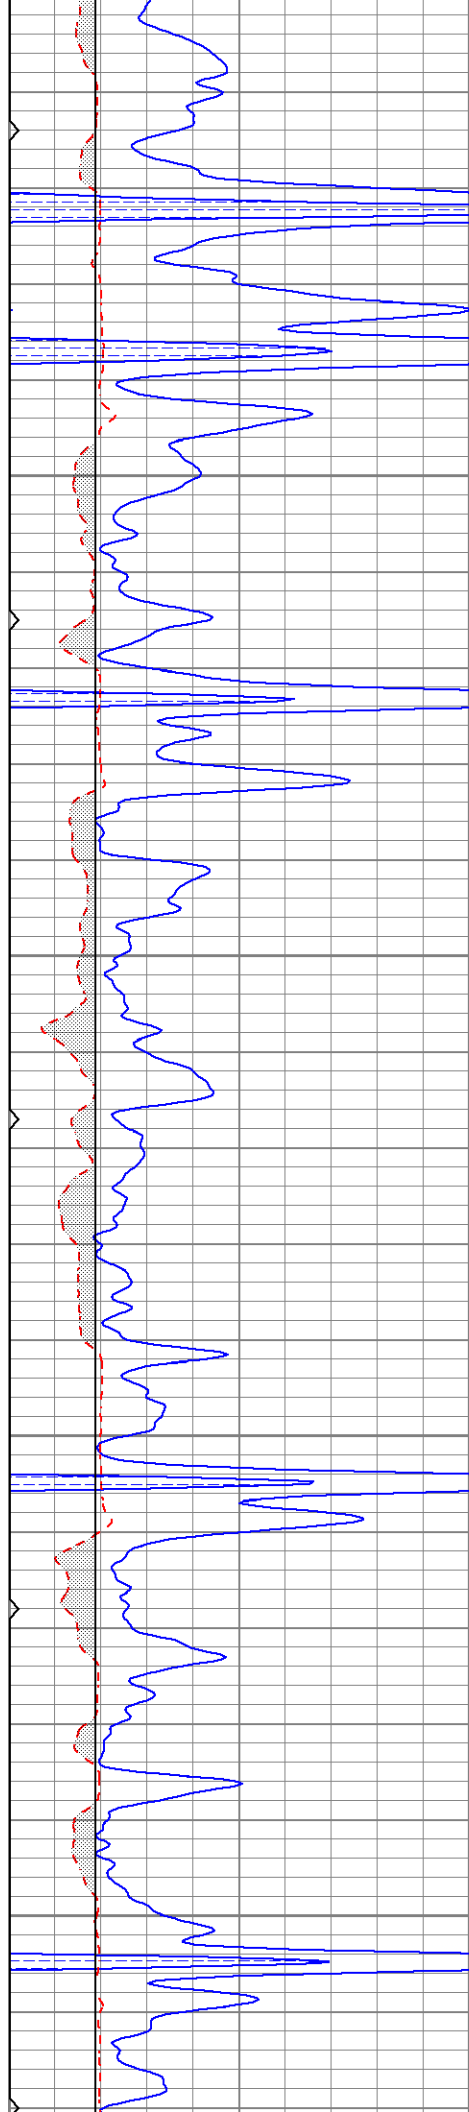


4100


4150

4200

4250

4300

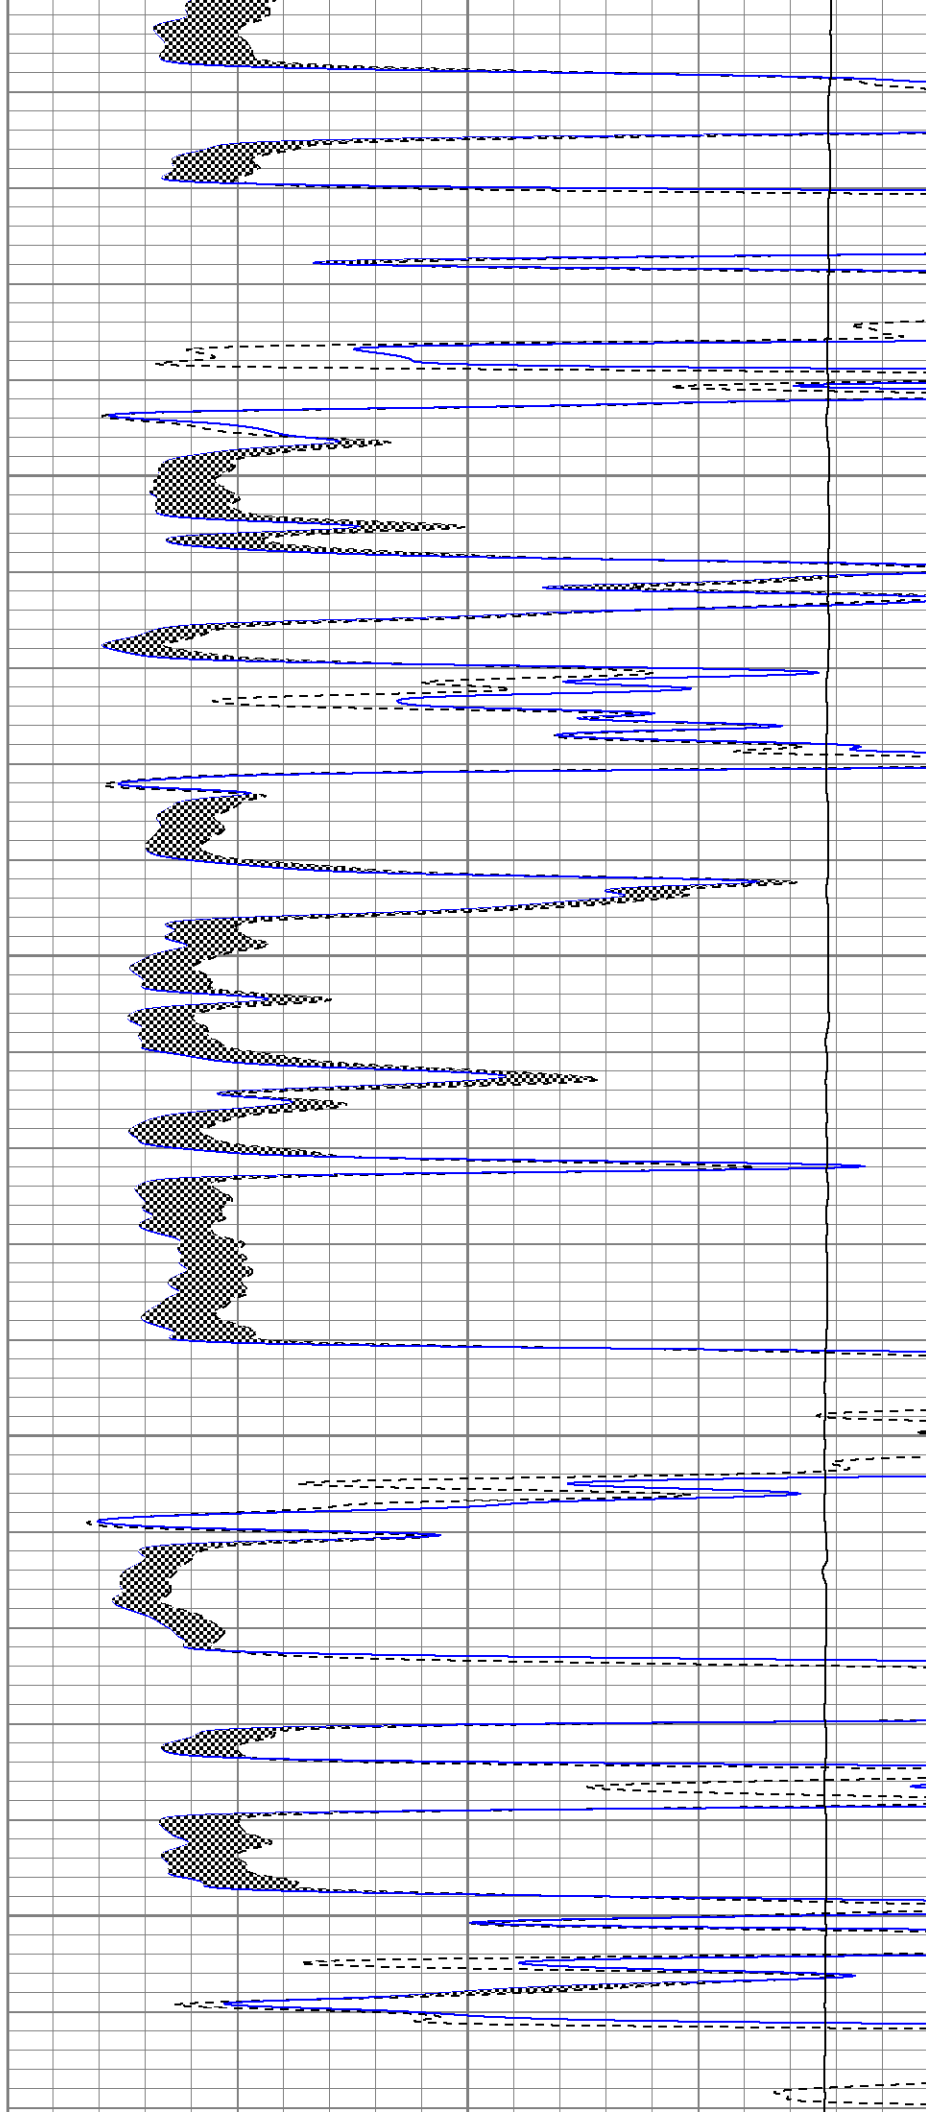

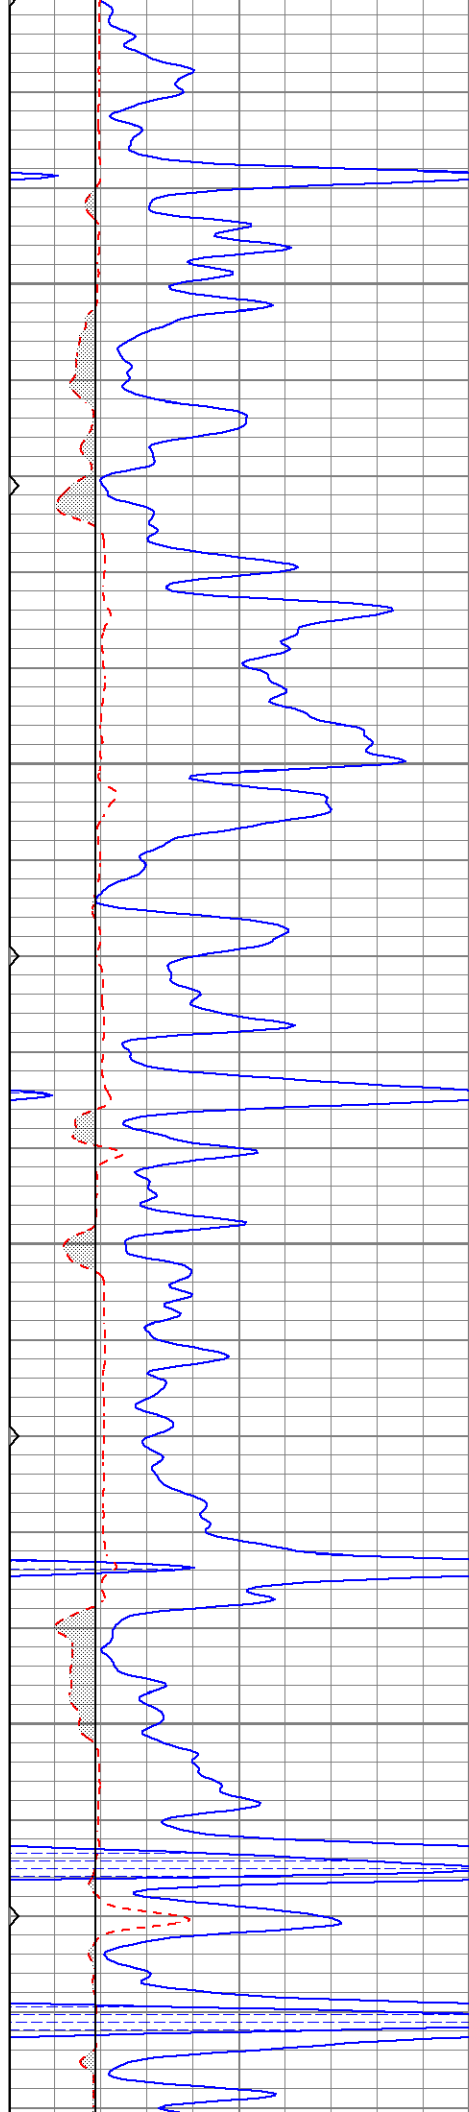



4350

4400

4450

4500

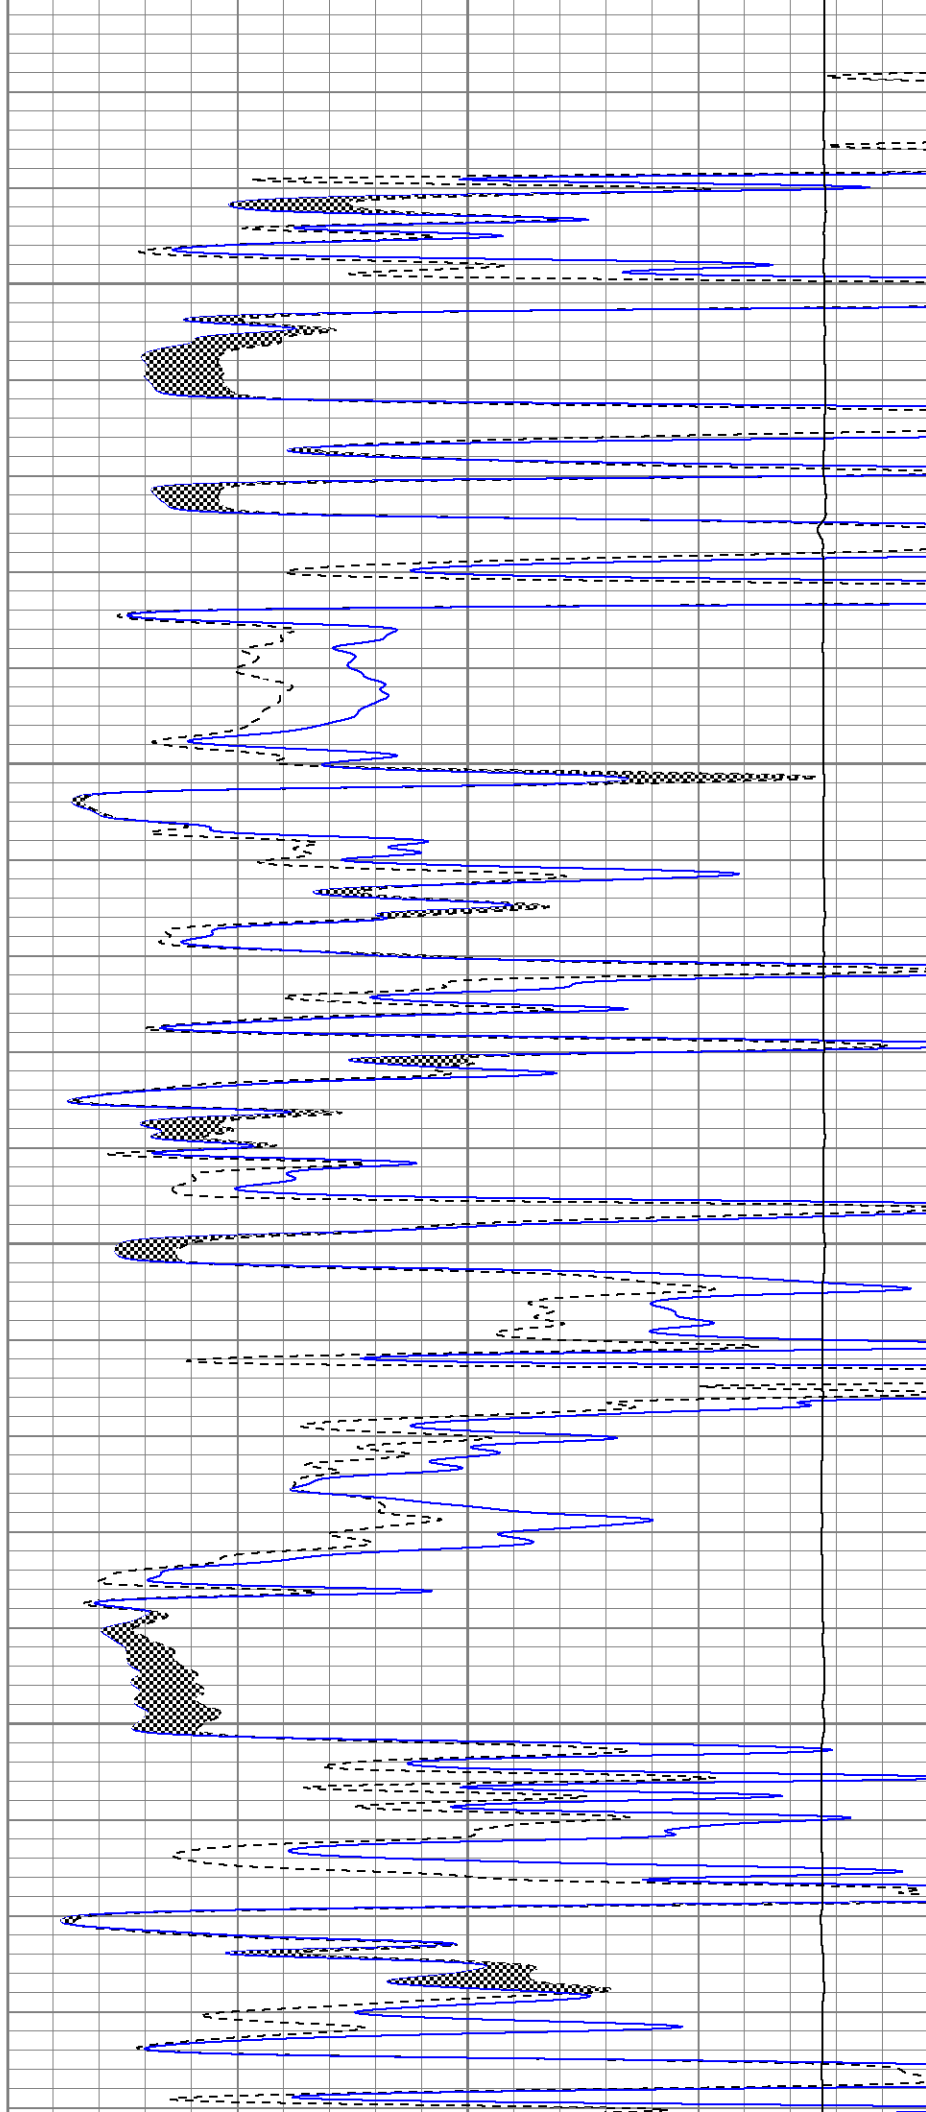

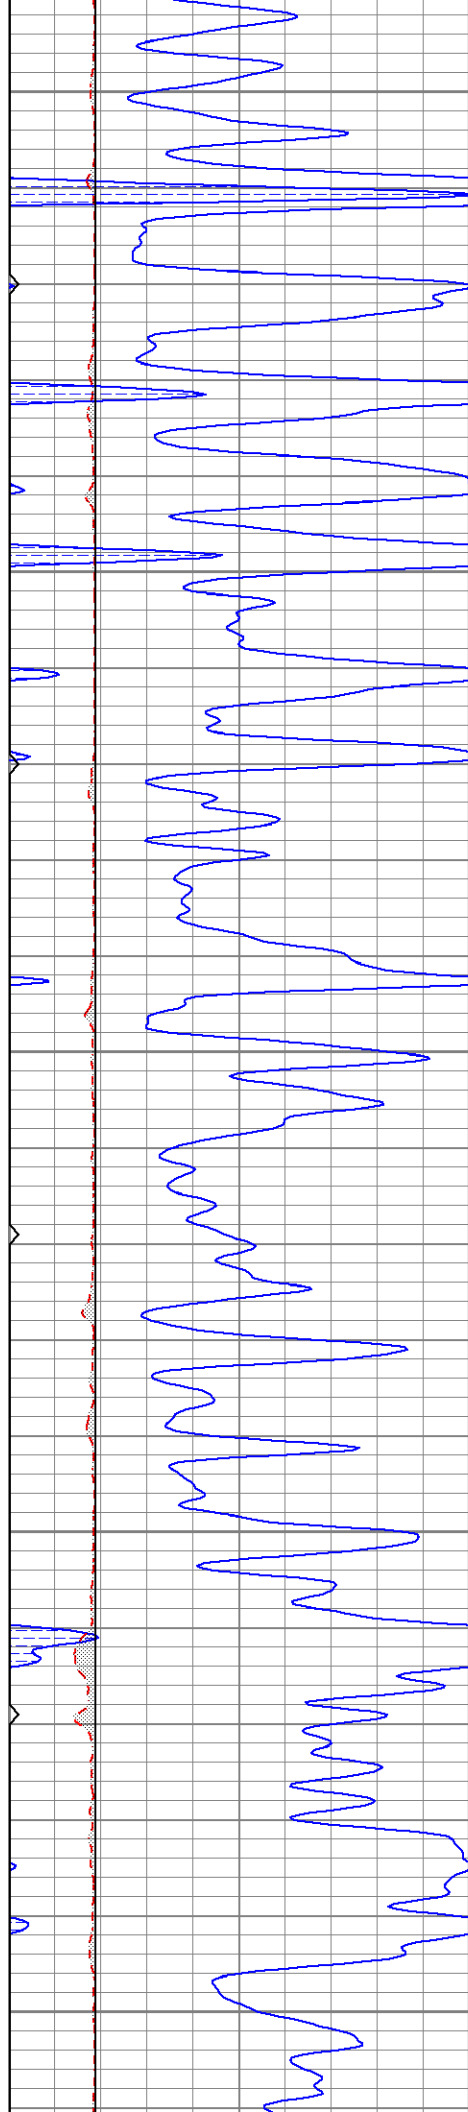


4550


4600

4650

4700

4750

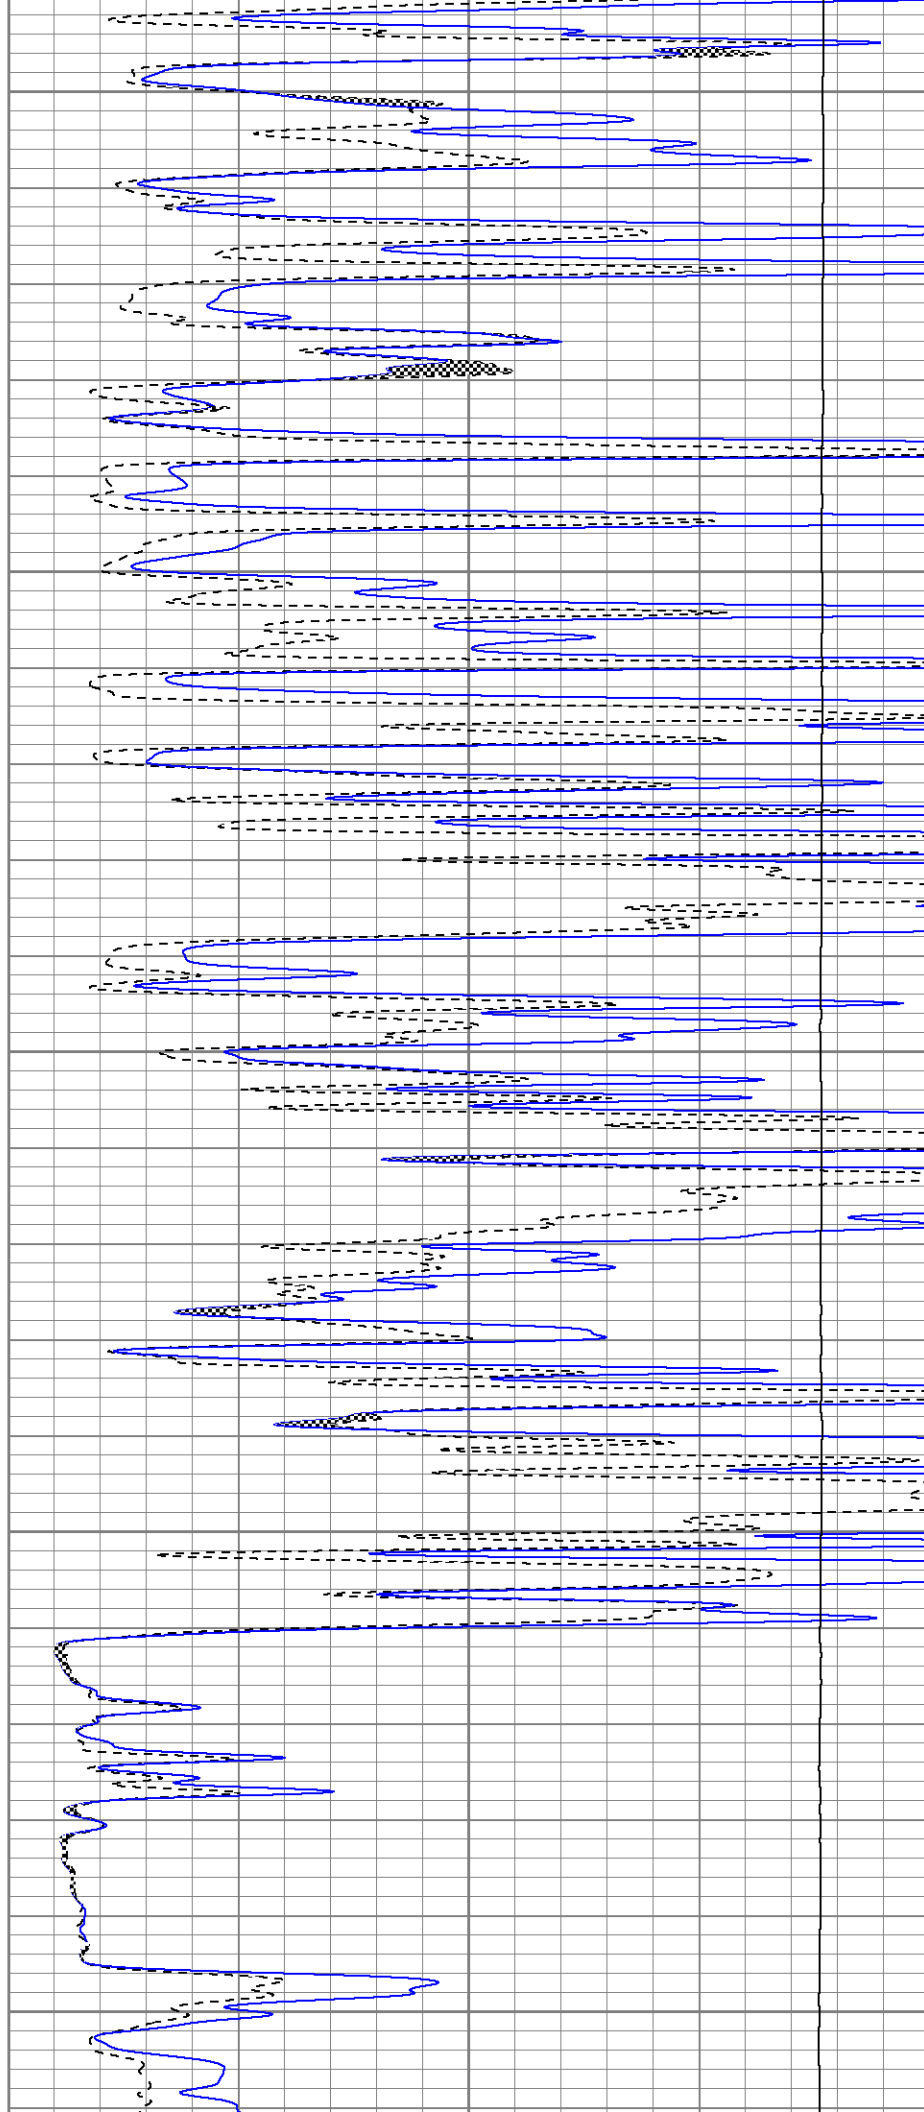

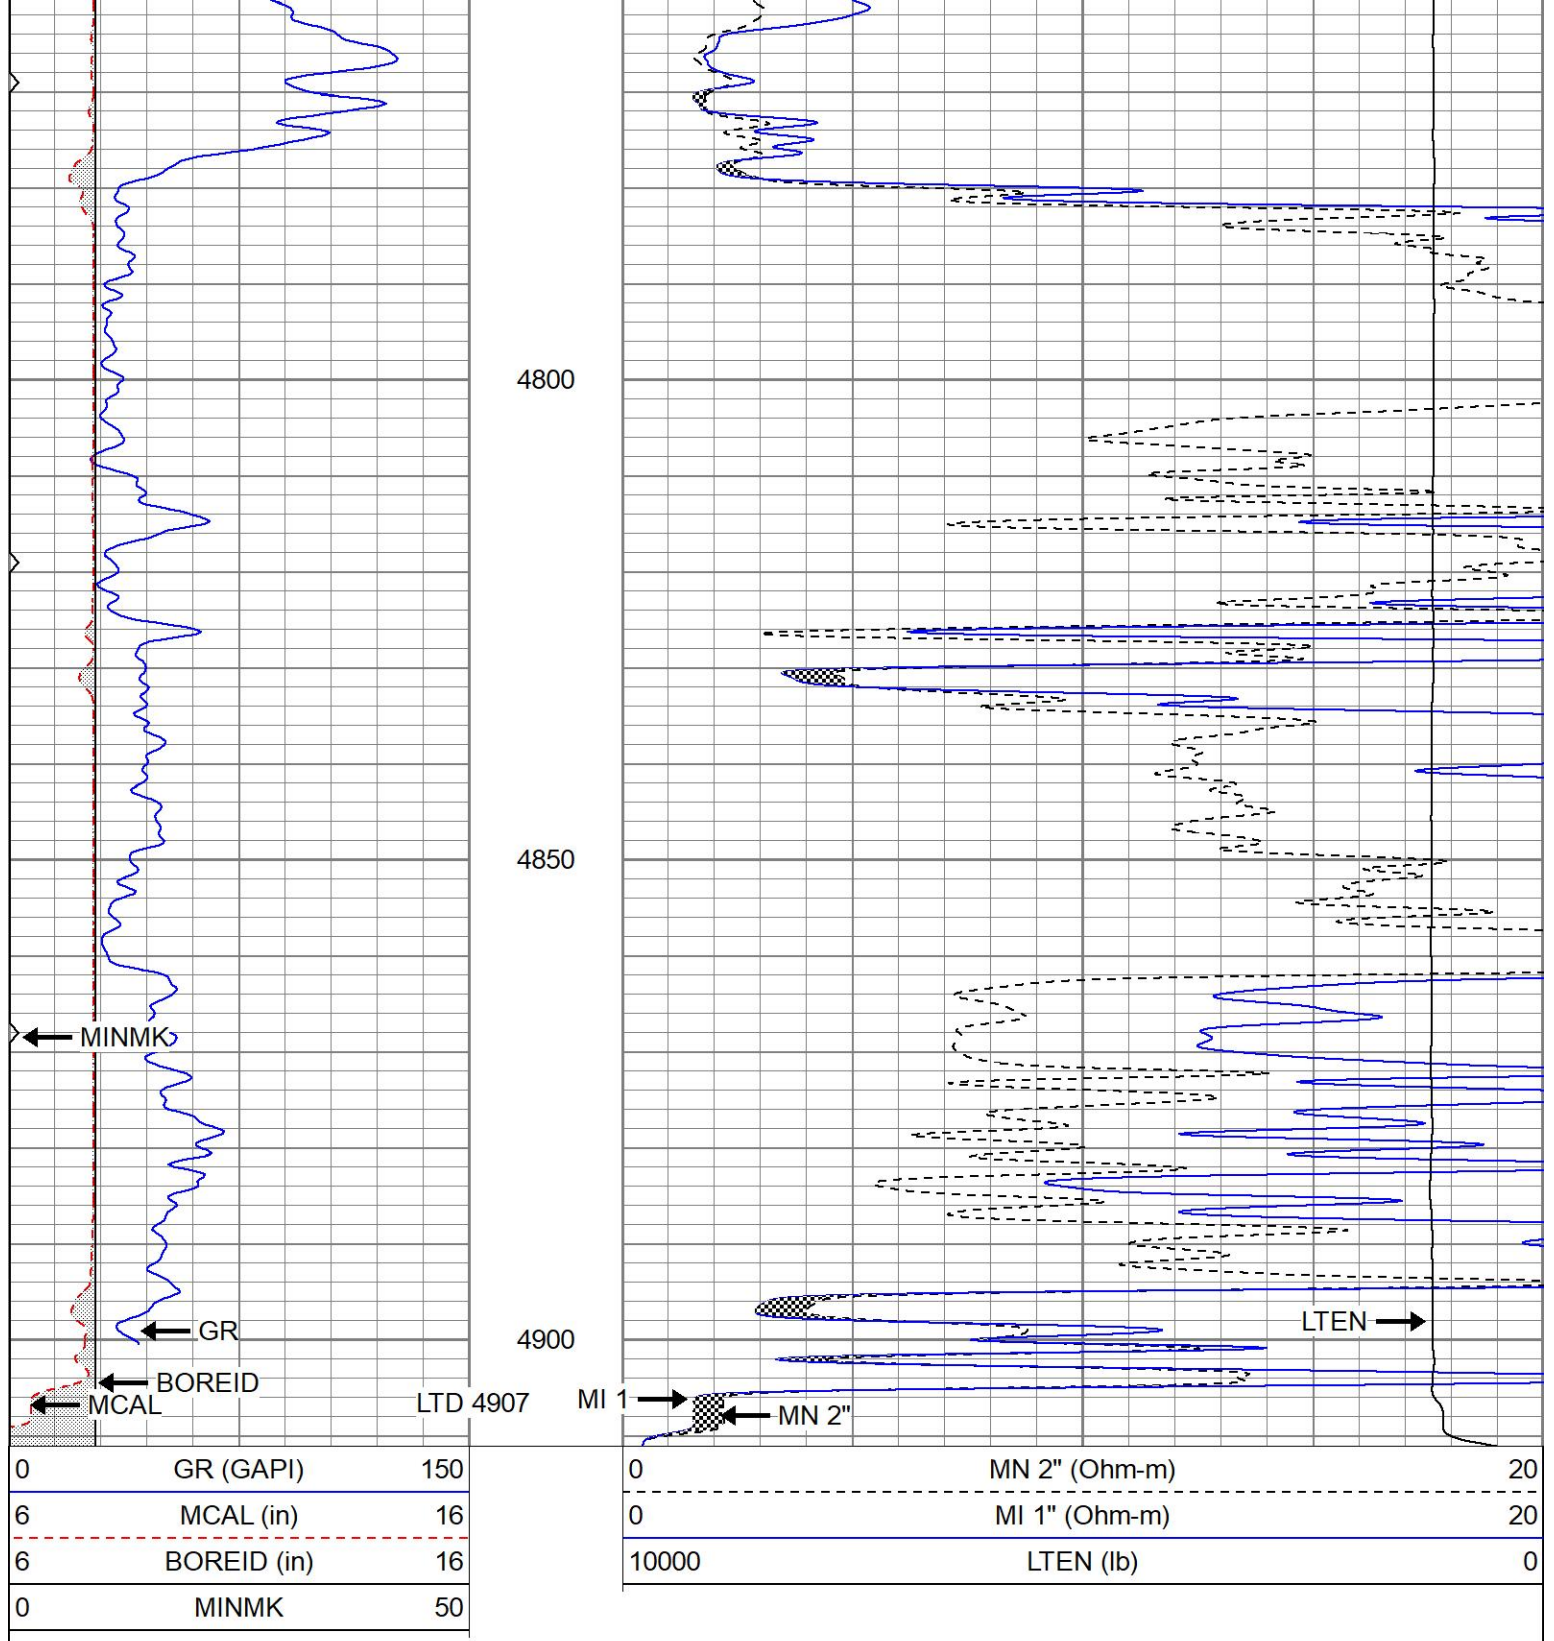


REPEAT SECTION

Database File ppcasablanca#2oh.db
 Dataset Pathname pass4.1
 Presentation Format kml
 Dataset Creation Wed Jun 15 13:53:05 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	0	MN 2" (Ohm-m)	20
---	-----------	-----	---	---------------	----

6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

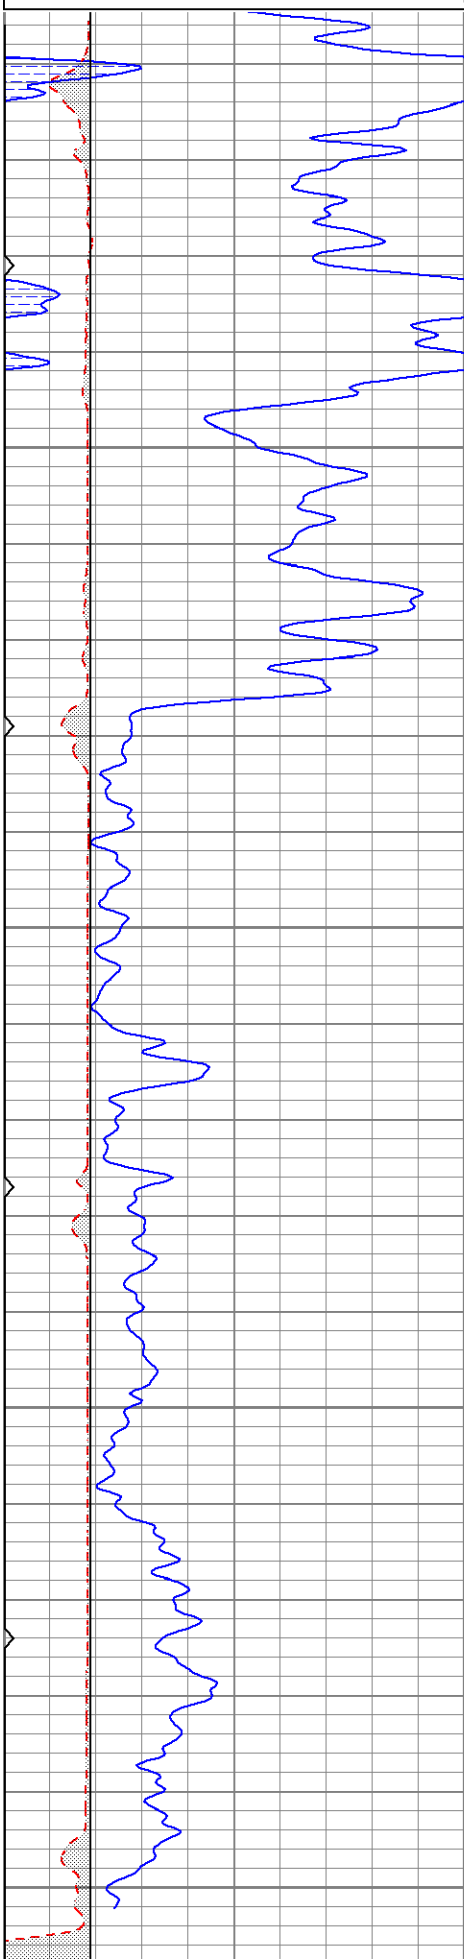


4750

4800

4850

4900

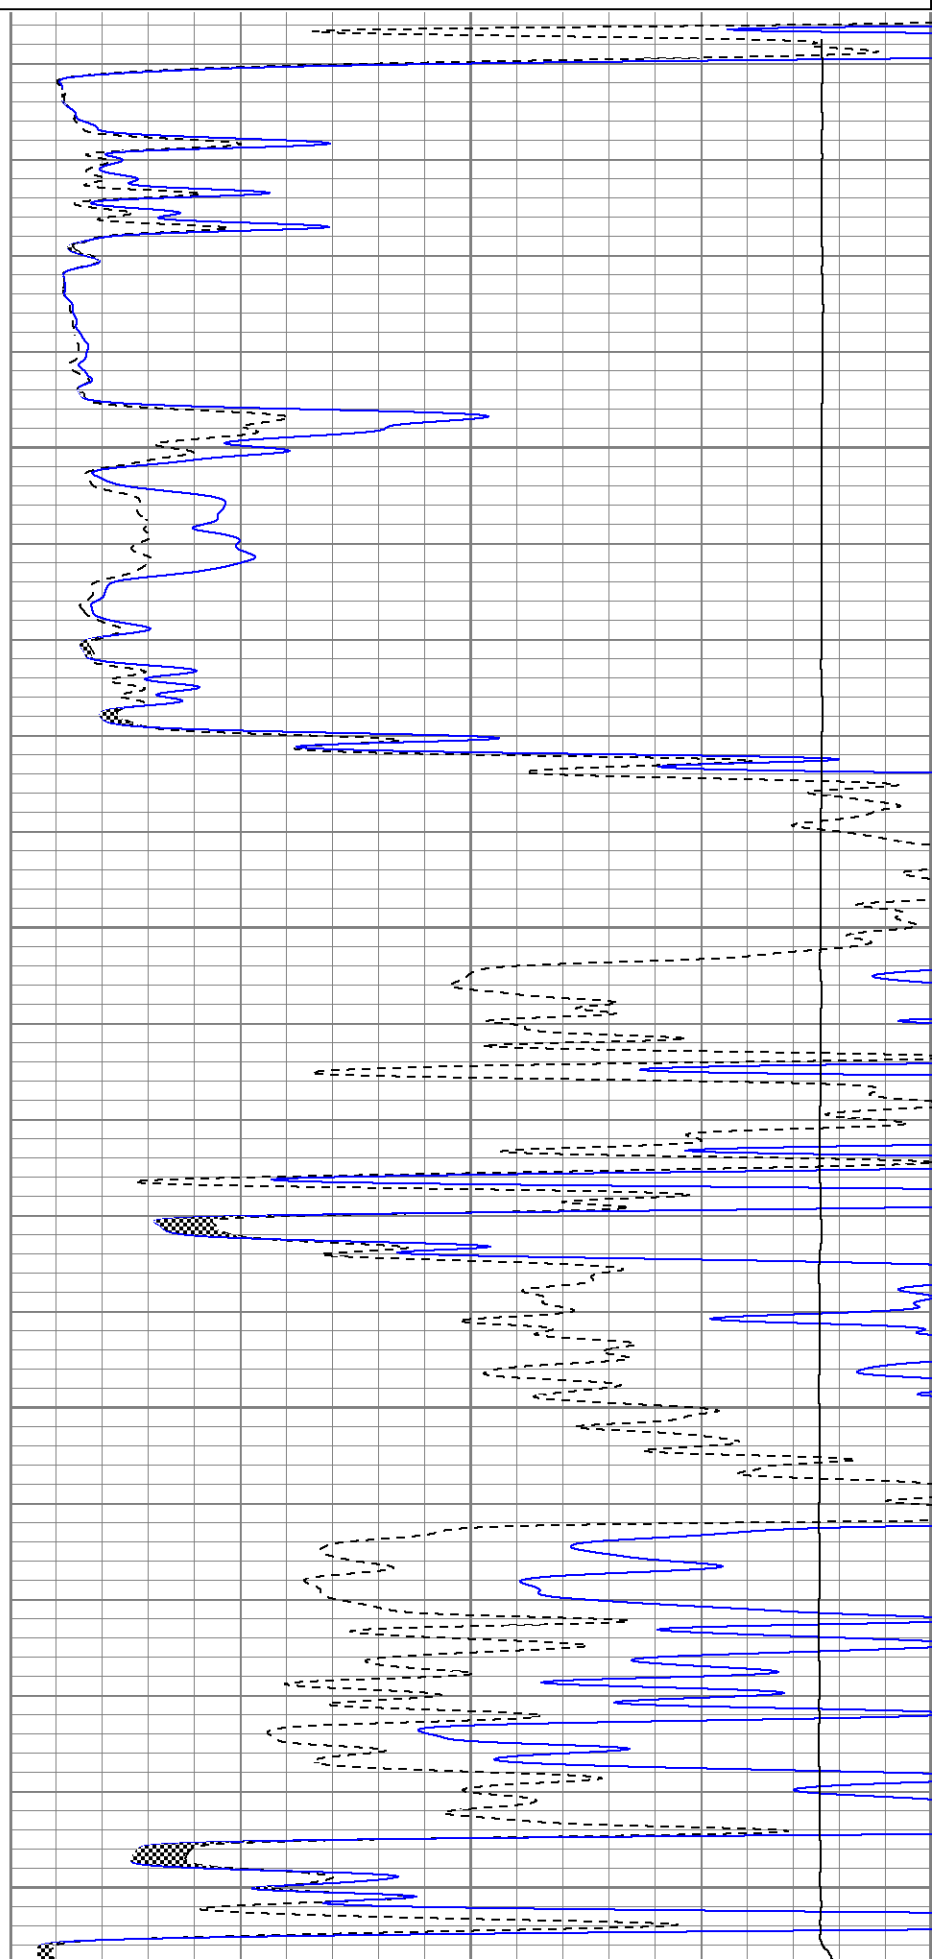

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

Calibration Report								
Database File	ppcasablanca#2oh.db							
Dataset Pathname	pass4.1							
Dataset Creation	Wed Jun 15 13:53:05 2022							
Microlog Calibration Report								
Serial-Model:			1600-Pengo					
Performed:			Wed Jun 15 13:31:16 2022					
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	-0.0215	0.4843	V	0.0000	10.0000	Ohm-m	19.7717	0.4245
Inverse	-0.0294	0.6430	V	0.0000	10.0000	Ohm-m	14.8738	0.4366
Caliper	3.2319	6.4483	V	8.0000	15.0000	in	2.1364	0.9662
Gamma Ray Calibration Report								
Serial Number:			2001					
Tool Model:			OH					
Performed:			Sat Sep 4 22:48:39 2021					
Calibrator Value:			1.0		GAPI			
Background Reading:			0.0		cps			
Calibrator Reading:			1.0		cps			
Sensitivity:			0.8200		GAPI/cps			