


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

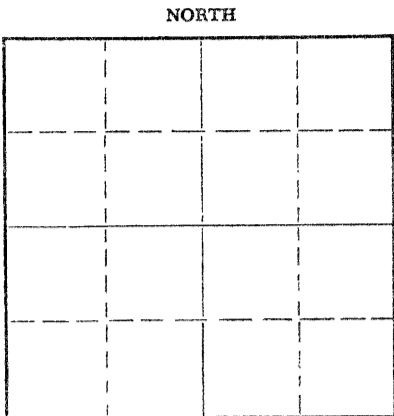

Locate well correctly on above
Section Plat

Rooks County. Sec. 21 Twp. 9S Rge. (E) 18 (W)
Location as "NE/CNW/SW" or footage from lines. SW NE SE
Lease Owner Robinowitz Oil Company
Lease Name Rempe Well No. 5
Office Address 1322 East 50th Sr. Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 1-20 19 67
Application for plugging filed 1-20 19 67
Application for plugging approved 1-20 19 67
Plugging commenced 1-20 11:45 AM 19 67
Plugging completed 1-21 8:30 PM 19 67
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production none 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey - Hays, Kansas
Producing formation Depth to top Bottom Total Depth of Well 3580 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
soil clay & sand		0	201	12 1/4	201	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill hole to 550' with mud set plug, Cemented with 25 sacks through drill pipe.
fill hole to 190' set plug and cemented with 20 sacks through pipe, Mud up to
40' plug & hulls with 10 sacks. Plugged rat hole with 2 sacks.

RECEIVED
STATE CORPORATION COMMISSION
JAN 24 1967
1-24-67
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor B & B Drilling Inc.
Address 548 Petroleum Building - Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Bill Lahar (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill Lahar
548 Petroleum Building - Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of January, 19 67

My commission expires May 31, 1970
Alma A. Neese Notary Public.

January 23, 1967

DRILLERS LOG

COMPANY: ROBINOWITZ OIL CO.
 CONTRACTOR: B & B DRILLING INC.
 TOTAL DEPTH: 3580'
 COMMENCED: January 13, 1967
 COMPLETED: January 20, 1967

Re: Rempe # 5
 SE NE SE
 Section 21-9S-18W
 Rooks County, Kansas

0	30	Soil Clay & Sand
30	125	Sand & Shale
125	201	Shale & Clay
201	493	Shale
493	990	Clay & Shale
990	1025	Shale & Sand
1025	1320	Shale & Sand
1320	1520	Clay & Red Bed
1520	1538	Anhydrite
1538	1561	Anhydrite
1561	1995	Shale & Shells
1995	2177	Shale & Lime
2177	2378	Shale & Lime
2378	2552	Lime & Shale
2552	2625	Lime
2625	2775	Shale & Lime
2775	2935	Lime & Shale
2935	3050	Lime & Shale
3050	3226	Lime & Shale
3226	3319	Lime & Shale
3319	3414	Lime & Shale
3414	3420	Lime
3420	3470	Lime
3470	3530	Lime
3530	3580	Lime
3580		Total Depth D & A

RECEIVED
 MINERAL RIGHTS COMMISSION
 JAN 24 1967
 INFORMATION DIVISION
 Topeka, Kansas

We certify the above and foregoing to be true and correct copy of the log on the Rempe # 5, located in Rooks County, Kansas

B & B DRILLING INC.

Bill Pahan President

Alma A. Moses Notary Public

Subscribed and sworn to before me

this 23rd day of January, 1967