

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Rooks County. Sec. 34 Twp. 9S Rge. (E) 19 (W)

Location as "NE/CNW/SW" or footage from lines SE NE SW

Lease Owner Patton Oil Co.

Lease Name SPARKS Well No. 1

Office Address 70 West 6th Avenue - Denver, Colorado

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 9-12 19 69

Application for plugging filed 9-12 19 69

Application for plugging approved 9-12 19 69


Plugging commenced 9-12 19 69

Plugging completed 9-12 19 69

Reason for abandonment of well or producing formation No oil or gas found in commercial quantities.

If a producing well is abandoned, date of last production -- 19 --

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

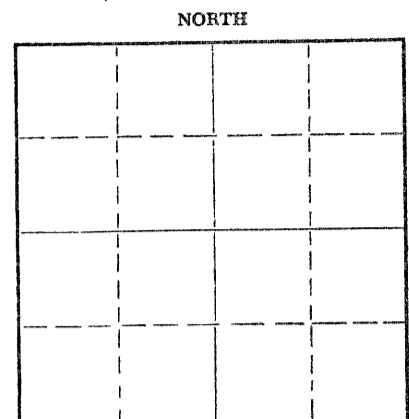

Locate well correctly on above Section Flat

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Ks.

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3710 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	214'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set plug at 720 feet with 70 sacks cement. Set second plug at 210' with 20 sacks cement. Set solid plug at 40' with 10 sacks cement. Plugged by Allied Cementing Co., Inc. Plugging completed at 11:30 A.M. 9-12-69.

RECEIVED
STATE CORPORATION COMMISSION
OCT 23 1969
10-23-69
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rains & Williamson Oil Co., Inc.
Address 1425 Wichita Plaza - Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Wilson Rains (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains
1425 Wichita Plaza - Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 15 day of September, 1969

My commission expires 6-30-71
Sherry Gish
Sherry Gish Notary Public.

ROTARY DRILLING LOG

Operator: Patton Oil Co.
SPARKS #1
SE NE SW Sec. 34-9S-19W
Rooks County, Kansas

Contractor: Rains & Williamson
Oil Co., Inc.
Commenced: 9-4-69
Completed: 9-12-69
Casing: 8-5/8"/214'/150 sx.

Formations

Surface Dirt	21'
Water Sand	75'
Shale with Lime Streaks	221'
Shale and Shells	660'
Sand	695'
Shale	860'
Shale with Sand	982'
Shale w/Sand Streaks	1020'
Dakota Sand	1245'
Shale with Shells	1575'
Anhydrite	1596'
Shale with Shells	1867'
Shale with Lime Streaks	2235'
Shale and Lime	2507'
Shale	2760'
Lime and Shale	3268'
Lime	3310'
Lime and Shale	3400'
Lime	3680'
Chert, Lime, Shale	3710'
Rotary Total Depth (D & A)	3710'


RECEIVED
STATE CORPORATION COMMISSION
OCT 23 1969
CONSERVATION DIVISION
Wichita, Kansas

We certify the above log is true and correct to the best of our knowledge and belief.

RAINS & WILLIAMSON OIL CO., INC.


Wilson Rains

Subscribed and sworn to before me, a Notary Public within and for the State of Kansas, County of Sedgwick, this 15th day of September, 1969.

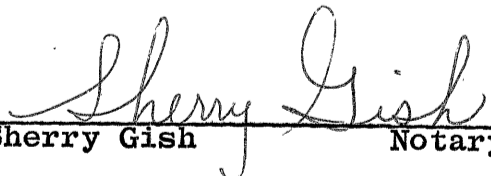
Sherry Gish Notary Public

My Commission Expires:
6-30-71