

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas


WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Rooks County. Sec. 34 Twp. 9S Rge. (E) 19 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines.....
Lease Owner Cities Service Oil Co.
Lease Name Puloc Well No. 1
Office Address Cartersville Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 30 1945
Application for plugging filed May 30 1945
Application for plugging approved May 30 1945
Plugging commenced May 30 1945
Plugging completed May 30 1945
Reason for abandonment of well or producing formation.....



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production..... 19.....
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Herb Kerr
Producing formation Arbuckle lime Depth to top 3707' Bottom..... Total Depth of Well 3751' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
<u>Arbuckle lime</u>	<u>Dry</u>			<u>8 7/8</u>	<u>302'</u>	<u>None</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Filled with Heavy Mud From TD 3757' To 300' set Plug Dumped 15 Sacks Cement Heavy Mud to 30' Dumped 10 Sacks Cement Mud & Dirt To Surface

PLUGGING
FILE # 34 9-1944
BOOK PAGE 15 LINE 4

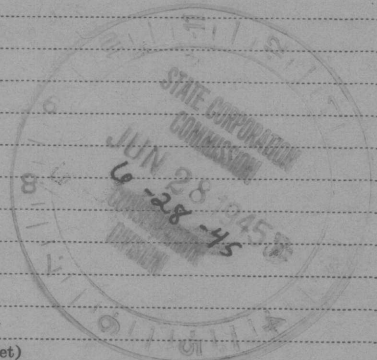

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Mr R.C. Hauber
Address Cities Service Oil Co. Great Bend, Kansas.

STATE OF Kansas, COUNTY OF Darton, SS.
Mr J.A. Cleverley (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J.A. Cleverley
Cities Service Oil Co. Russell Kansas (Address)

SUBSCRIBED AND SWORN to before me this 13th day of June 1945
W. J. Smith Notary Public.

My Commission Expires Mar. 12, 1947

Company Citizen Service Oil Well No. 12 Farm Puleo
 Location 990' E & 330' E of N/4 Corner Sec. 34 T. 9 R. 19W
 Elevation 2217' County Rock State Kansas
 Initial Prod. Dry. P. & A. 5-30-45 Contractor Veeder Supply & Dev. Co.
 Acid None Drig. Comm. May 12, 1945
 T. D. 3751' Drig. Comp. May 29, 1945

CASING RECORD:

8 5/8" @ 302' w/ 150 sx. con.
 Cemented top 38' of 8 5/8"
 w/ 50 sx. con. & 100' C. C.

Top Arbuckle 3707'
 Penetration 44'
 Total Depth 3751'

FORMATION RECORD:

sand	0-90
shale & shells	115
lime & shale	125
shale	172
chalk & shale	225
shale	518
sand	750
sandy lime & shale	815
sand	974
sandy lime & shale	1017
sandy lime	1080
sand	1320
shale	1330
shale & lime shells	1430
shale & shells	1575
lime & anhydrite	1630
anhydrite	1664
shale	1940
shale & shells	2385
lime & shale	2535
shale & lime	2680
lime & shale	2730
shale & shells	2780
lime & shale	2990
shale & lime	3215
lime & shale	3270
shale & lime	3320
lime & shale	3370
lime	3430
lime & chert	3445
cherty lime	3470
lime	3540
lime & shale	3570
lime	3669
lime & shale	3710
lime cherty	3747
lime	3751

Slope Tests (acid bottle):

1000' - O. K.
 1500' - O. K.
 2000' - O. K.
 2500' - O. K.
 3000' - O. K.

PLUGGING
 FILE 34 9-074
 BOOK PAGE 15 LINE 4 3751 T. D.

