


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

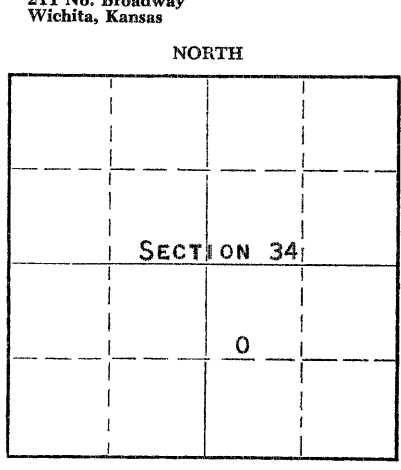

Locate well correctly on above
Section Plat

ROOKS County. Sec. 34 Twp. 9S Rge. 19W (#) (W)
Location as "NE/CNW/SW" or footage from lines SW NW SE
Lease Owner PETROLEUM, INC.
Lease Name WEBSTER "D" Well No. 1
Office Address ROUTE 2, GREAT BEND, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE
Date well completed JULY 10 19 59
Application for plugging filed JULY 10 19 59
Application for plugging approved JULY 10 19 59
Plugging commenced JULY 10 19 59
Plugging completed JULY 10 19 59
Reason for abandonment of well or producing formation NO PRODUCIBLE ZONE

If a producing well is abandoned, date of last production NONE 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well ELDON PETTY, BOX 326, HAYS, KANSAS
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3711' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	197'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

MUD UP WITH HEAVY MUD TO 540', FOLLOWED BY WOODEN PLUG, PLACED 20 SACKS CEMENT THROUGH DRILL PIPE ON TOP OF PLUG. MUD UP TO 180' FOLLOWED BY A WOODEN PLUG AND PLACED 20 SACKS OF CEMENT THROUGH DRILL PIPE ON TOP OF PLUG. MUD UP TO 40' FOLLOWED BY A WOODEN PLUG. FILLED HOLE TO BASE OF CELLAR WITH 10 SACKS OF CEMENT.

RECEIVED
STATE CORPORATION COMMISSION
JUL 30 1959
7-30-59
CONSERVATION DIVISION
Wichita

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor GARVEY DRILLING COMPANY
Address ROUTE 2, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.
DON SEARLE (employee of owner) or (#####) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Don Searle
ROUTE 2, GREAT BEND, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 29TH day of JULY, 19 59

My commission expires 11/12/62
Notary Public.

PLUGGING
FILE SEC 34 T 9 R 9W
BOOK PAGE 50 LINE 36

WELL LOG

COMPANY PETROLEUM, INCORPORATED

SEC. 34 T. 9S R. 19W

FARM WEBSTER "D" NO. 1

LOC. SW, NW, SE


TOTAL DEPTH 3711;

COUNTY ROOKS CO., KANSAS

COMM. June 30, 1959

COMP. July 10, 1959

CONTRACTOR GARVEY DRILLING COMPANY



CASING 8 5/8" @ 197' W/150 sax.

ELEVATION

PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

40	Surface clay & sand
197	Clay & shale
400	Shale
1065	Shale & shells
1300	Sand
1375	Shale & shells
1570	Shale
1608	Anhydrite
2270	Shale & shells
3110	Shale & lime
3265	Lime & shale
3677	Lime
3711	Shale & chert
3711	T. D.

RECORDED
STATE CORPORATION COMMISSION

JUL 30 1959
7-30-59
CONSERVATION DIVISION
Wichita, Kansas

State of KANSAS }
County of BARTON } ss:

I, VERNE A. MORRIS of GARVEY DRILLING COMPANY

upon oath state that the above and foregoing is a true and correct copy of the log of the #1 WEBSTER "D" well

Verne A. Morris

Subscribed and sworn to before me this 28th day of July 19 59

My Commission Expires: November 12, 1960

PLUGGING
FILE SEC. 34 T. 9 R. 19W
BOOK PAGE 50 LINE 36

Beaufort

NOTARY PUBLIC