MICRO LOG

Company PALOMINO PETROLEUM, INC.
Well THE OTHER SIDE OF THE WIND #1
Field AMAZON DITCH
County FINNEY State KANSAS

Location: API # : 15-055-22567-0000
330' FSL & 985' FEL
NE/4
SEC 30 TWP 22S RGE 34W

Other Services
CDL/CNL
DIL

Permanent Datum GROUND LEVEL Elevation 2981
Log Measured From KELLY BUSHING 11' A.G.L
Drilling Measured From KELLY BUSHING

Elevation
K.B. 2992
D.F. 2990
G.L. 2981

Date	9/6/22		
Run Number	TWO		
Depth Driller	4870		
Depth Logger	4870		
Bottom Logged Interval	4868		
Top Log Interval	2100		
Casing Driller	8 5/8" @ 354		
Casing Logger	354		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8,000 PPM	
Density / Viscosity	9.4/54		
pH / Fluid Loss	9.5/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.30 @ 85F		
Rmf @ Meas. Temp	.975 @ 85F		
Rmc @ Meas. Temp	1.56 @ 85F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.906 @ 124F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	6:30 P.M.		
Maximum Recorded Temperature	124F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	COLE ROBBEN		
Witnessed By	RYAN SEIB		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

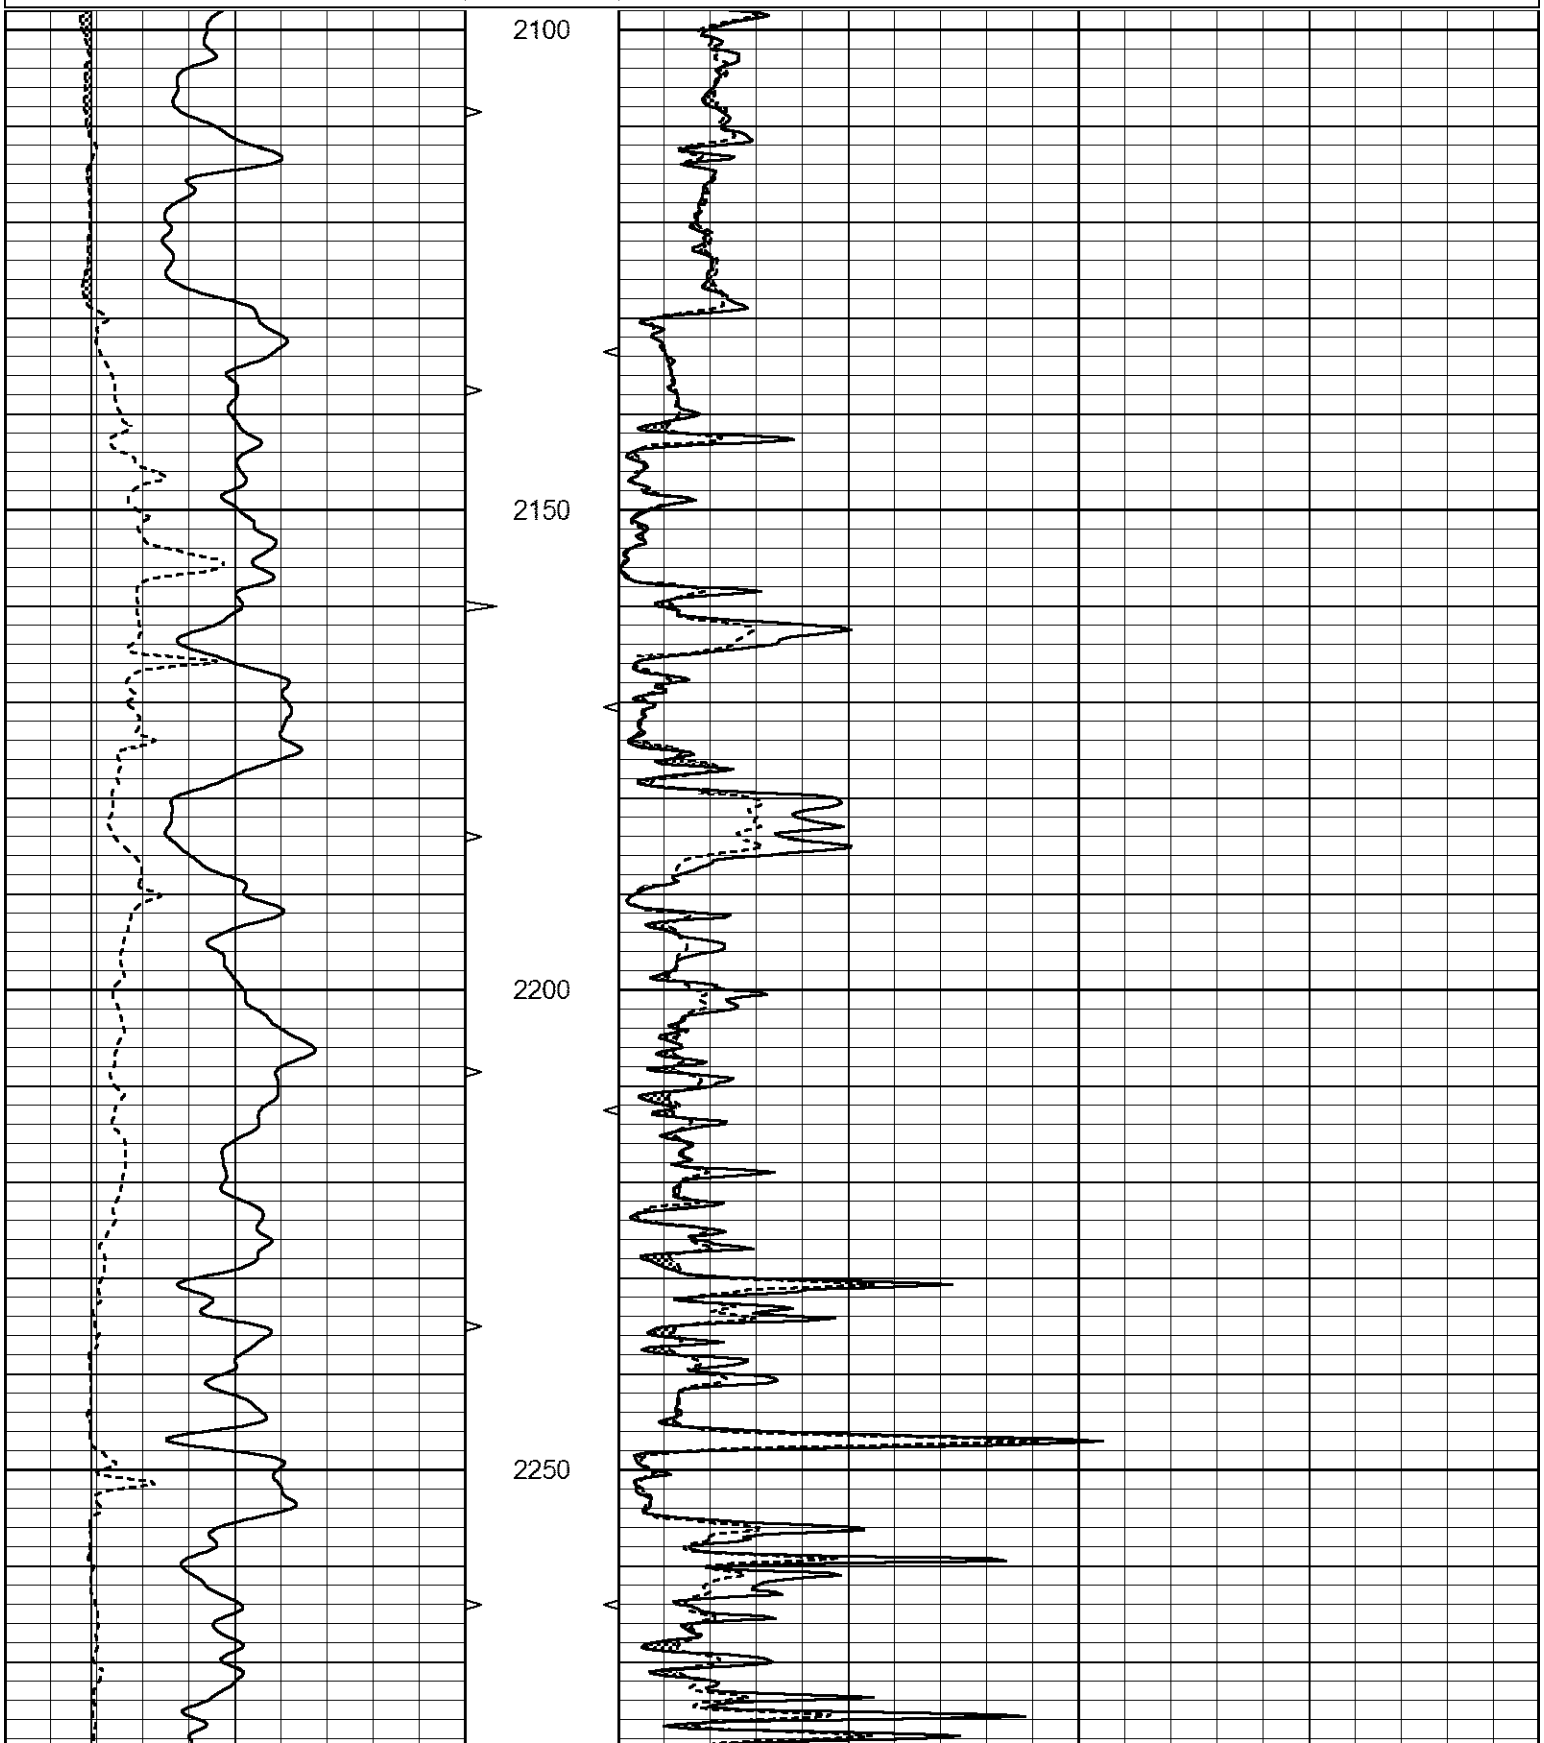
THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

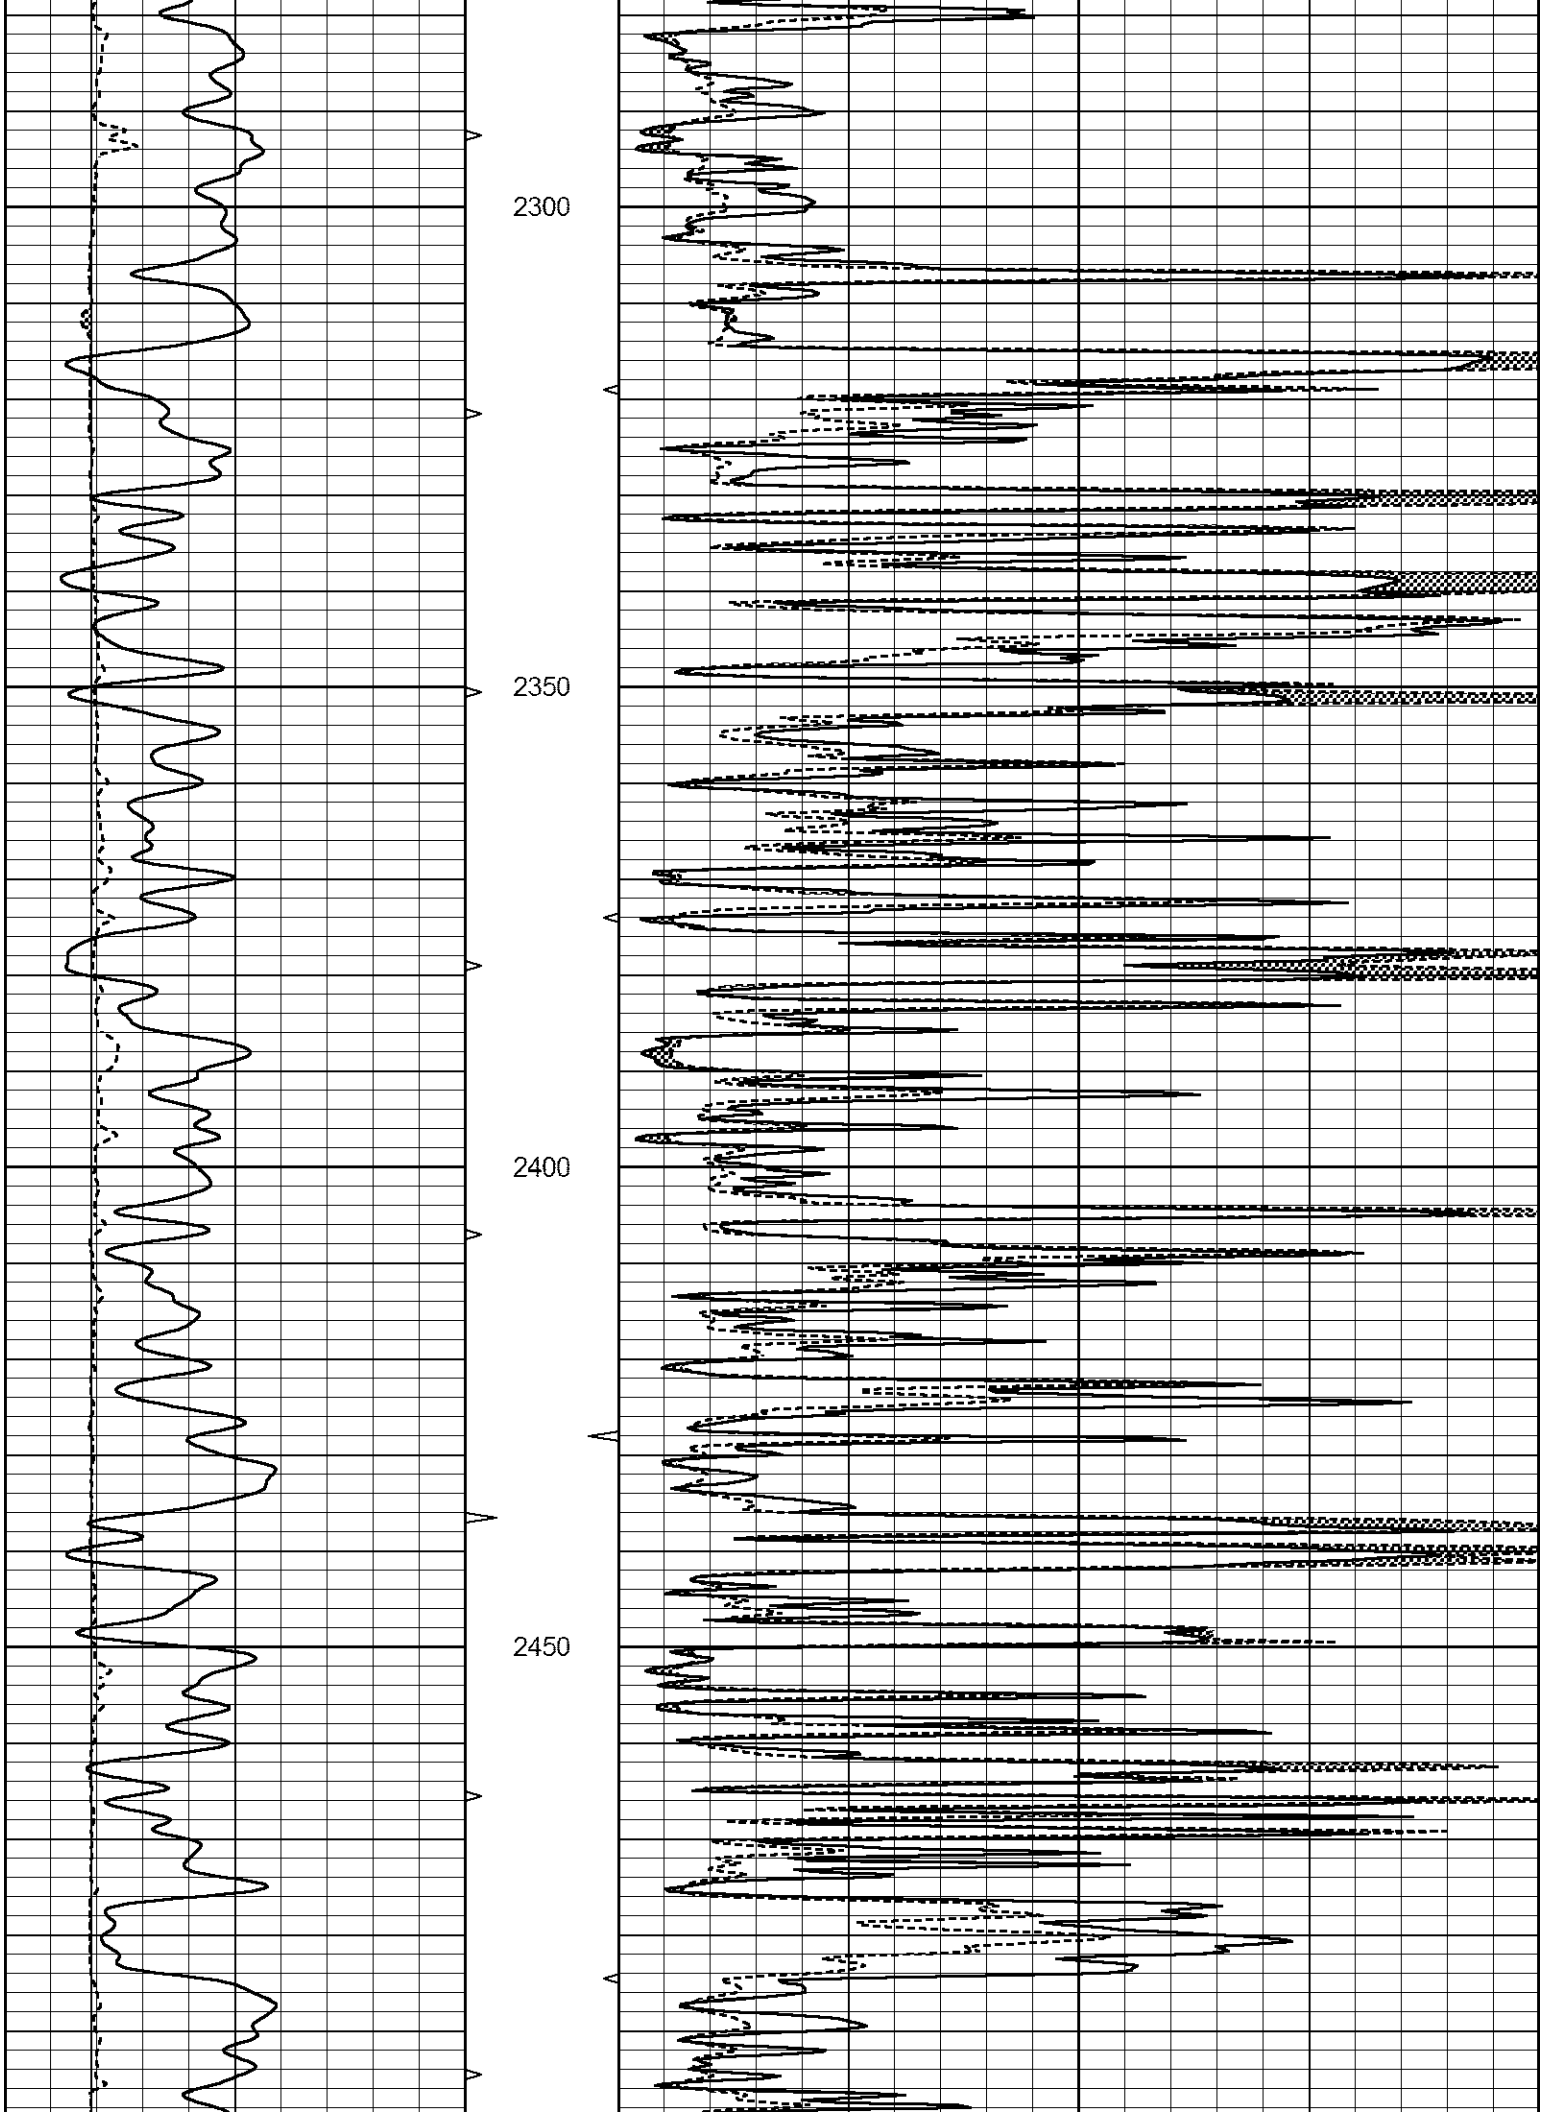
DIRECTIONS:
FROM HOLCOMB, KS. GO NORTH ON BIG LOWE ROAD TO WEST MILLER ROAD,
5 1/4 WEST, SOUTH INTO

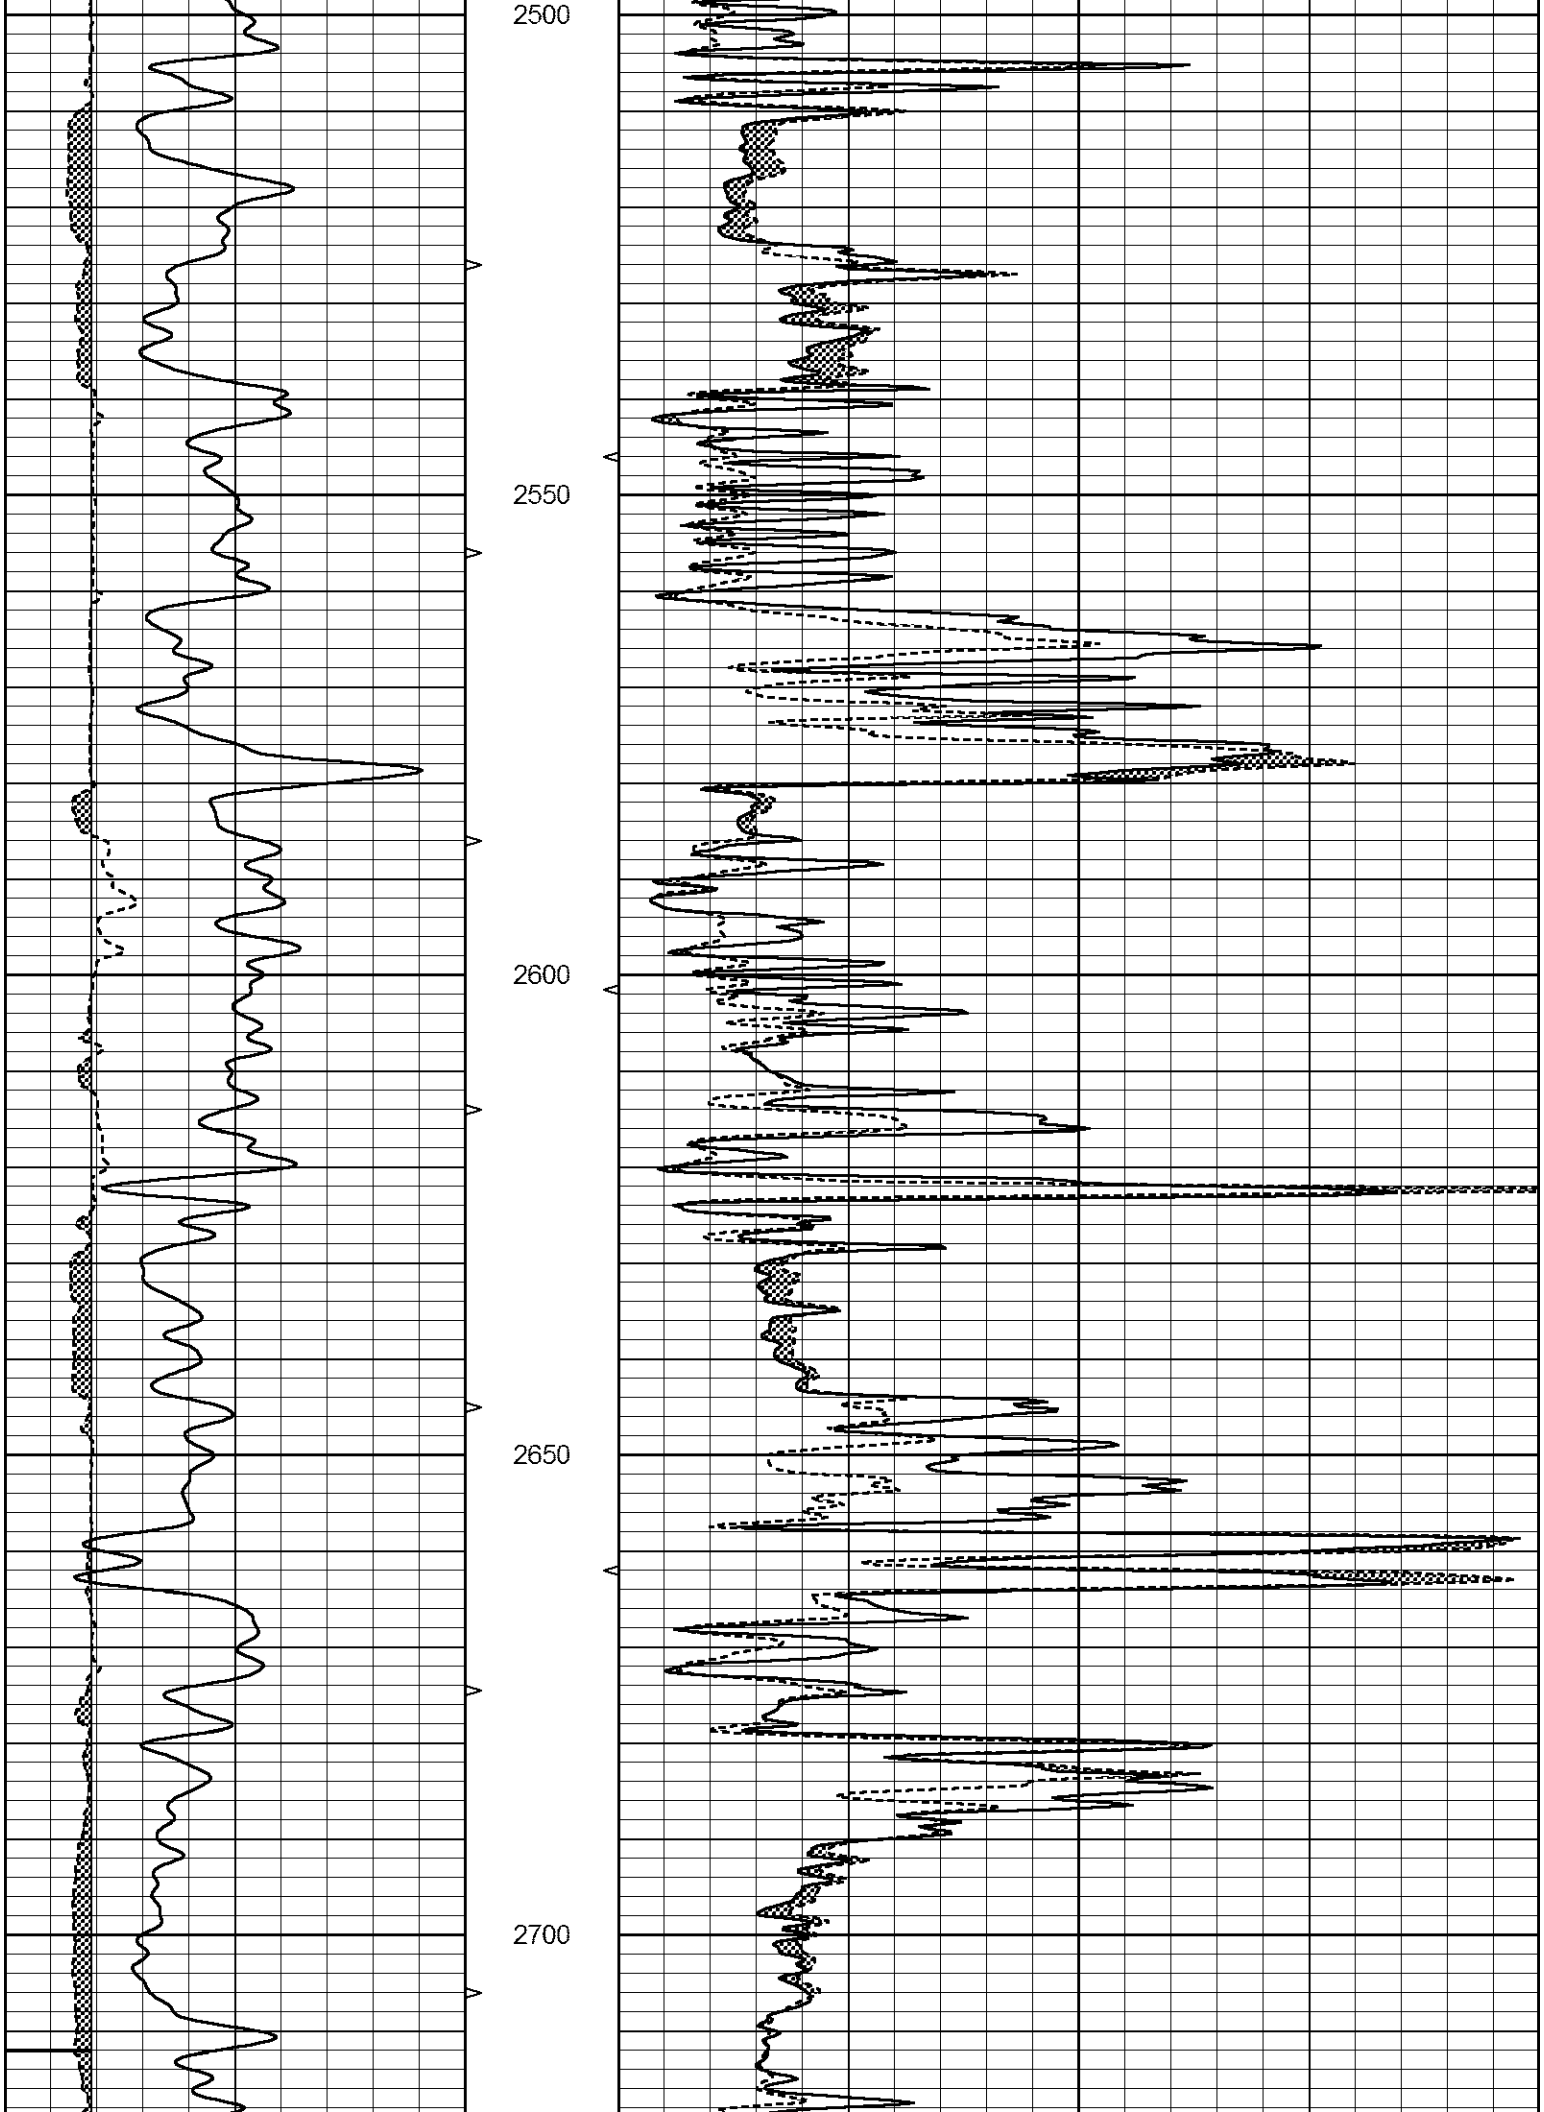
MAIN SECTION

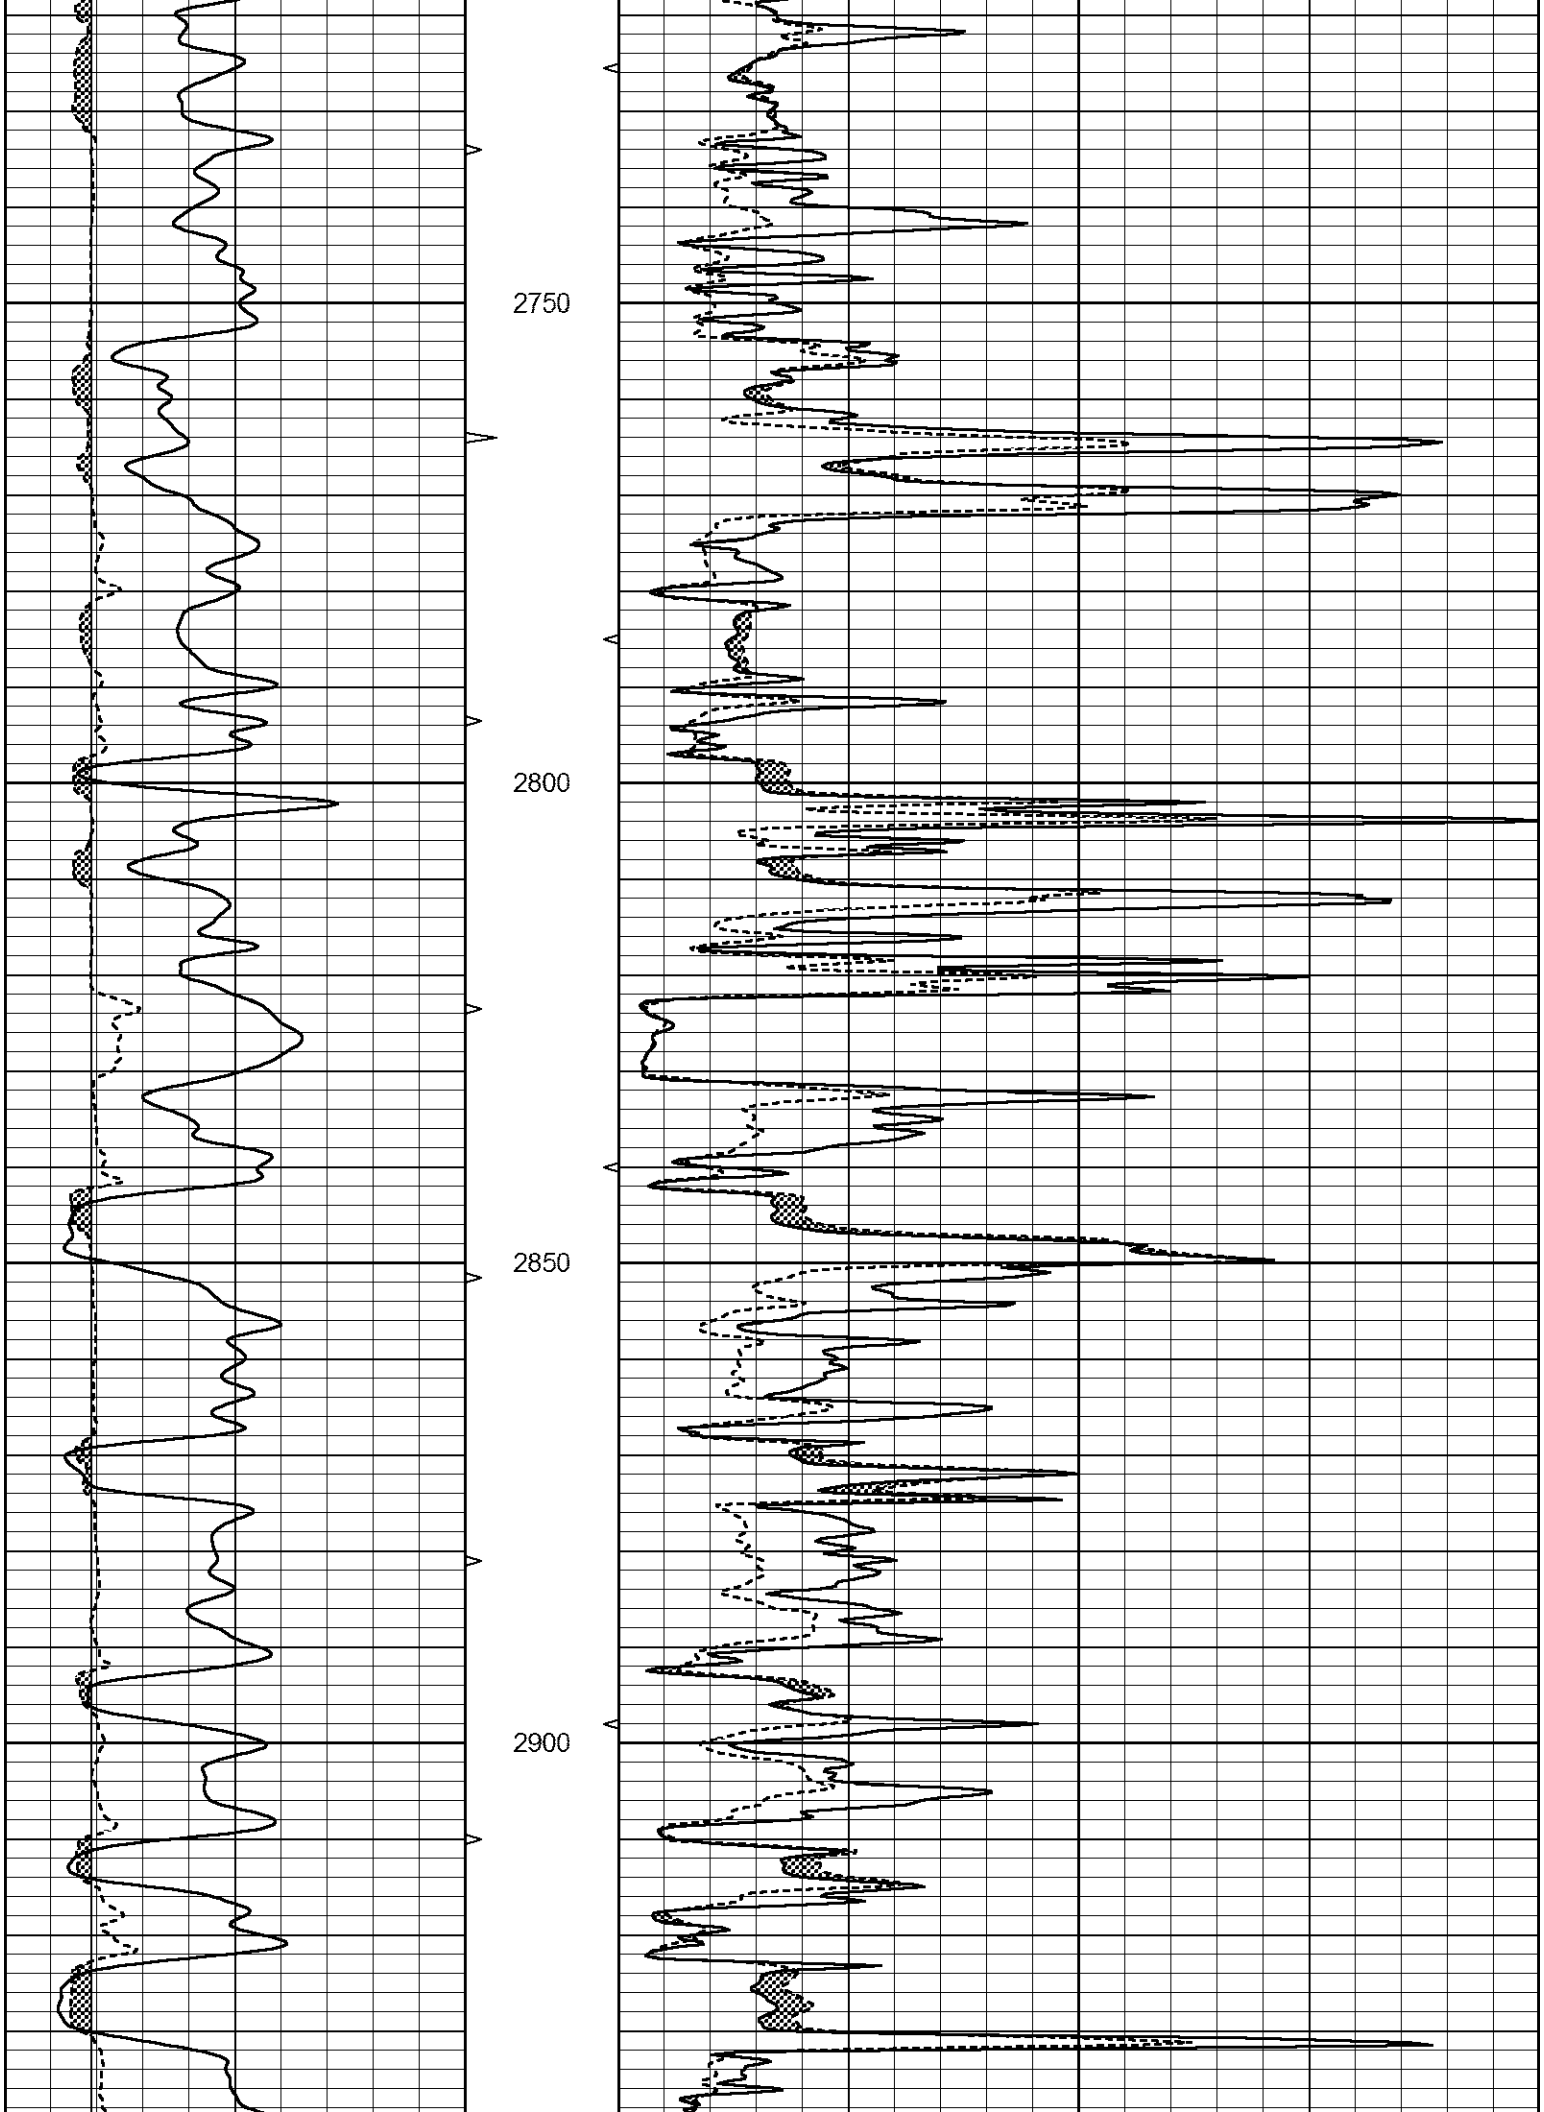
Database File	7010pe.db
Dataset Pathname	pass6D
Presentation Format	_micro
Dataset Creation	Tue Sep 06 20:58:39 2022
Charted by	Depth in Feet scaled 1:240

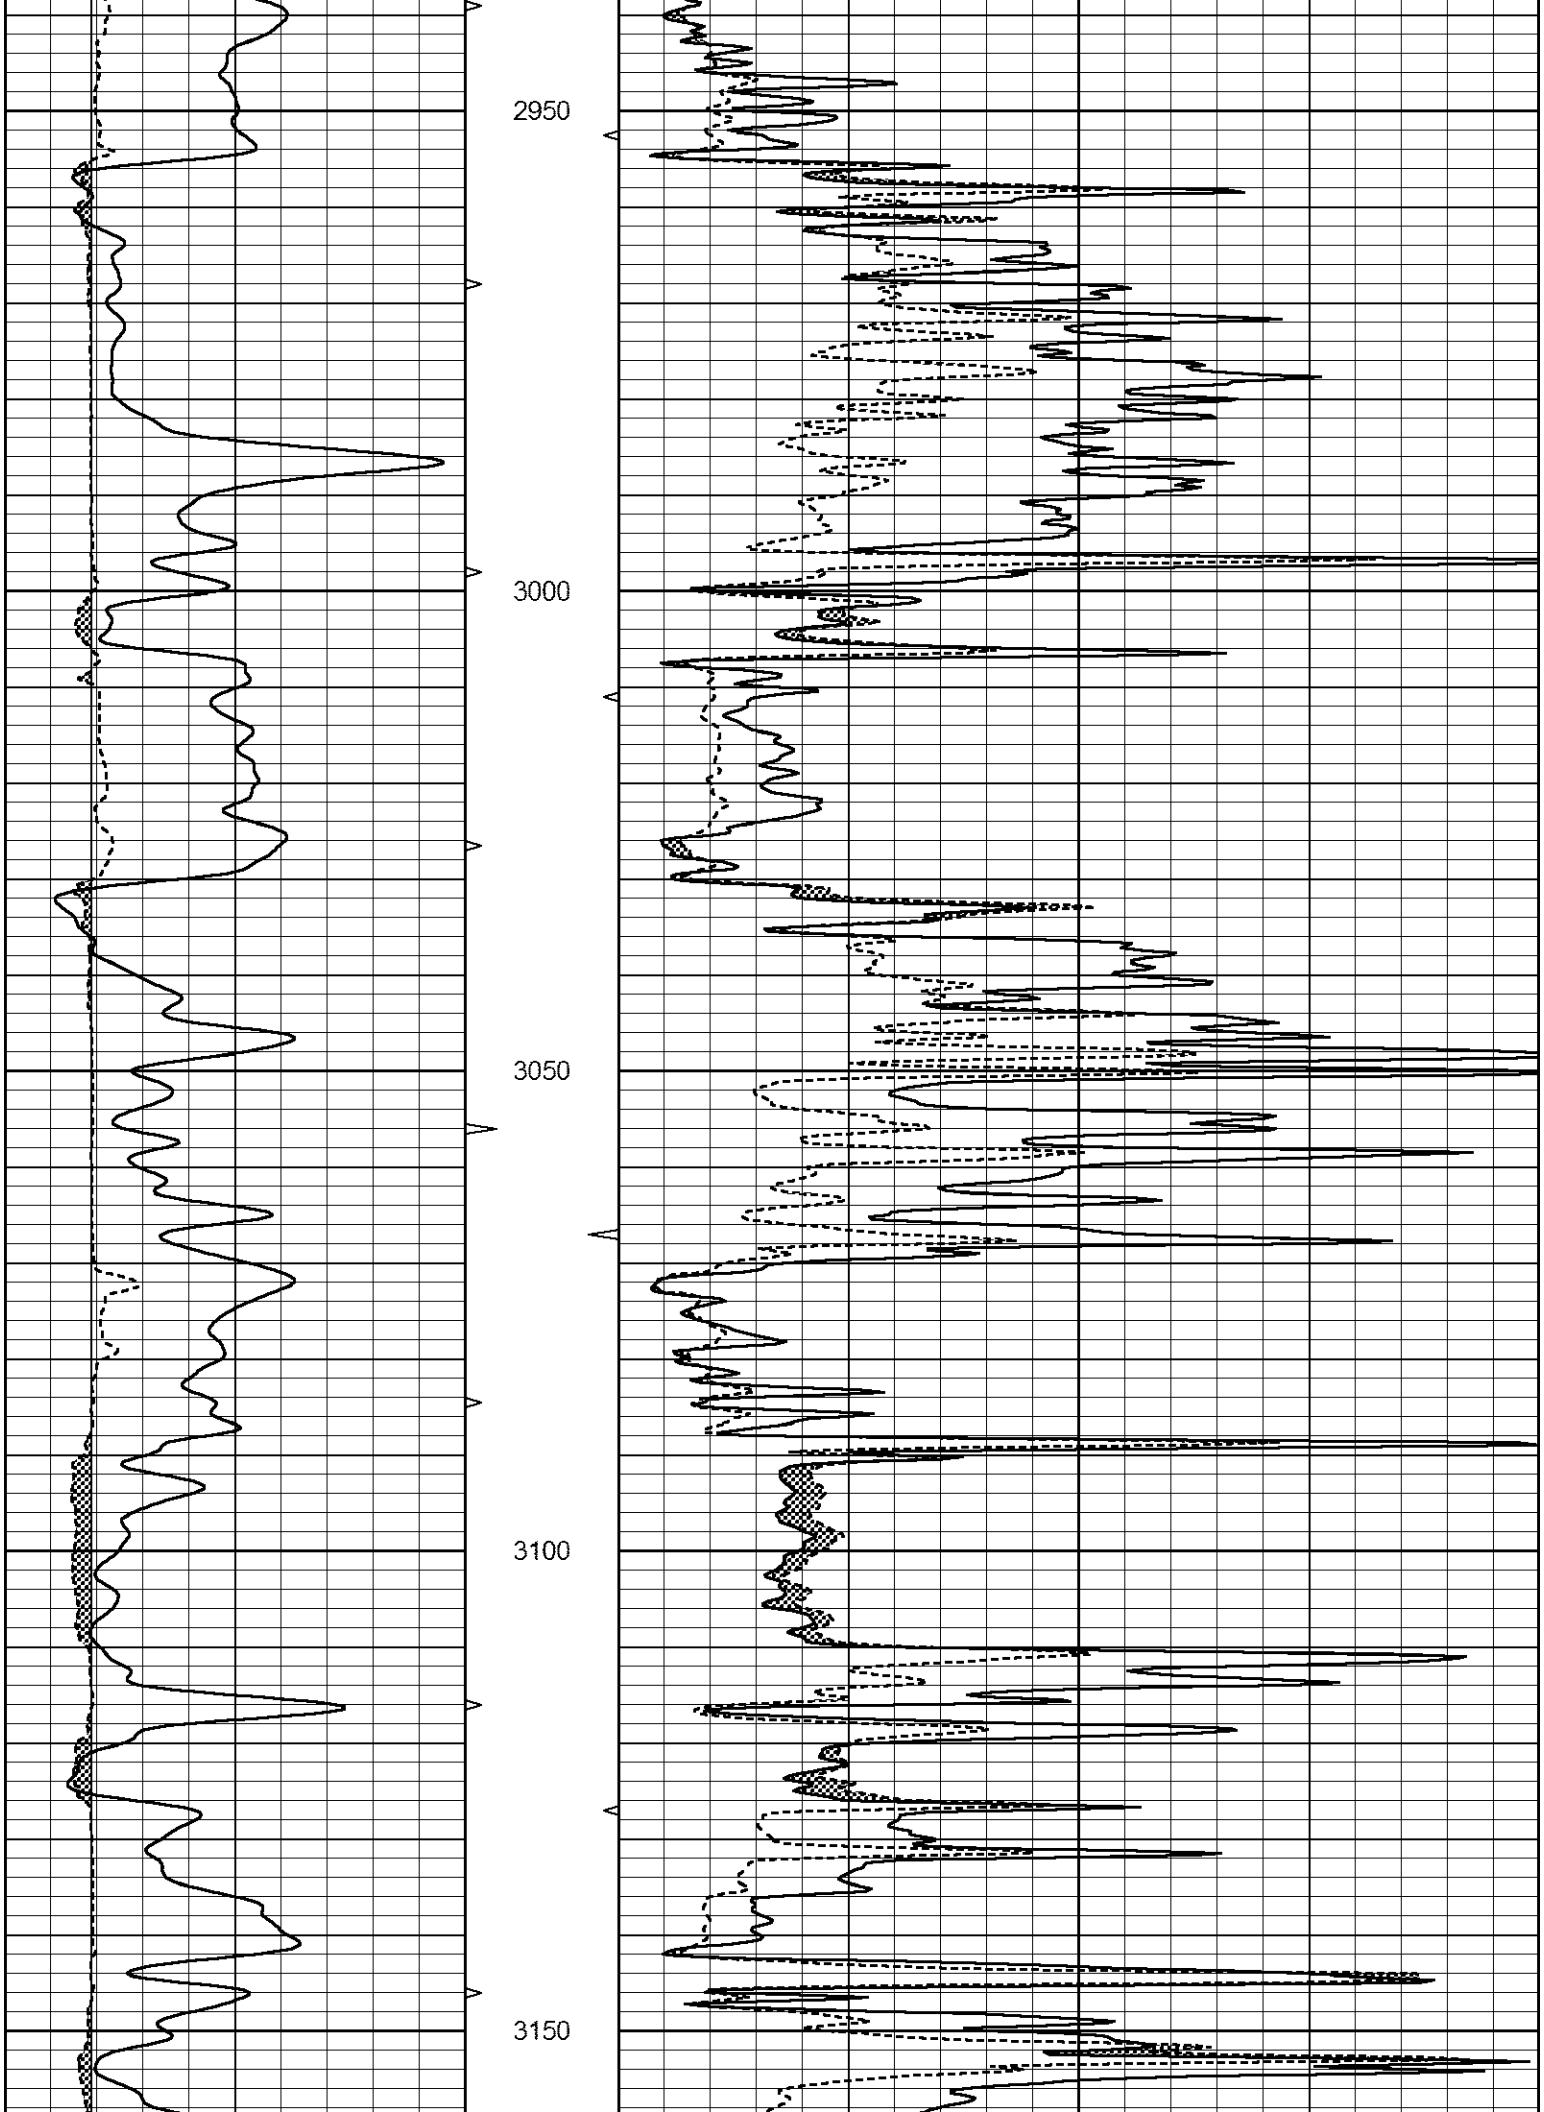
0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

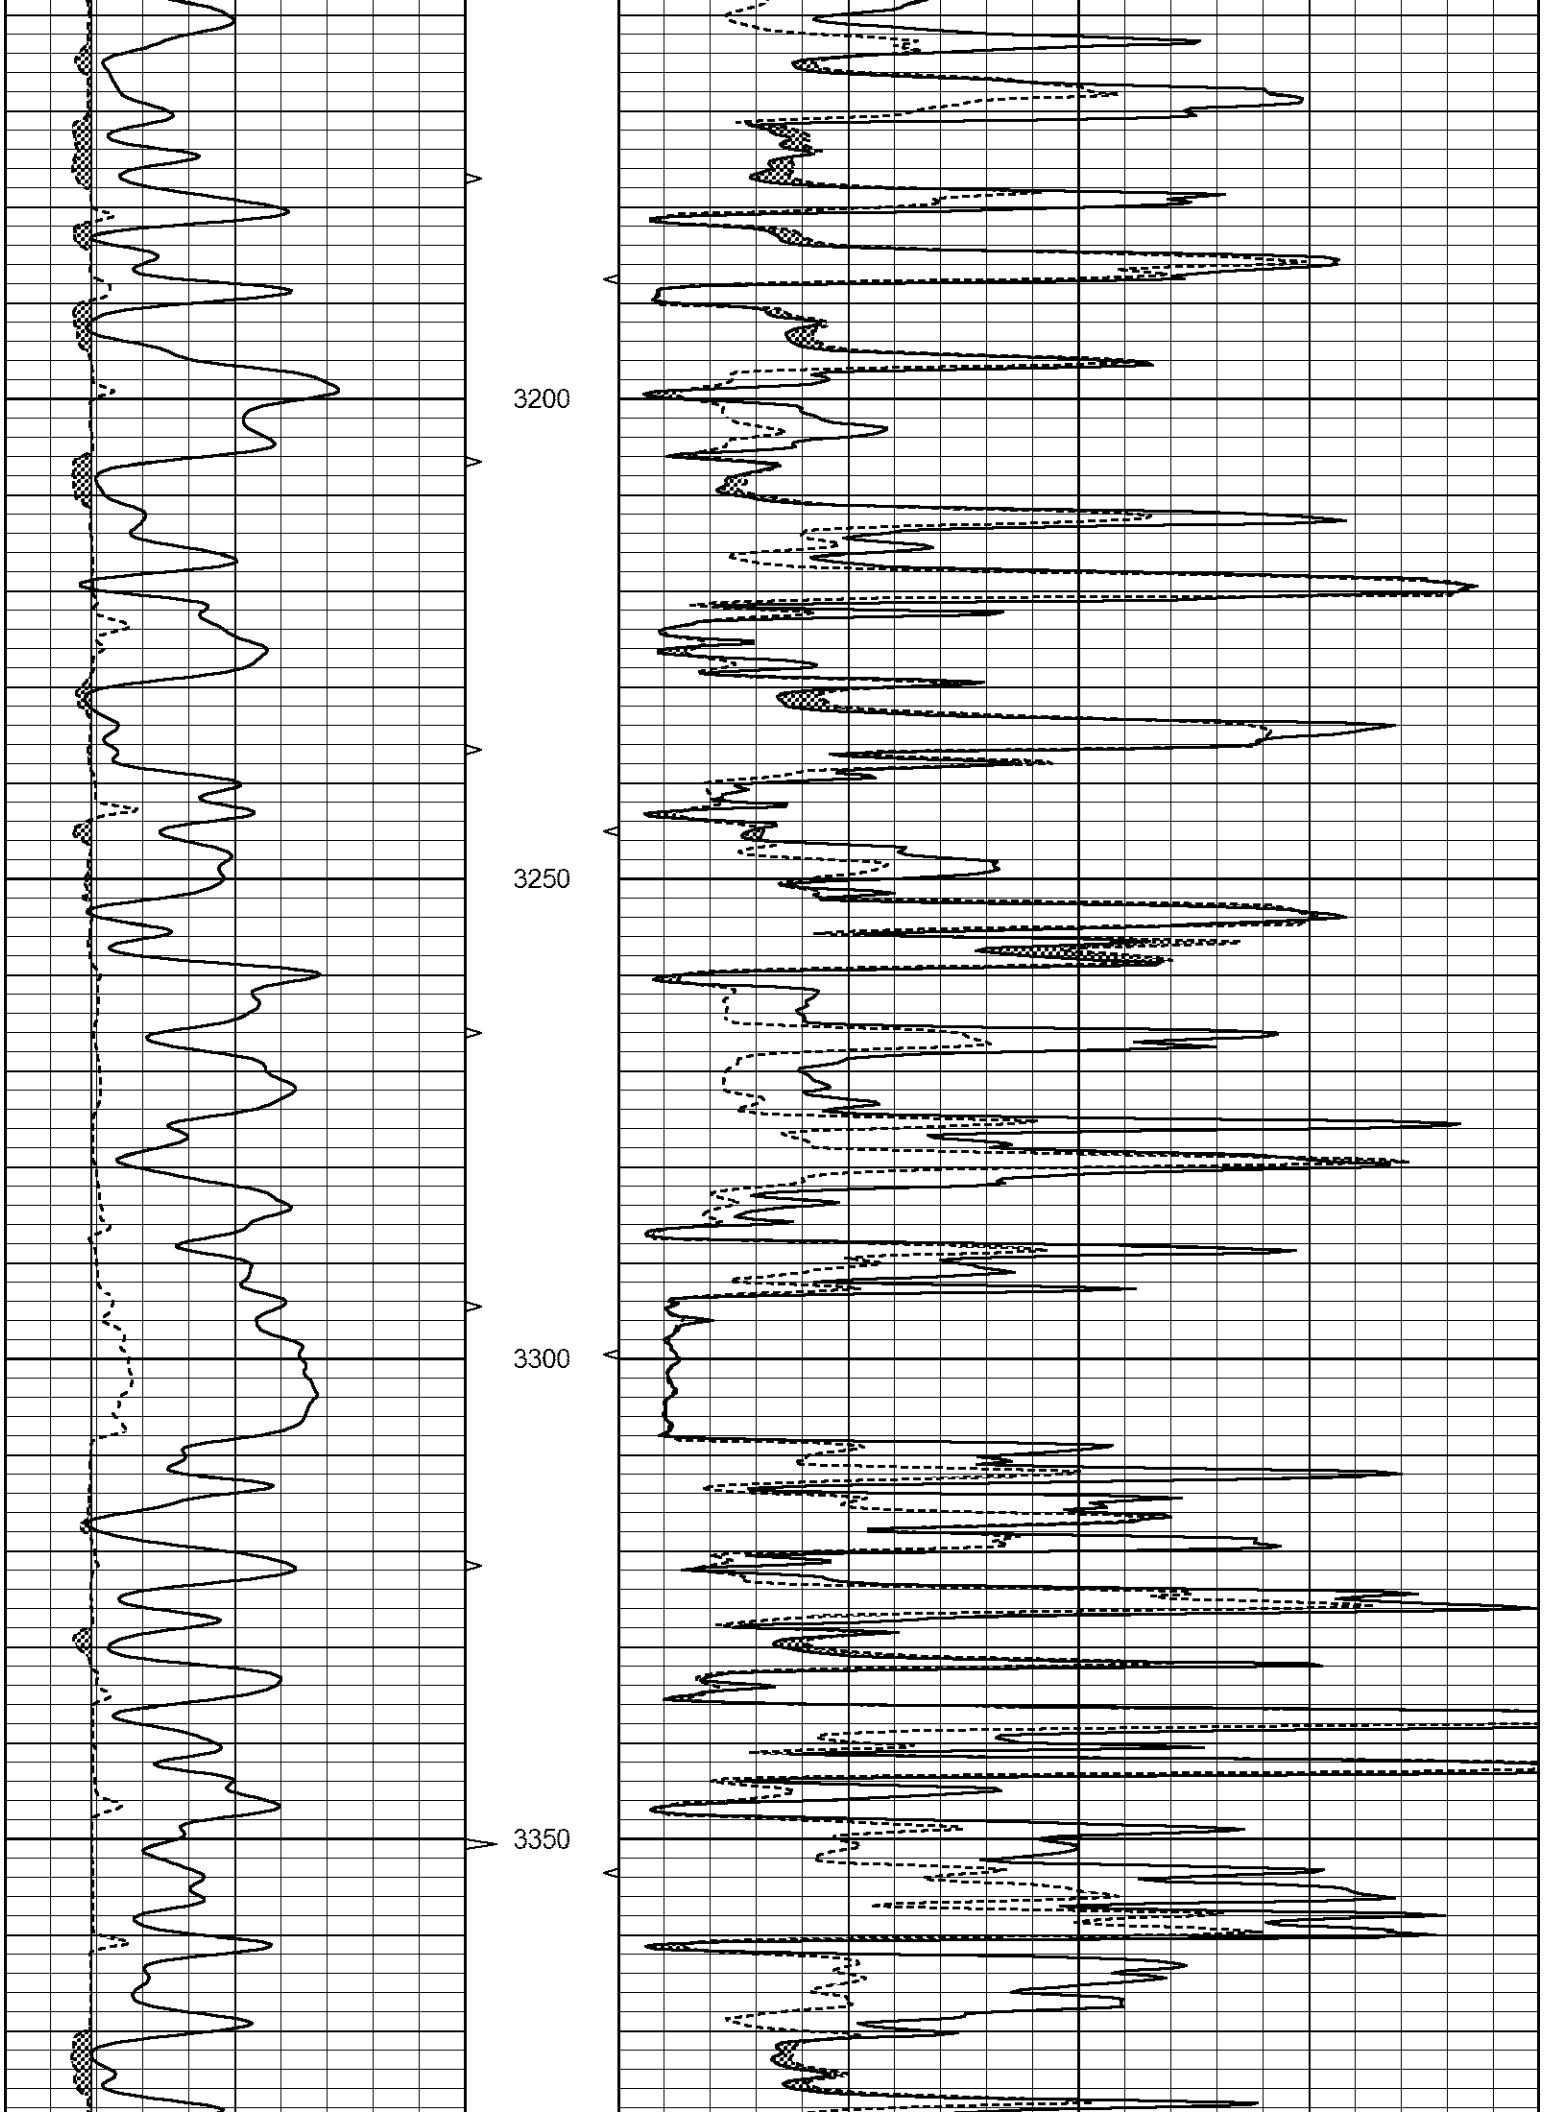


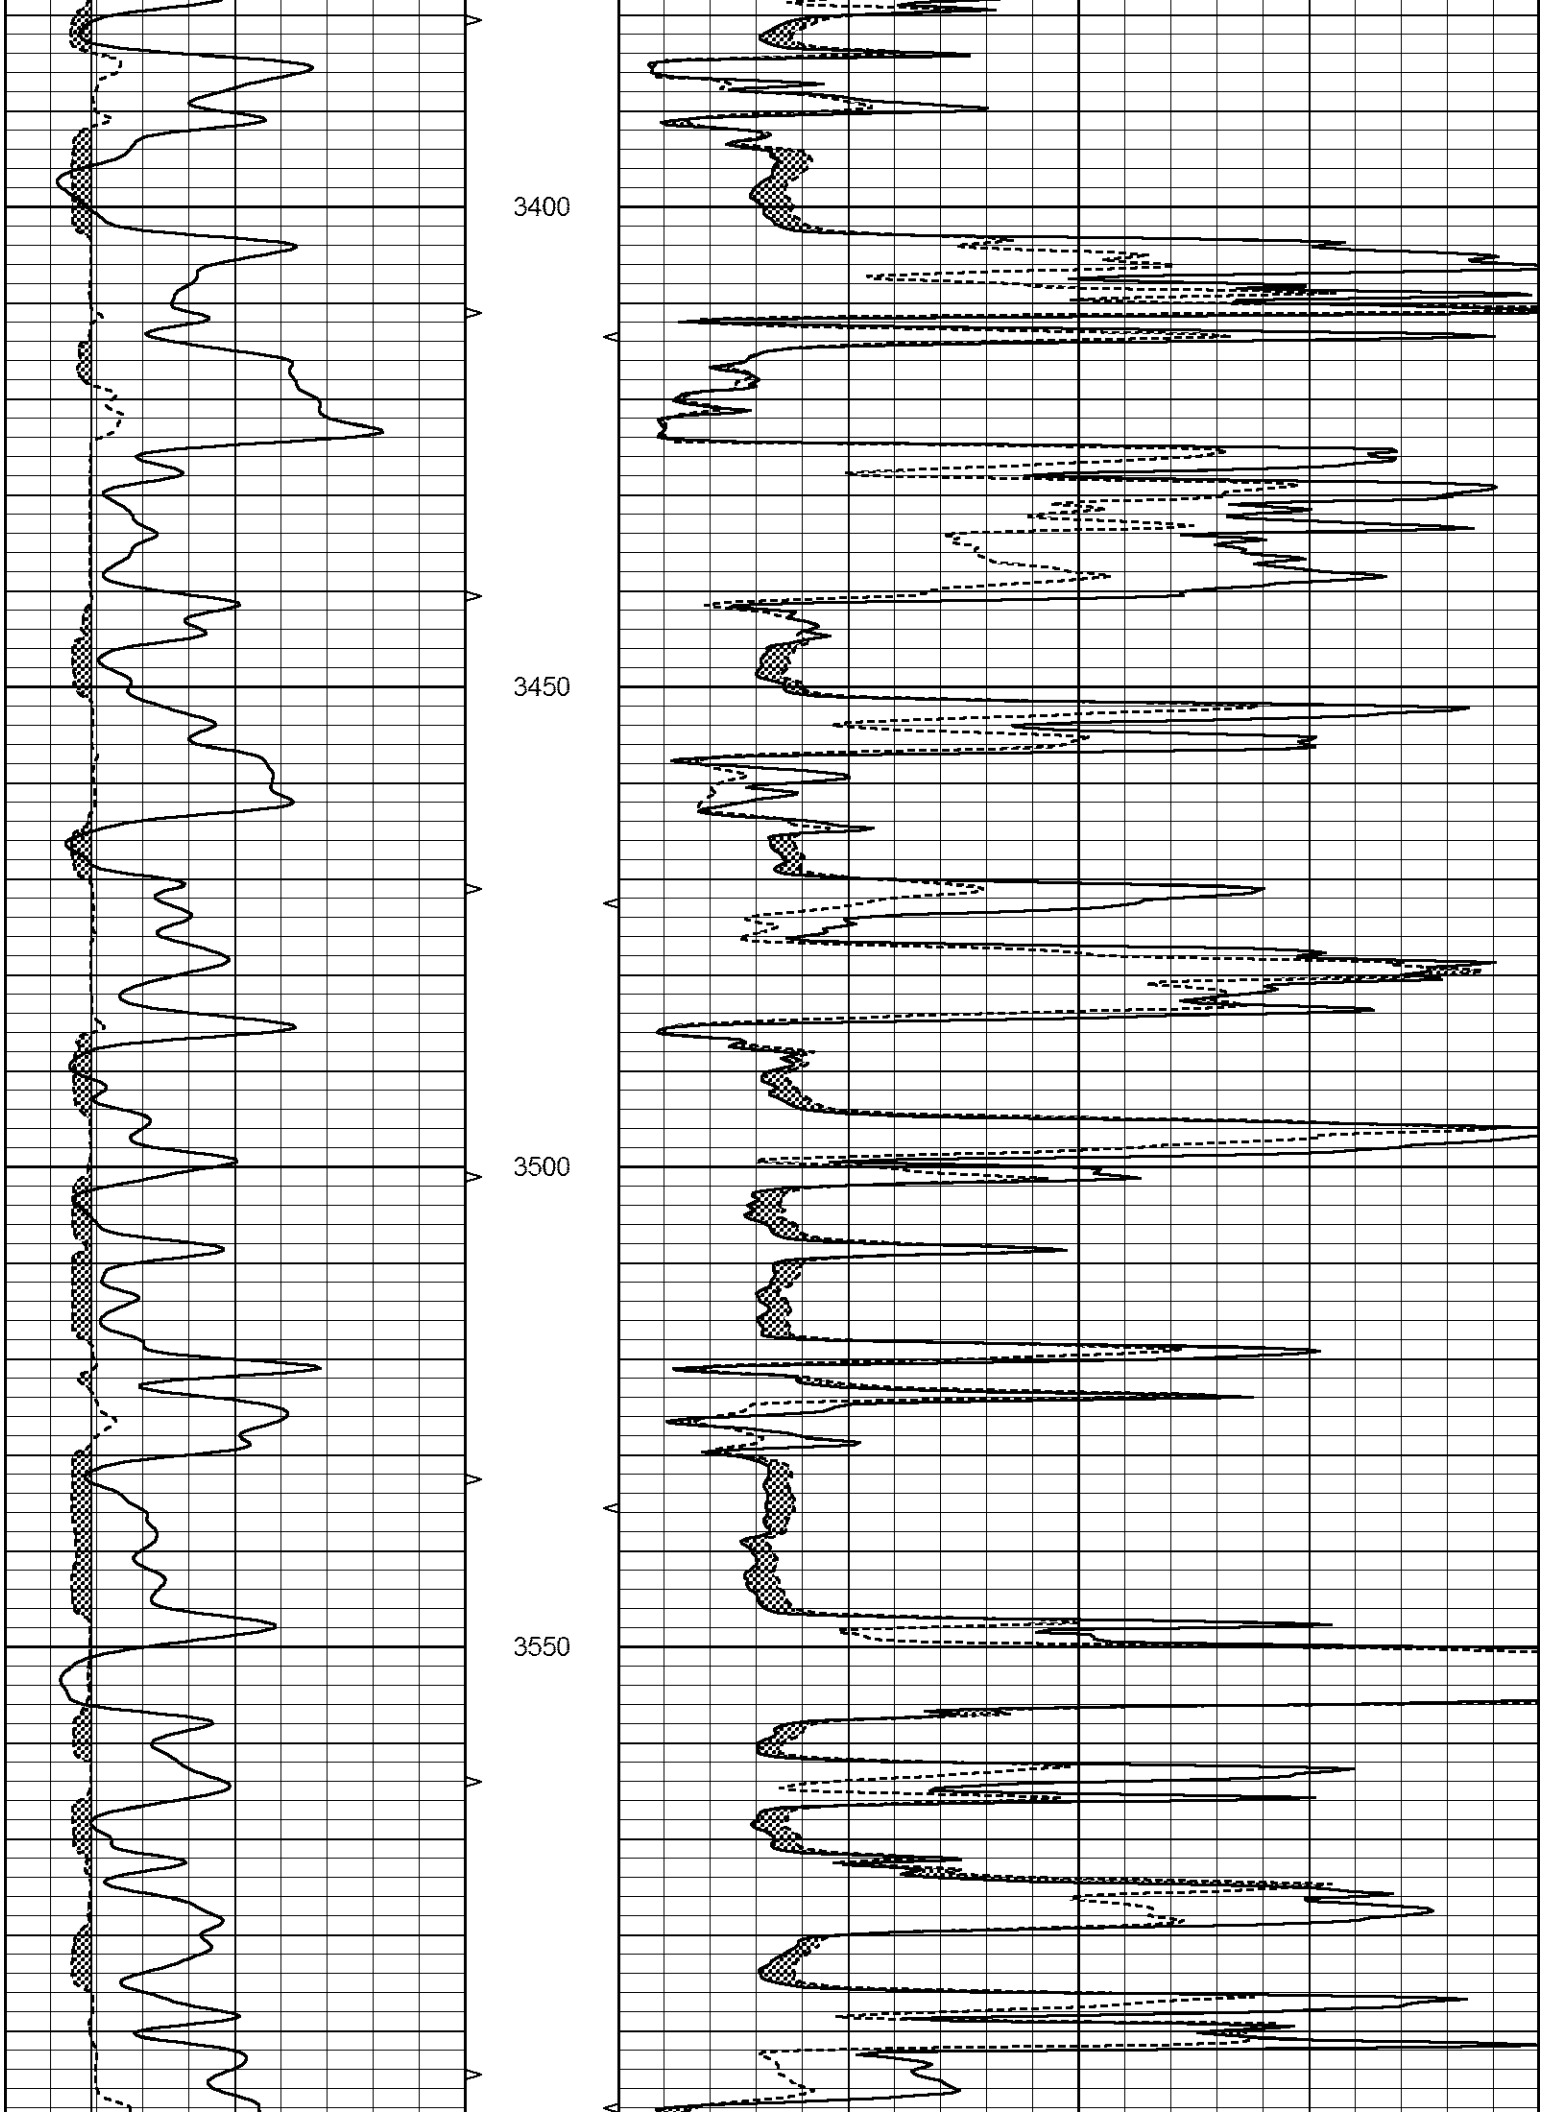

2300
2350
2400
2450

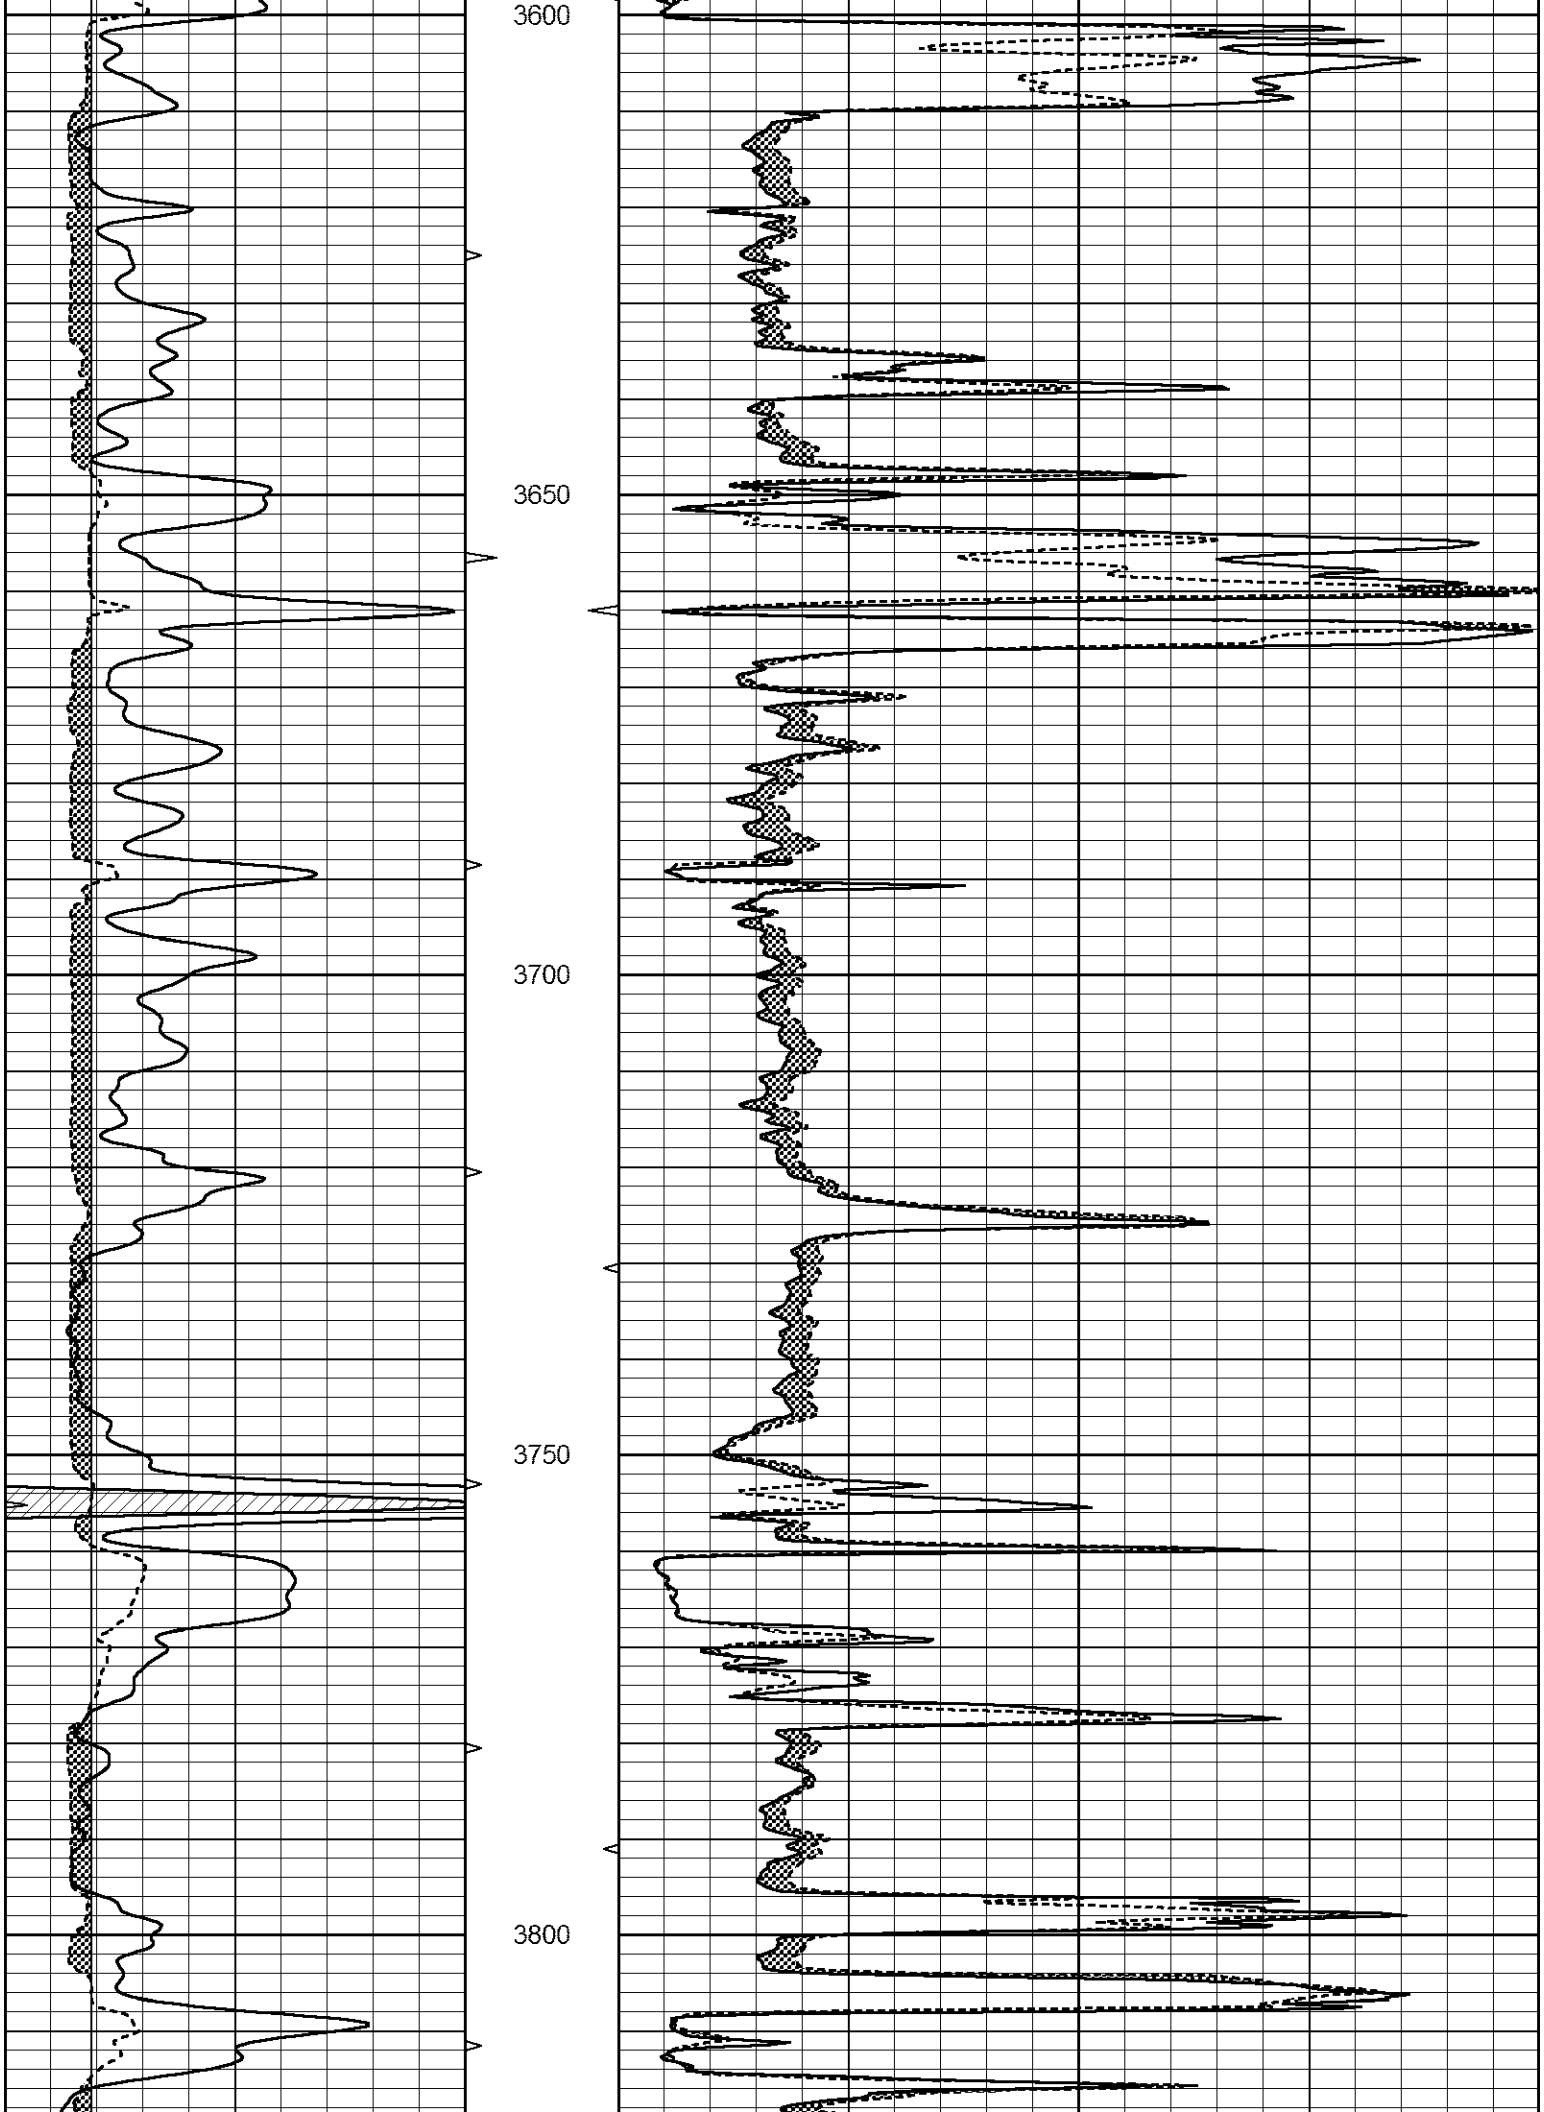

2500
2550
2600
2650
2700

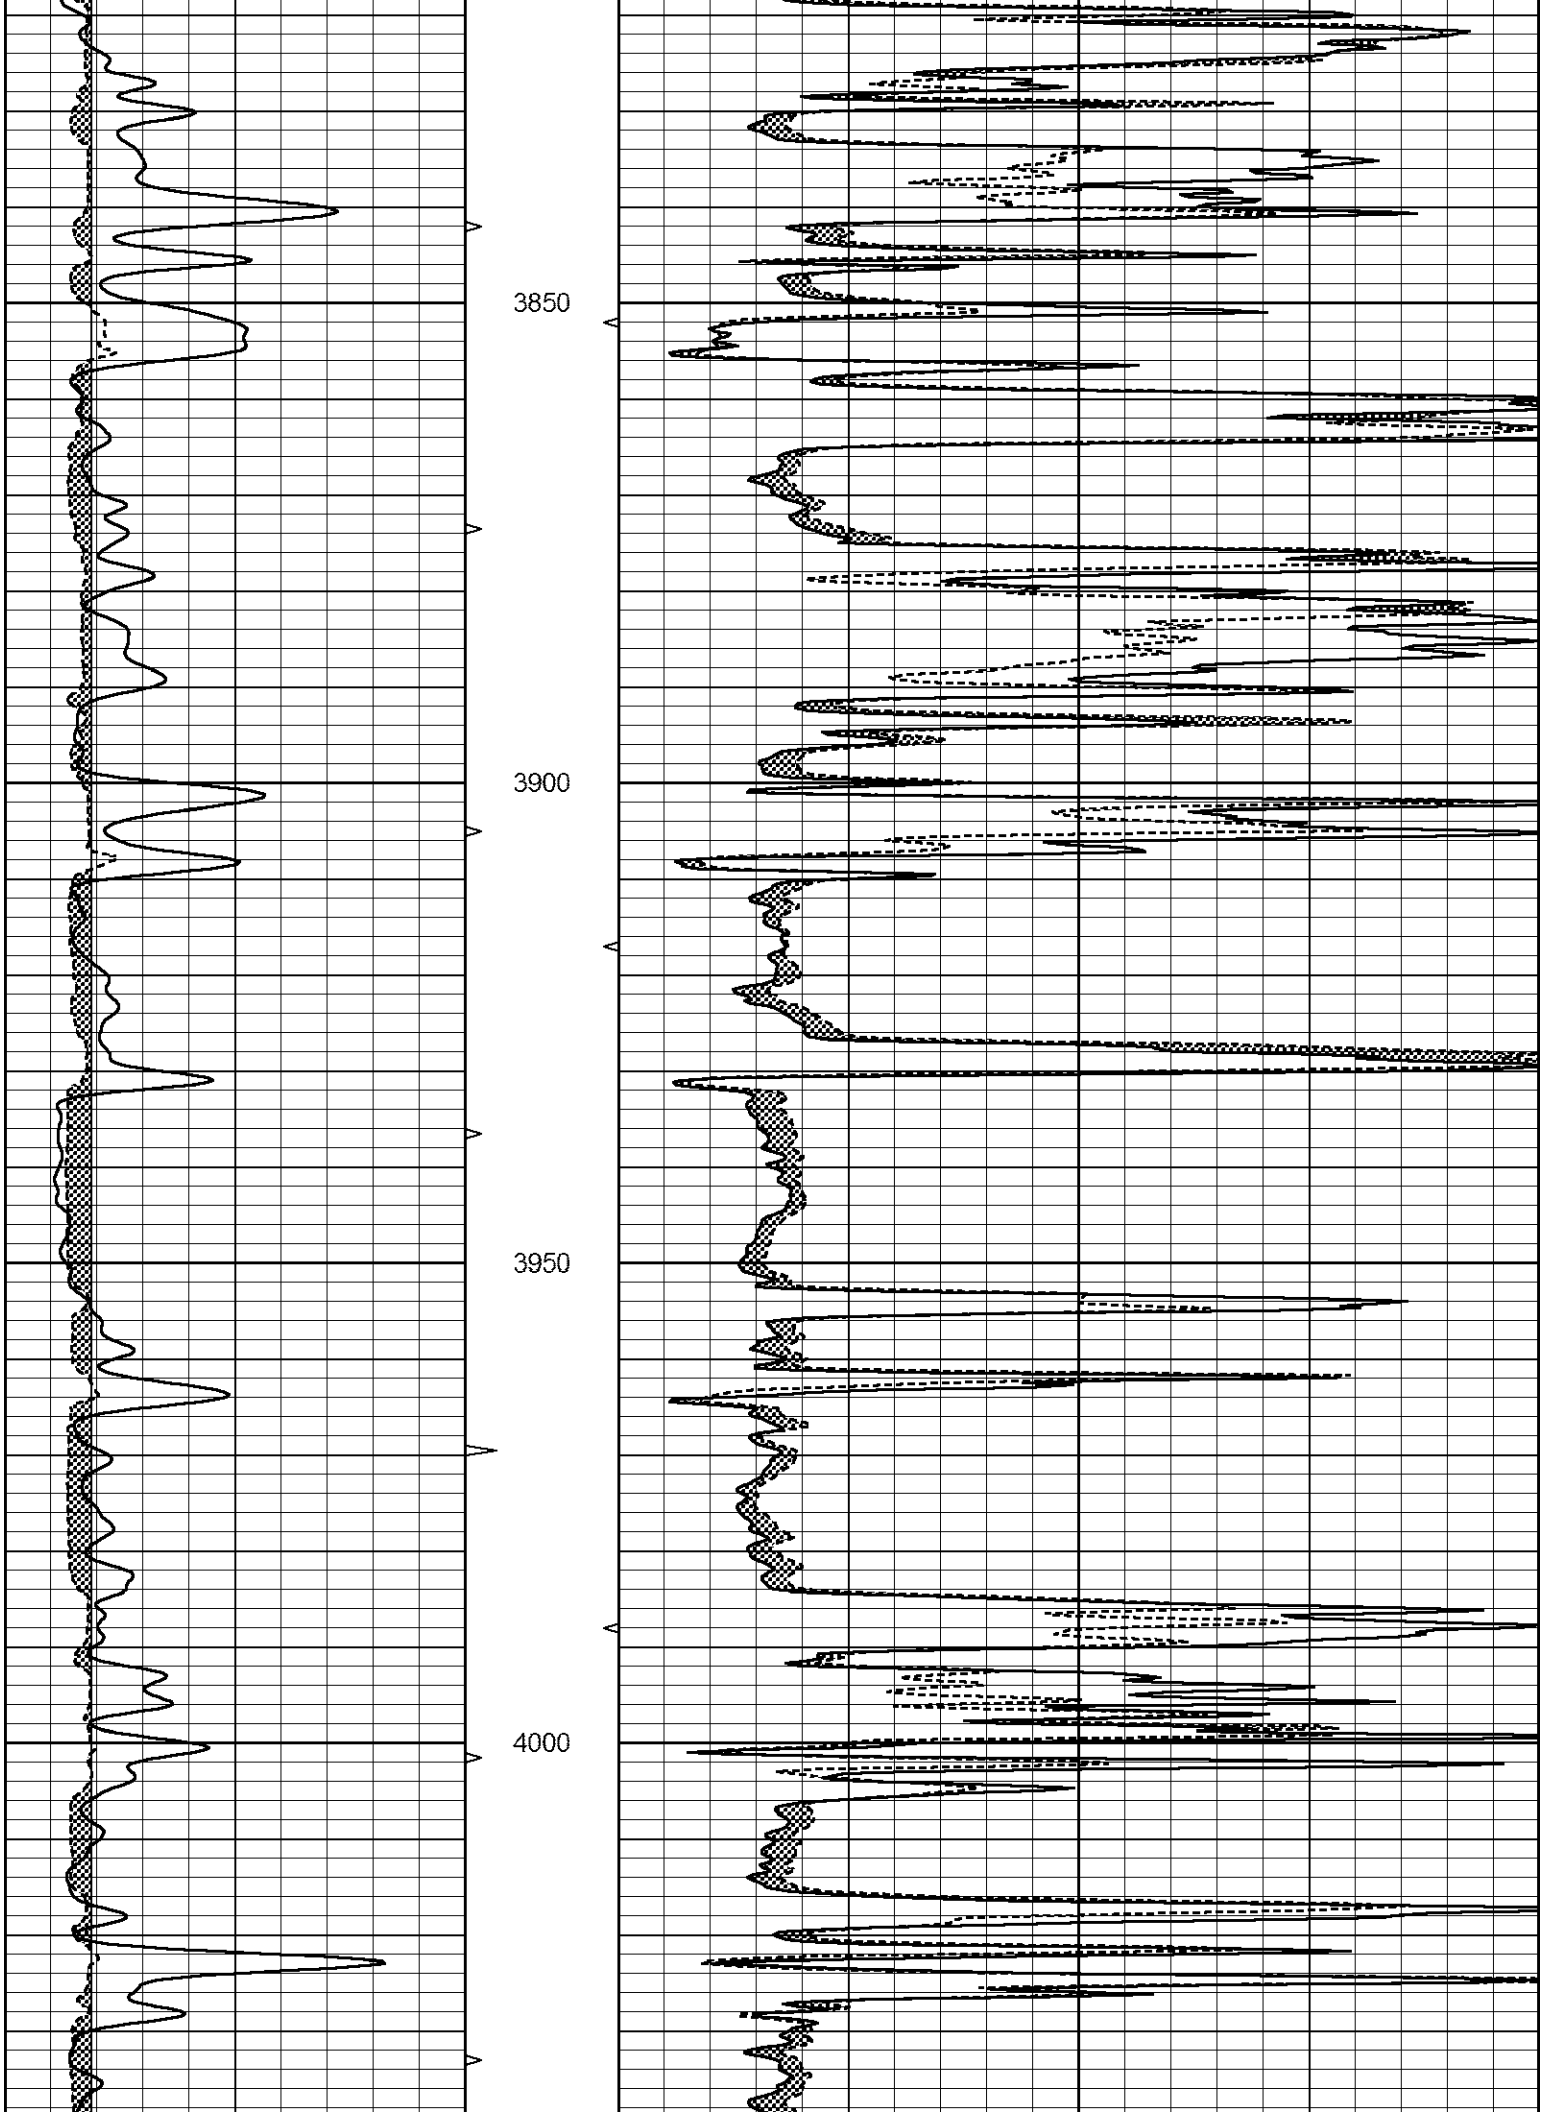

2750
2800
2850
2900

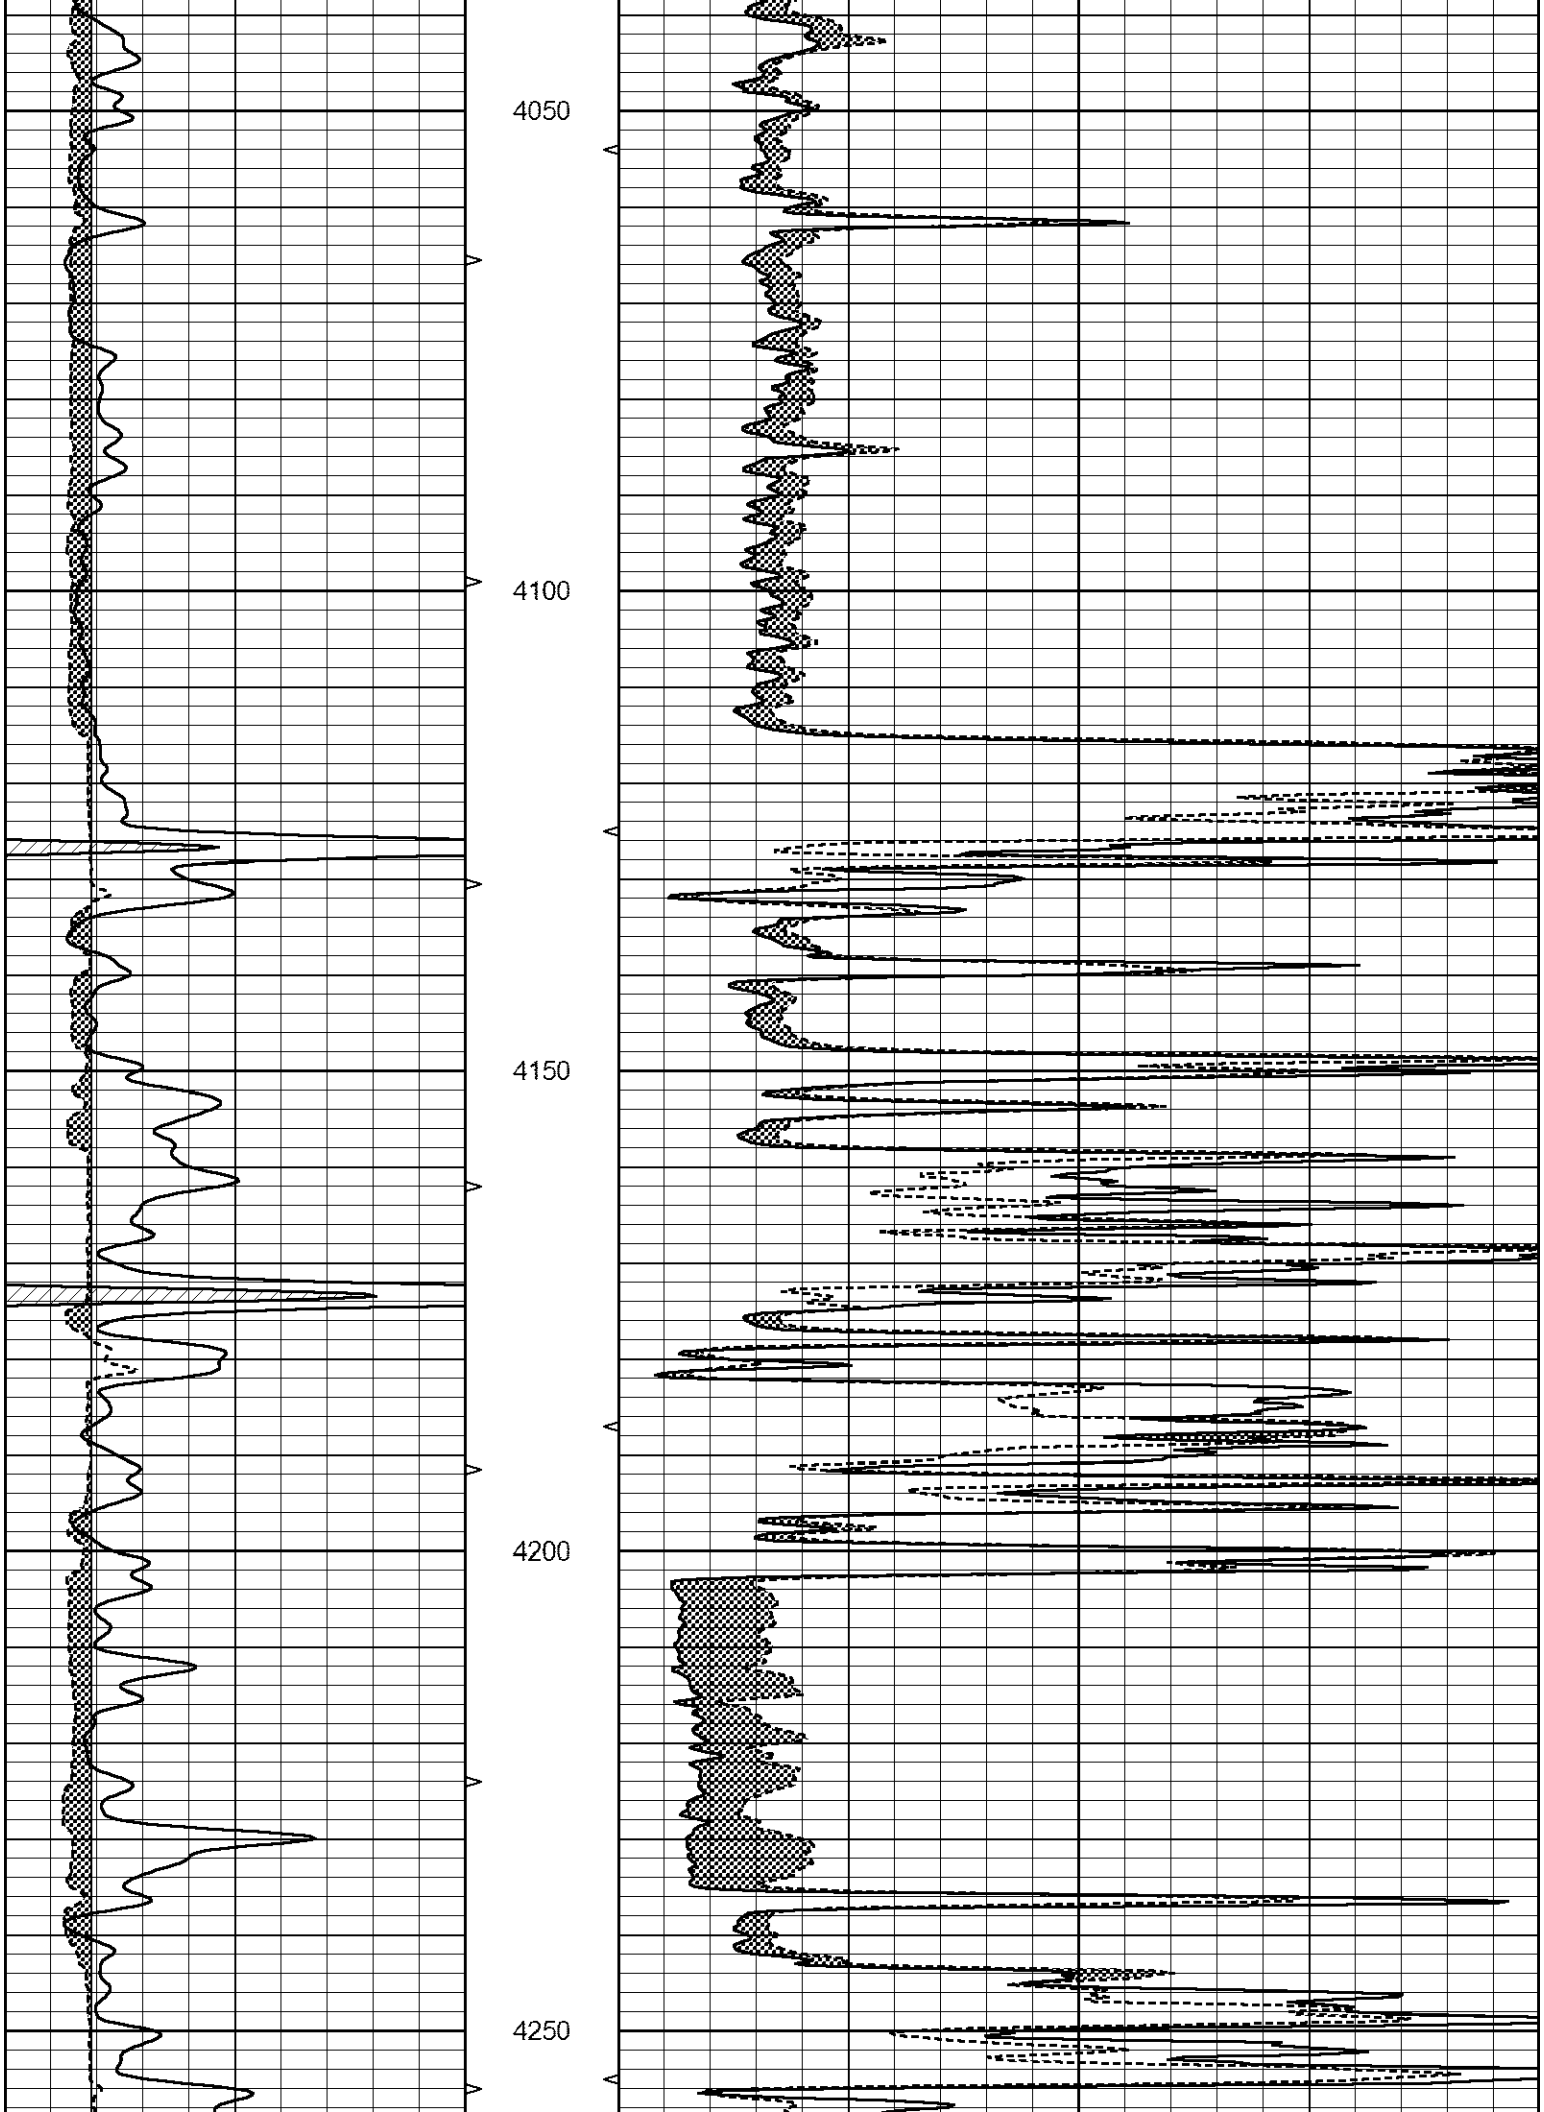

2950
3000
3050
3100
3150

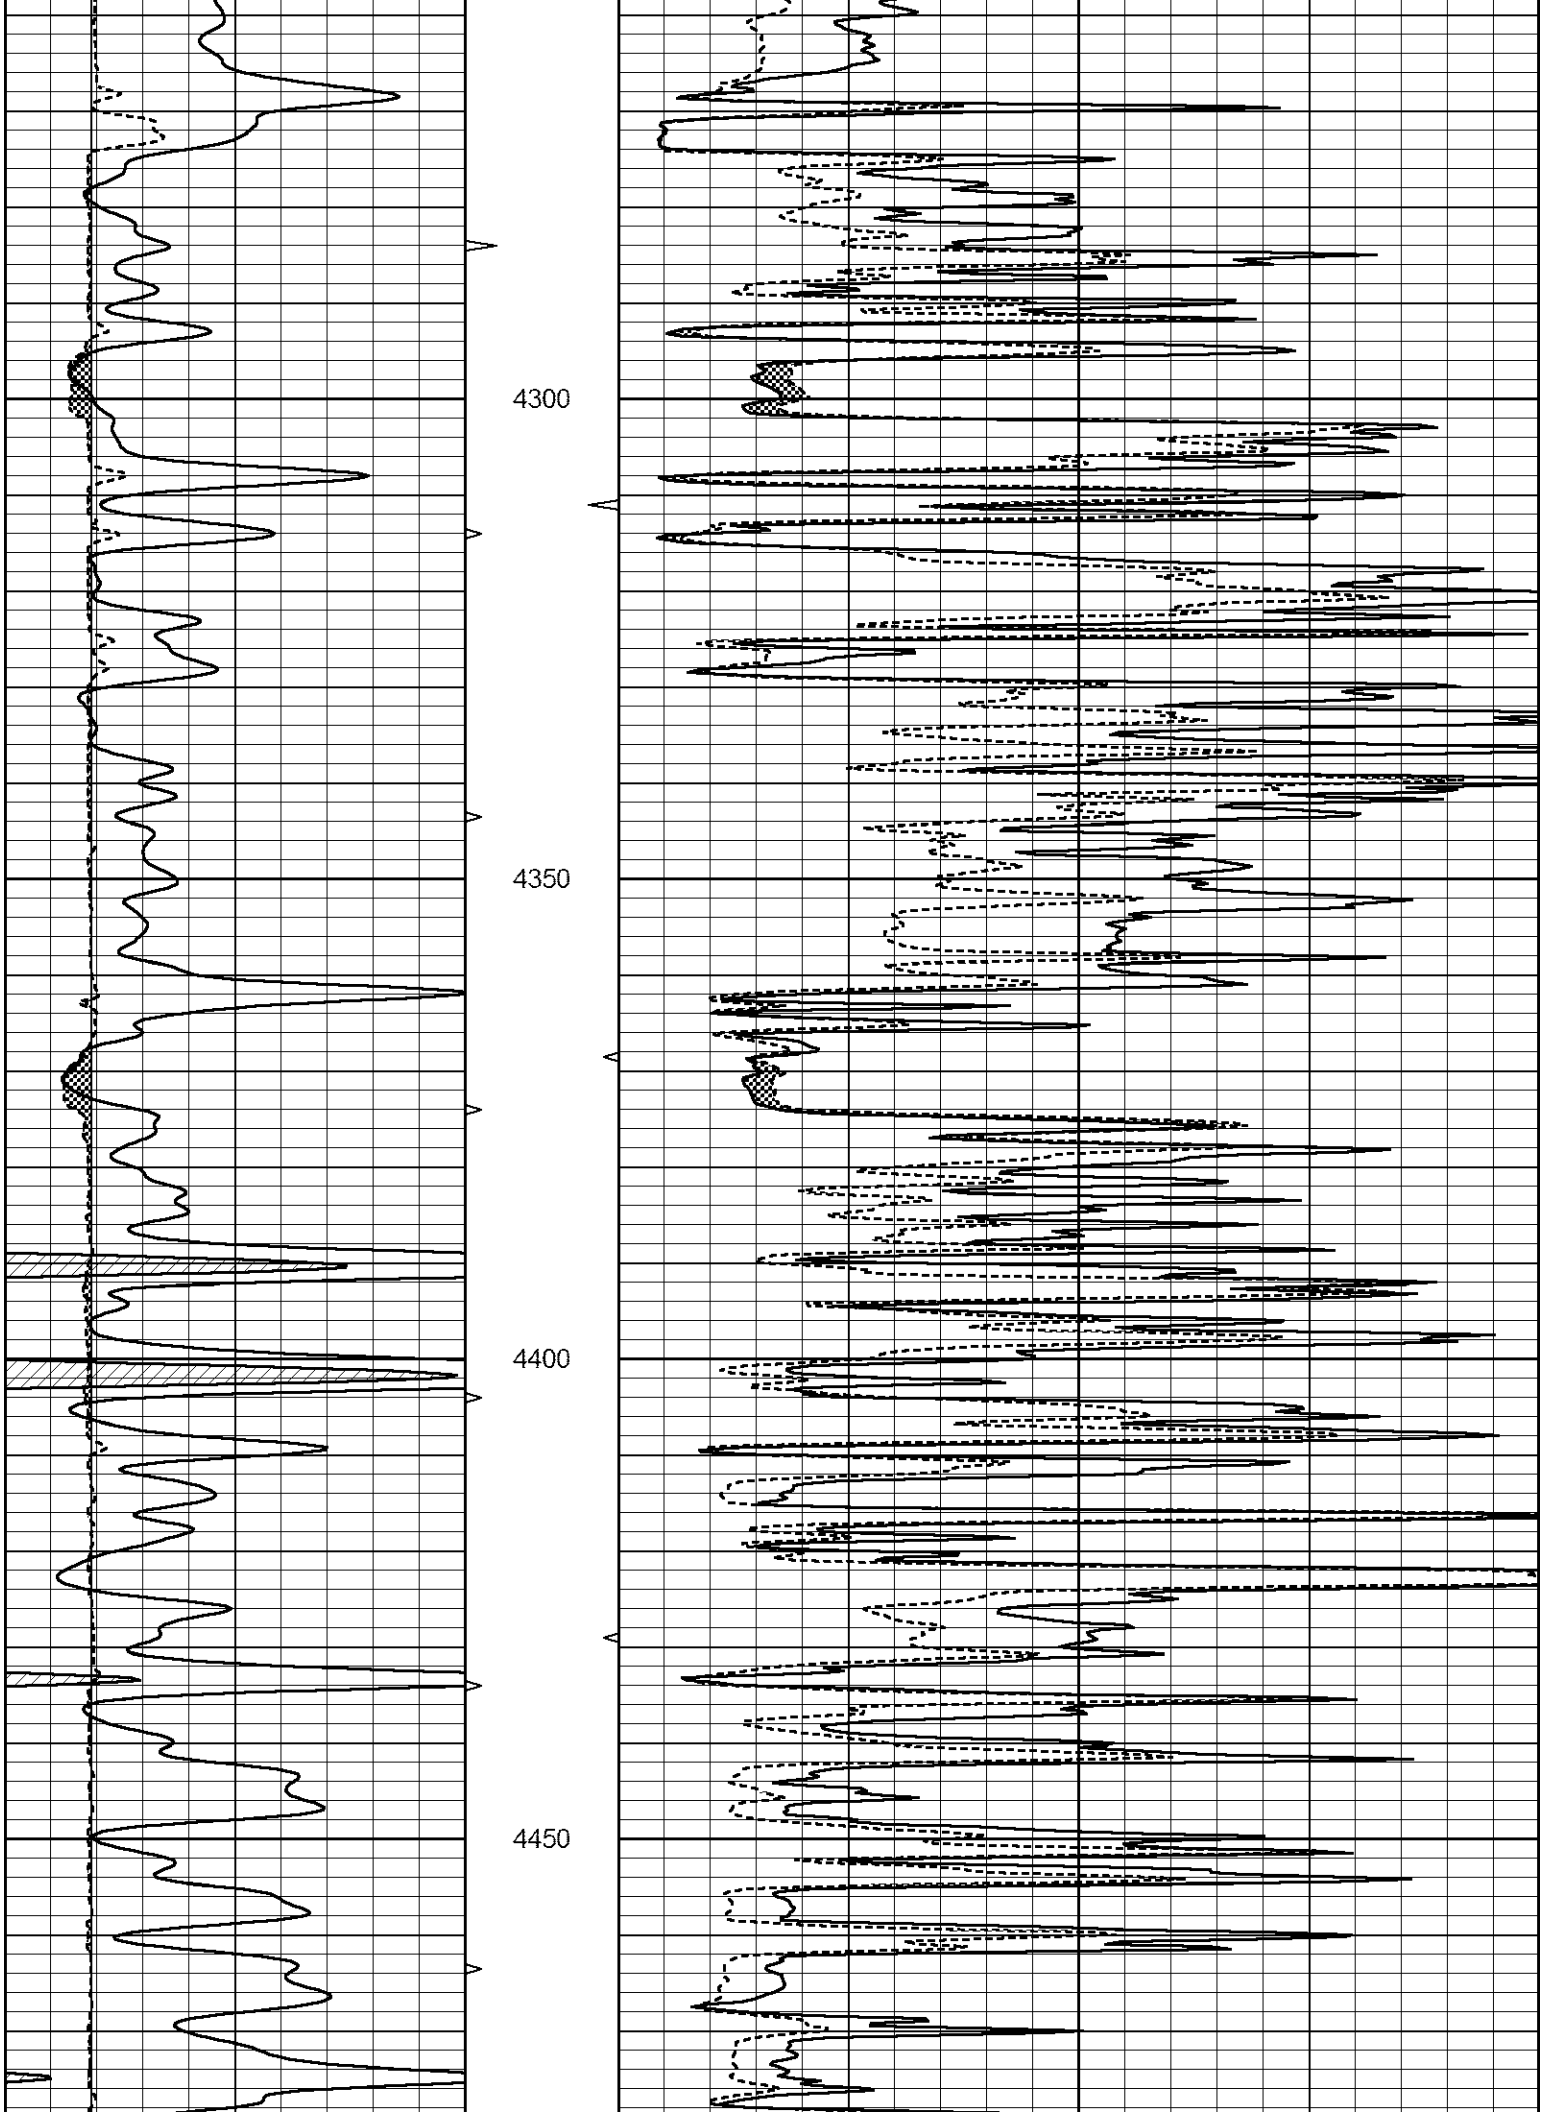

3200
3250
3300
3350

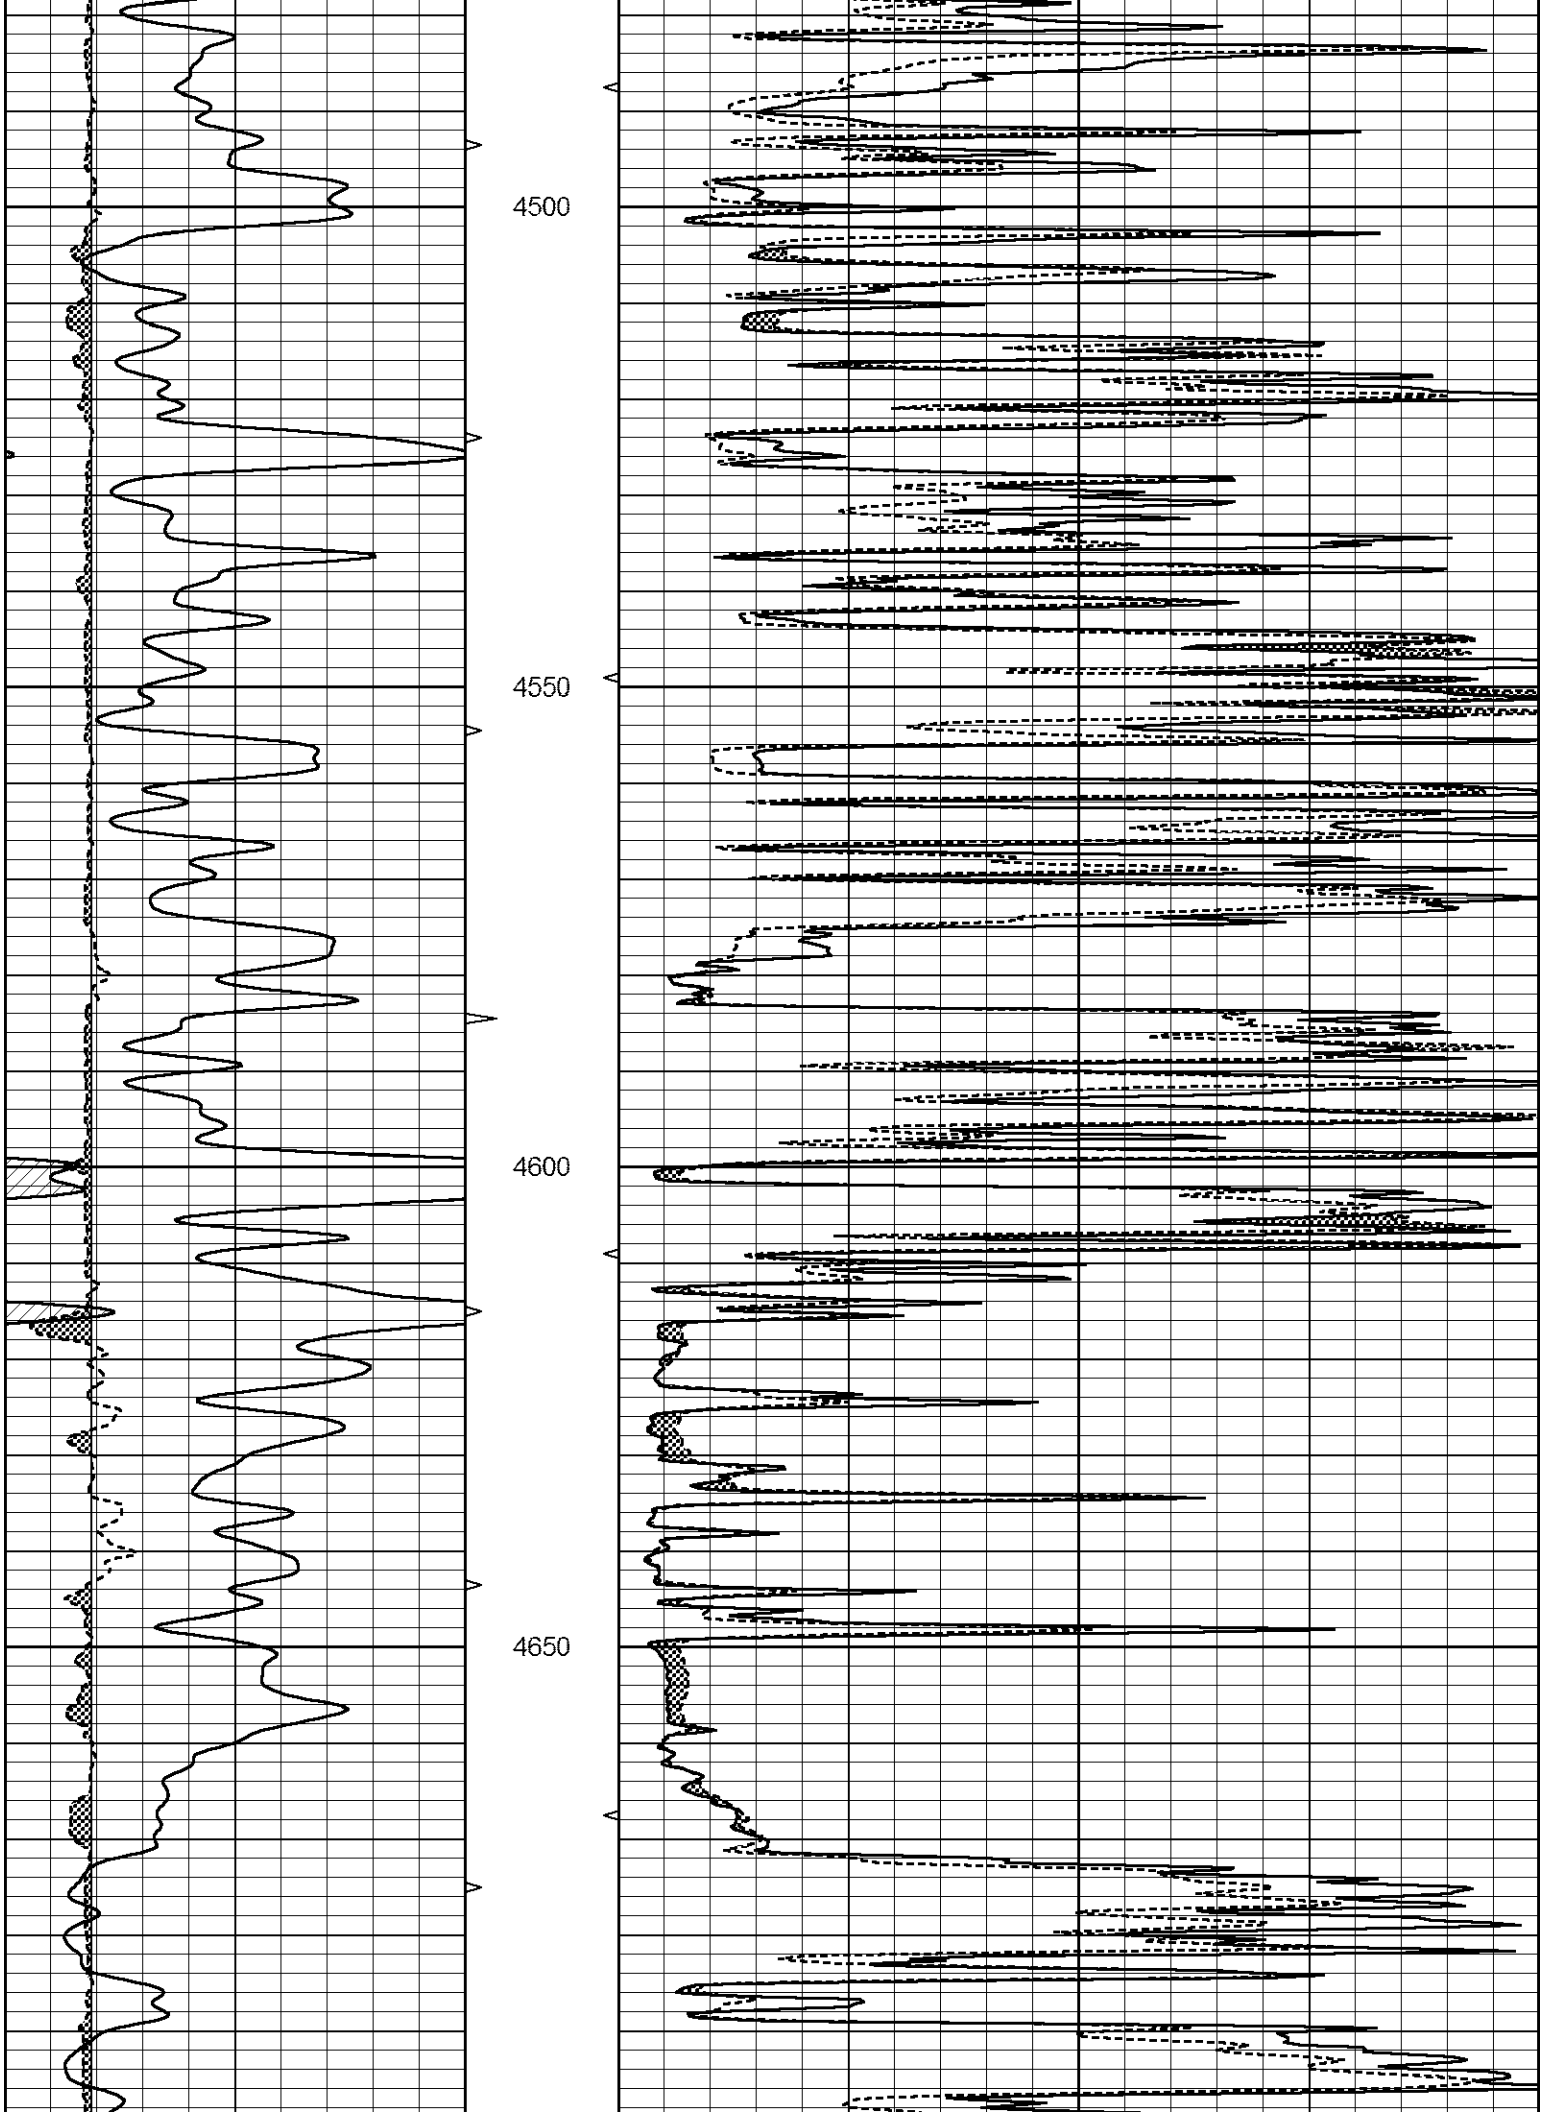

3400
3450
3500
3550

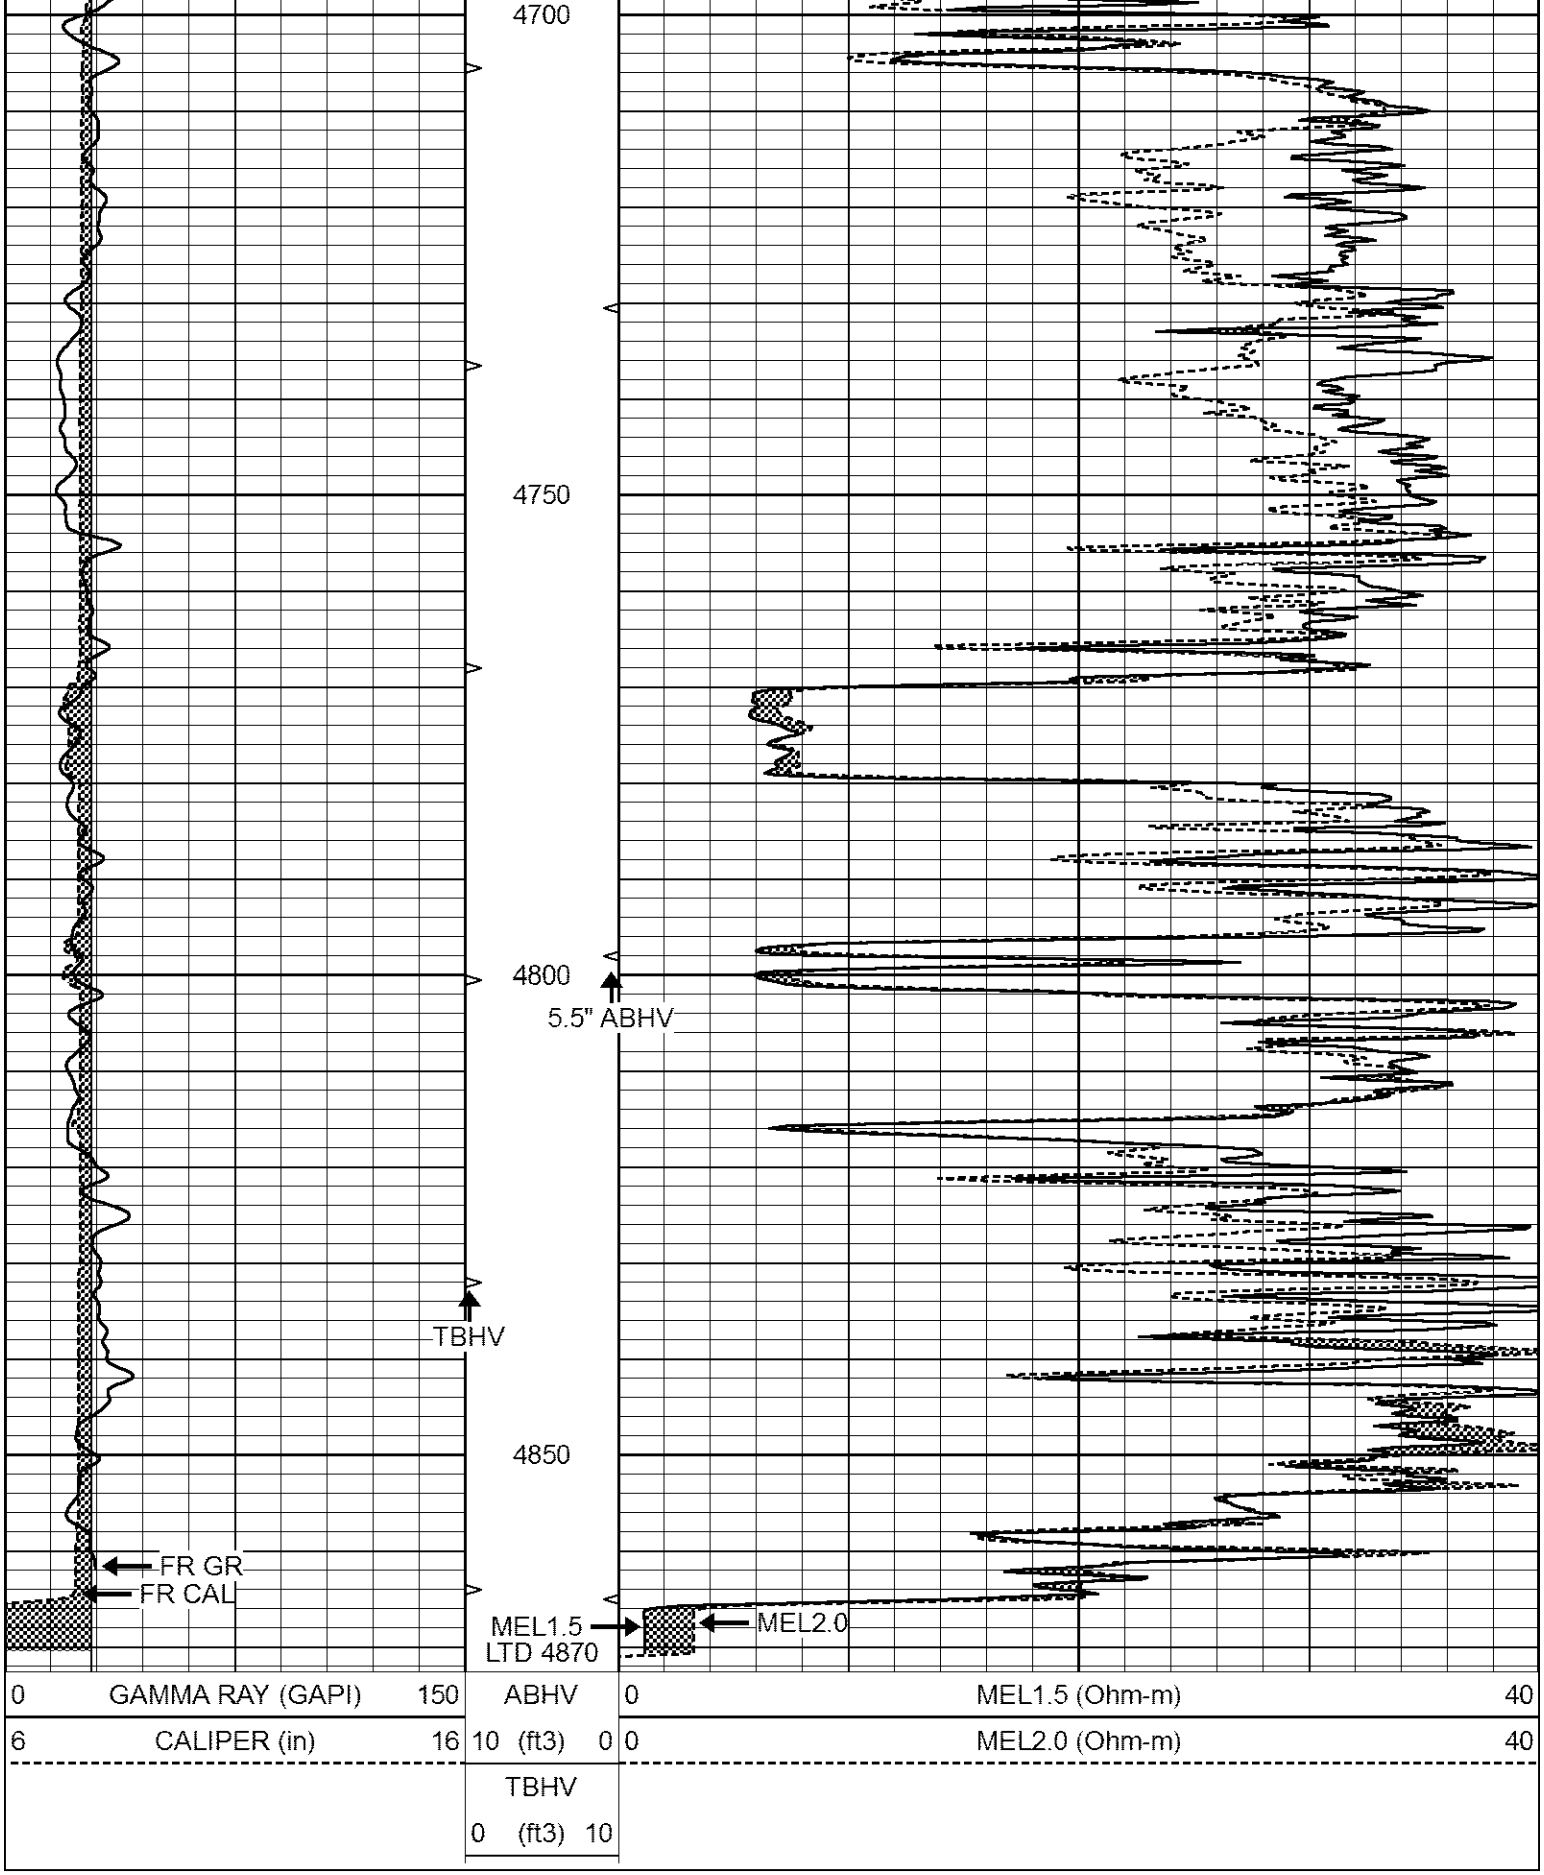

3600
3650
3700
3750
3800


3850
3900
3950
4000


4050
4100
4150
4200
4250


4300
4350
4400
4450

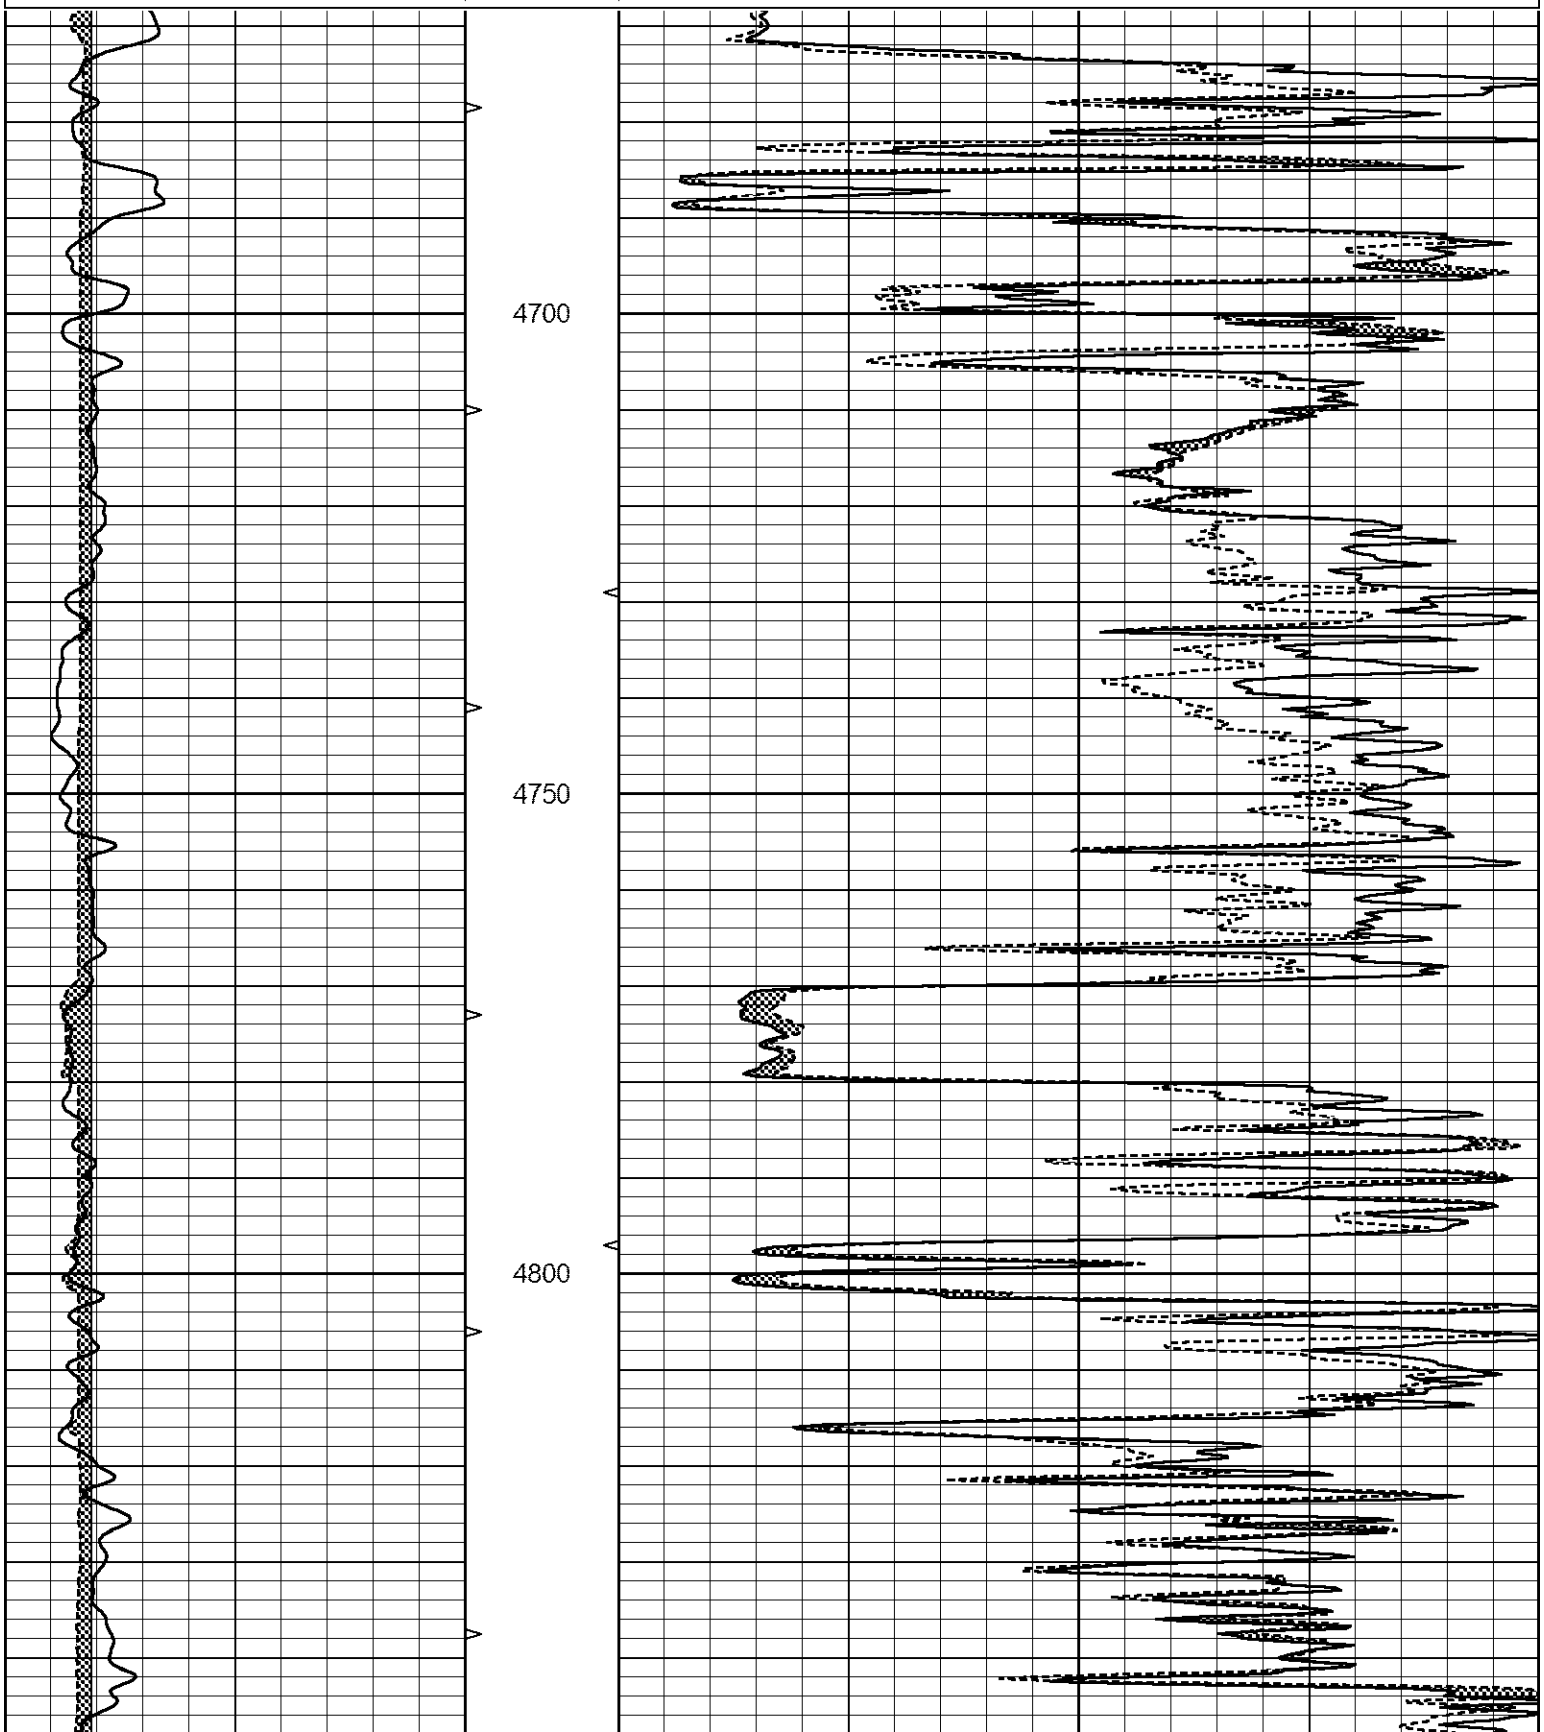

4500
4550
4600
4650

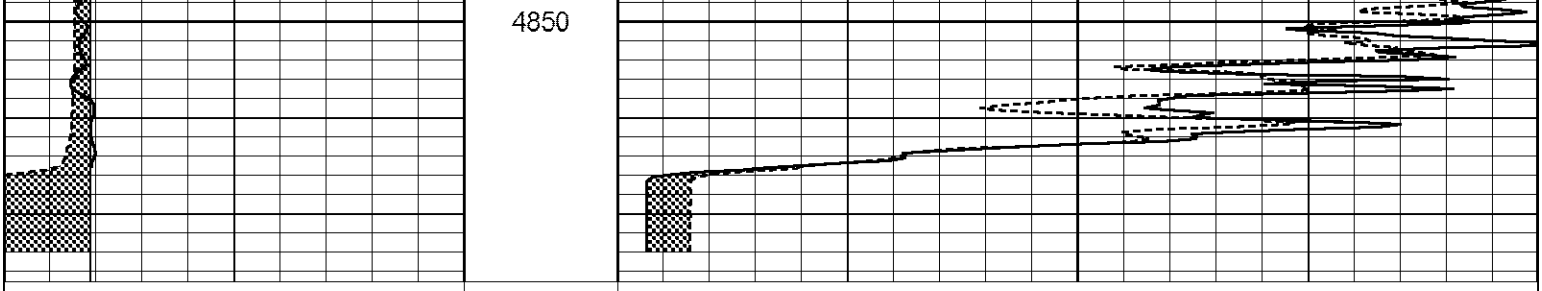


REPEAT SECTION

Database File	7010pe.db
Dataset Pathname	pass5R
Presentation Format	_micro
Dataset Creation	Tue Sep 06 20:00:03 2022
Charted by	Depth in Feet scaled 1:240

0 GAMMA RAY (GAPI) 150	ABHV	0 MEL1.5 (Ohm-m) 40		
6 CALIPER (in) 16	10 (ft3) 0	0 MEL2.0 (Ohm-m) 40		
	TBHV			
	0 (ft3) 10			





0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m) 40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m) 40
			TBHV		
			0 (ft3) 10		

Calibration Report

Database File 7010pe.db
Dataset Pathname pass6D
Dataset Creation Tue Sep 06 20:58:39 2022

MICRO_USR Calibration Report

Serial Number: 070911
Tool Model: ProbeL
Performed: Thu Aug 25 03:27:32 2022

Caliper Calibration: Gain=4.500 Offset=0.480

	Low Cal	High Cal
References	8.000	14.000
Readings	1.451	3.049

1.5" Calibration: Gain=27.000 Offset=-0.500

	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	0.843

2" Calibration: Gain=18.000 Offset=1.500

	Low Cal	High Cal
References	0.000	20.000
Readings	0.021	0.810

Microlog Calibration Report

Serial-Model: 070911-ProbeL
Performed: Sat May 14 04:48:25 2022

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number: 070558
Tool Model: Probe1
Performed: Sat Jul 02 05:55:58 2022

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2600	GAPI/cps