



DUAL INDUCTION LOG

Company	PALOMINO PETROLEUM	Company	PALOMINO PETROLEUM
Well	LYIN' EYES #1	Well	LYIN' EYES #1
Field	BASINGER	Field	BASINGER
County	TREGO	County	TREGO
State	KS	State	KS
Location:	2275' FSL & 690' FWL		Other Services CDNL ML
Permanent Datum	SEC 33 TWP 15S RGE 25W	API #: 15 195 23148	
Log Measured From	Ground Level	Elevation	2453
Drilling Measured From	KB 8' AGL		
	KB		Elevation K.B. 2461 D.F. 2459 G.L. 2453
Date	9/13/22		
Run Number	One		
Depth Driller	4500		
Depth Logger	4500		
Bottom Logged Interval	4498		
Top Log Interval	00		
Casing Driller	8 5/8" @ 222		
Casing Logger	222		
Bit Size	7 7/8"		
Type Fluid in Hole	Chemical		
Density / Viscosity	9.2/57		
pH / Fluid Loss	10.0/8.8		
Source of Sample	Pit		
Rm @ Meas. Temp	1.3@80degf		
Rmf @ Meas. Temp	.98@80degf		
Rmc @ Meas. Temp	1.56@80degf		
Source of Rmf / Rmc	Calculated		
Rm @ BHT	85@121degf		
Time Circulation Stopped	6:30 P.M.		
Time Logger on Bottom	9:30 PM		
Maximum Recorded Temperature	121degf		
Equipment Number	T605		
Location	Hays, KS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	KEATON JONES		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

ARNOLD WEST TO H RD. 4 NORTH TO COUNTY LINE,
1 WEST, 1/2 NORTH, EAST INTO.

Thank You for using Gemini Wireline LLC
785-625-1182




MAIN PASS


Database File pplyineyes#1oh.db
 Dataset Pathname pass3.1
 Presentation Format kdillinn
 Dataset Creation Tue Sep 13 23:16:08 2022
 Charted by Depth in Feet scaled 1:600

0	GR (GAPI)	150
-100	SP (mV)	100


1000	CILD (mmho/m)	0
10000	LTEN (lb)	0


0	RILD (Ohm-m)	50
0	RLL3 (Ohm-m)	50
50	RILD x 10 (Ohm-m)	500
50	RLL3 x 10 (Ohm-m)	500

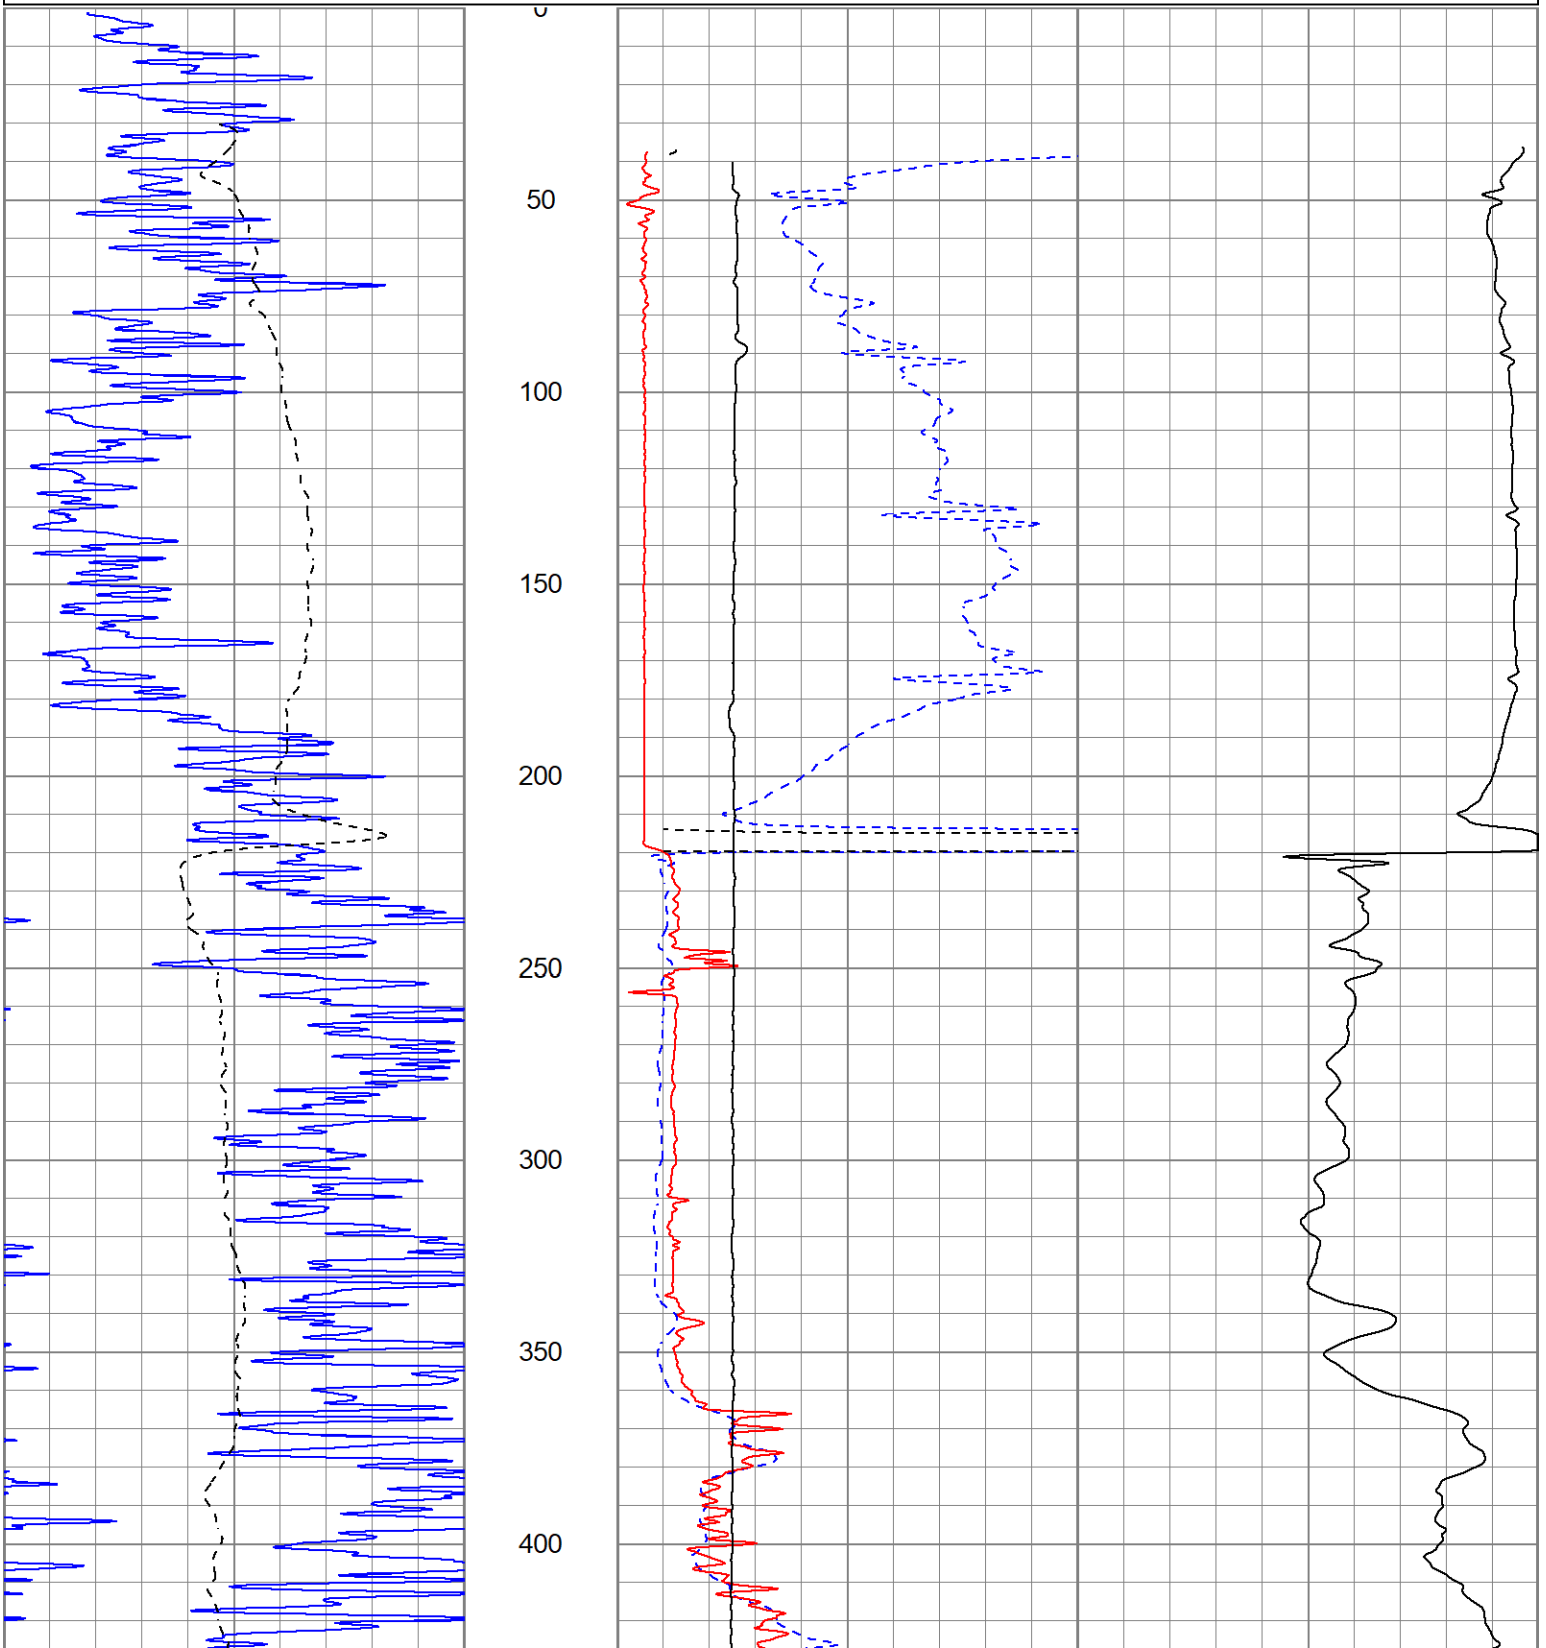

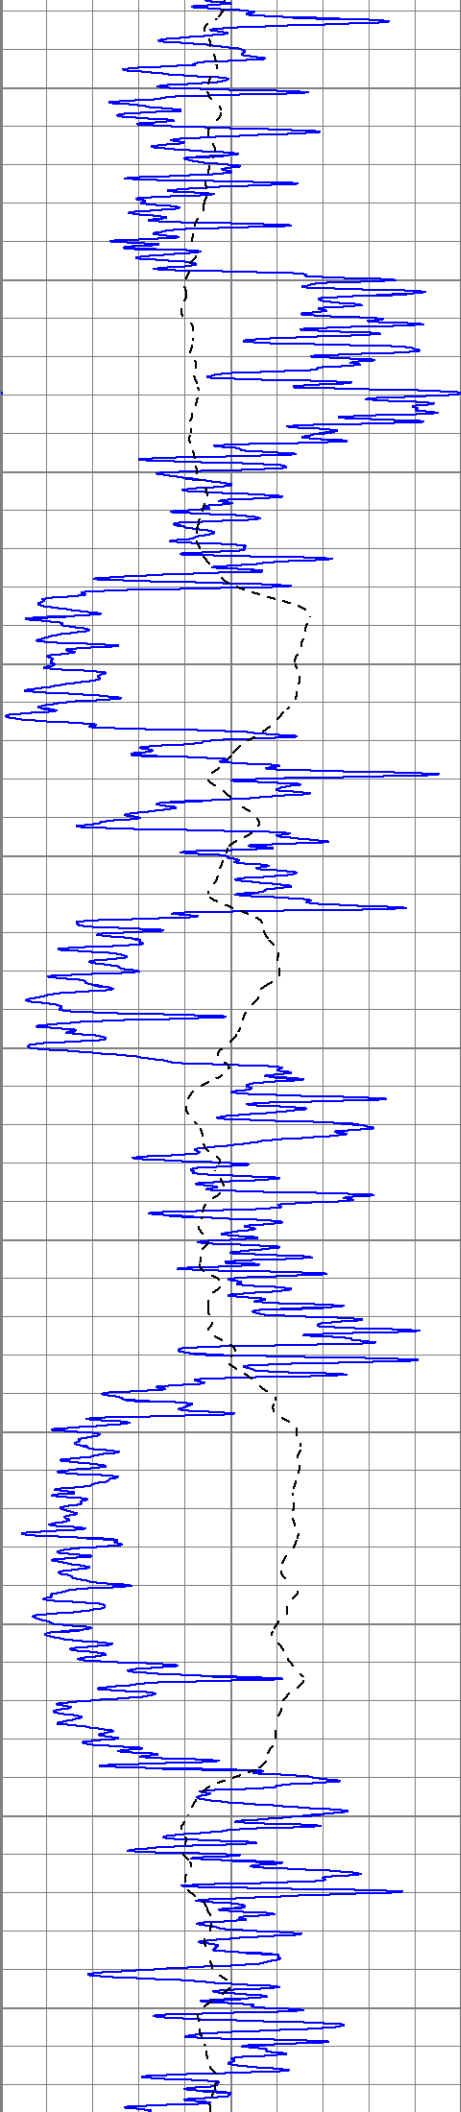




450
500
550
600
650
700
750
800
850
900
950

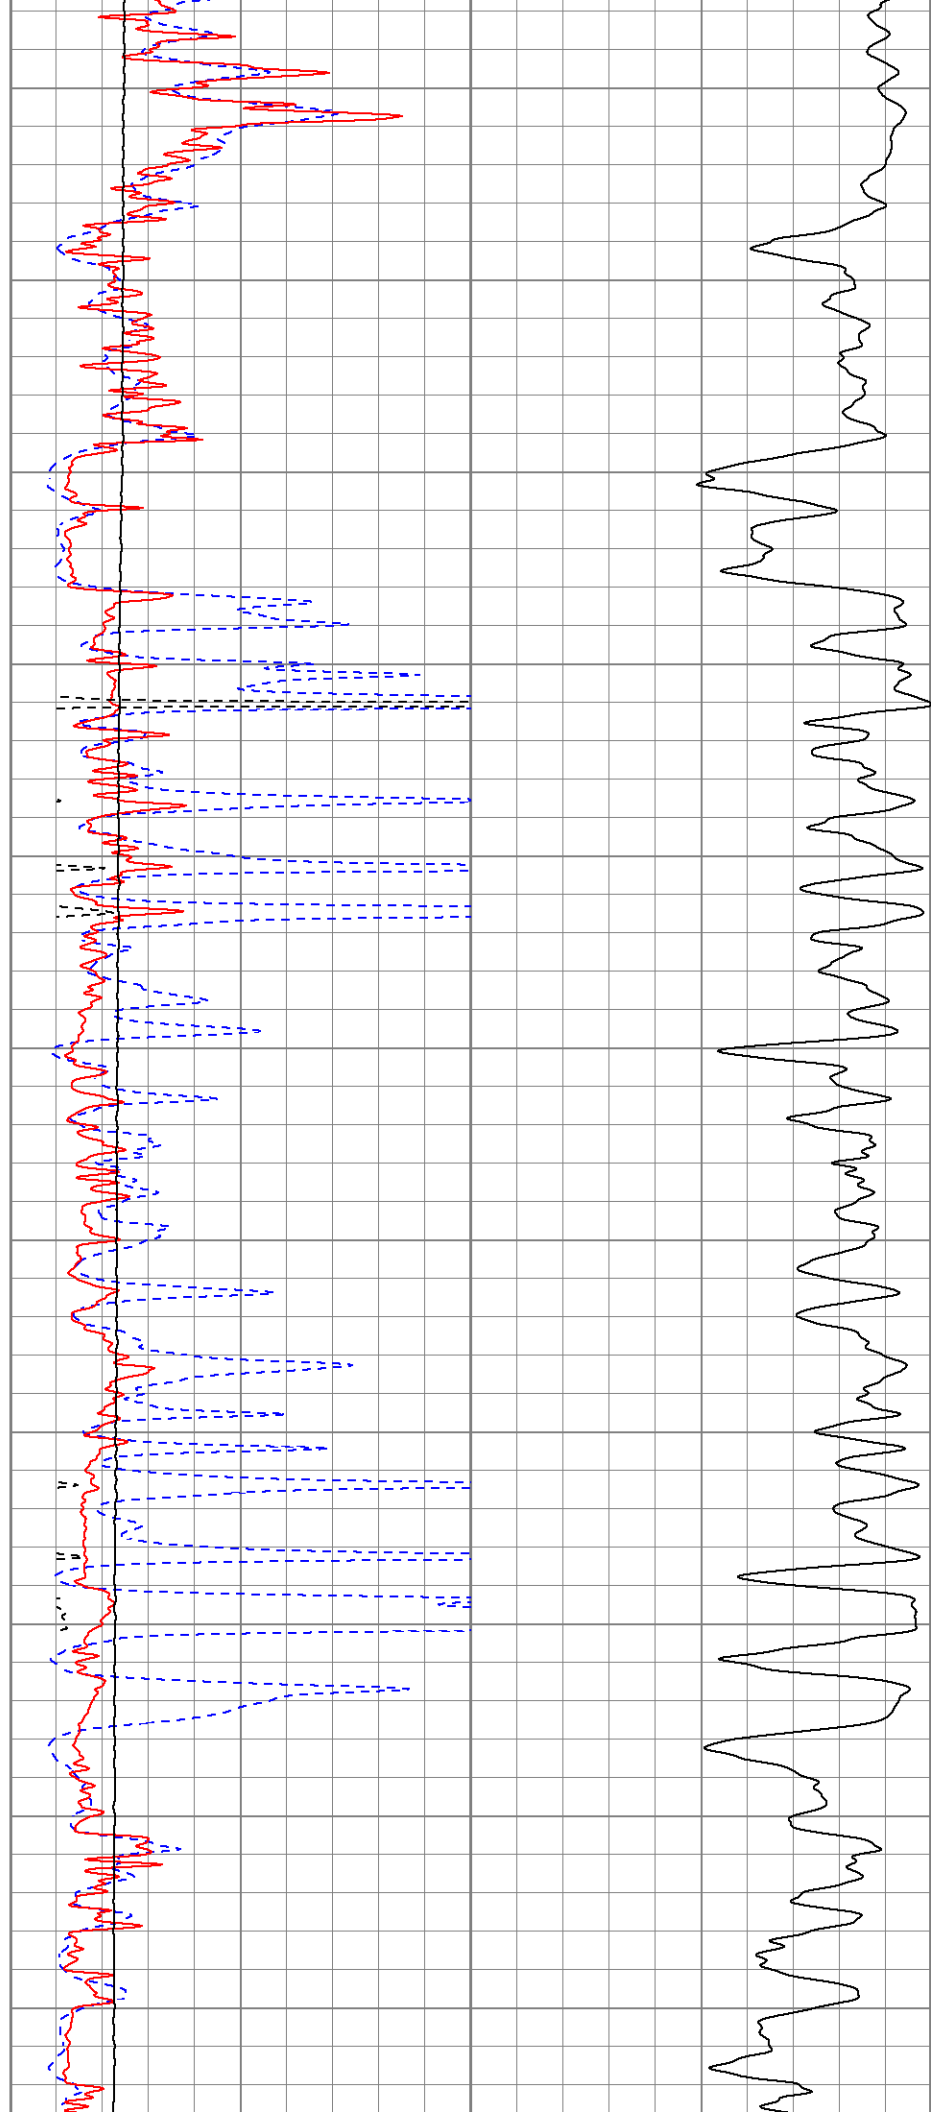



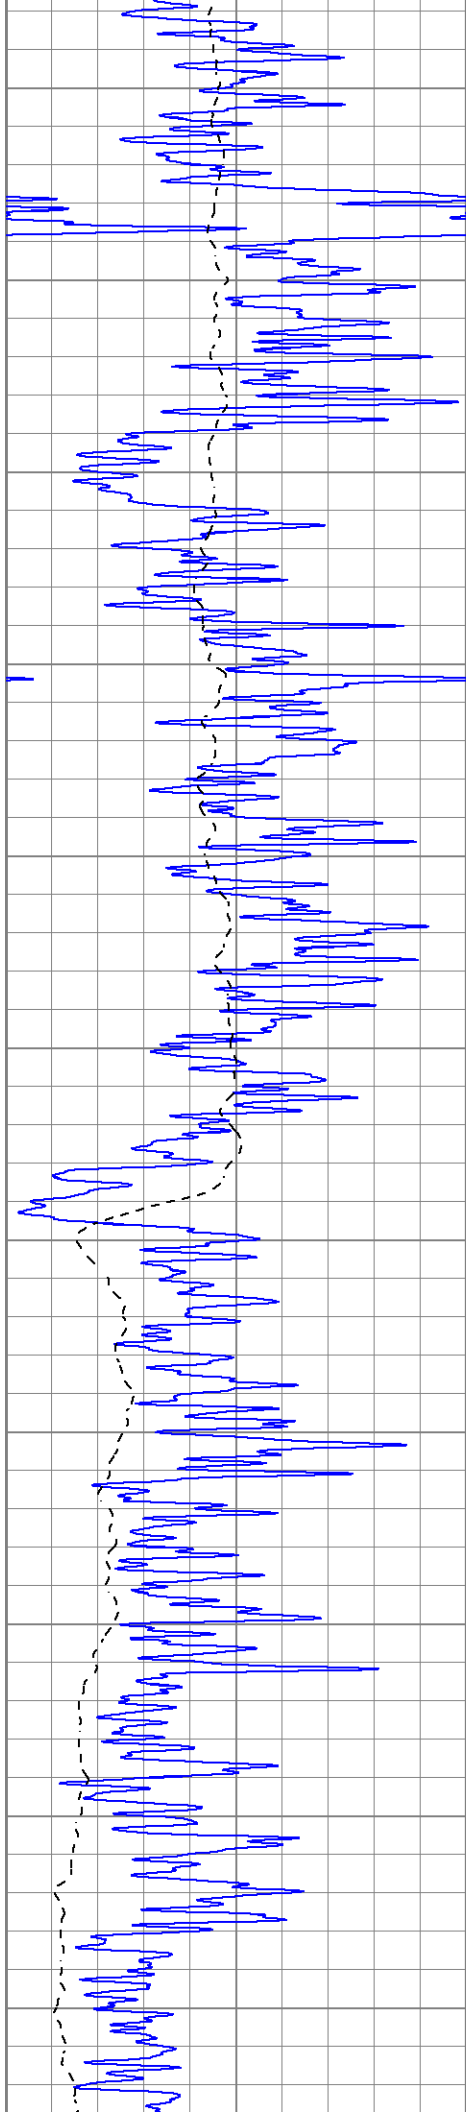




1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

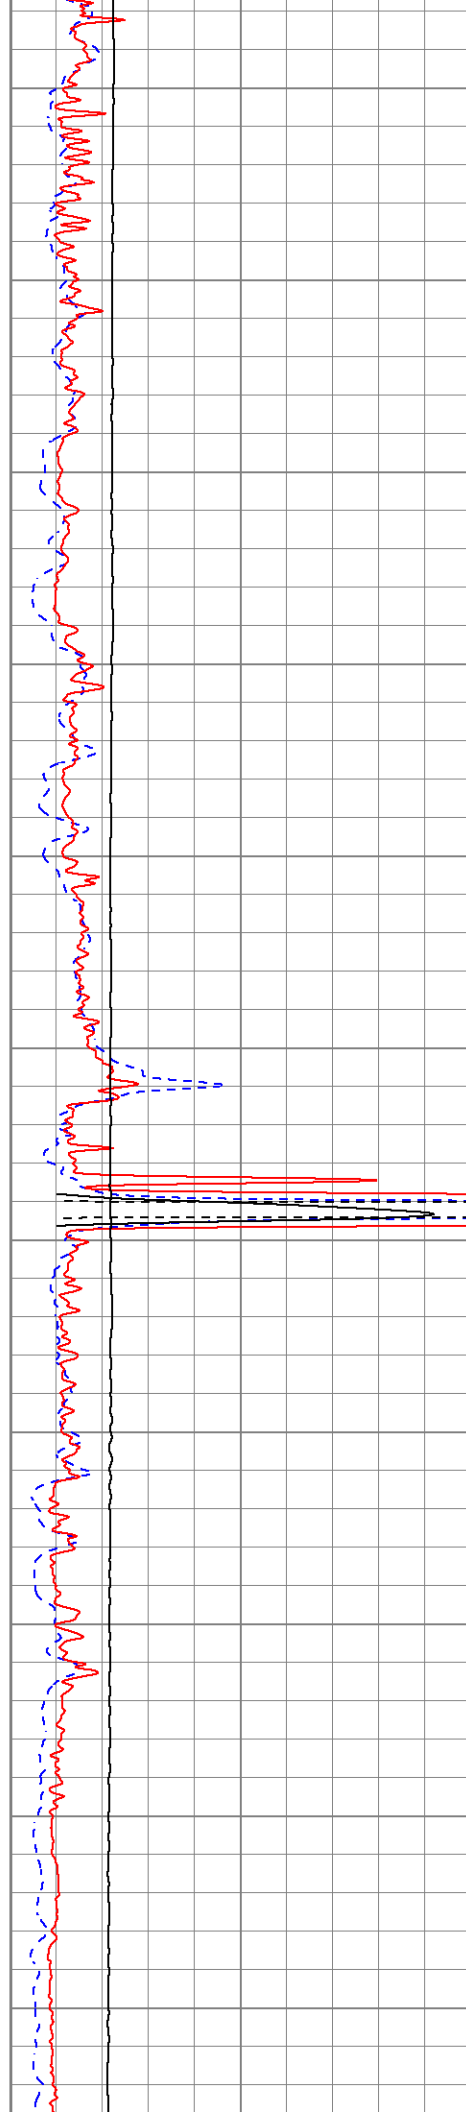


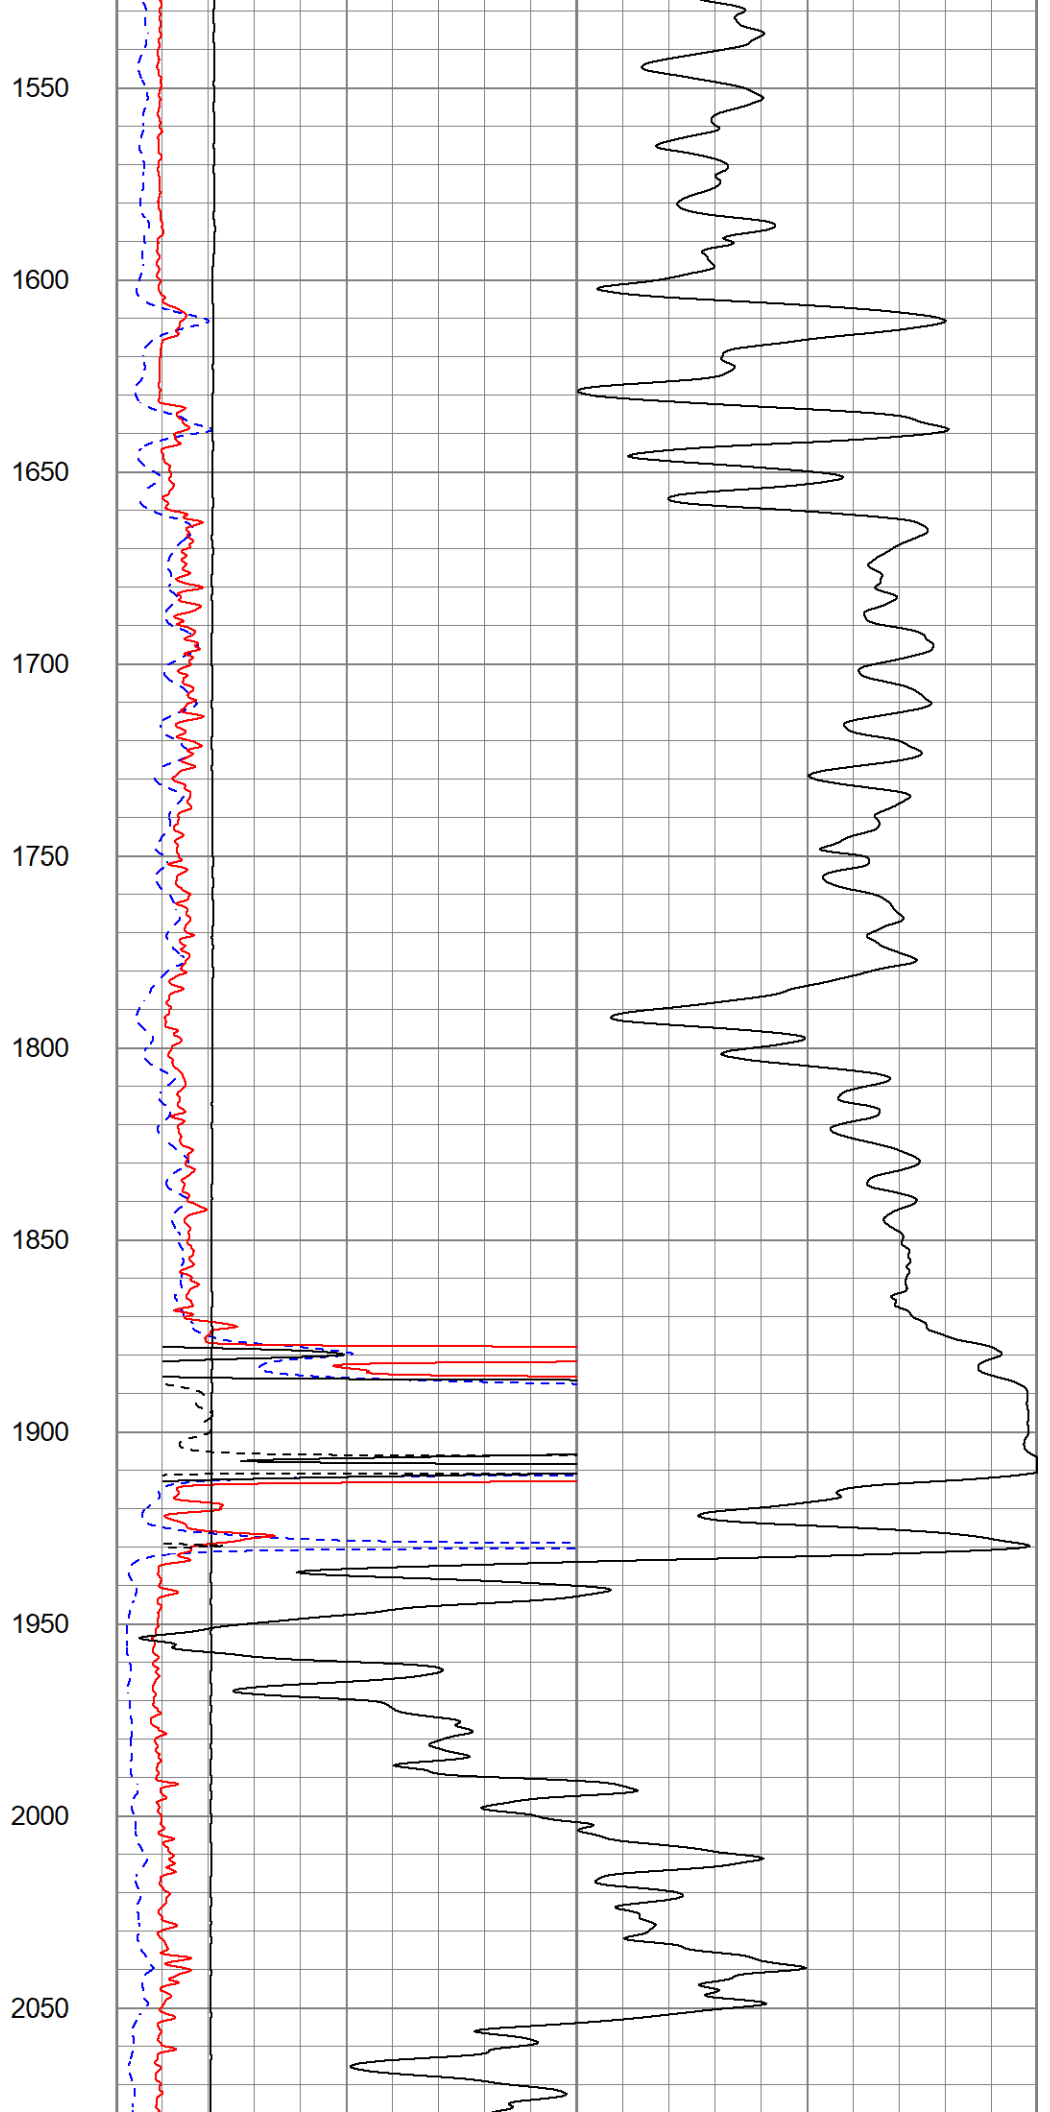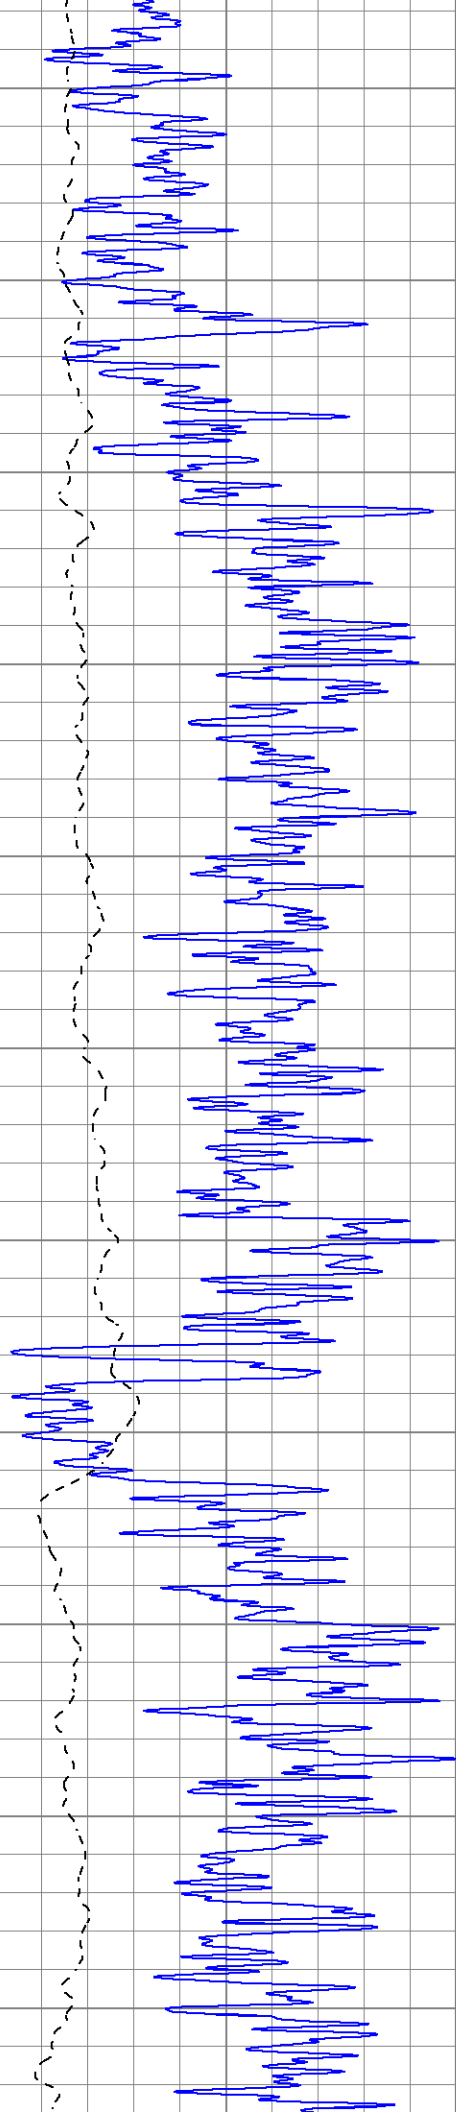

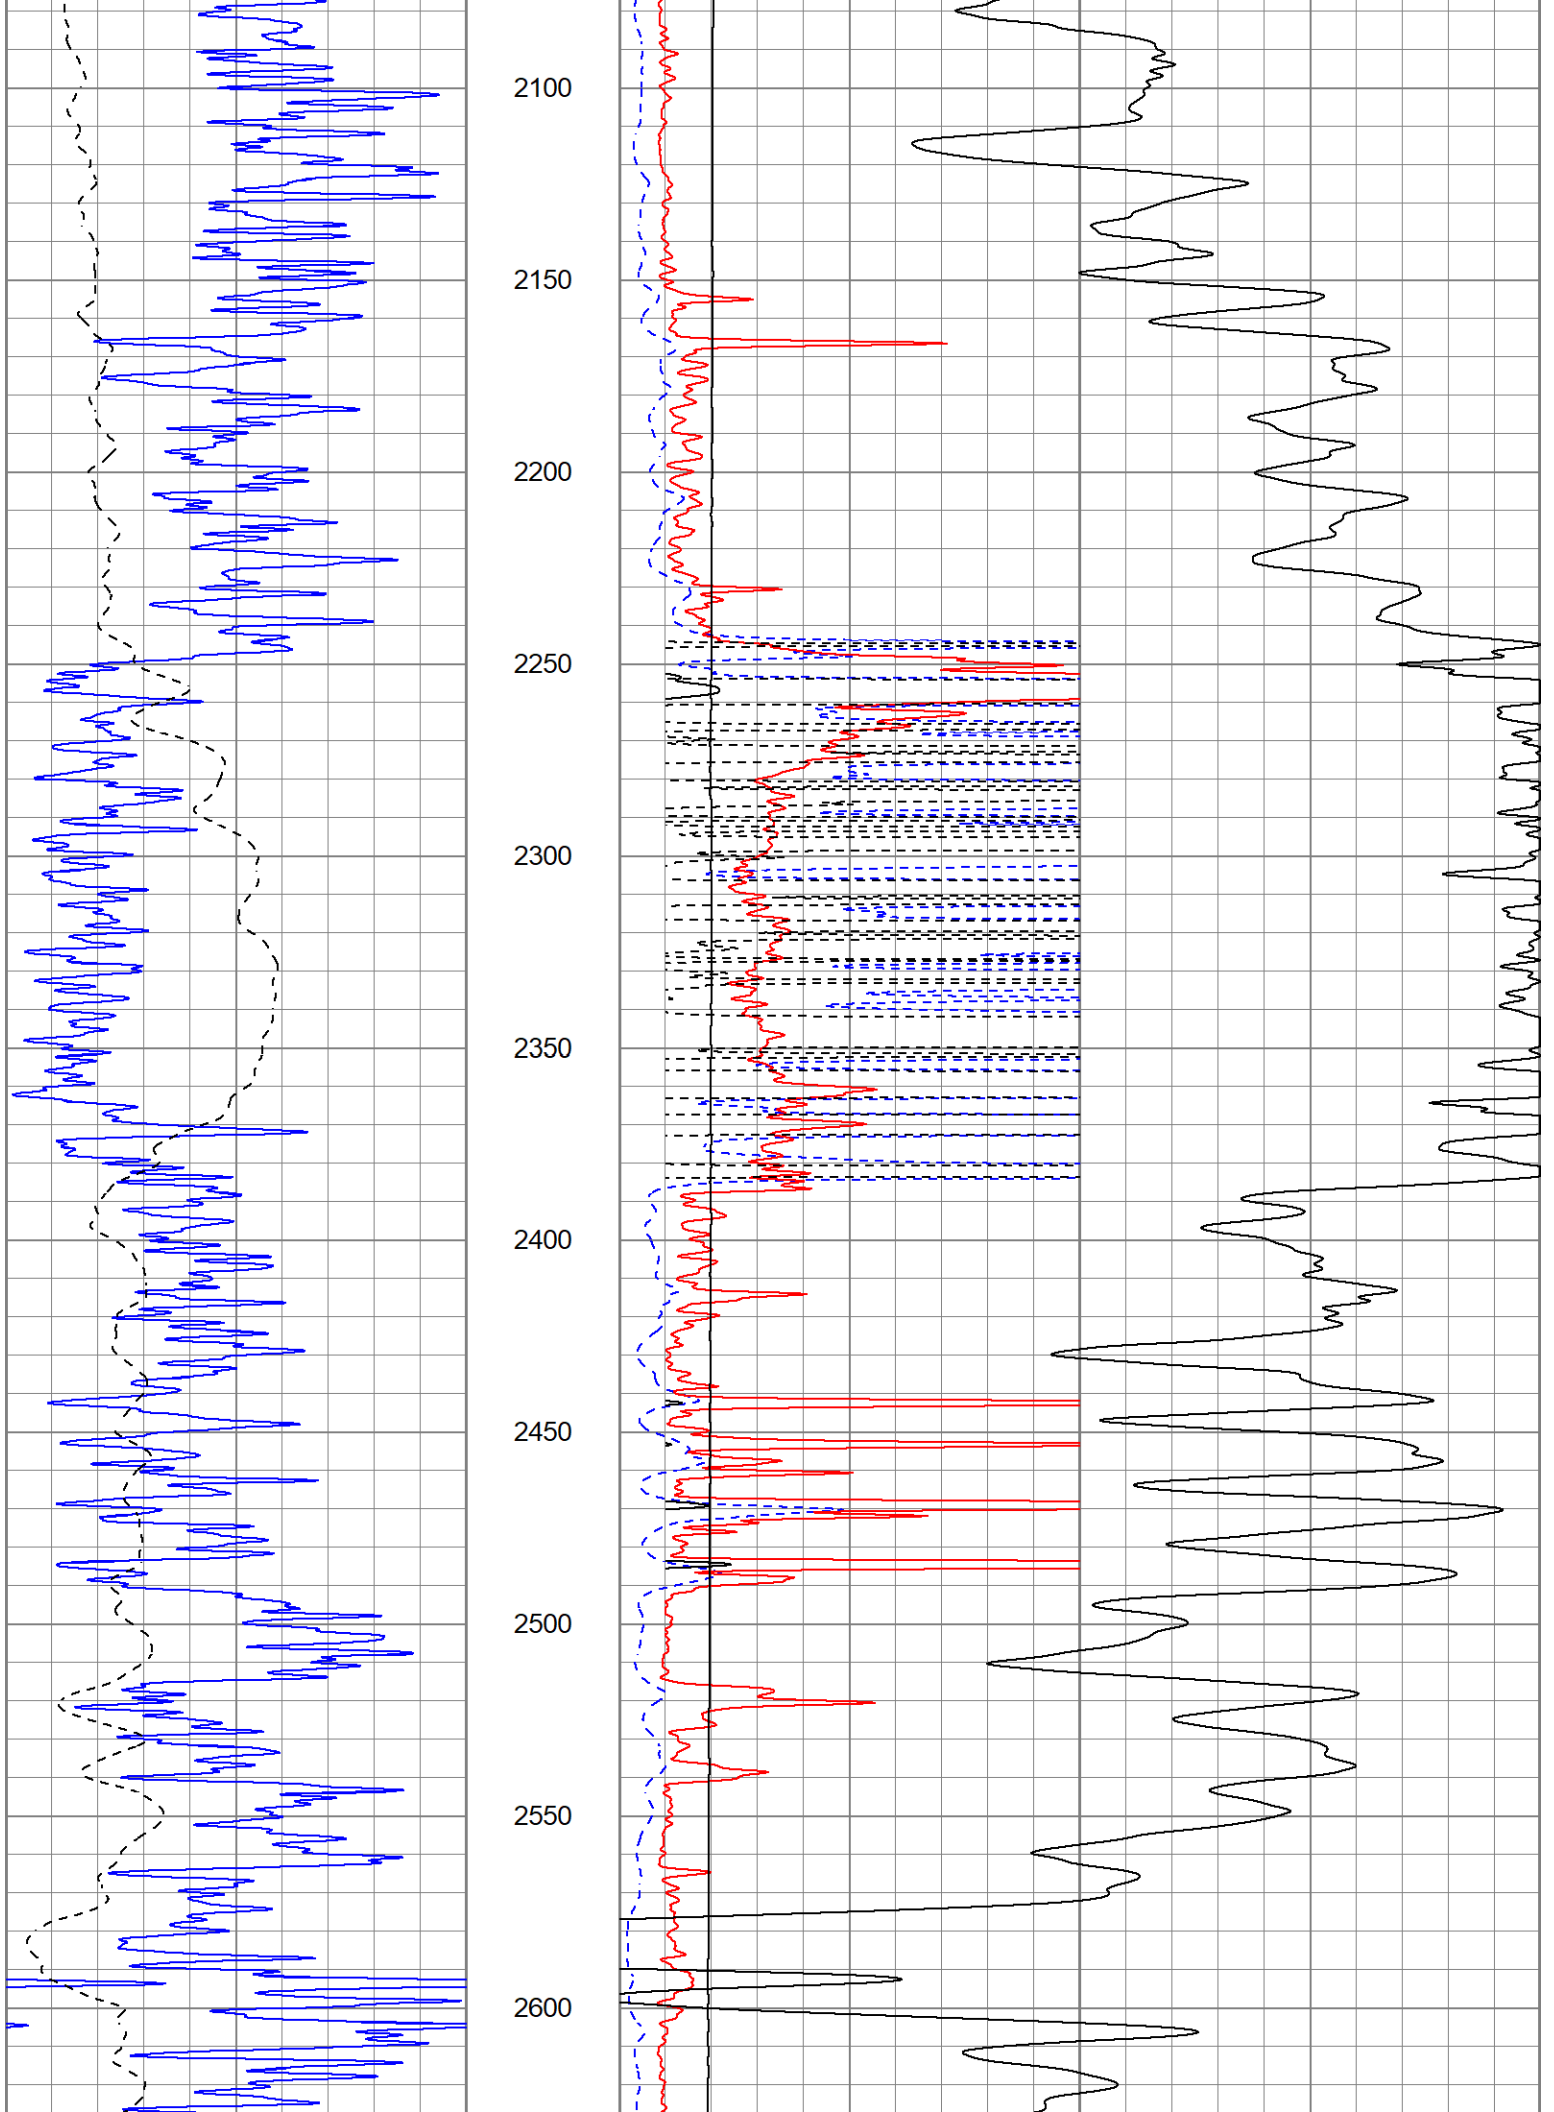

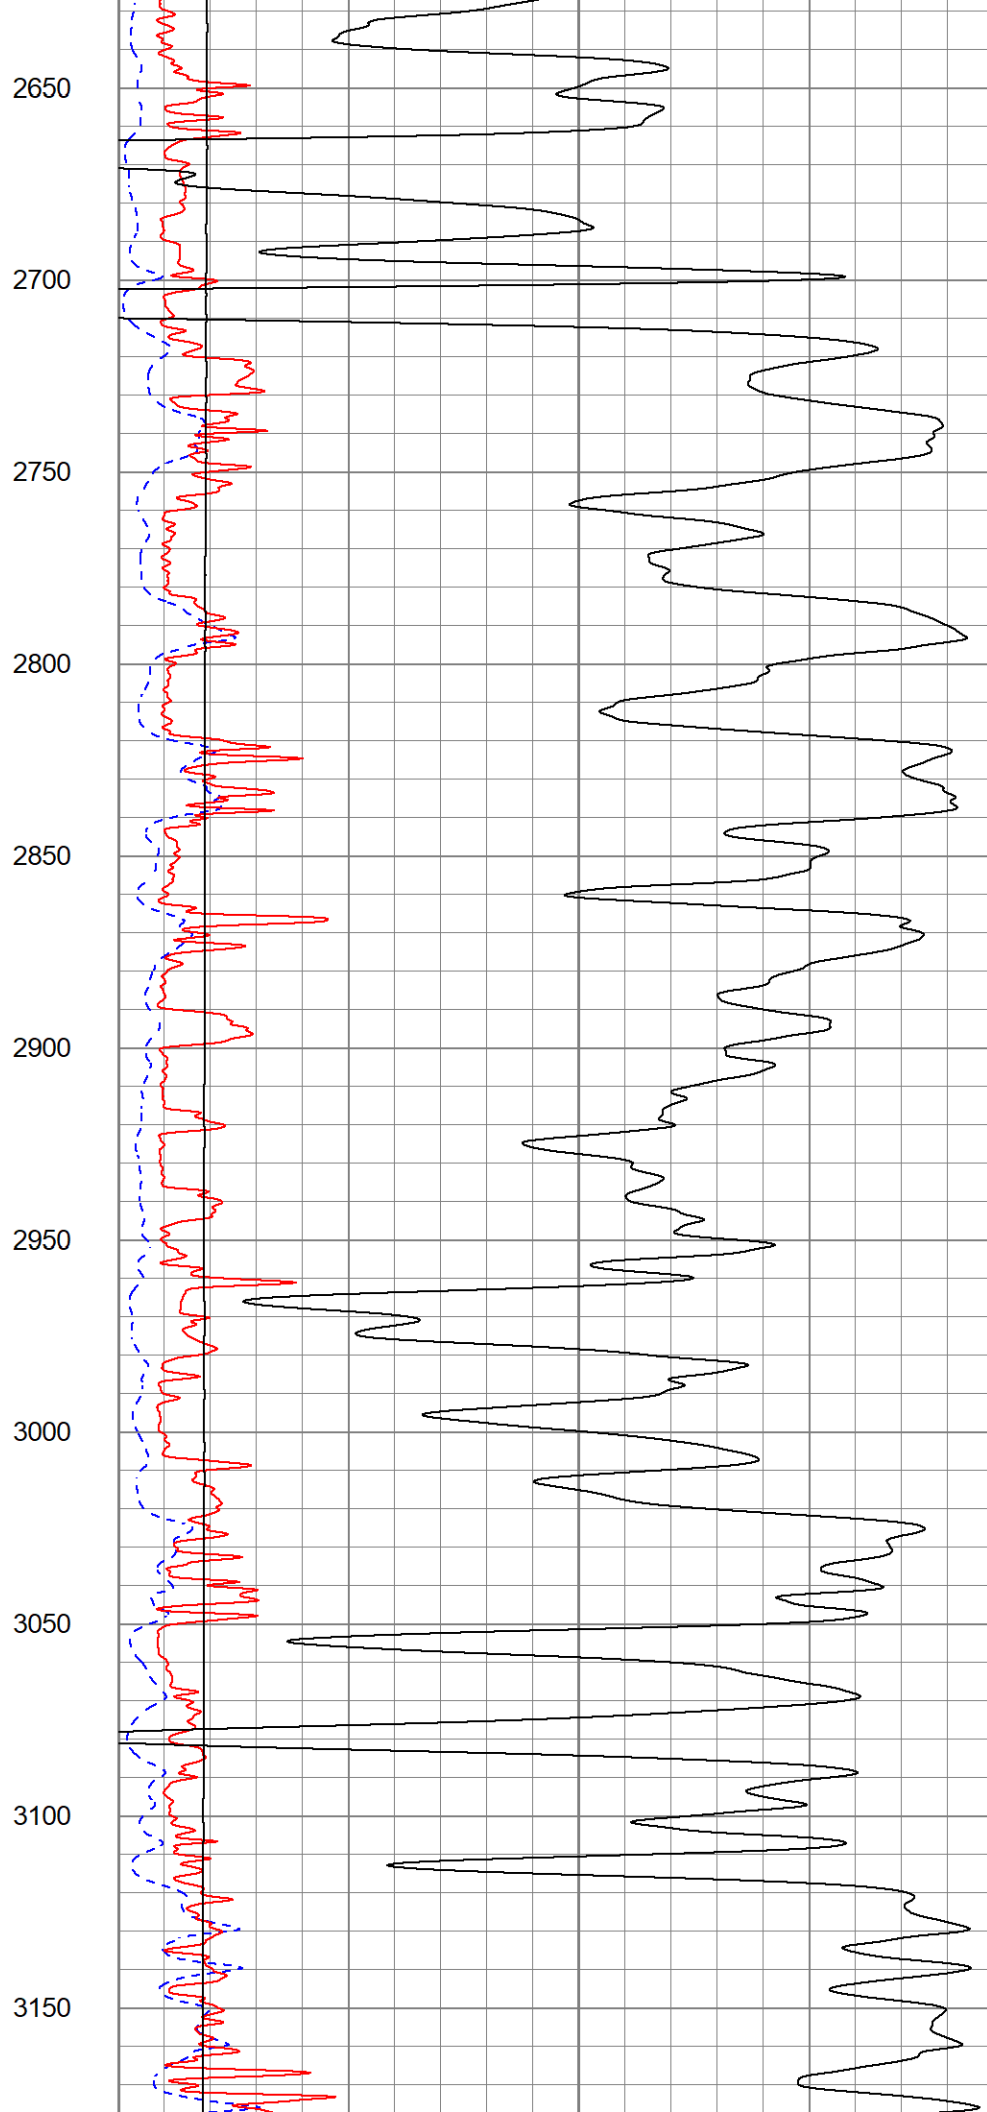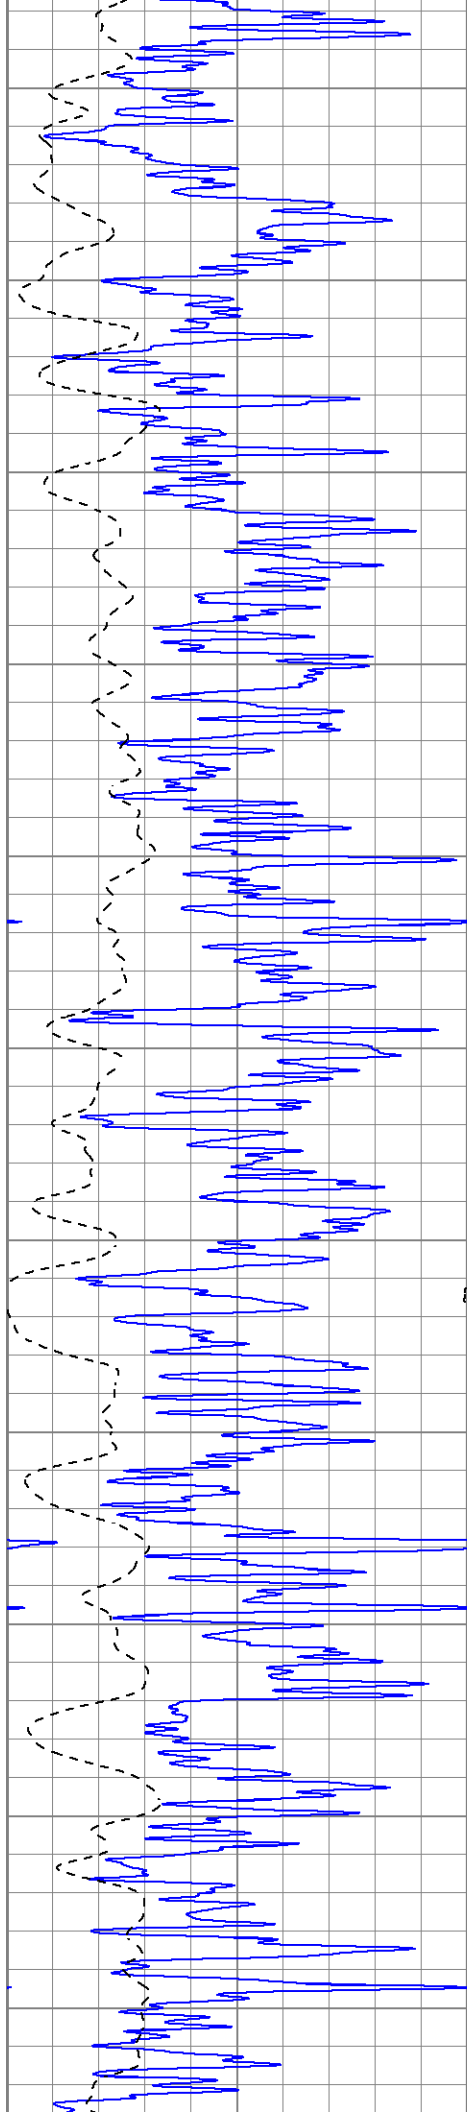

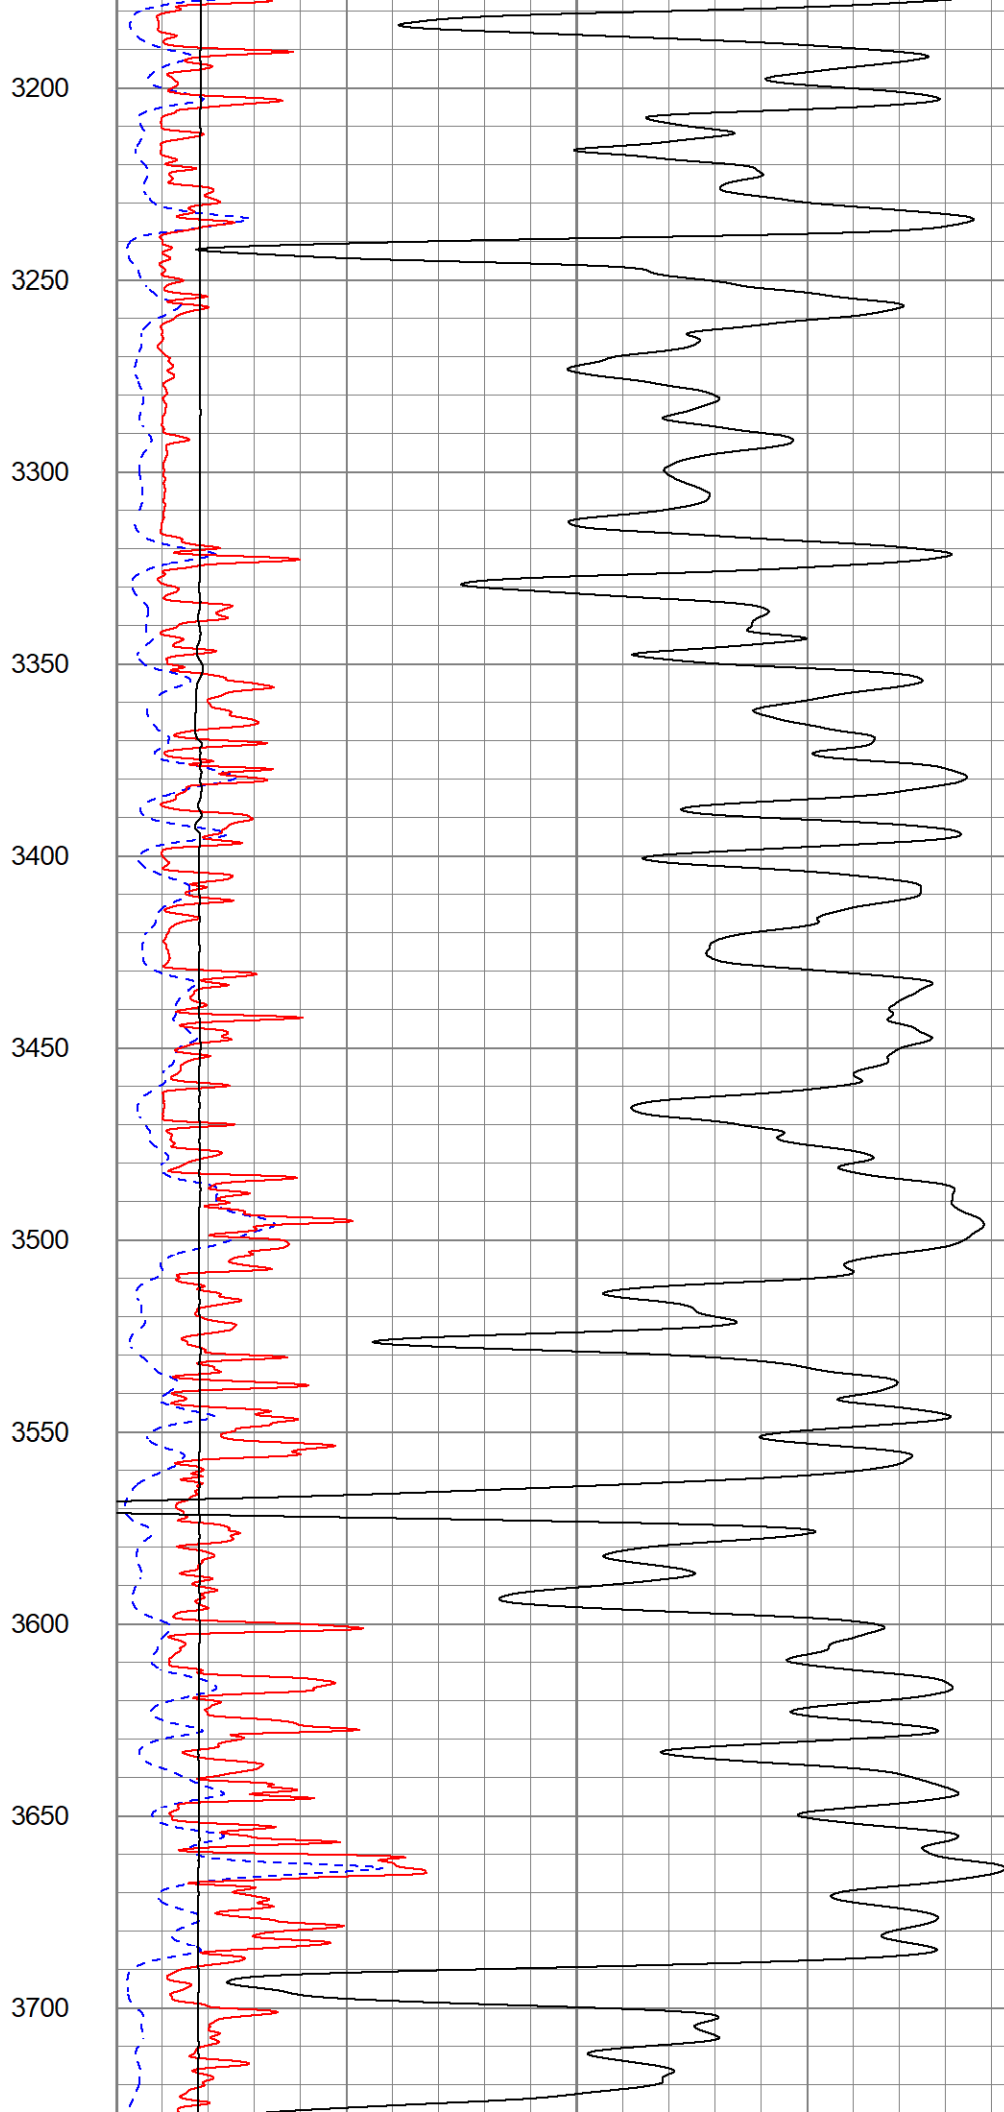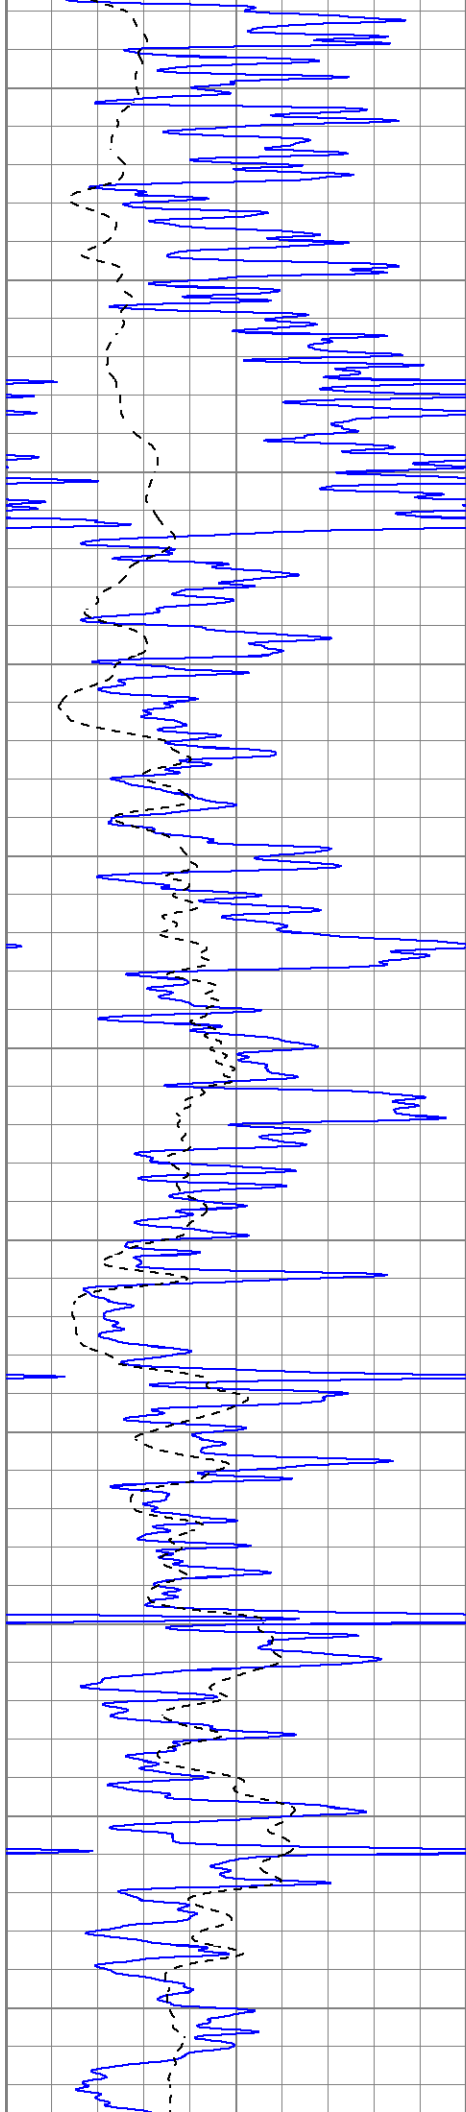

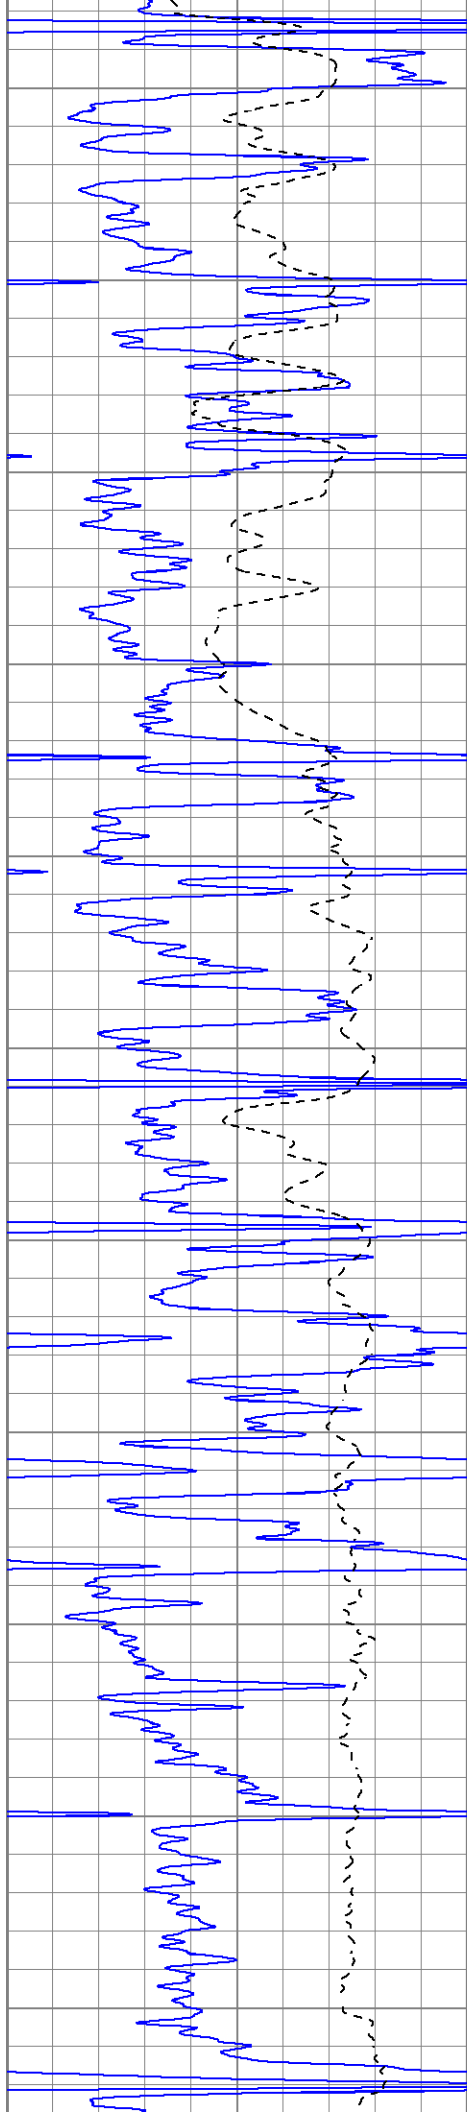

3750

3800

3850

3900

3950

4000



4050


4100

4150

4200

4250

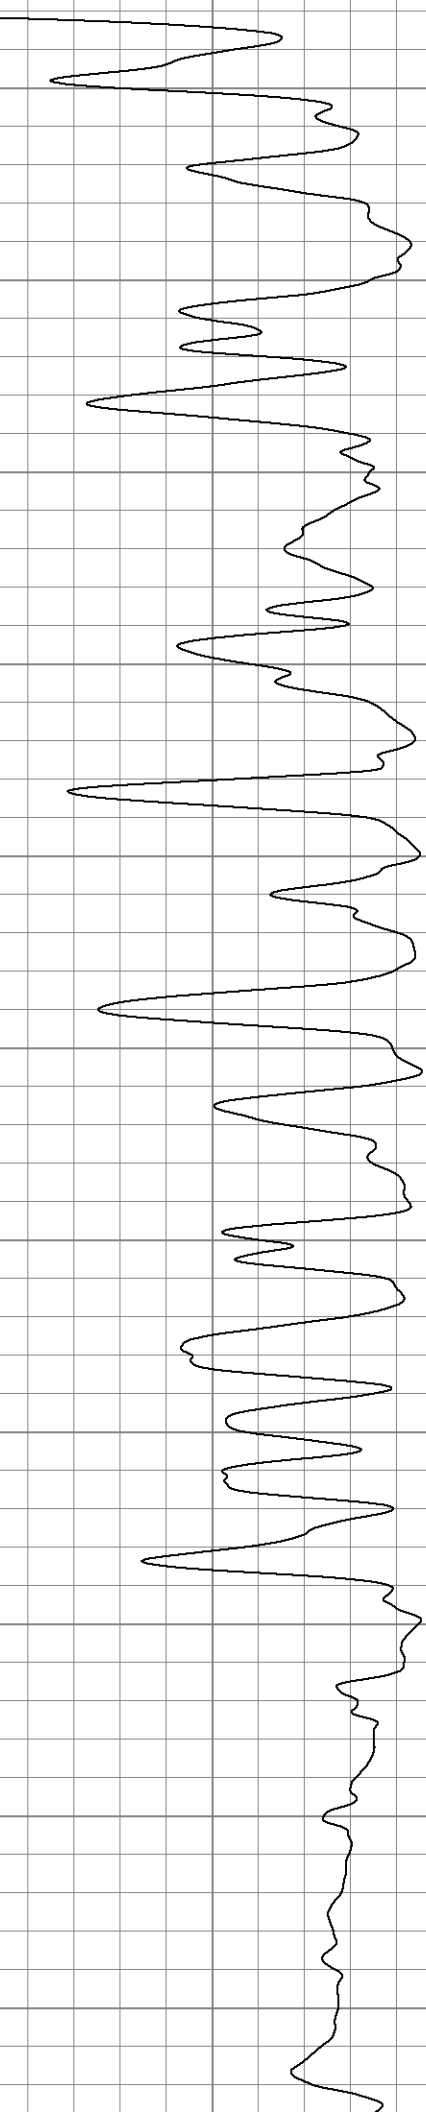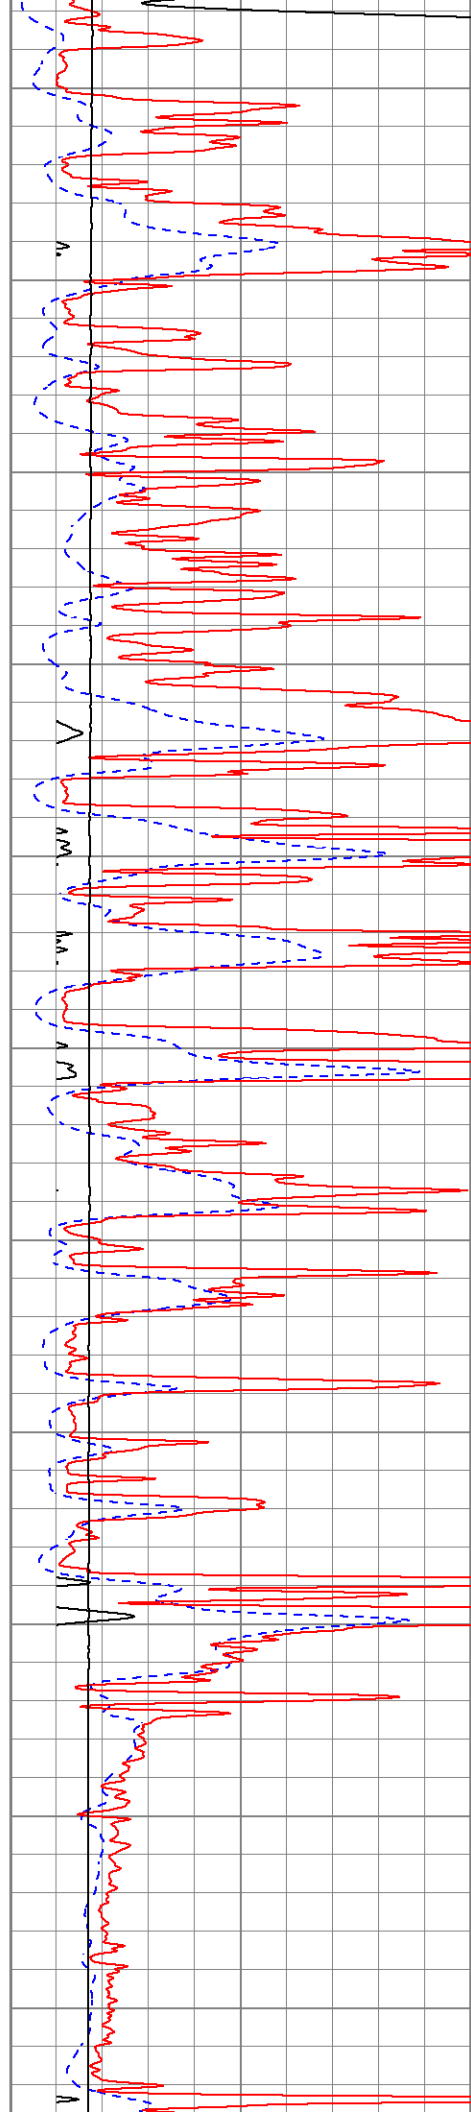


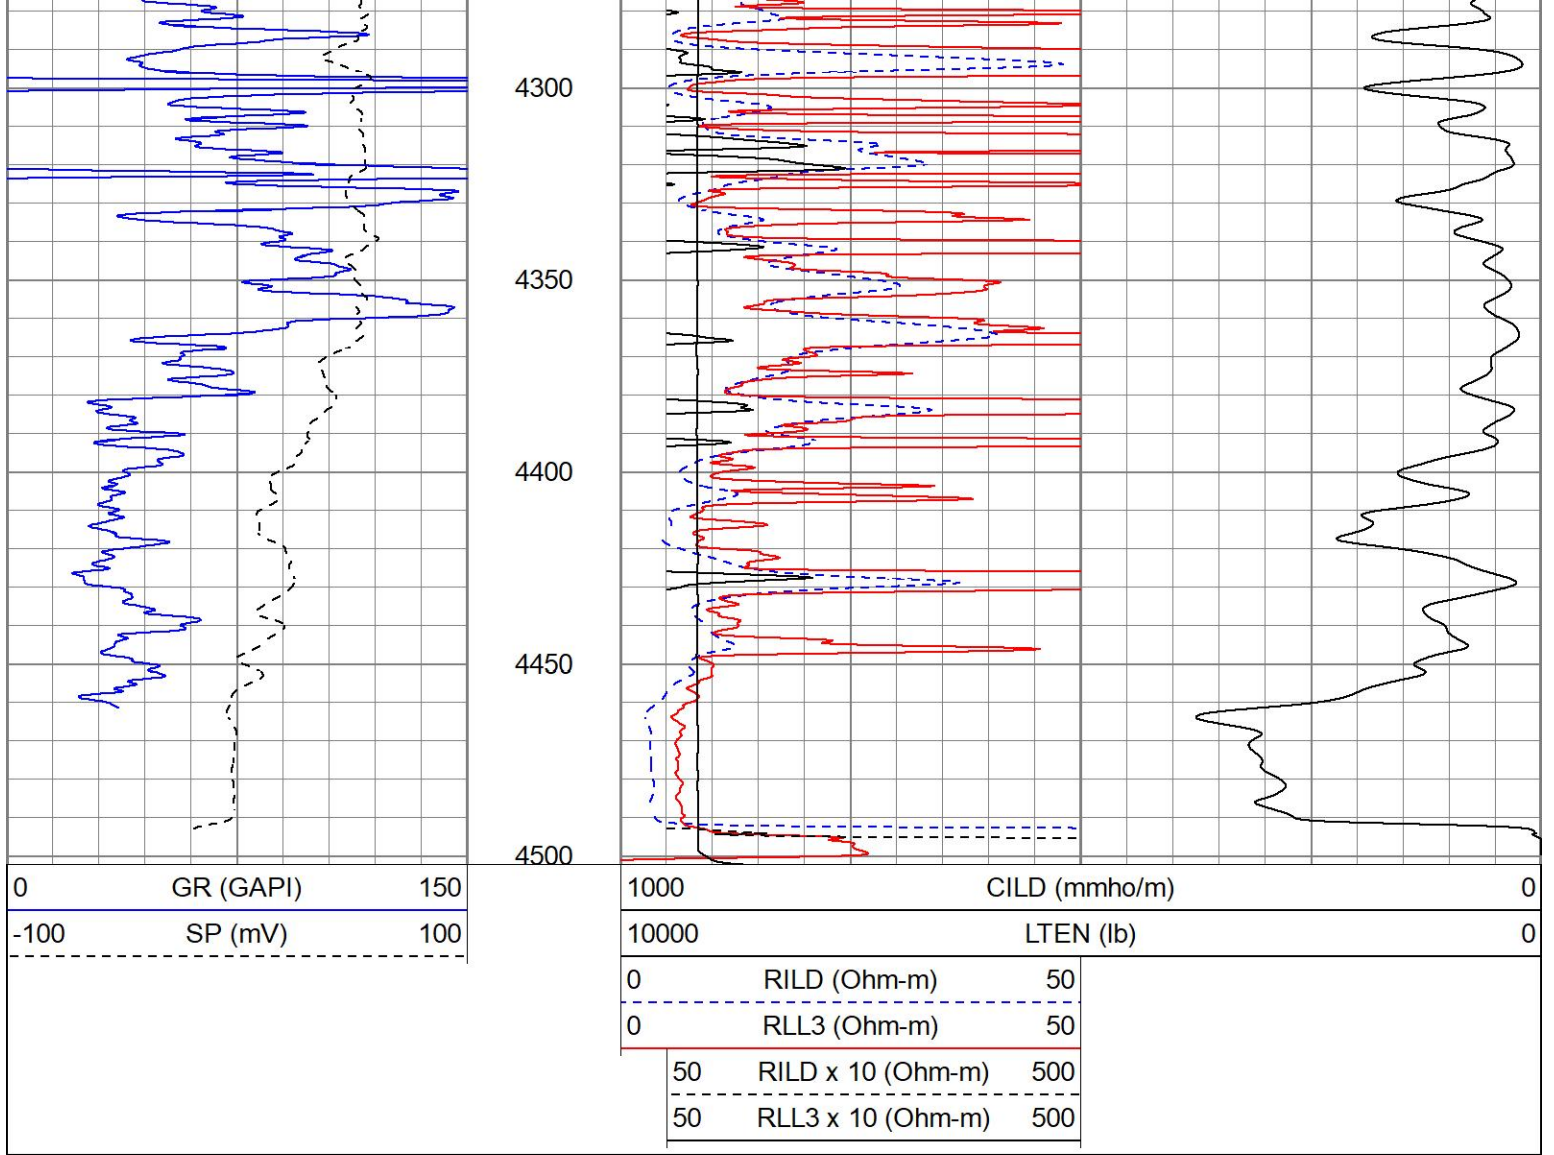


MAIN PASS


Database File pplyineyes#1oh.db
 Dataset Pathname pass3.1
 Presentation Format kdil
 Dataset Creation Tue Sep 13 23:16:08 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	0.2	RILD (Ohm-m)	2000
-100	SP (mV)	100	0.2	RLL3 (Ohm-m)	2000
			0.2	RILM (Ohm-m)	2000

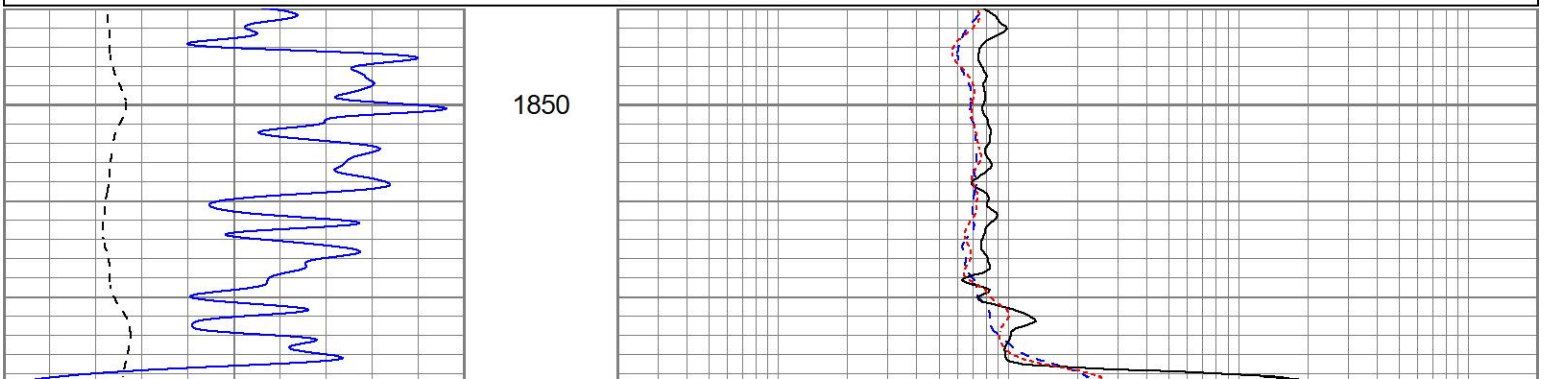



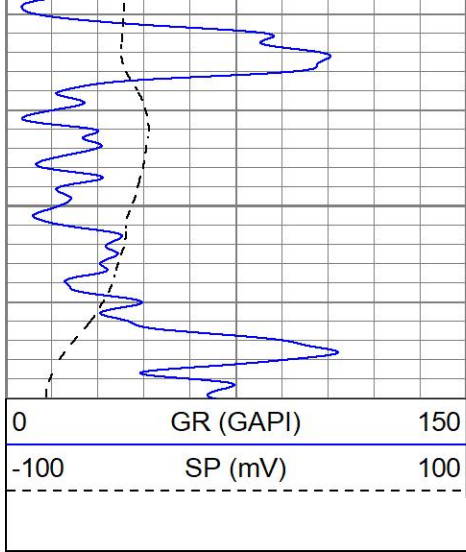


1900

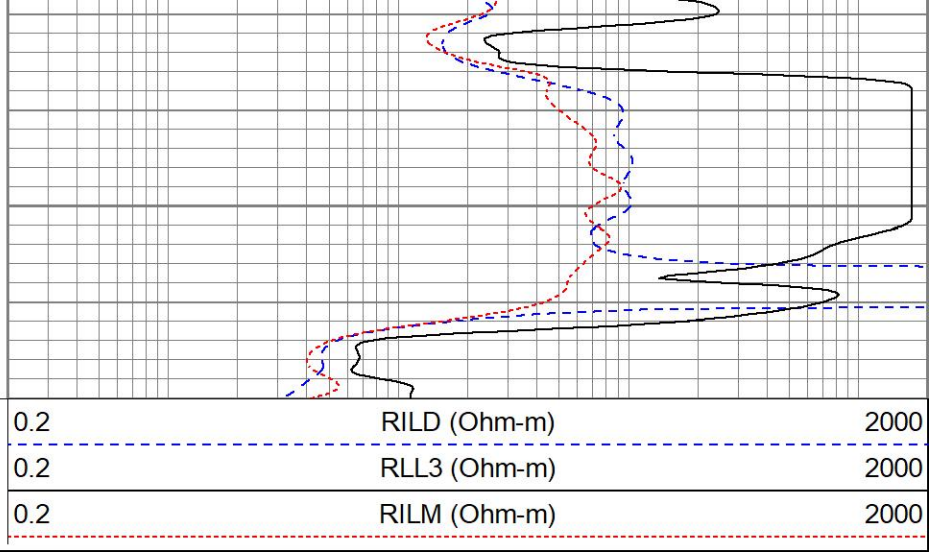

MAIN PASS


Database File pplyineyes#1oh.db
 Dataset Pathname pass3.1
 Presentation Format kdil
 Dataset Creation Tue Sep 13 23:16:08 2022
 Charted by Depth in Feet scaled 1:240

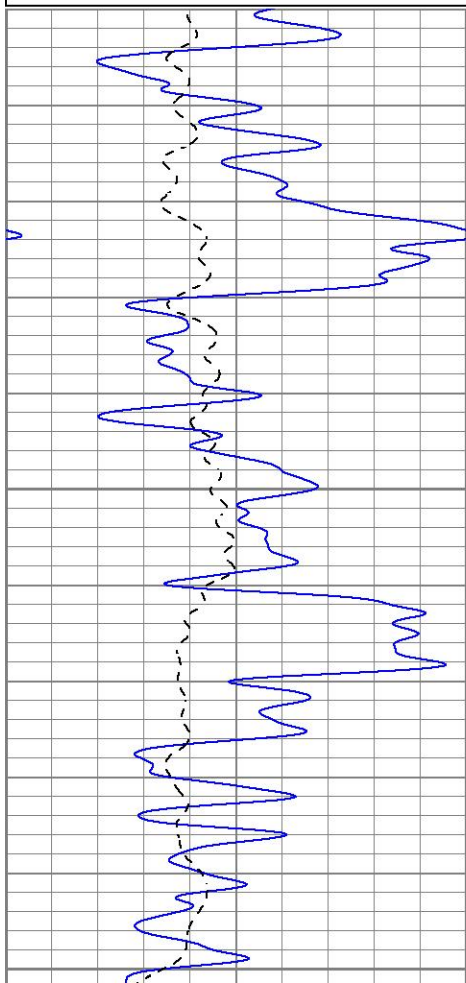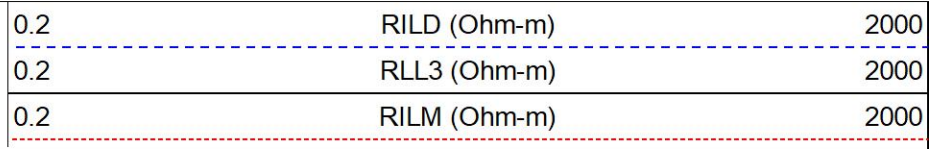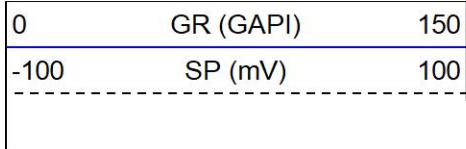


3400

3450

3500

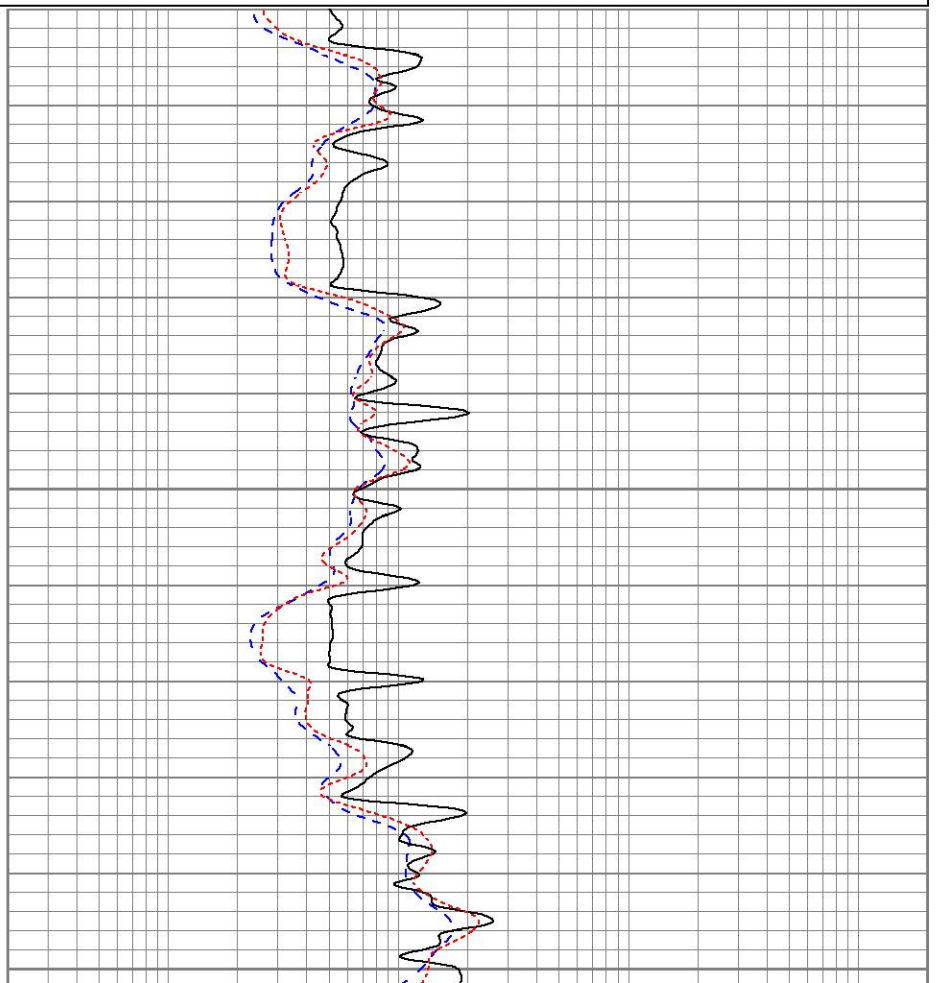

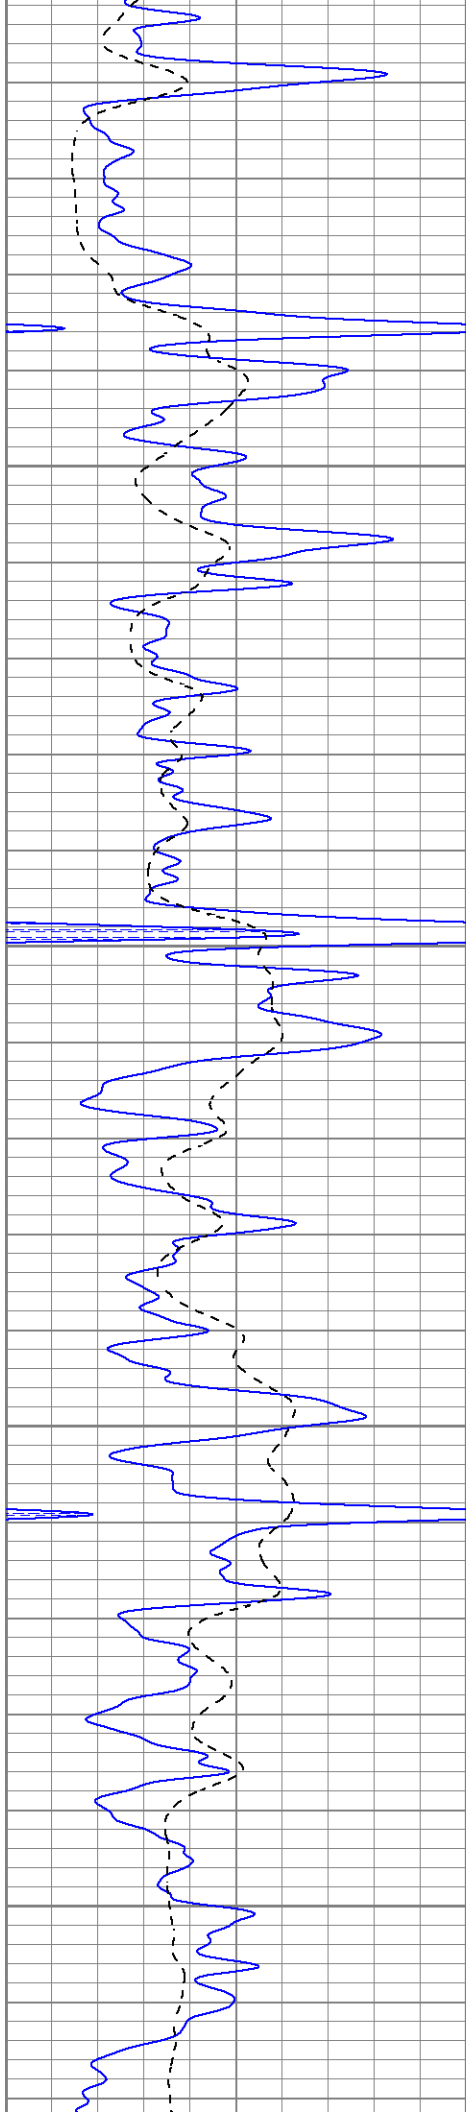



3550

3600

3650

3700

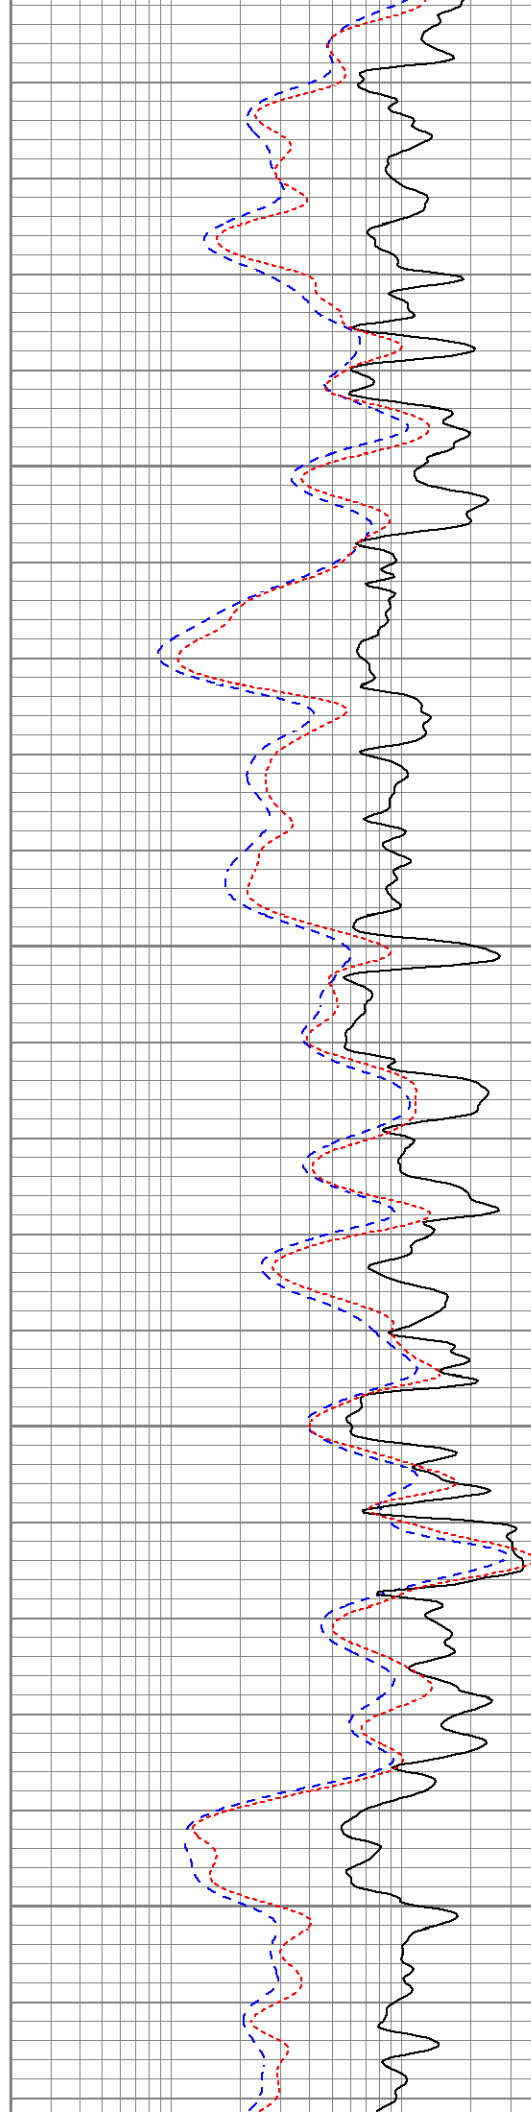

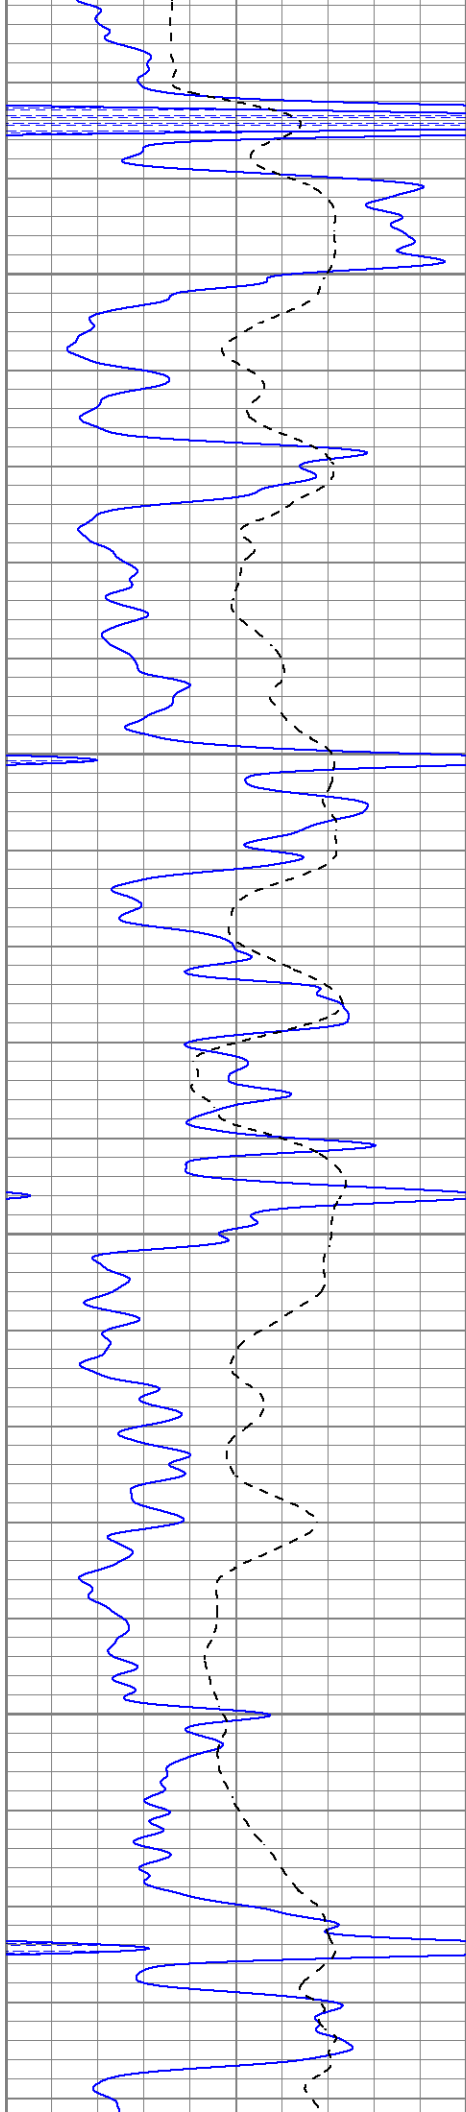



3750

3800

3850

3900

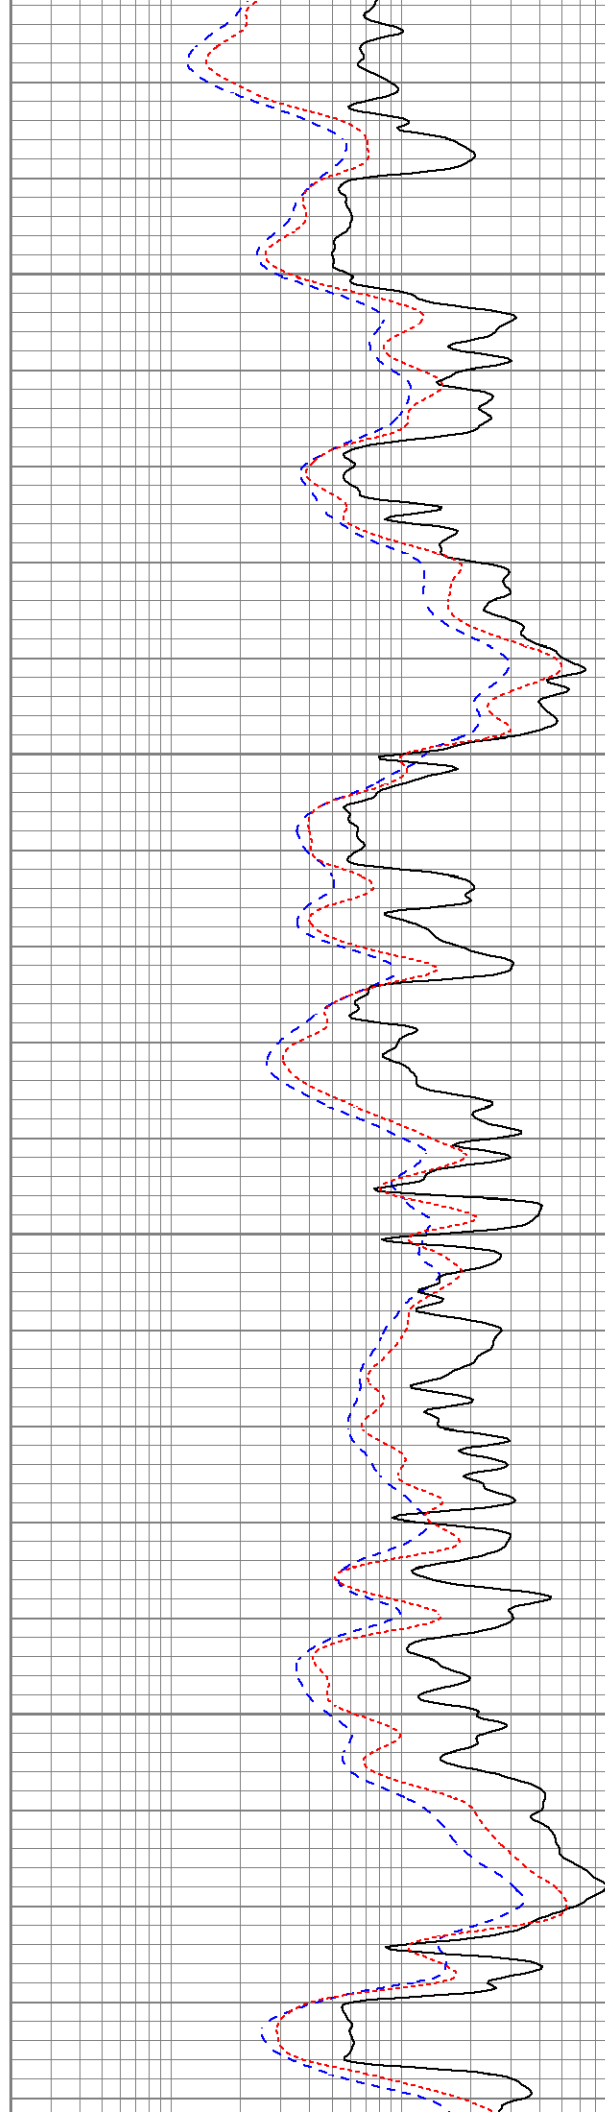

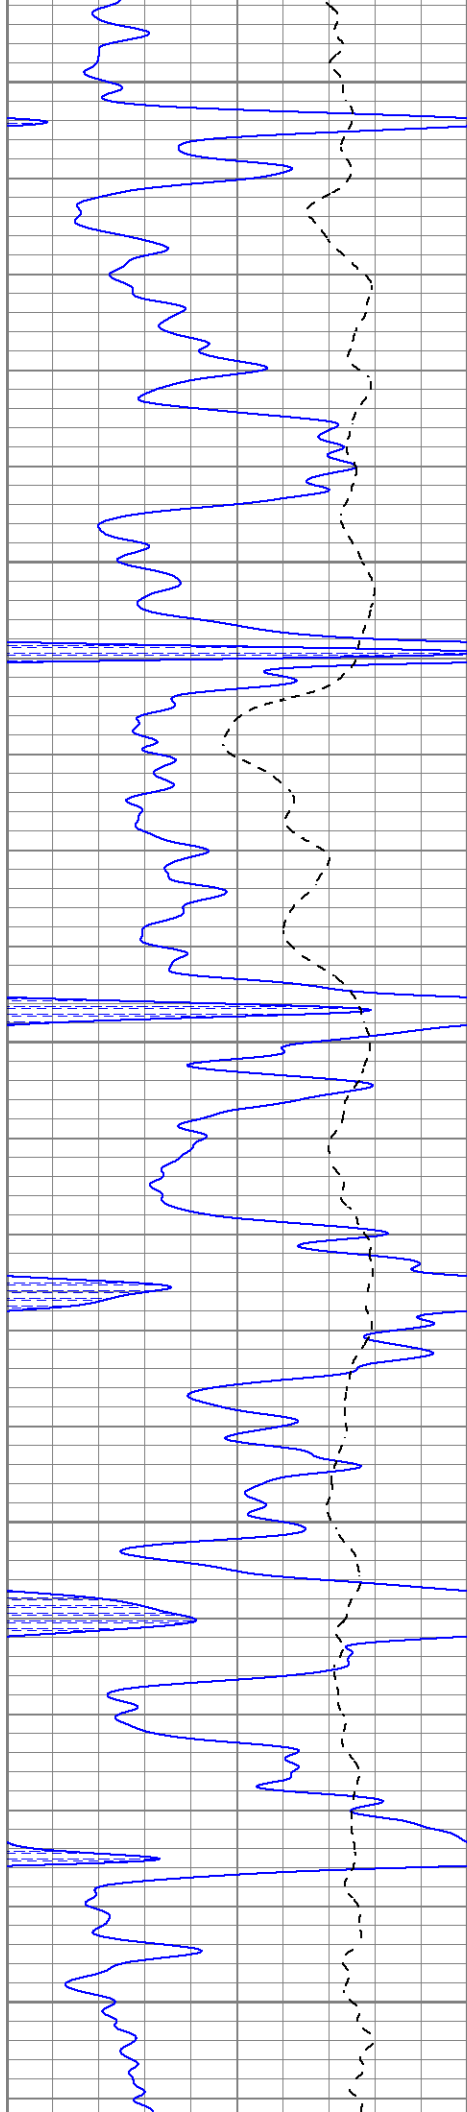


3950



4000


4050

4100

4150

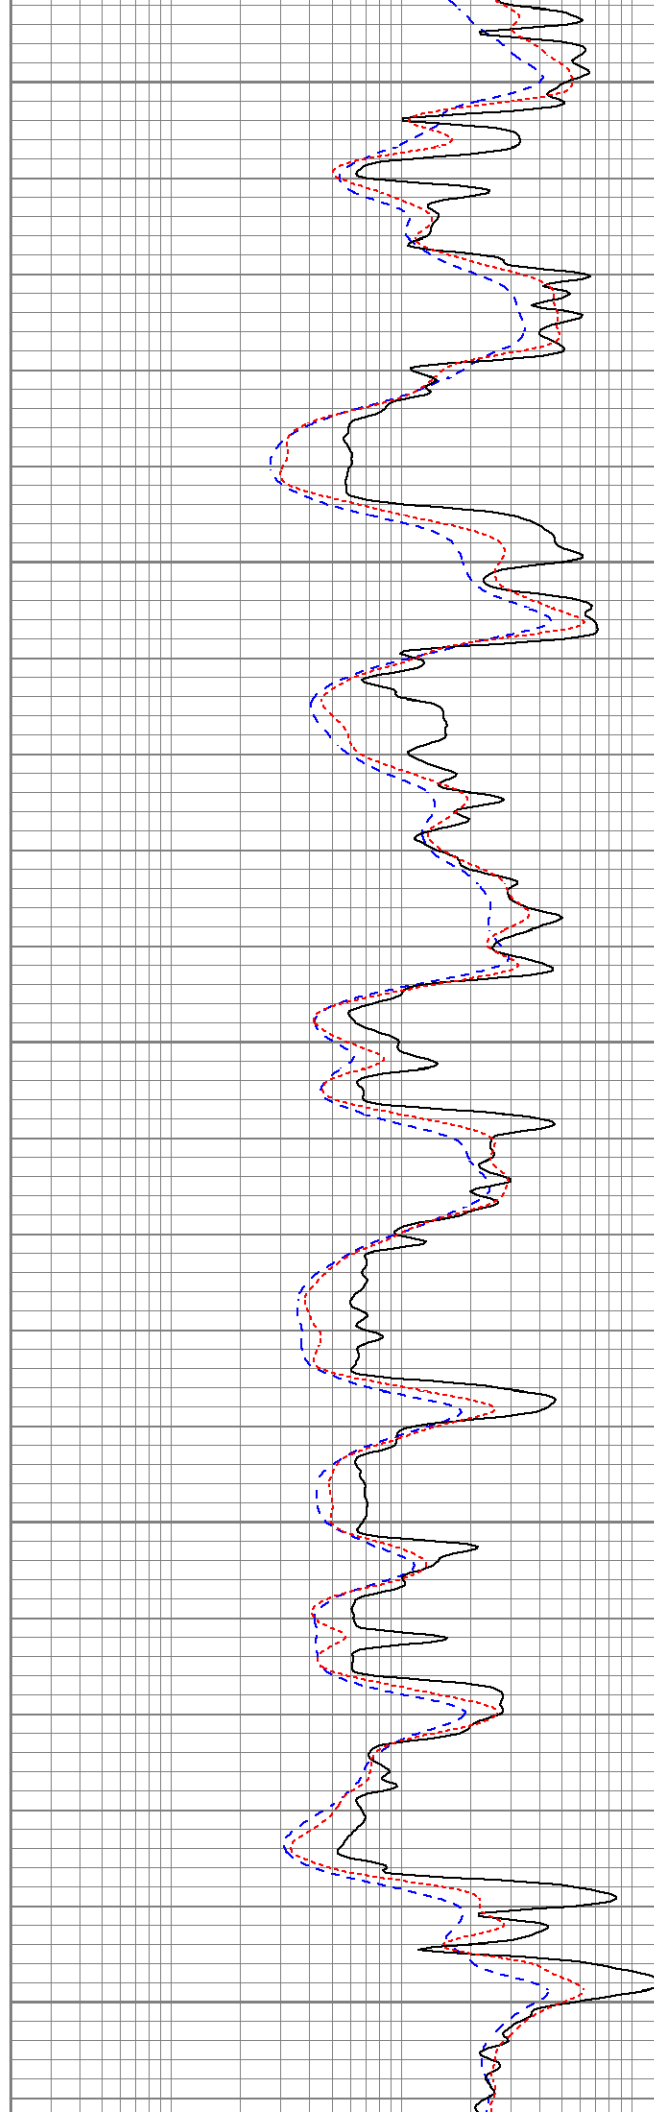

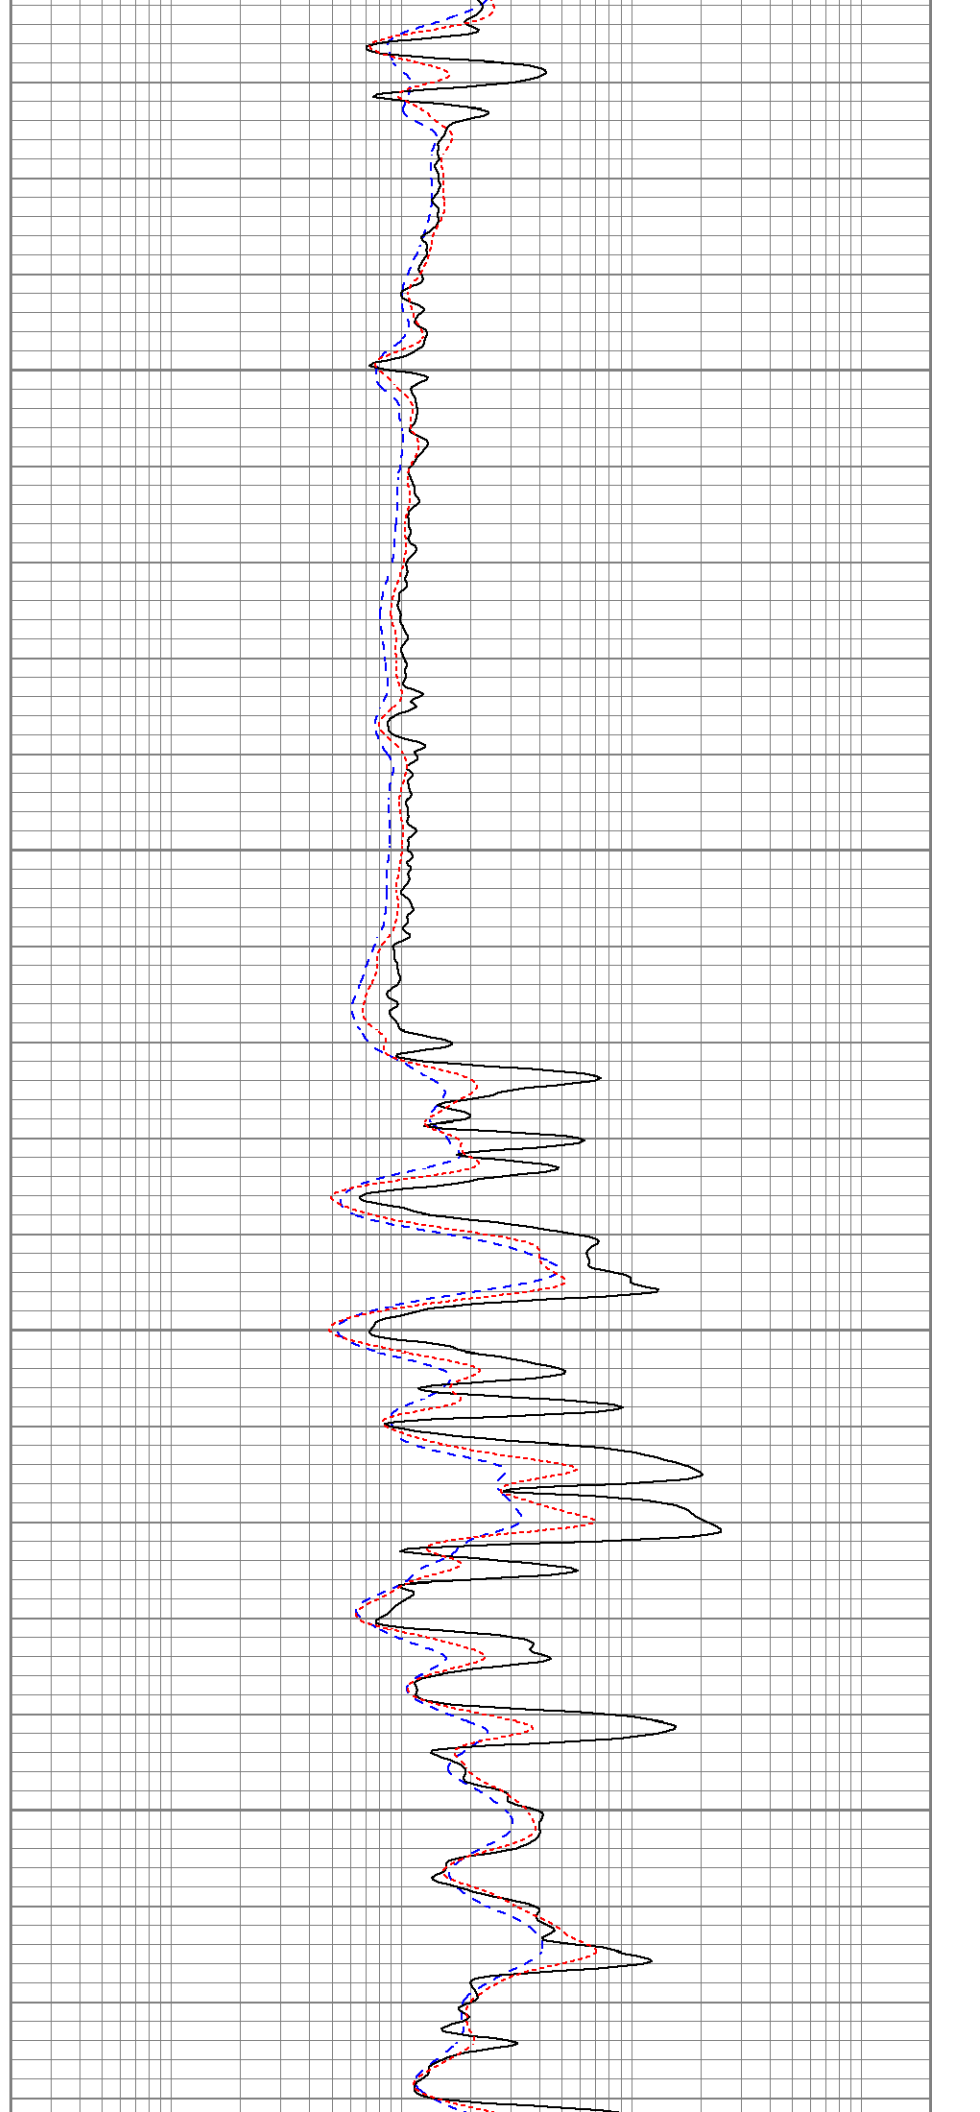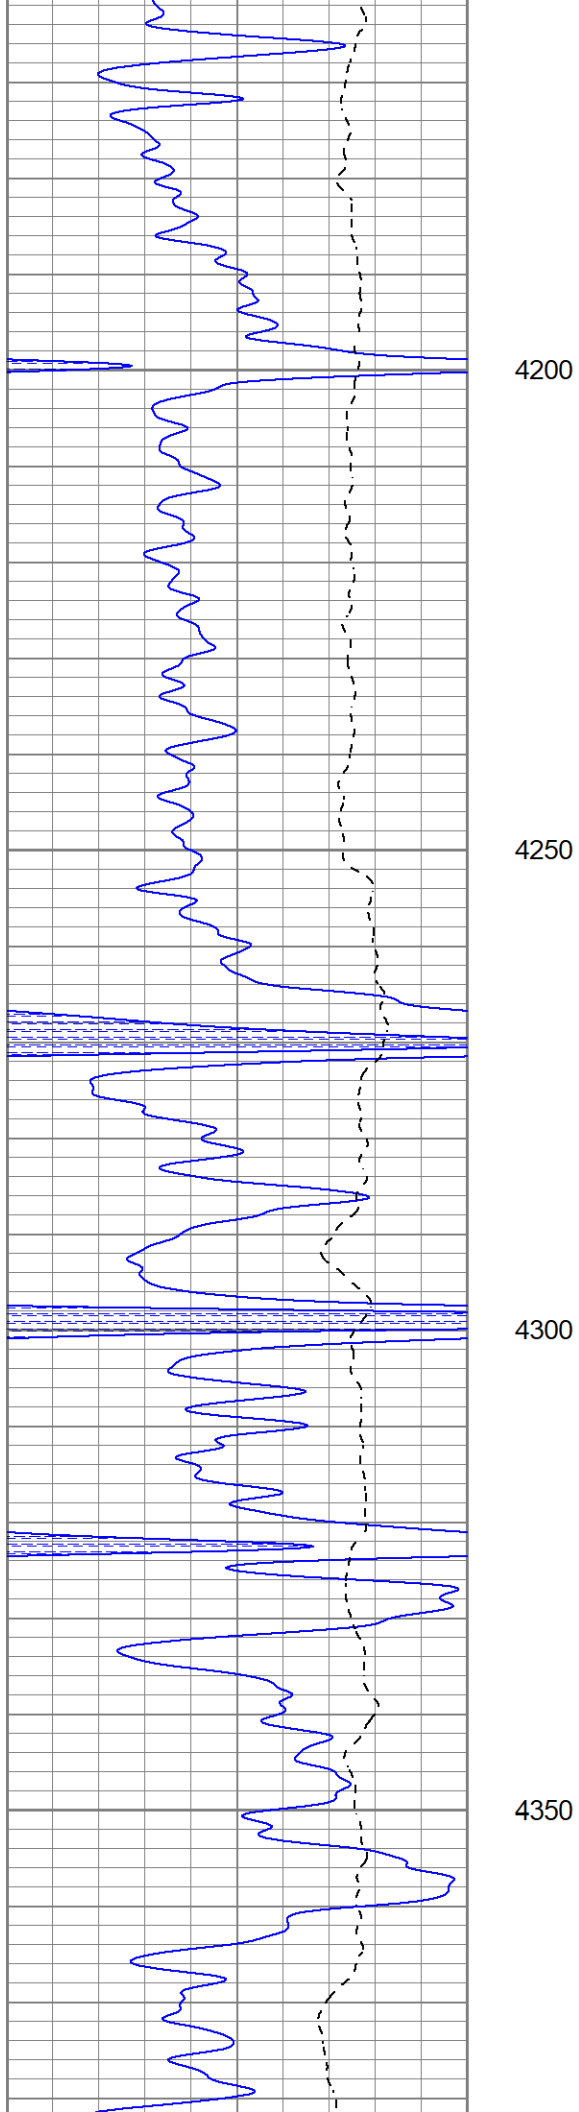

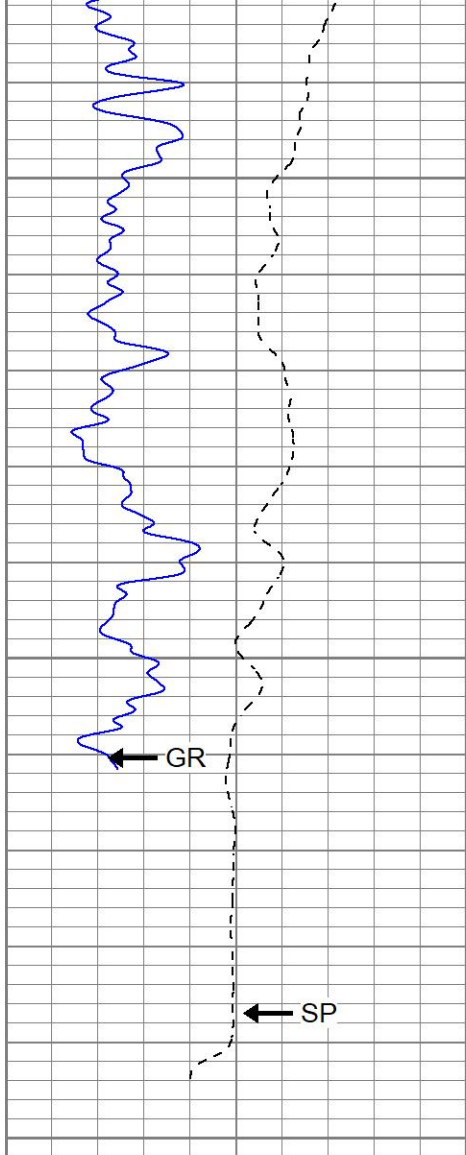

4400


4450

GR

SP

4500

0	GR (GAPI)	150
-100	SP (mV)	100

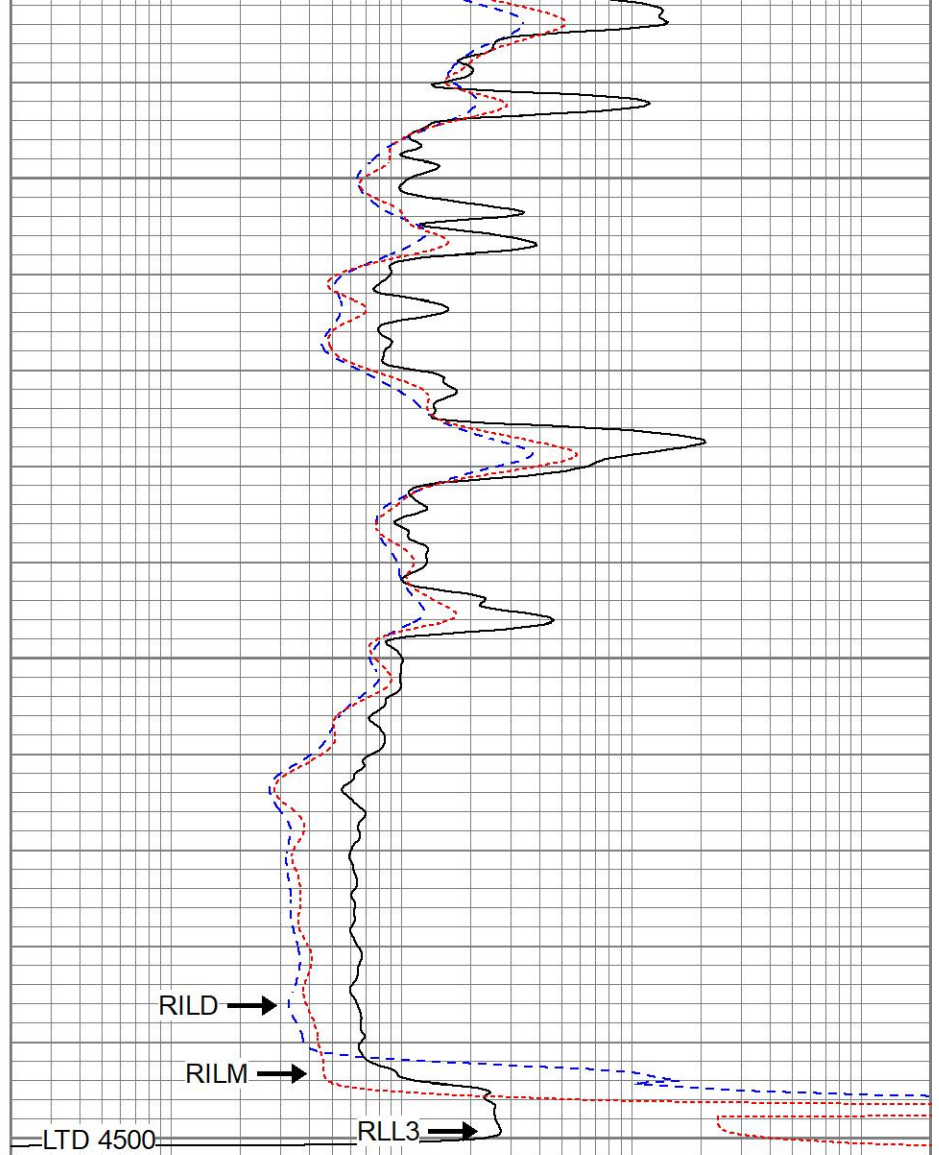

RILD

RILM

RLL3

0.2	RILD (Ohm-m)	2000
0.2	RLL3 (Ohm-m)	2000
0.2	RILM (Ohm-m)	2000




REPEAT SECTION


Database File pplyineyes#1oh.db
 Dataset Pathname pass2.1
 Presentation Format kdil
 Dataset Creation Tue Sep 13 22:44:54 2022
 Charted by Depth in Feet scaled 1:240


0	GR (GAPI)	150
-100	SP (mV)	100

0.2	RILD (Ohm-m)	2000
0.2	RLL3 (Ohm-m)	2000
0.2	RILM (Ohm-m)	2000

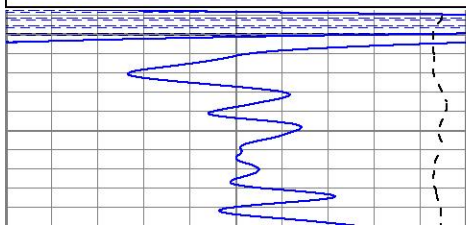


4300

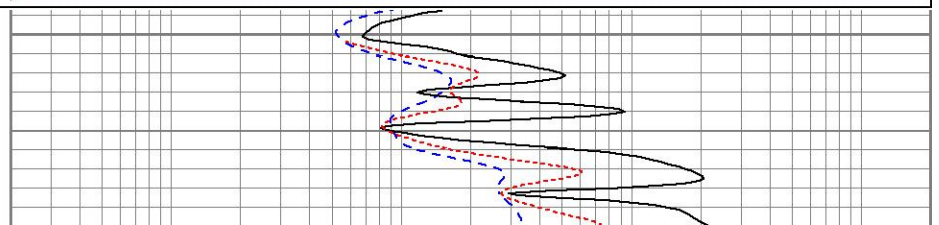

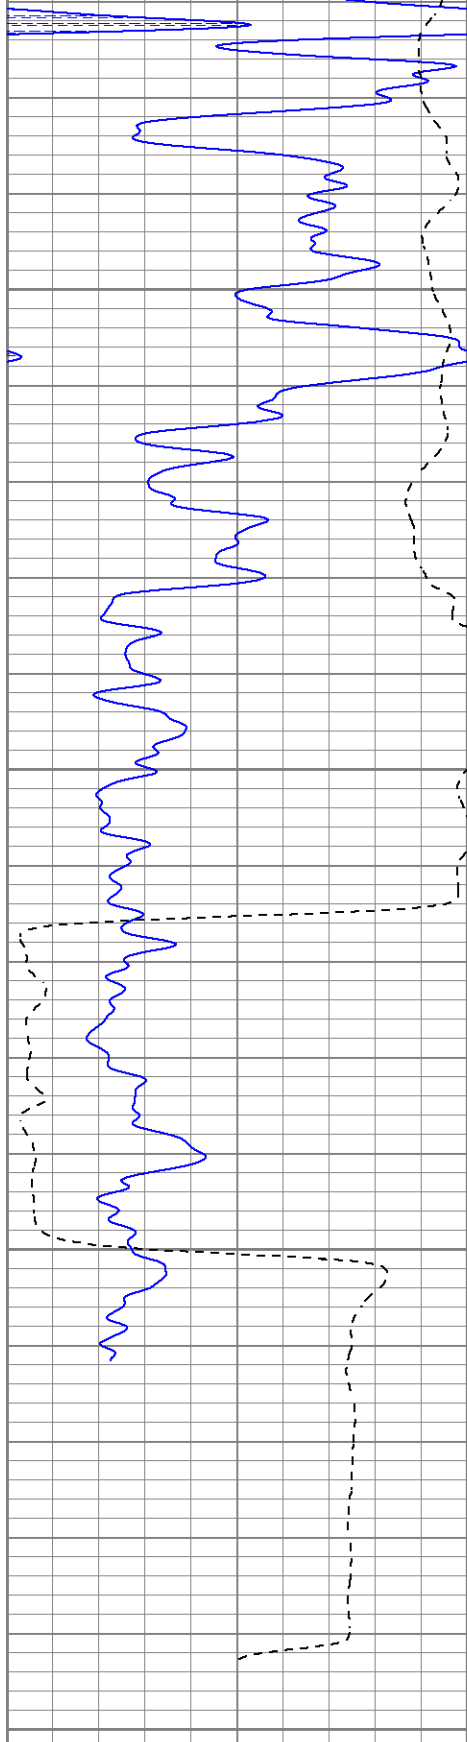

0	GR (GAPI)	150
-100	SP (mV)	100

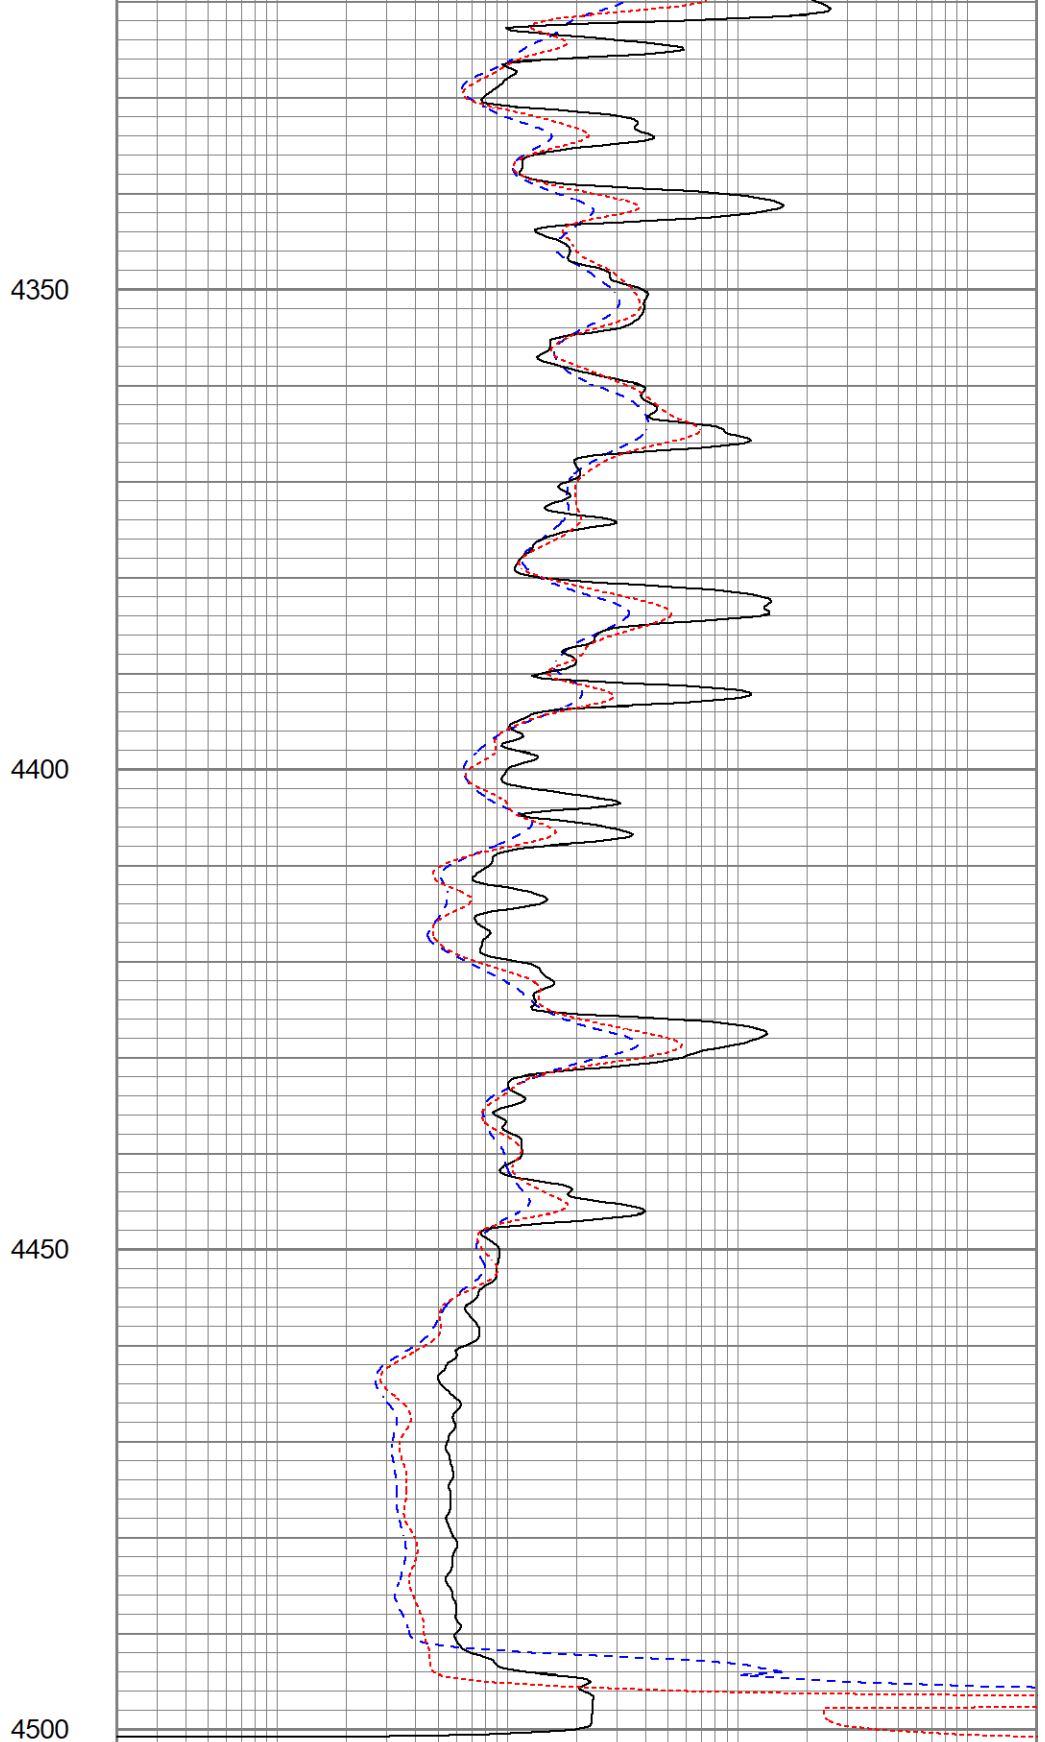

0.2	RILD (Ohm-m)	2000
0.2	RLL3 (Ohm-m)	2000
0.2	RILM (Ohm-m)	2000

Calibration Report

Database File pplyineyes#1oh.db
 Dataset Pathname pass2.1
 Dataset Creation Tue Sep 13 22:44:54 2022

Dual Induction Calibration Report

Serial-Model: 1842-ADM
 Surface Cal Performed: Mon Sep 20 22:00:42 2021
 Downhole Cal Performed: Mon Sep 20 22:00:24 2021
 After Survey Verification Performed: Mon Sep 20 22:05:52 2021

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop	V	Air	Loop		m	b
Deep	0.018	0.672	V	0.000	350.000	mmho/m	535.475	-9.896
Medium	0.003	0.769	V	0.000	400.000	mmho/m	522.607	-1.745
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.018	0.672	V	0.000	350.000	mmho/m	535.240	-9.549
Medium	0.003	0.768	V	0.000	550.000	mmho/m	718.637	-2.088

Downhole Calibration

Internal:	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Deep	-0.219	349.905	mmho/m	-0.343	349.810	mmho/m	1.000	-3.124
Medium	-0.118	399.722	mmho/m	-0.226	399.745	mmho/m	1.000	-3.108
Shallow	2.536	0.025	V	500.000	2.000	Ohm-m	165.330	-1.504

After Survey Verification

Internal:	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	-0.219	349.905	mmho/m	1.000	-3.124
Medium	0.000	0.000	mmho/m	-0.118	399.722	mmho/m	1.000	-3.108
Shallow	0.000	0.000	Ohm-m	500.000	2.000	Ohm-m	1.000	0.000

Admyr Lithodensity Calibration Report

Serial-Model: 1C-C
 Source: Blue2
 Master Calibration Performed: Tue Aug 30 10:20:37 2022

Master Calibration

	Density		Far Detector	Near Detector	
Magnesium	1.670	g/cc	6362.49	3546.71	cps
Aluminium	2.640	g/cc	1733.54	2362.69	cps
Aluminium+Sleeve	2.617	g/cc	1657.01	2197.69	cps

Spine Angle = 72.65

Density/Spine Ratio = 0.712

	PE		NLITH	NHARD	
Magnesium	1.900	barn	5031.16	2670.10	cps
Aluminium	2.400	barn	925.14	1260.20	cps
Aluminium+Sleeve	5.000	barn	816.33	1216.63	cps

M = 0.191

B = 0.171

R = 0.787

	Size		Reading	
Small Ring	8.00	in	8.61	V

Neutron Calibration Report

Serial Number:	AD5139		
Tool Model:	ADMY5139		
Performed:	(Not Performed)		
Calibrator Value:	1	NAPI	
Calibrator Reading:	1	cps	
Sensitivity:	1	NAPI/cps	

Temperature Calibration Report

Serial Number:	WithMC			
Tool Model:	WMC			
Performed:	Fri Apr 19 12:15:04 2019			
	Reference	Reading		
Low Reference:	0.00 degF	0.00	degF	
High Reference:	1.00 degF	1.00	degF	
Gain:	1.00			
Offset:	0.00			
Delta Spacing	1			

Inclinometer Calibration Report

Performed:	Wed May 5 19:20:48 2021				
	Low Read.	High Read.	Low Ref.	High Ref.	
X Accelerometer	205.00	1843.00	-1.00	1.00	gee
Y Accelerometer	205.00	1843.00	-1.00	1.00	gee
Z Accelerometer					gee

Gamma Ray Calibration Report

Serial Number:	WithMC		
Tool Model:	WMC		
Performed:	Wed Jun 15 11:53:49 2022		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	1.1000	GAPI/cps	