



MICRO LOG

Company RAYMOND OIL COMPANY, INC.

Well #1 TABRIZI

Field WILDCAT

County LANE State KANSAS

Location: API #: 15-101-22674-0000
445' FSL & 335' FEL
NW - SE - SE - SE

Other Services
CDL/CNL
DIL

SEC 2 TWP 20S RGE 28W

Permanent Datum GROUND LEVEL Elevation 2724
Log Measured From KELLY BUSHING 5' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation

K.B. 2729
D.F. 2727
G.L. 2724

Date 9/3/22

Run Number TWO

Depth Driller 4720

Depth Logger 4722

Bottom Logged Interval 4720

Top Log Interval 3400

Casing Driller 8 5/8" @ 259'

Casing Logger 259

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.4/43

pH / Fluid Loss 9.5/9.6

Source of Sample FLOWLINE

Rm @ Meas. Temp .900 @ 84F

Rmf @ Meas. Temp .675 @ 84F

Rmc @ Meas. Temp 1.08 @ 84F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .620 @ 122F

Time Circulation Stopped 4 HOURS

Time Logger on Bottom 1:30 A.M.

Maximum Recorded Temperature 122F

Equipment Number 922339

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By KIM SHOEMAKER

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-101-22674-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
DIGHTON, KS., 9S. ON HWY 23 TO "RD. 60", 5E., 1 S. INTO




MAIN SECTION

Database File	6916ddn.db
Dataset Pathname	pass7.2
Presentation Format	micro
Dataset Creation	Sat Sep 03 02:15:39 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

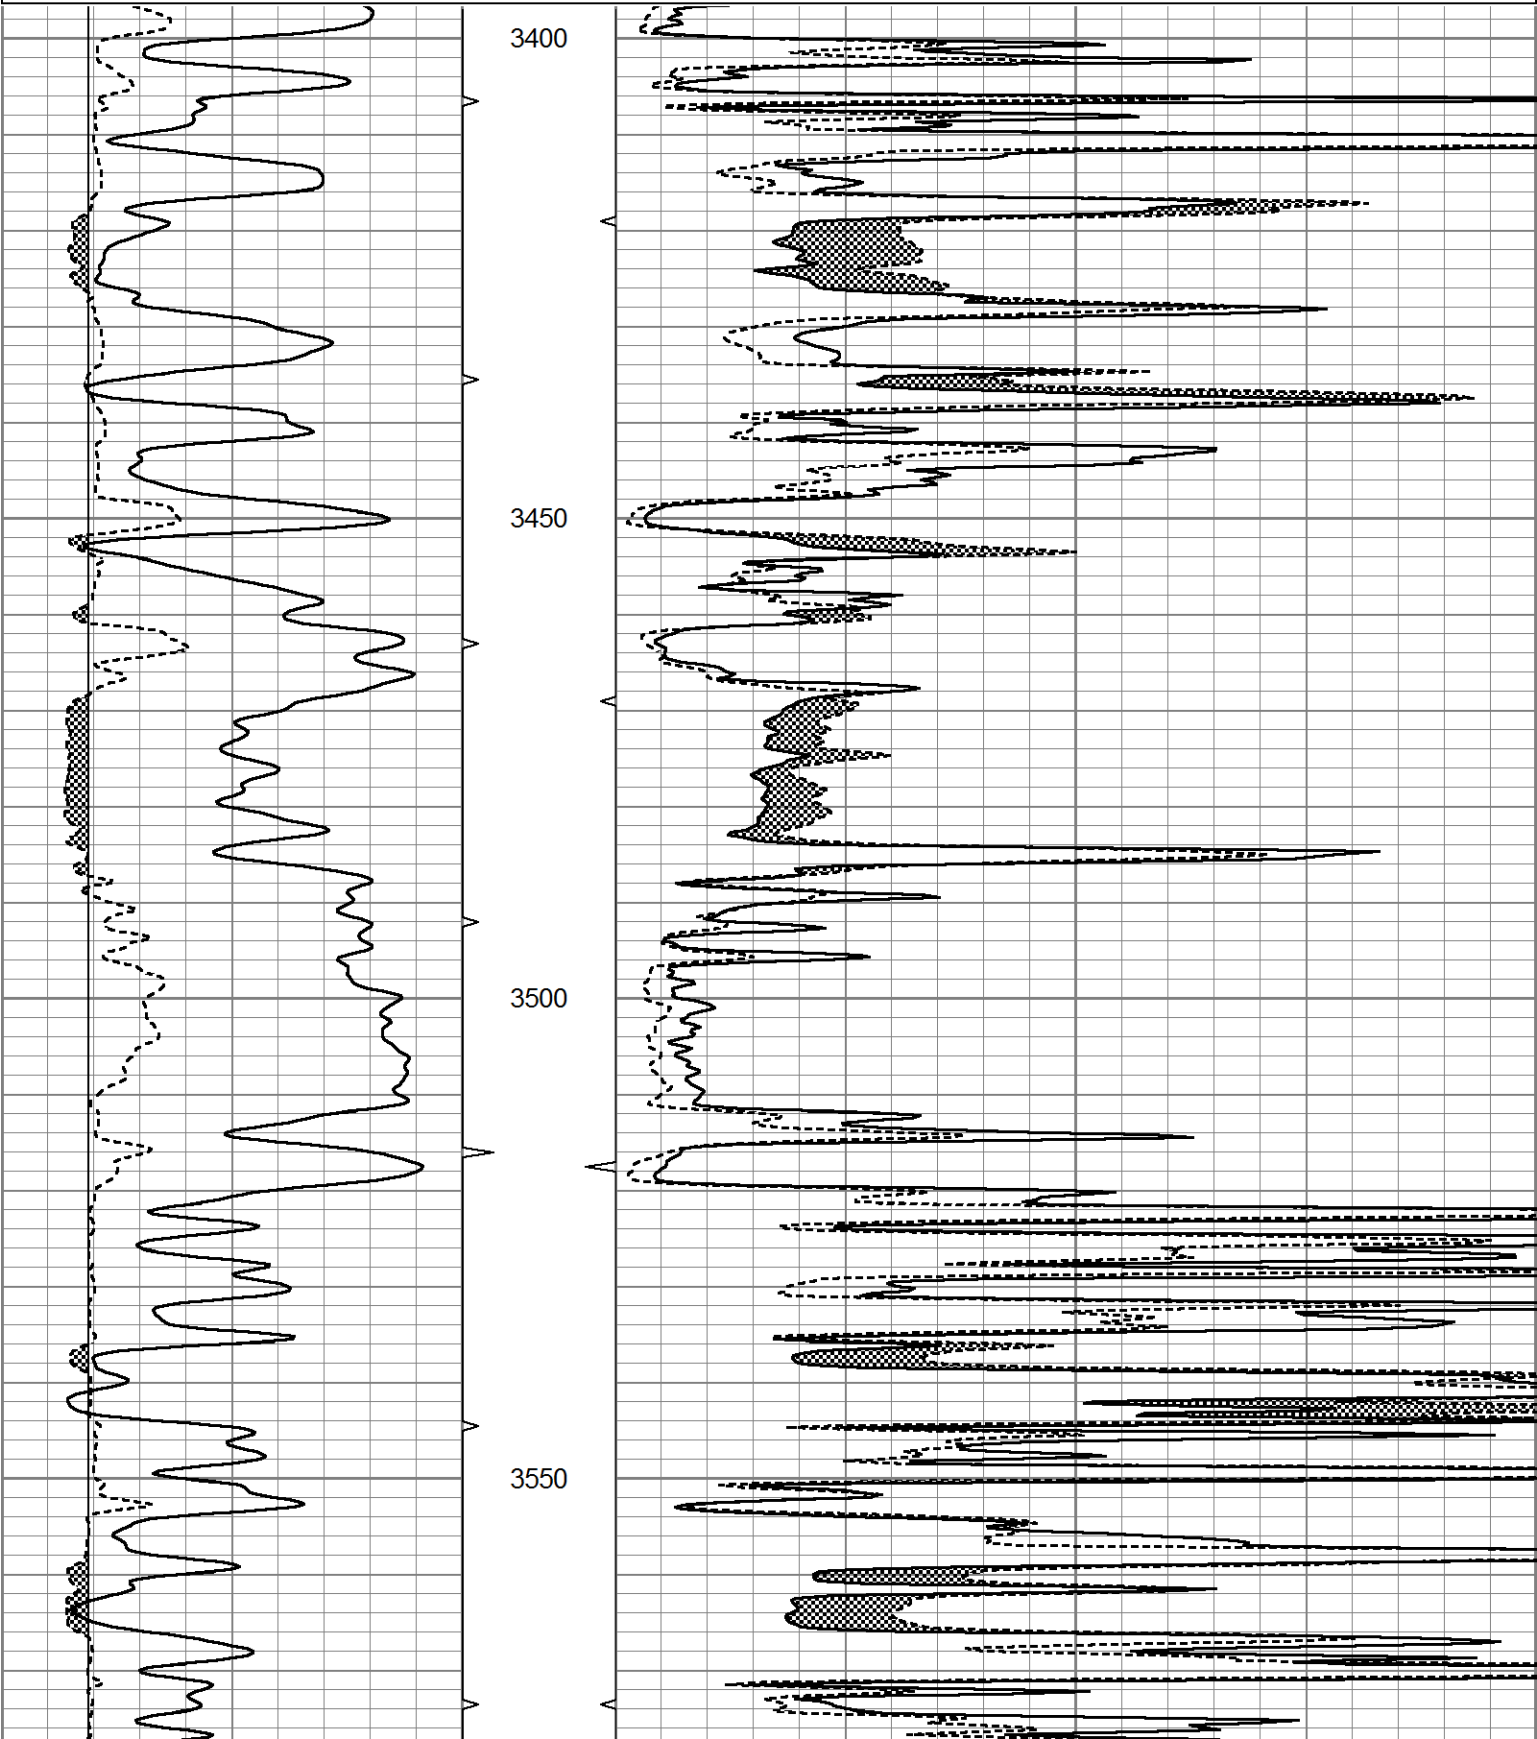

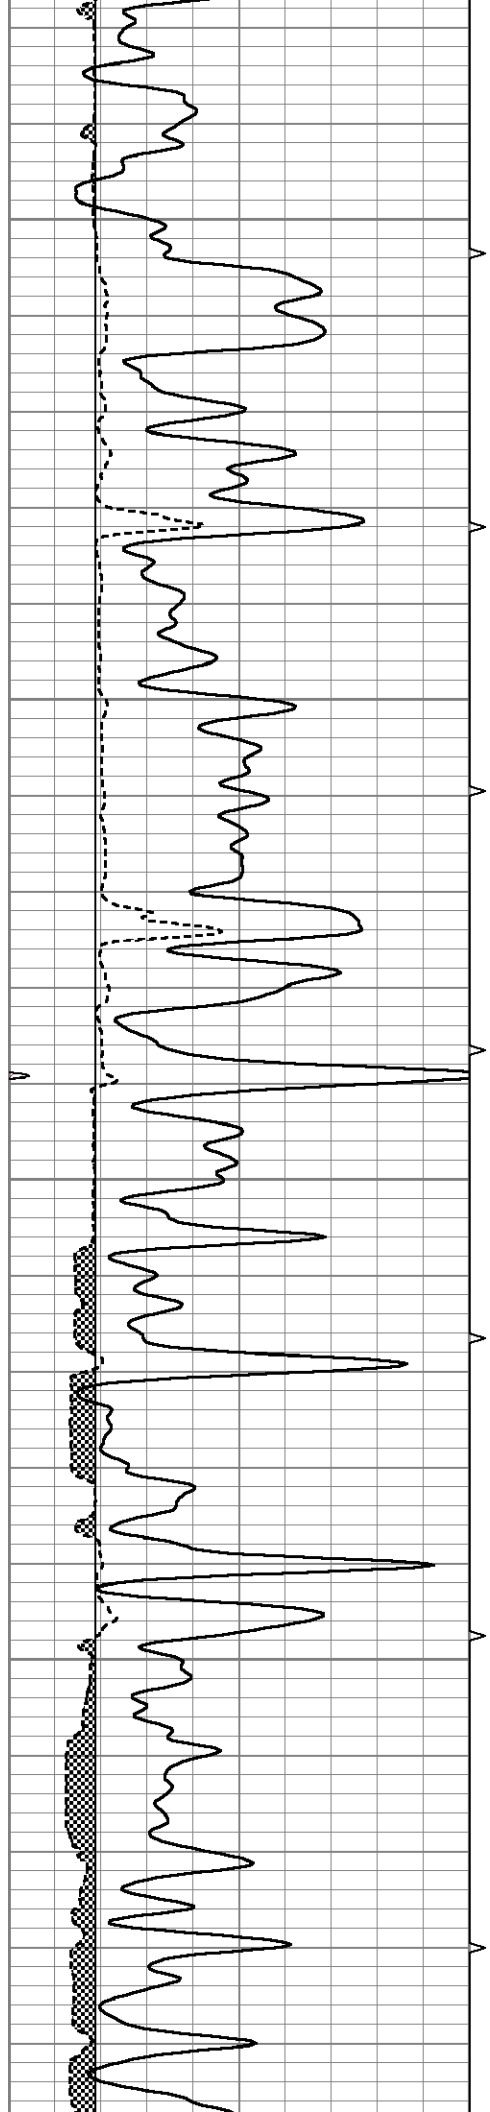



3600


3650

3700

3750

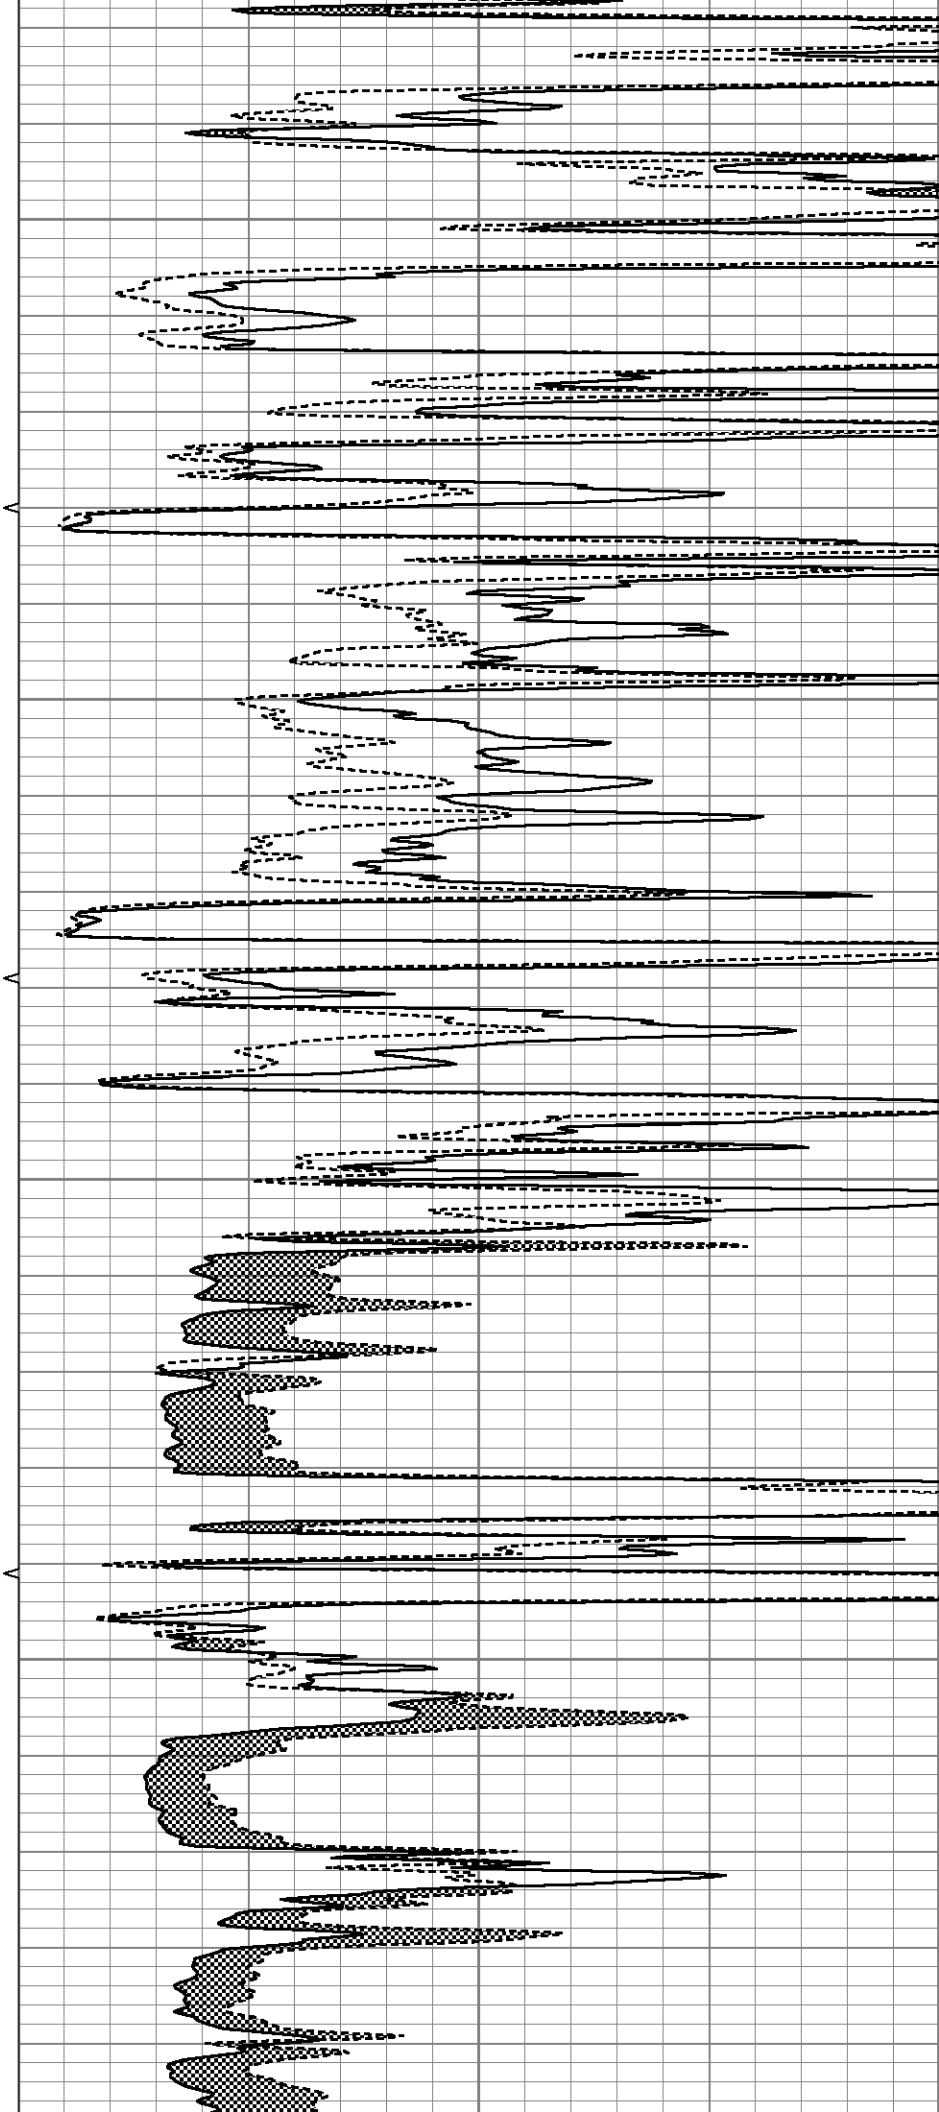

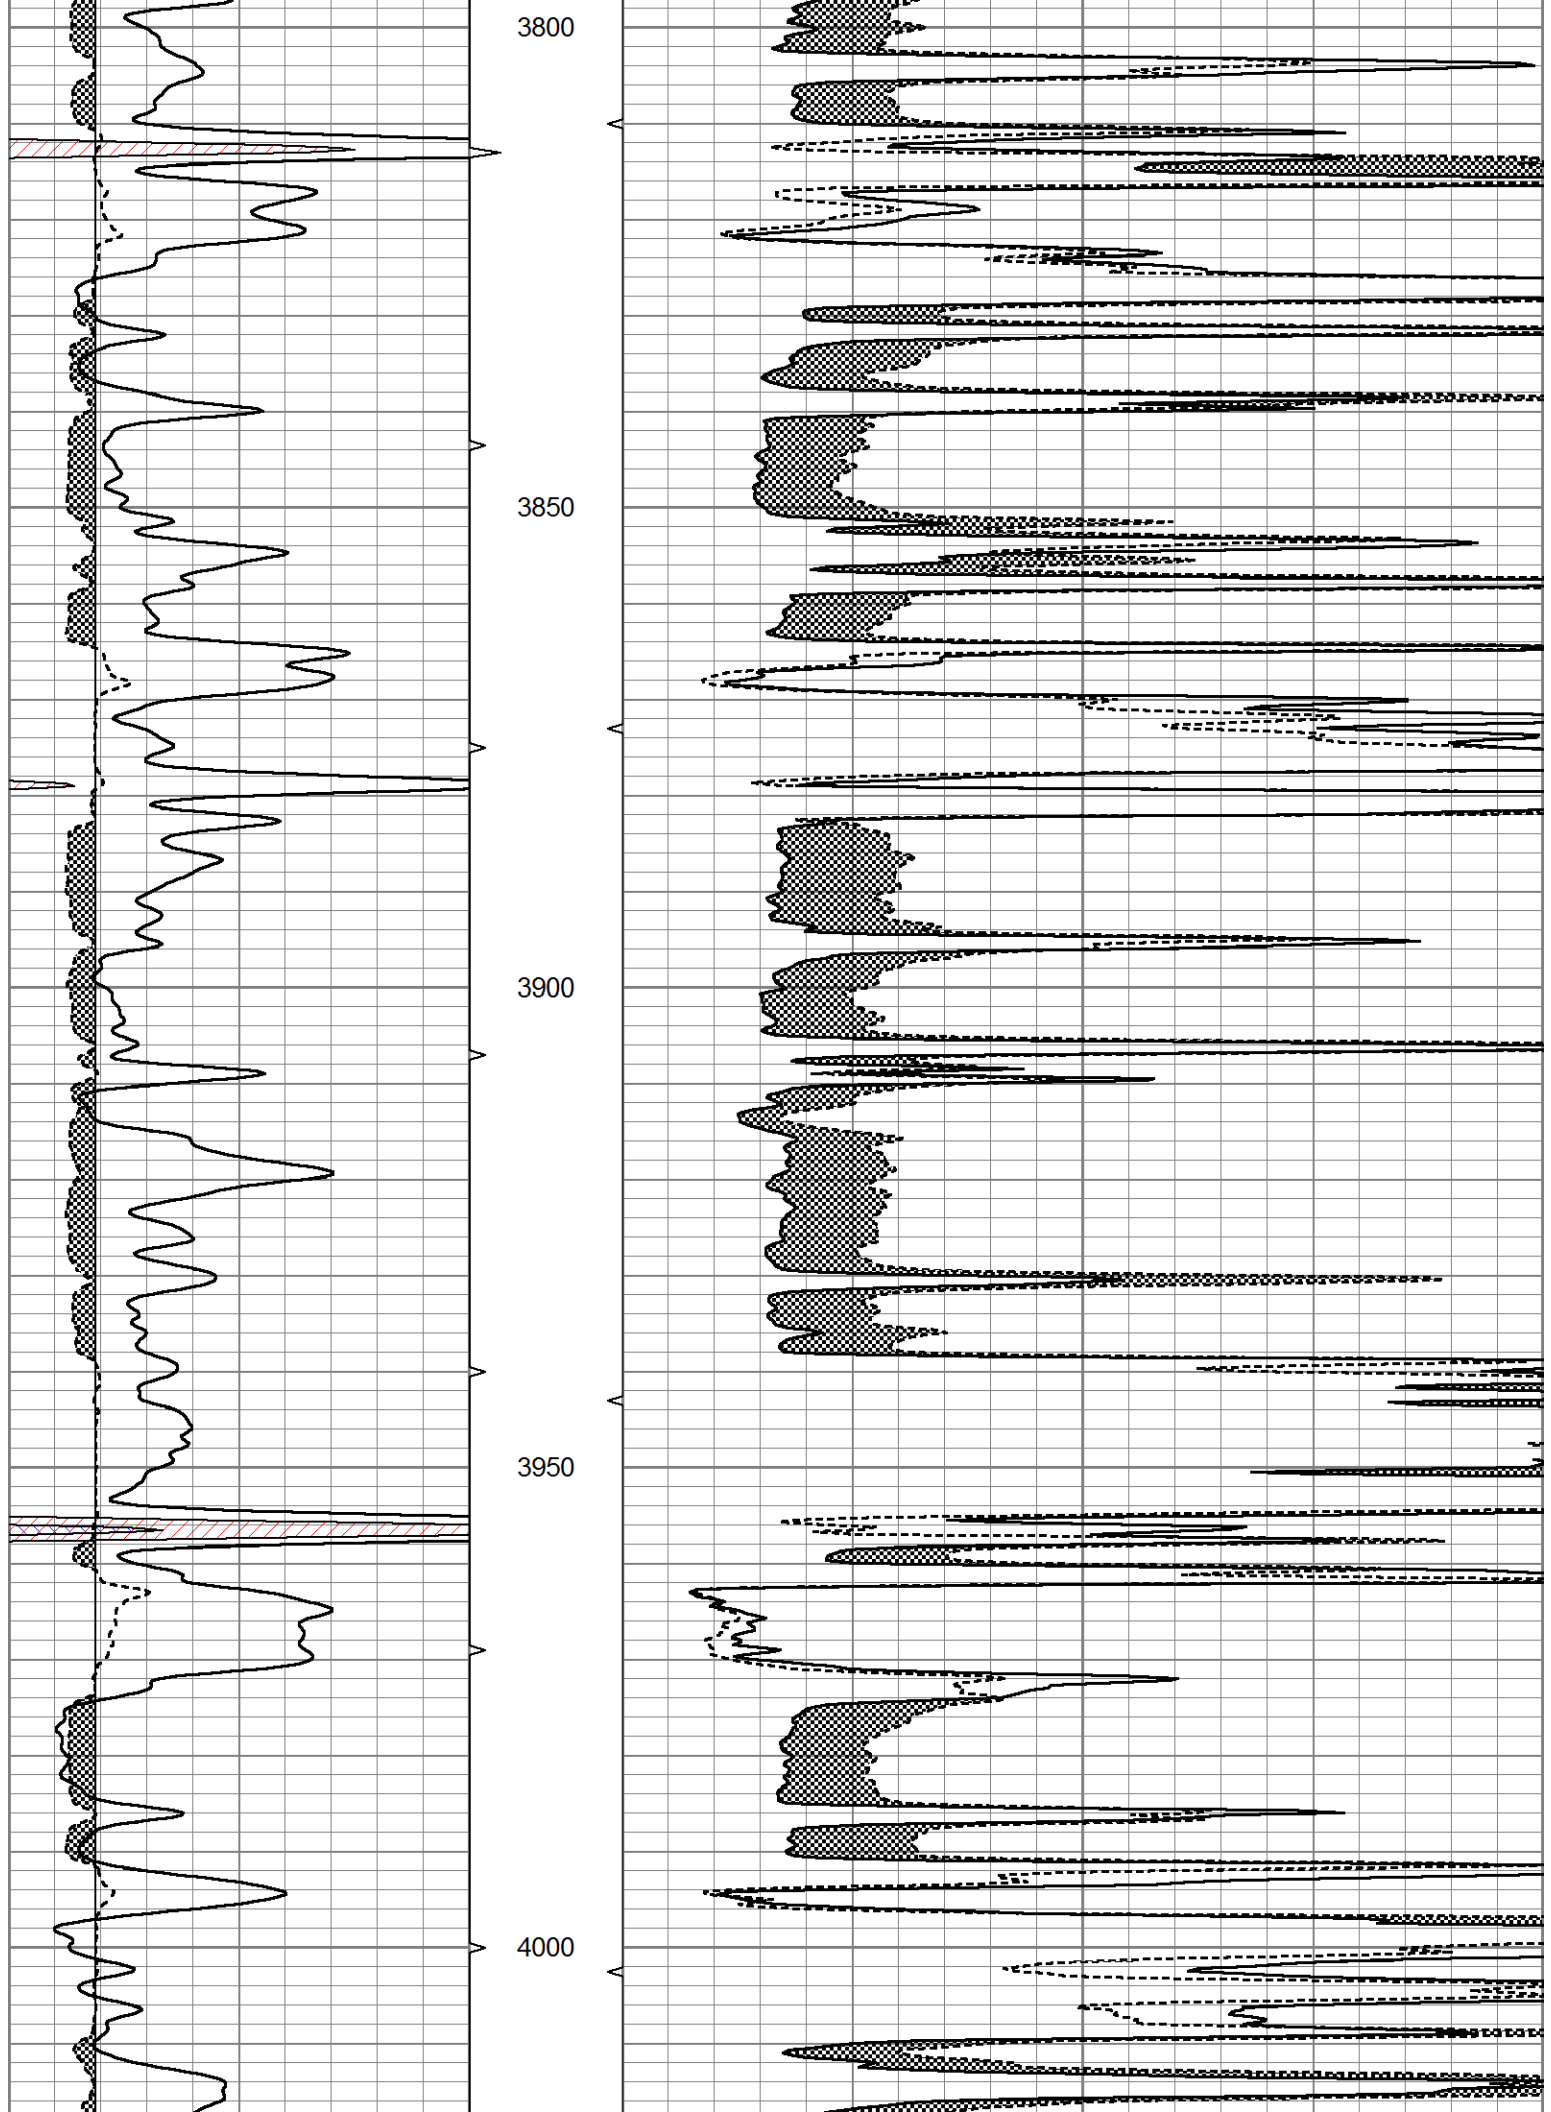

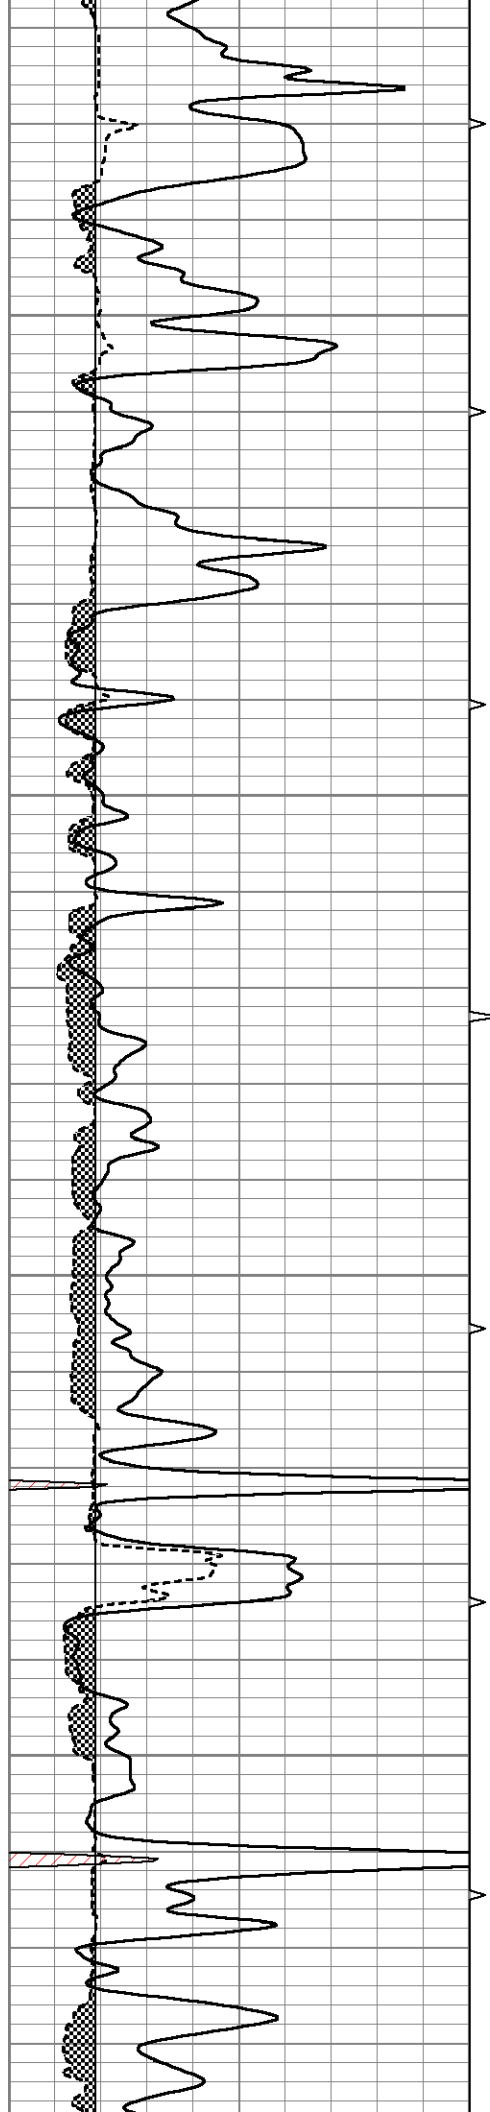



4050


4100


4150

4200

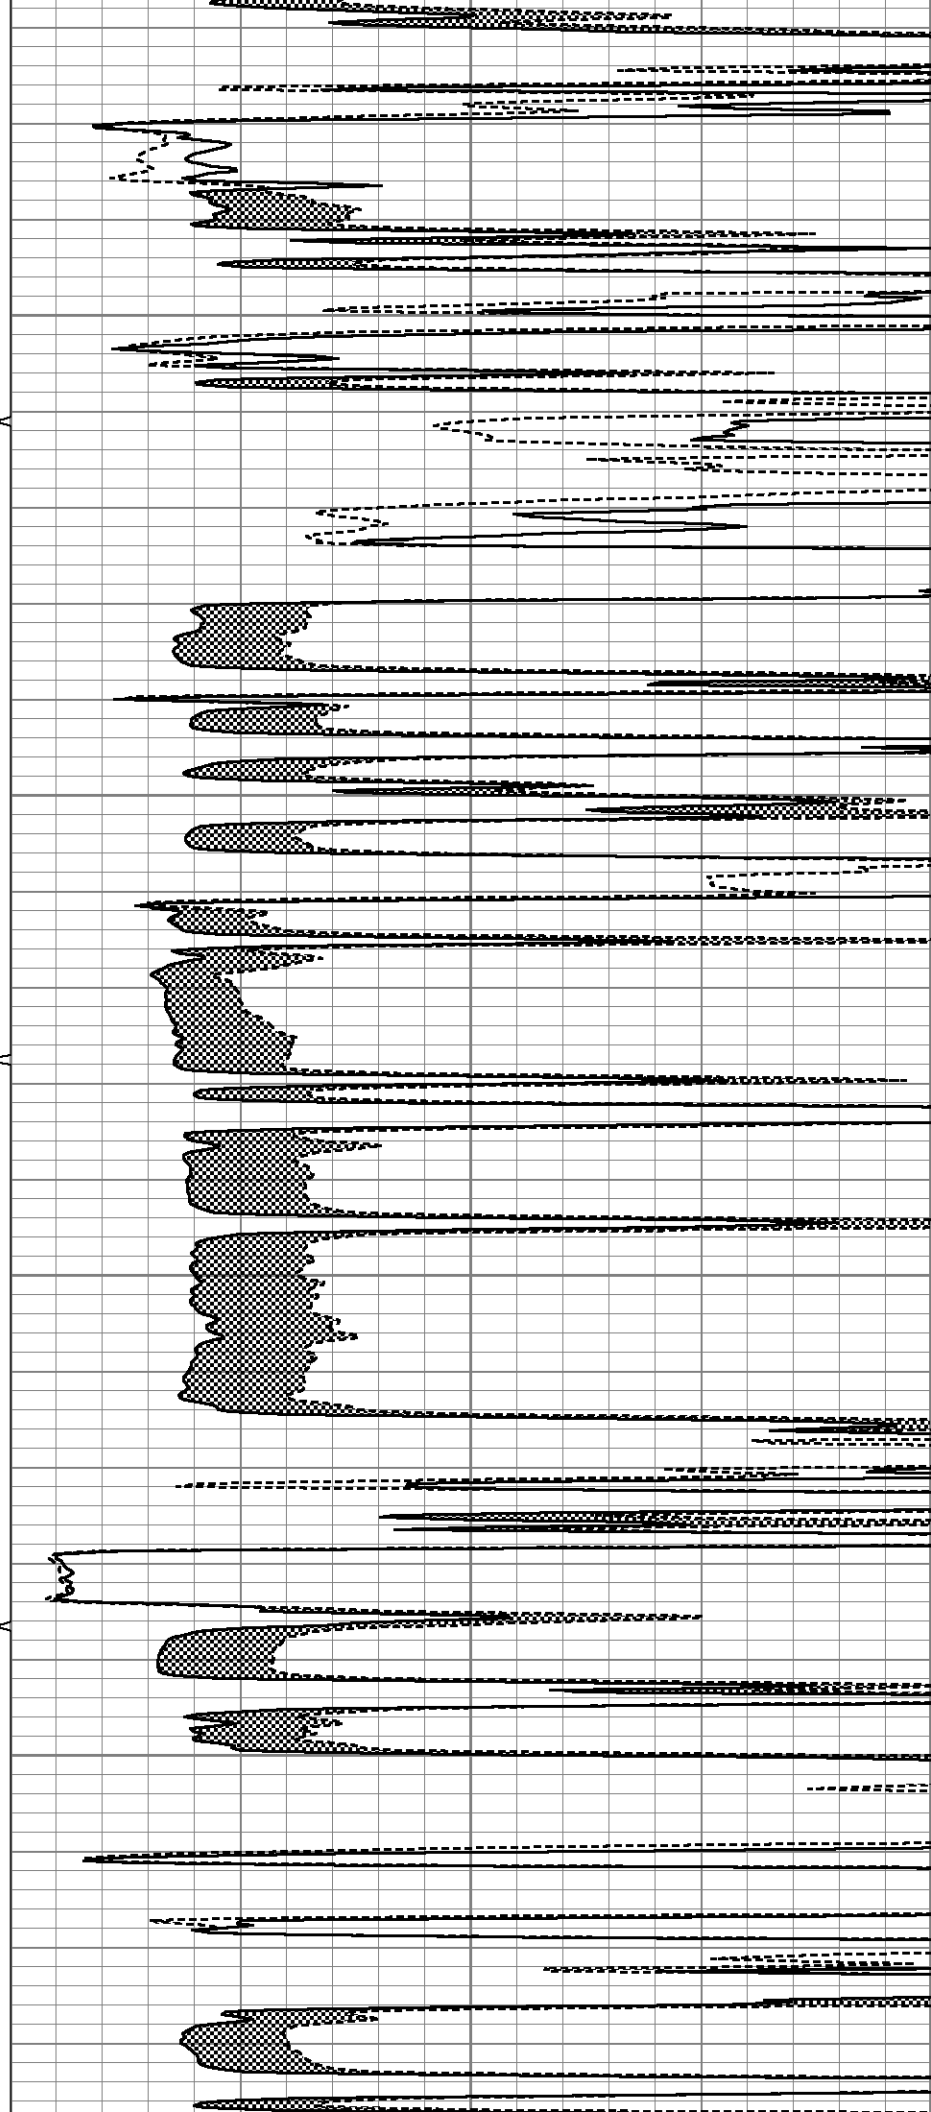

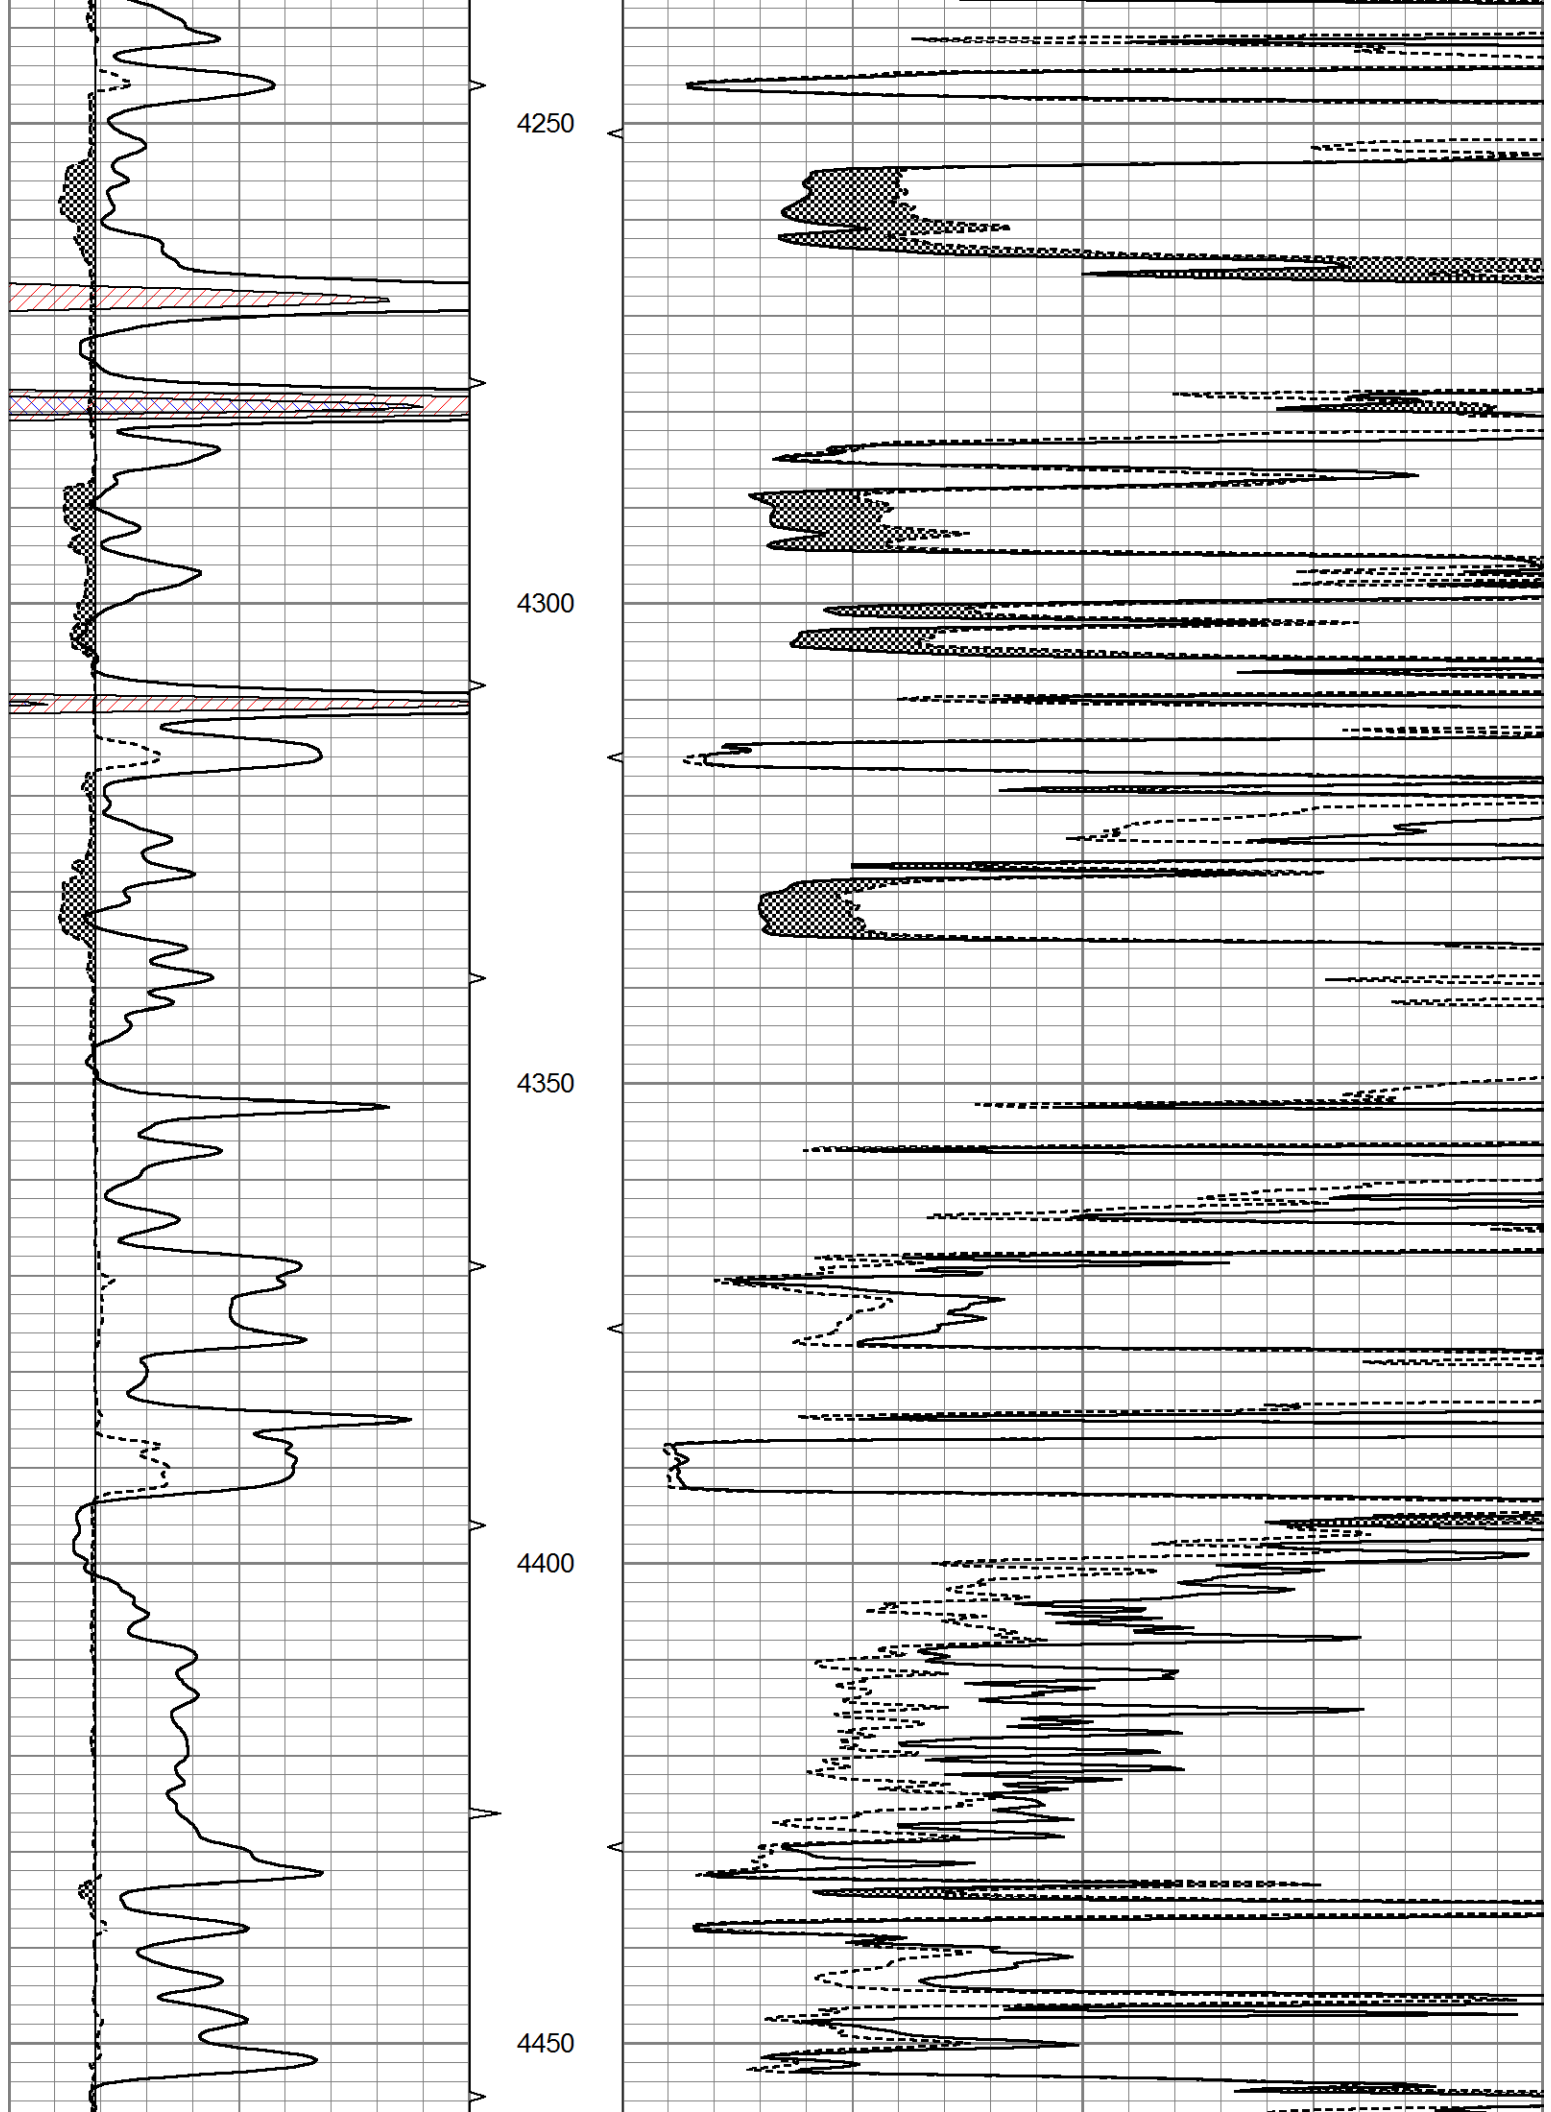

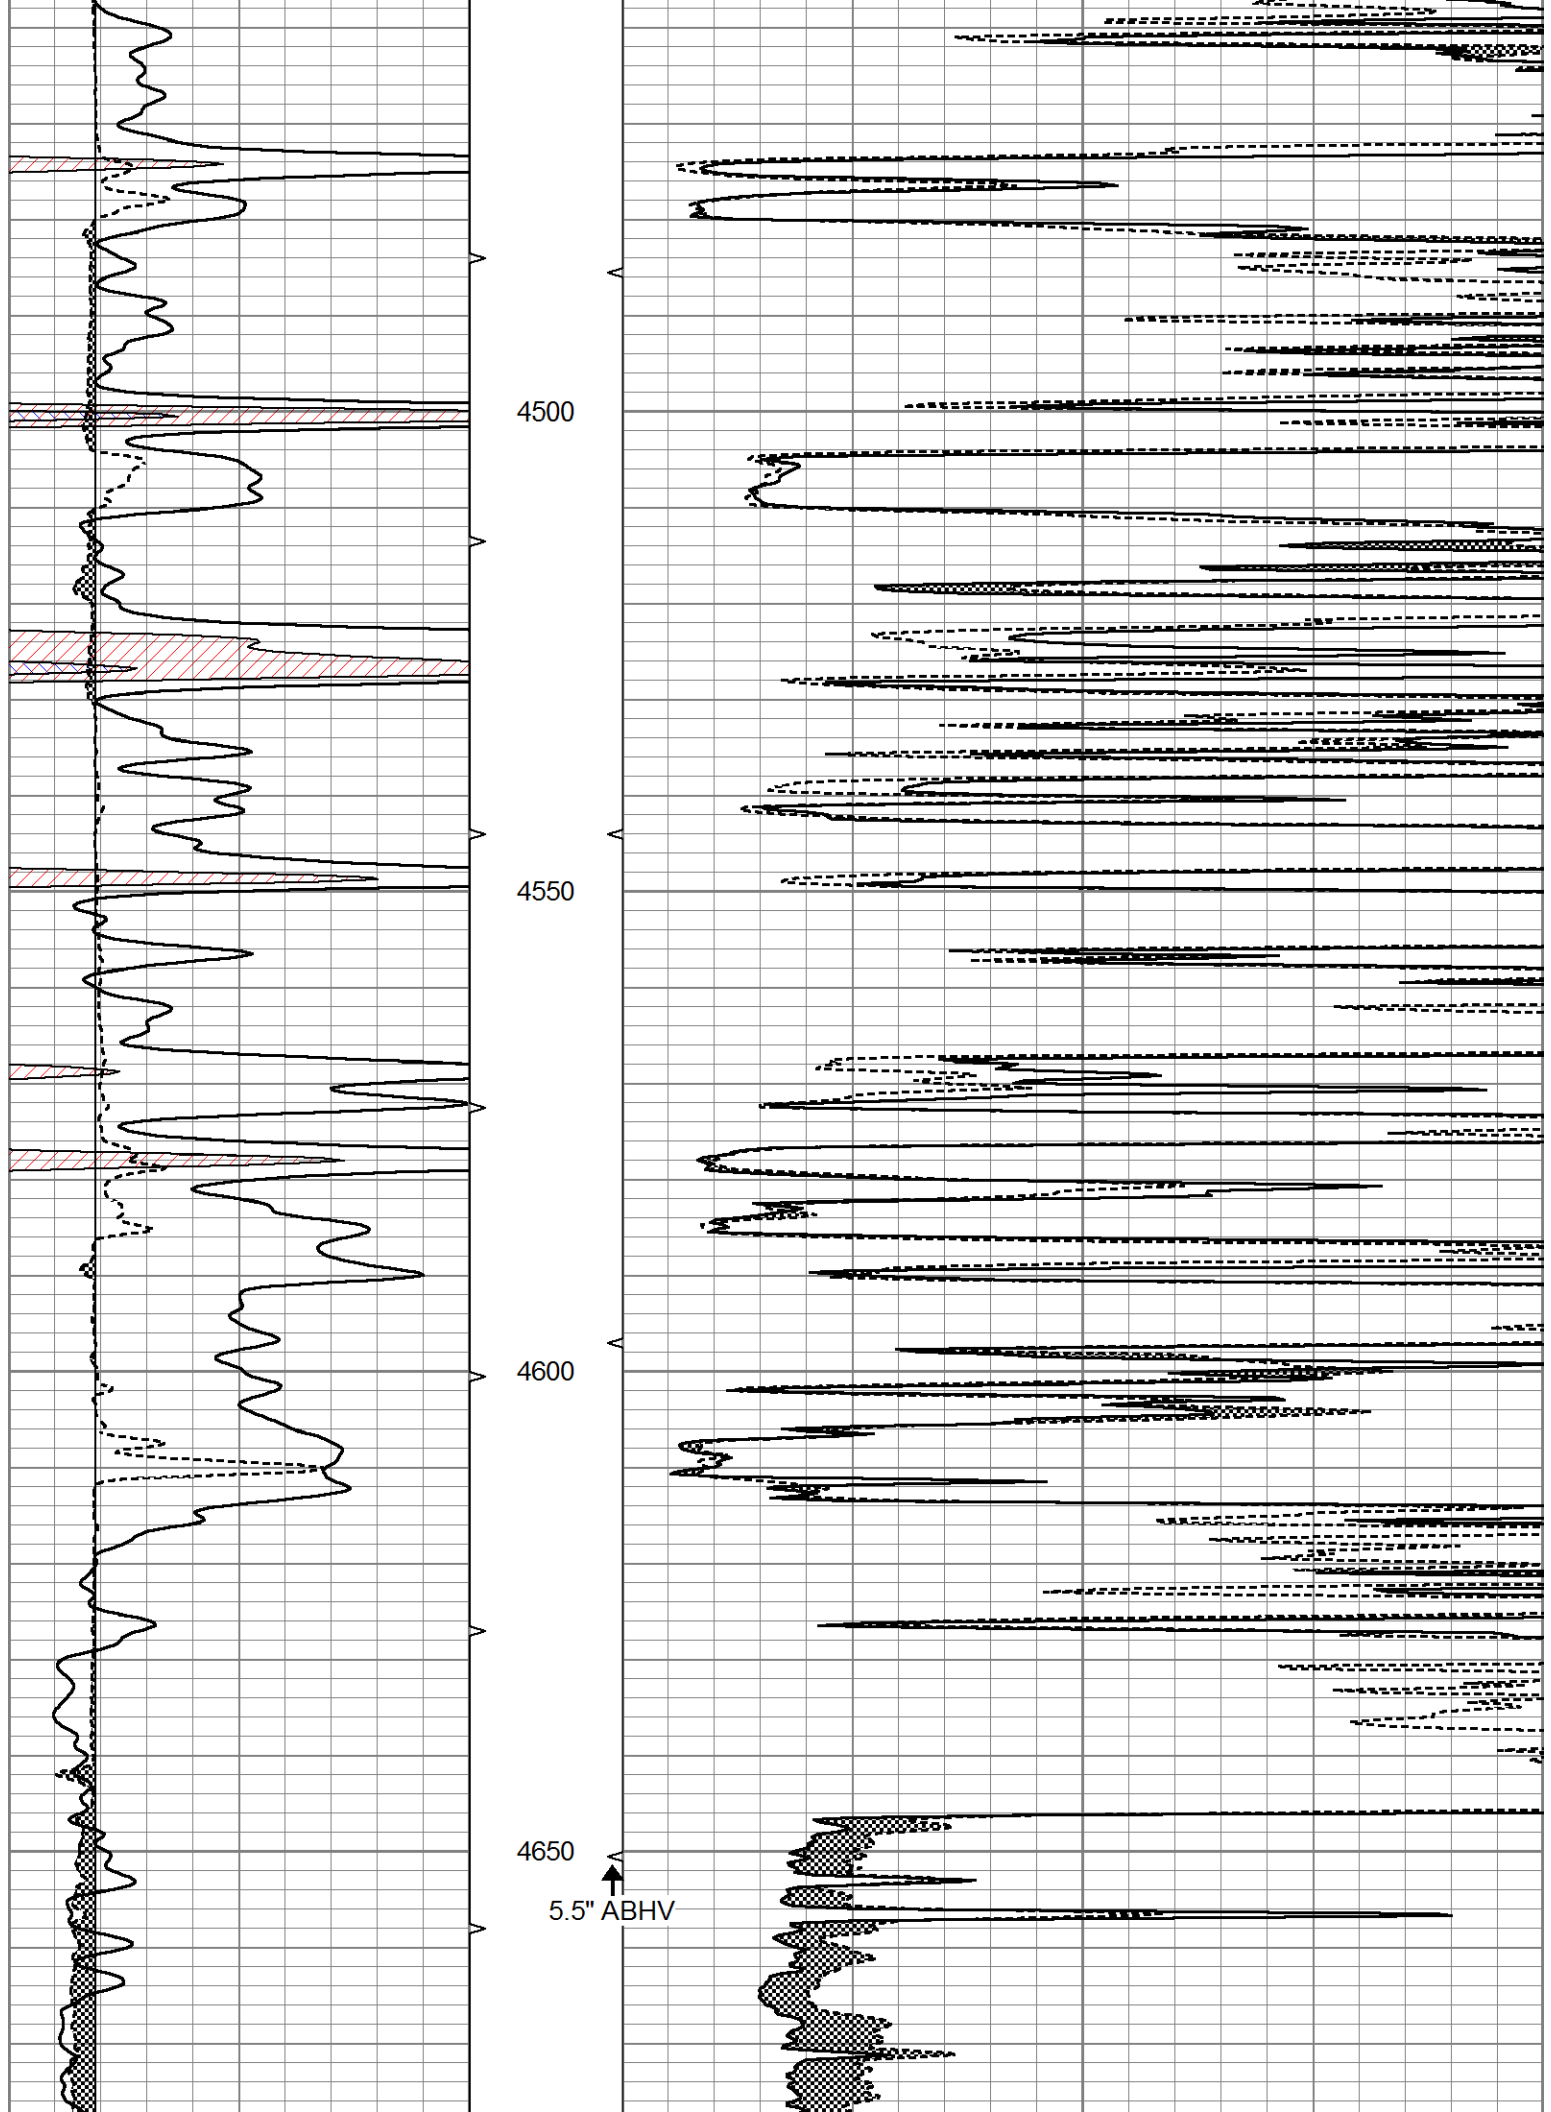


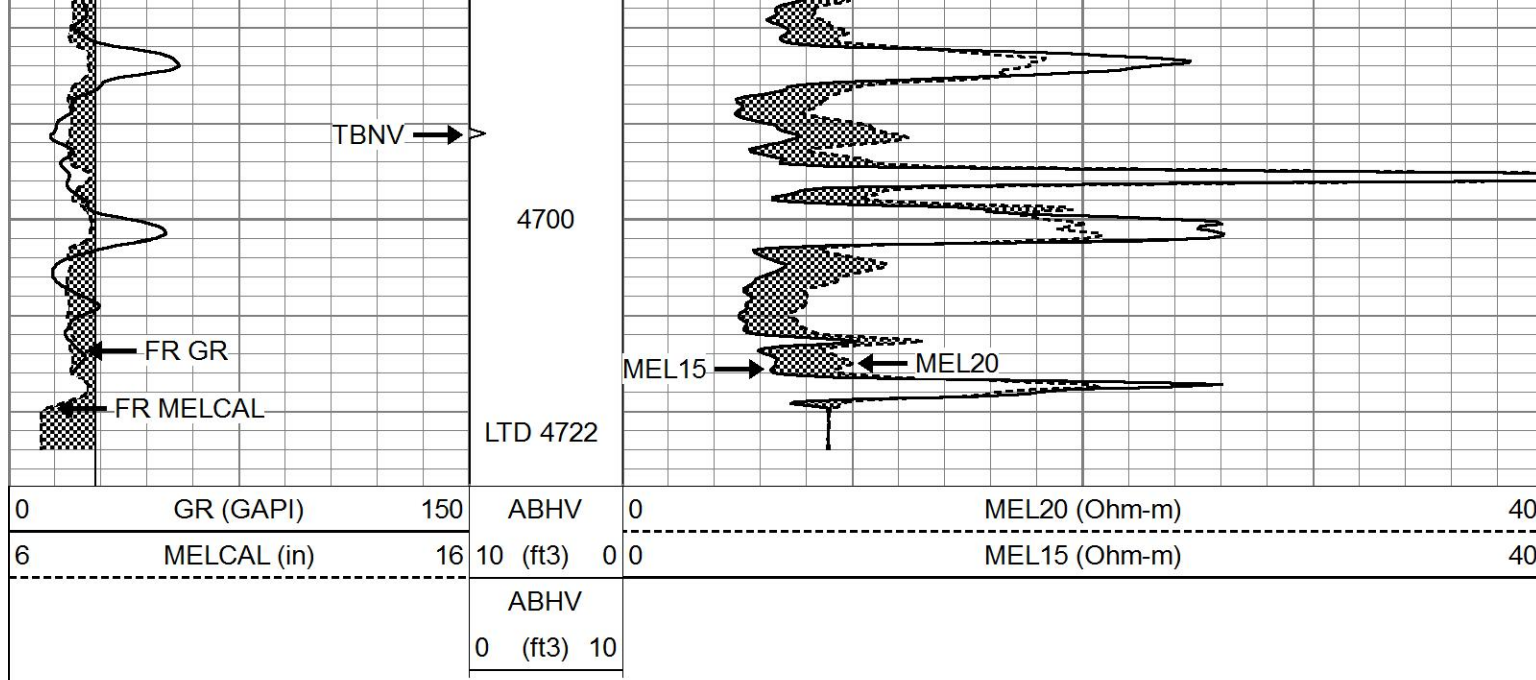


REPEAT SECTION

Database File 6916ddn.db
 Dataset Pathname pass6.1
 Presentation Format micro
 Dataset Creation Sat Sep 03 01:33:49 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

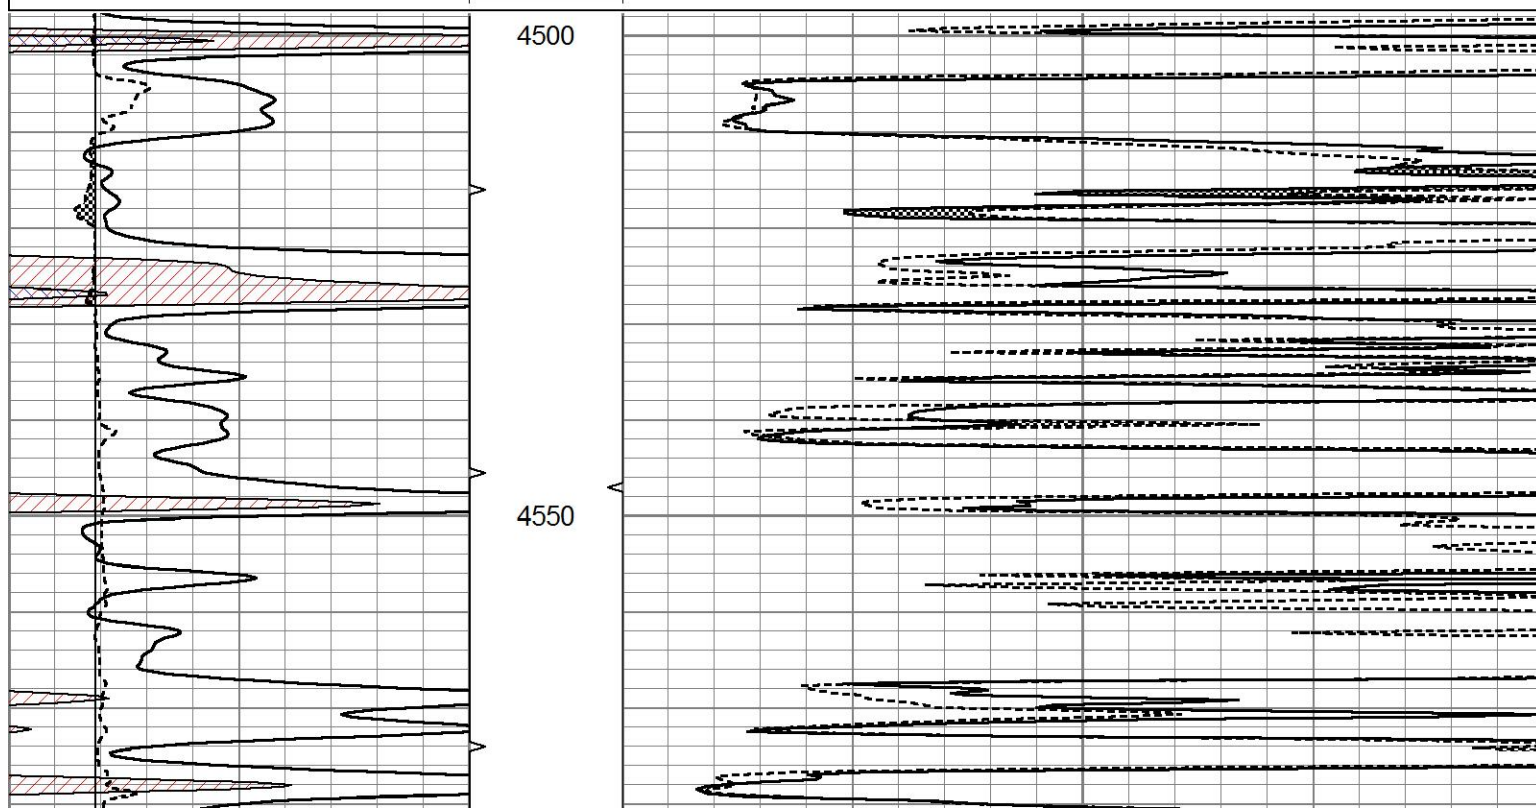

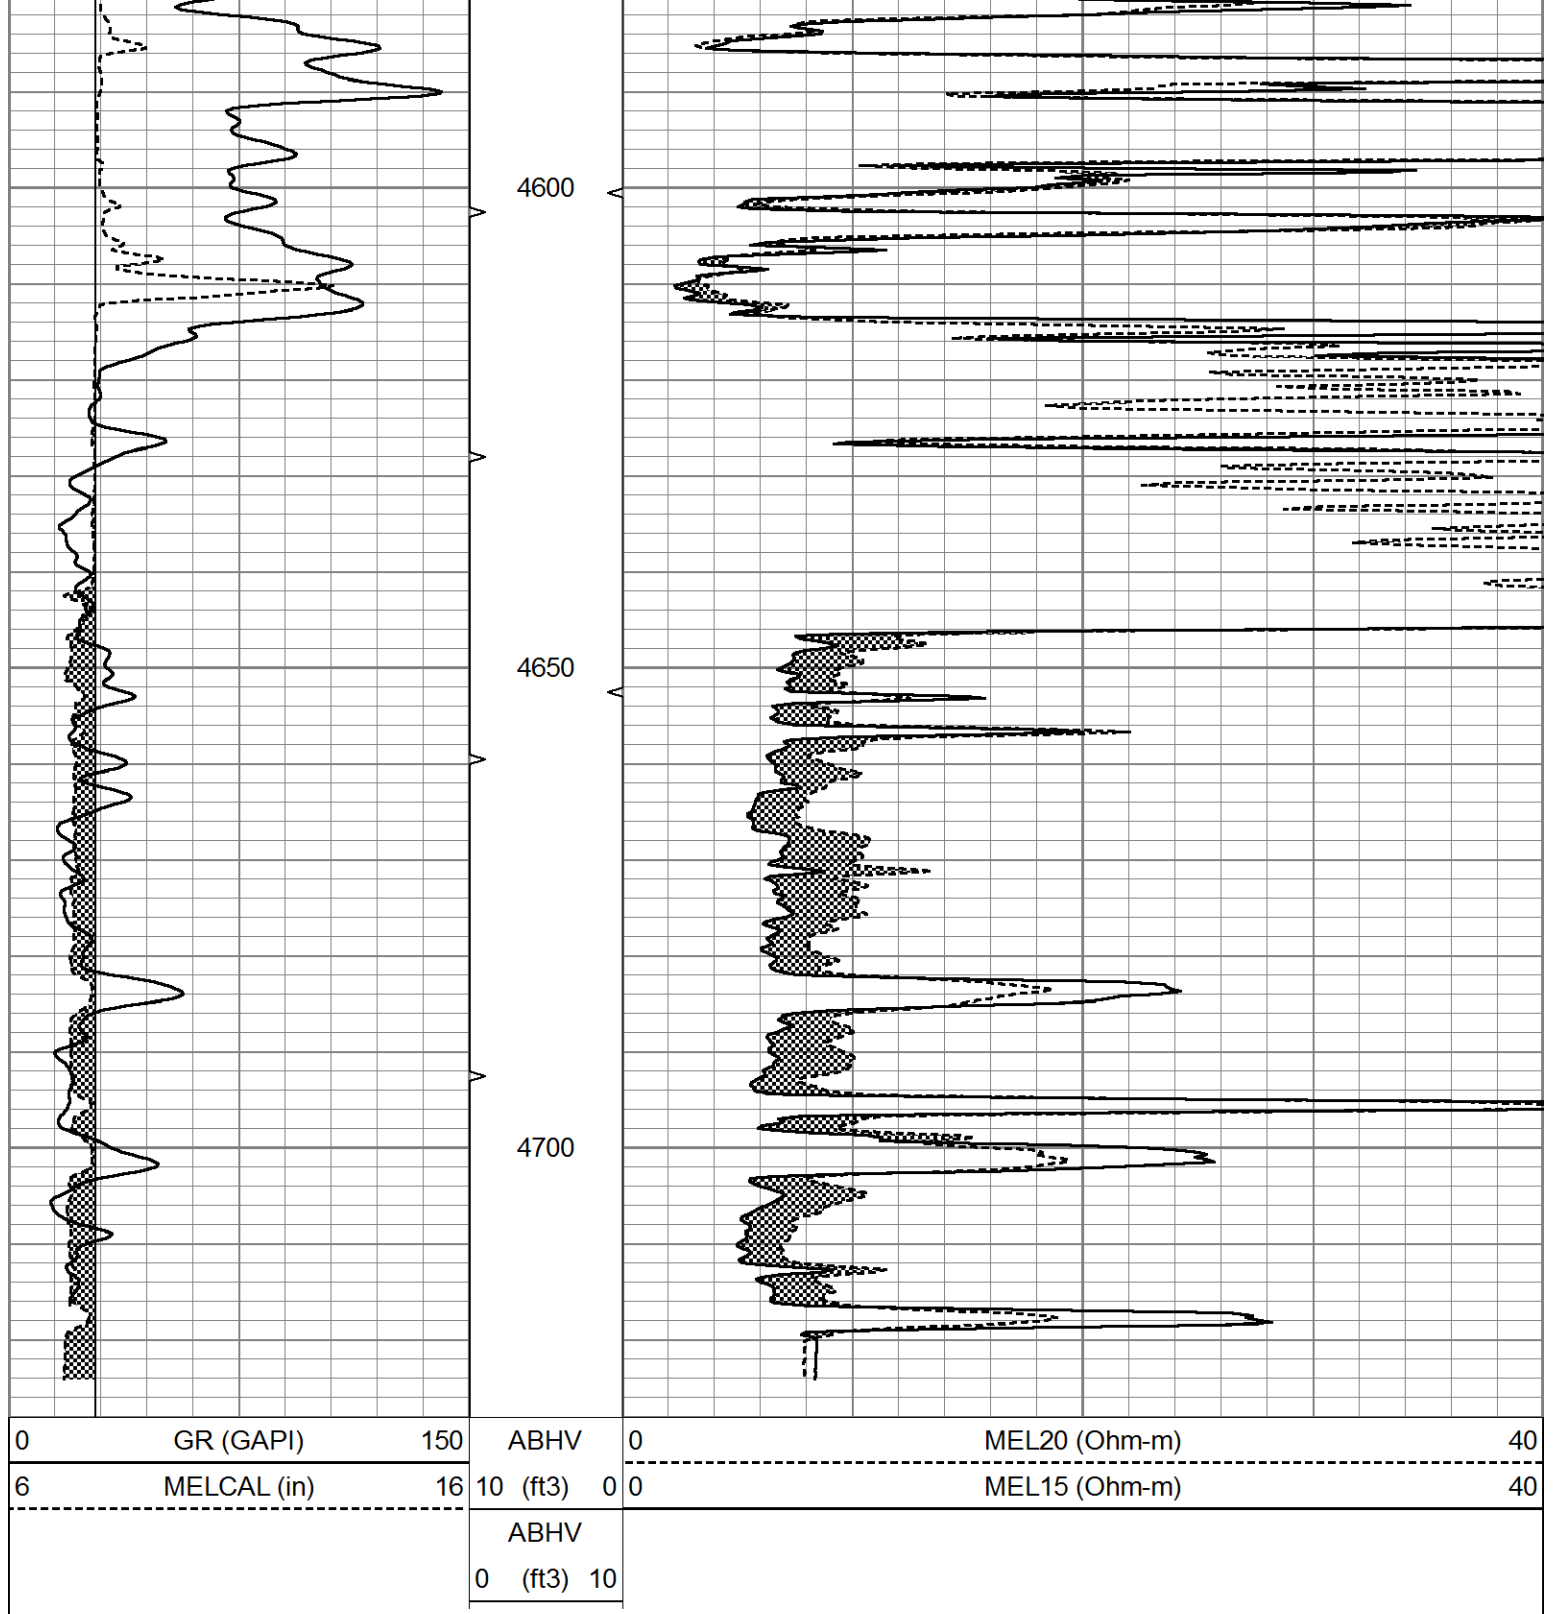

Calibration Report			
Database File	6916ddn.db		
Dataset Pathname	pass7.2		
Dataset Creation	Sat Sep 03 02:15:39 2022		
MICRO Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeN		
Performed:	Sat Sep 03 01:45:26 2022		
Caliper Calibration:	Gain=4.706	Offset=0.471	
	Low Cal	High Cal	

References	8.000	16.000
Readings	1.600	3.300
1.5" Calibration:	Gain=38.000	Offset=0.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.000	1.216
2" Calibration:	Gain=60.000	Offset=-1.300
References	Low Cal	High Cal
Readings	0.000	20.000
	0.002	1.053
Gamma Ray Calibration Report		
Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Sat Aug 27 03:25:27 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3200	GAPI/cps