



MICRO LOG

Company	PALOMINO PETROLEUM		
Well	RODEO TIME #1		
Field	WILDCAT		
County	NESS	State	KS
Location:	API # : 15 135 26184 1642' FSL & 394' FEL		Other Services CDNL DIL
Permanent Datum	SEC 20 TWP 16S RGE 26W	Ground Level	Elevation 2648
Log Measured From	KB 8' AGL		Elevation K.B. 2656 D.F. 2654 G.L. 2648
Drilling Measured From	KB		
Date	8/15/22		
Run Number	TWO		
Depth Driller	4690		
Depth Logger	4690		
Bottom Logged Interval	4688		
Top Log Interval	3600		
Casing Driller	8 5/8" @ 692		
Casing Logger	692		
Bit Size	7 7/8"		
Type Fluid in Hole	Chemical		
Density / Viscosity	9.4/58		
pH / Fluid Loss	10.0/5.8		
Source of Sample	Pit		
Rm @ Meas. Temp	.75@80degf		
Rmf @ Meas. Temp	.56@80degf		
Rmc @ Meas. Temp	.90@80degf		
Source of Rmf / Rmc	Calculated		
Rm @ BHT	.57@117degf		
Time Circulation Stopped	2:30 P.M.		
Time Logger on Bottom	4:00 PM		
Maximum Recorded Temperature	117degf		
Equipment Number	T605		
Location	Hays, KS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	CHAD COUNTS		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

UTICA WEST TO N RD. B NORTH .25,
WEST INTO.

Thank You for using Gemini Wireline LLC
785-625-1182





MAIN PASS

Database File	pptime#10h.db
Dataset Pathname	pass7.1
Presentation Format	kml
Dataset Creation	Mon Aug 15 19:00:14 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

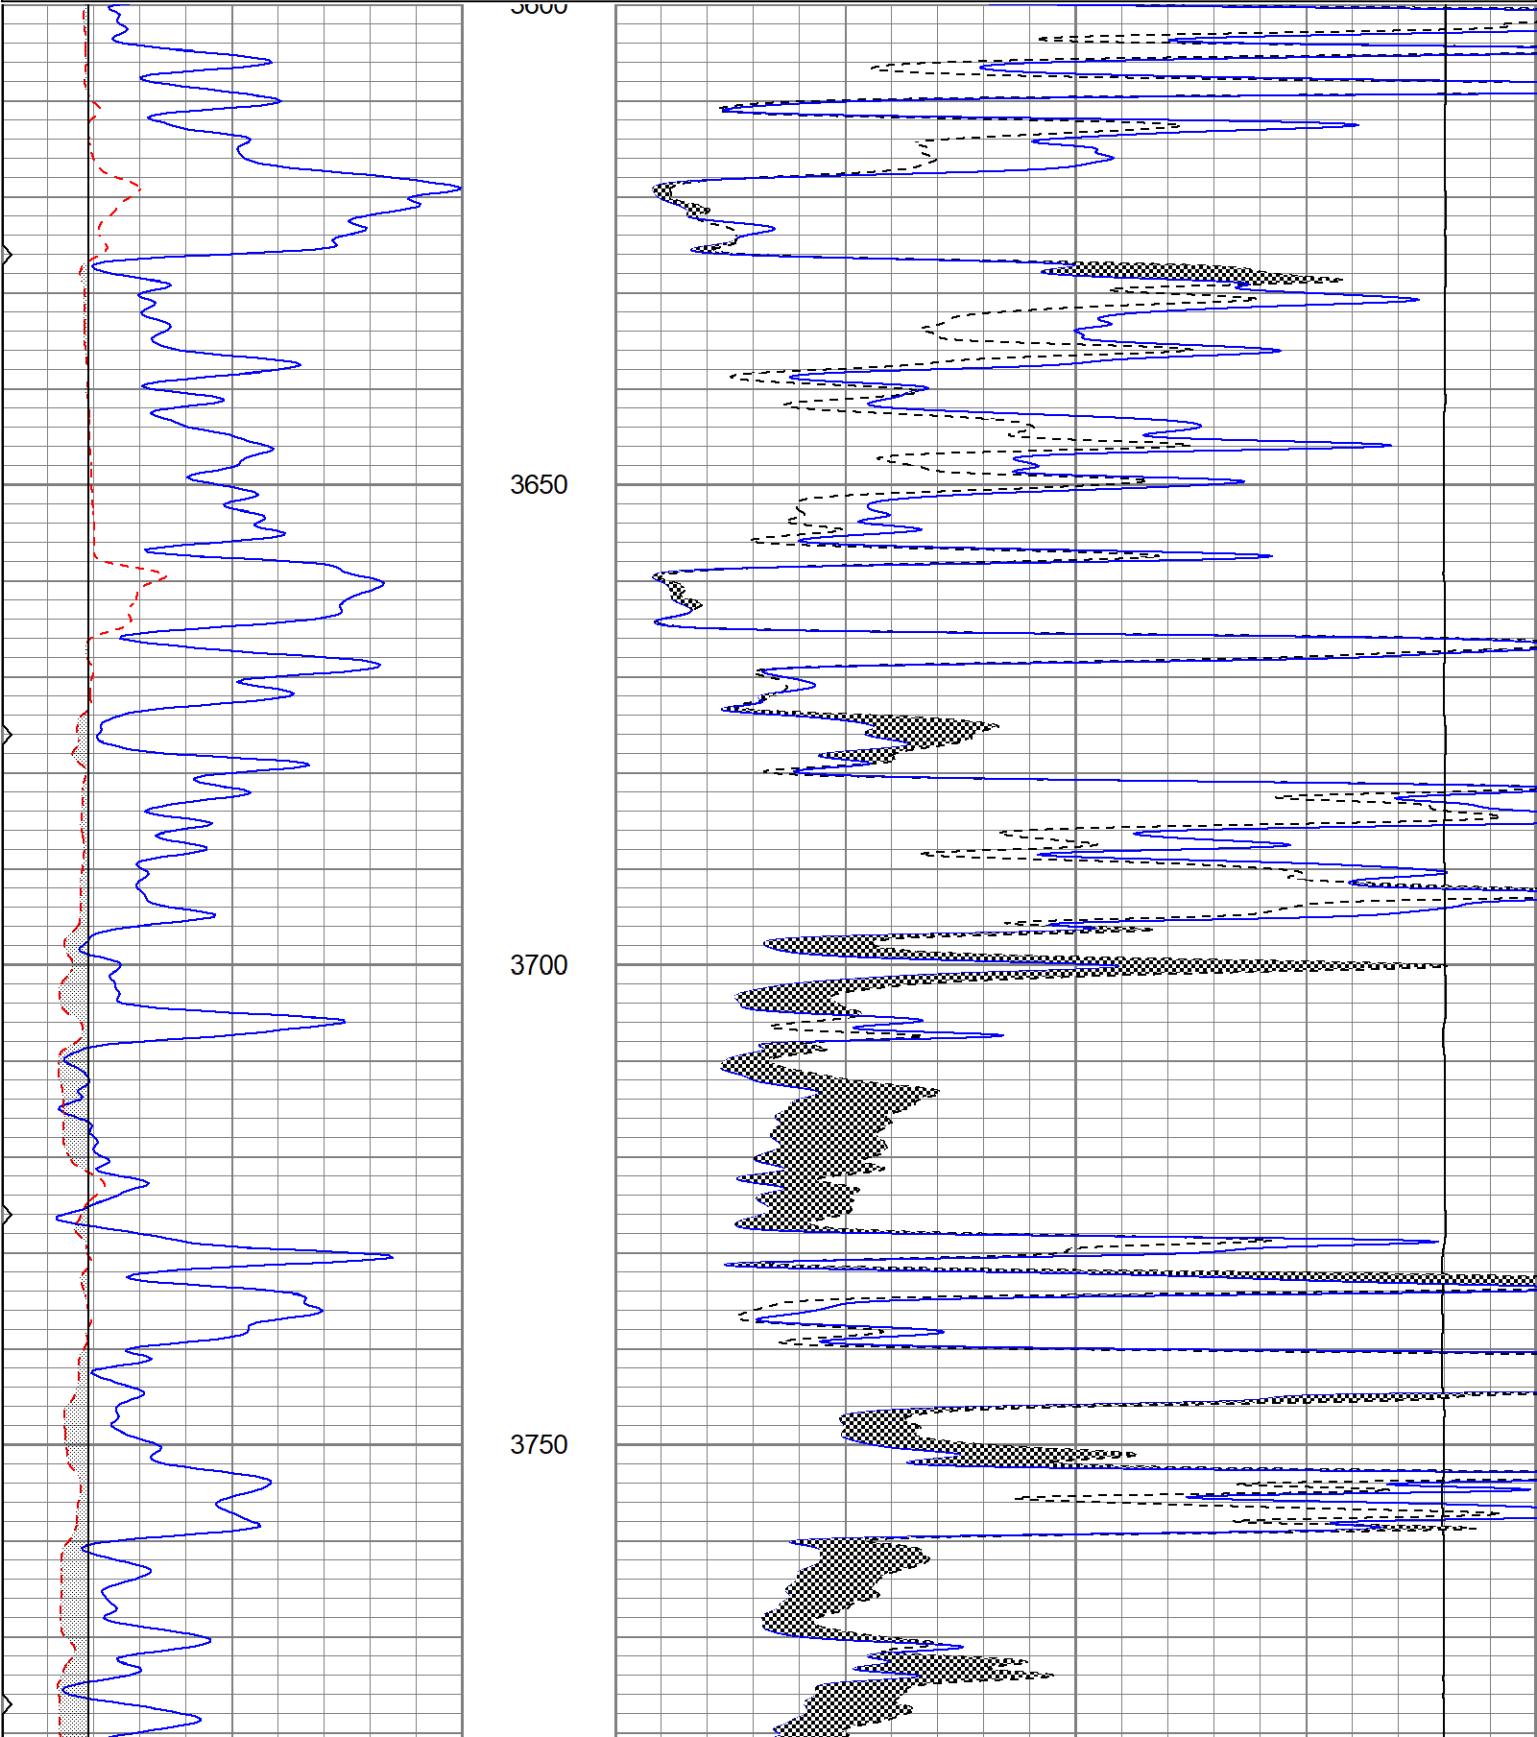

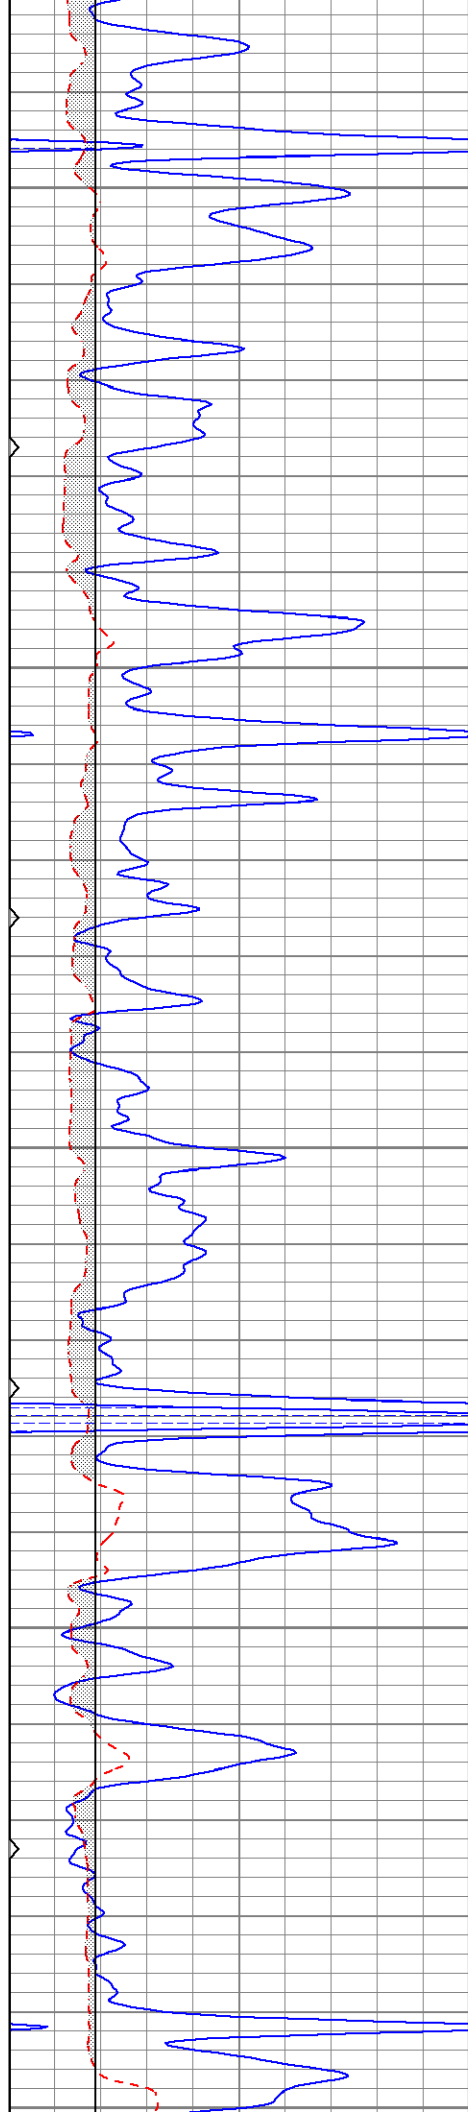


3800



3850


3900

3950

4000

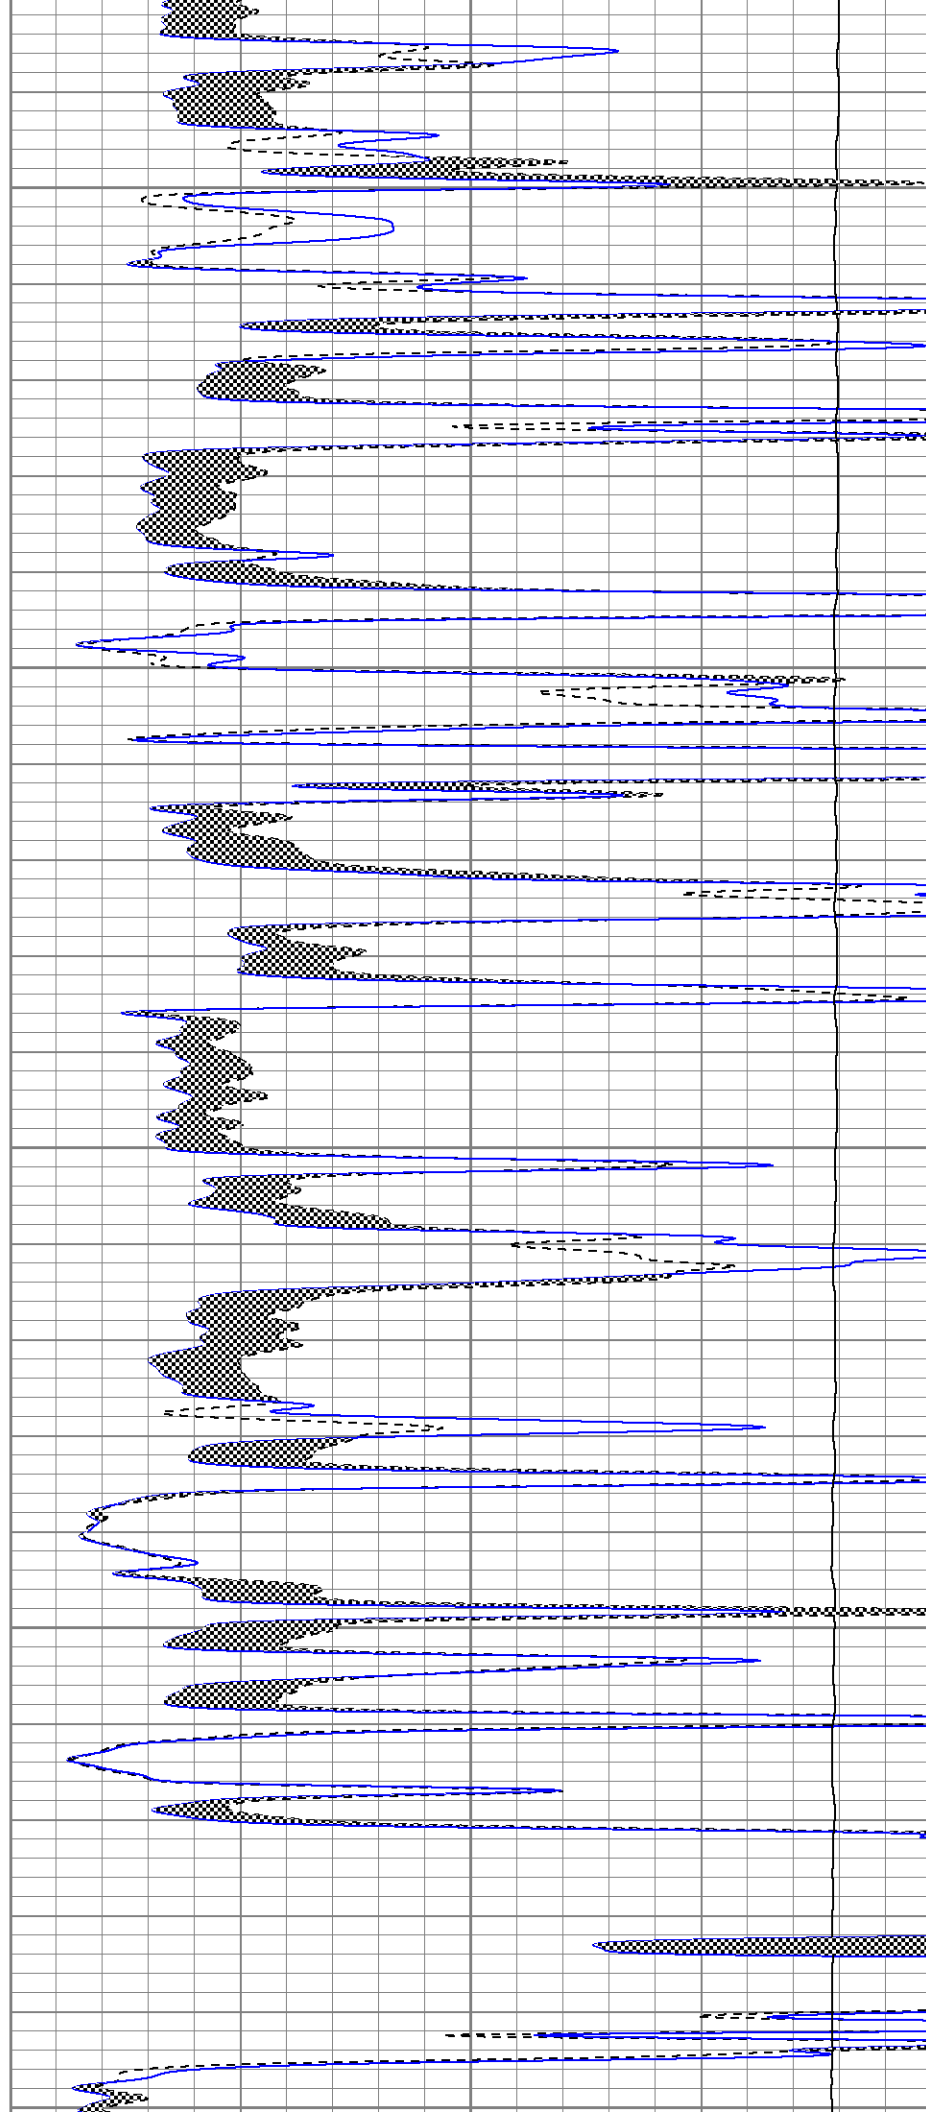

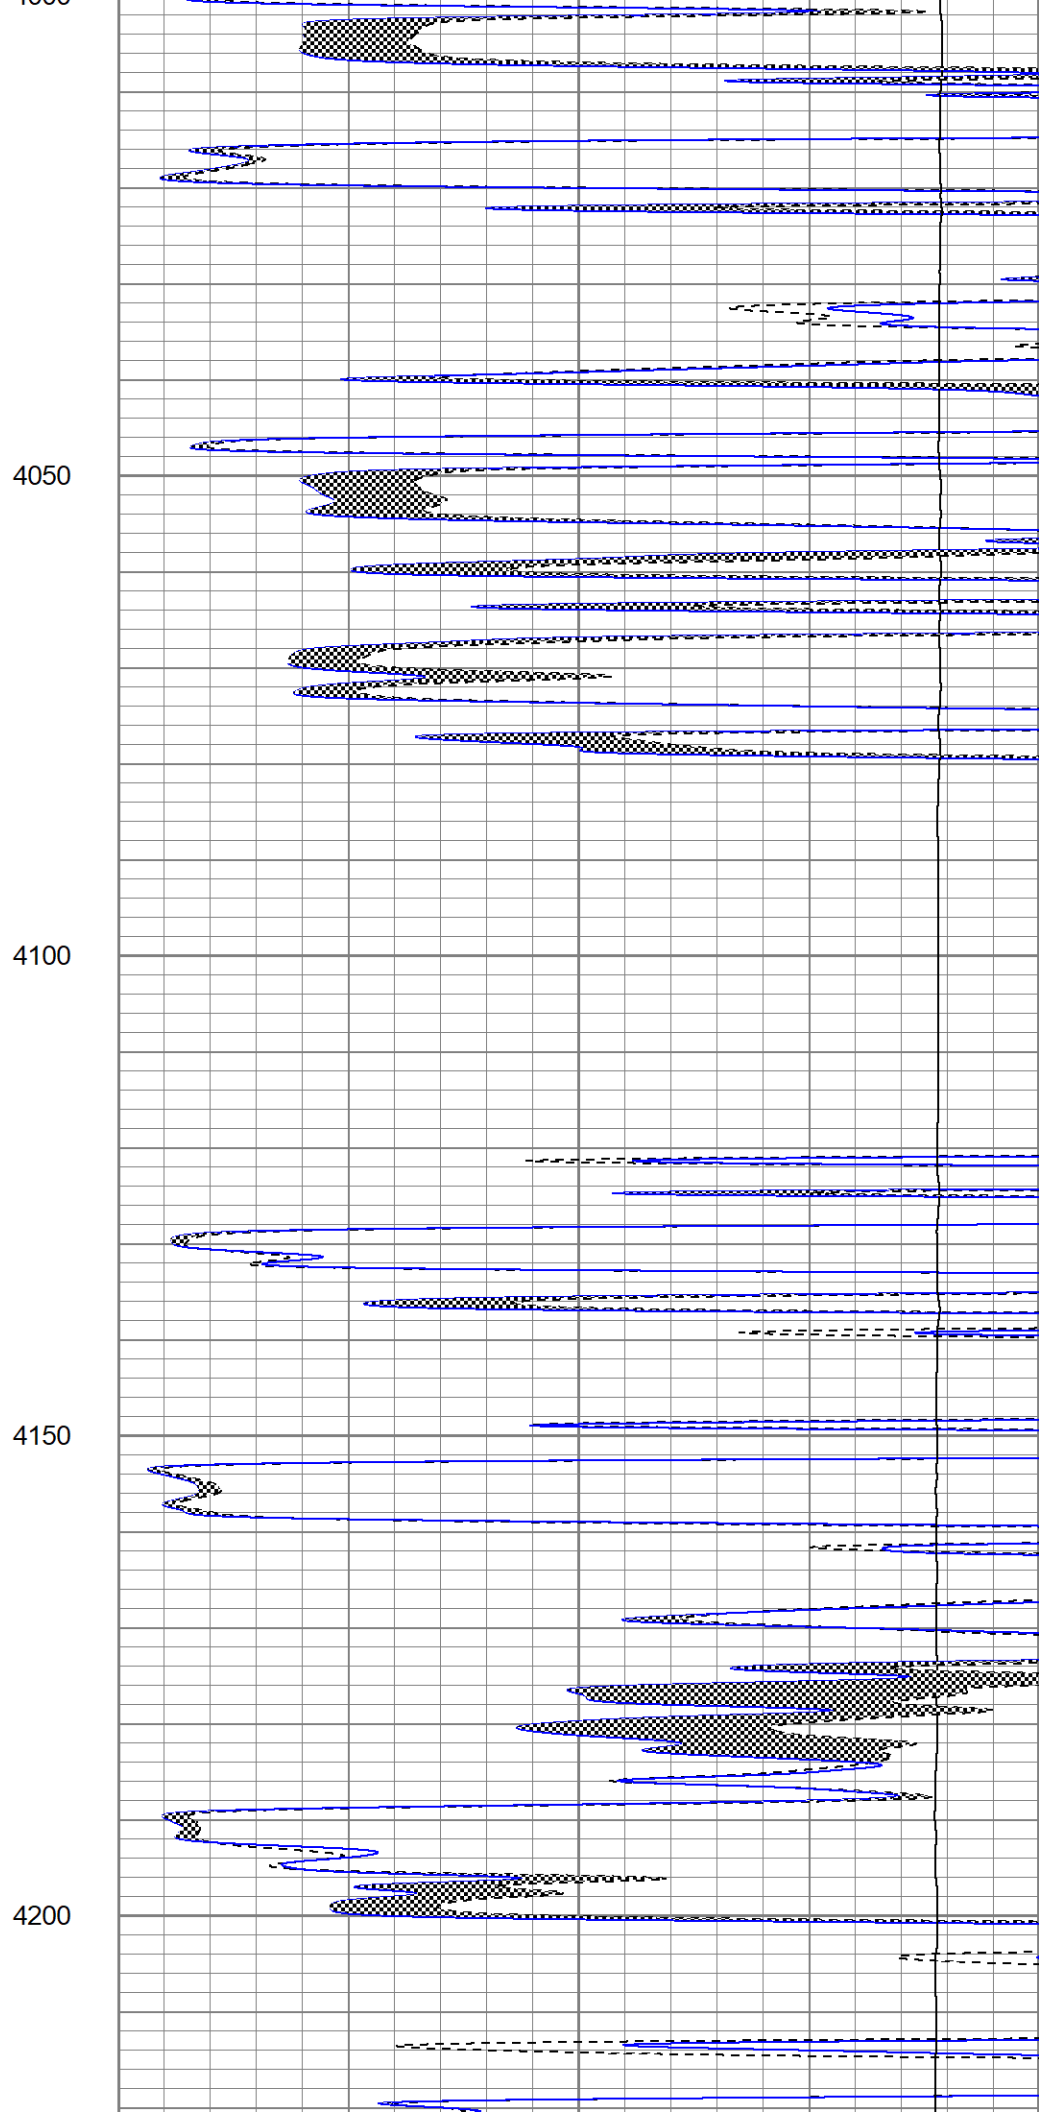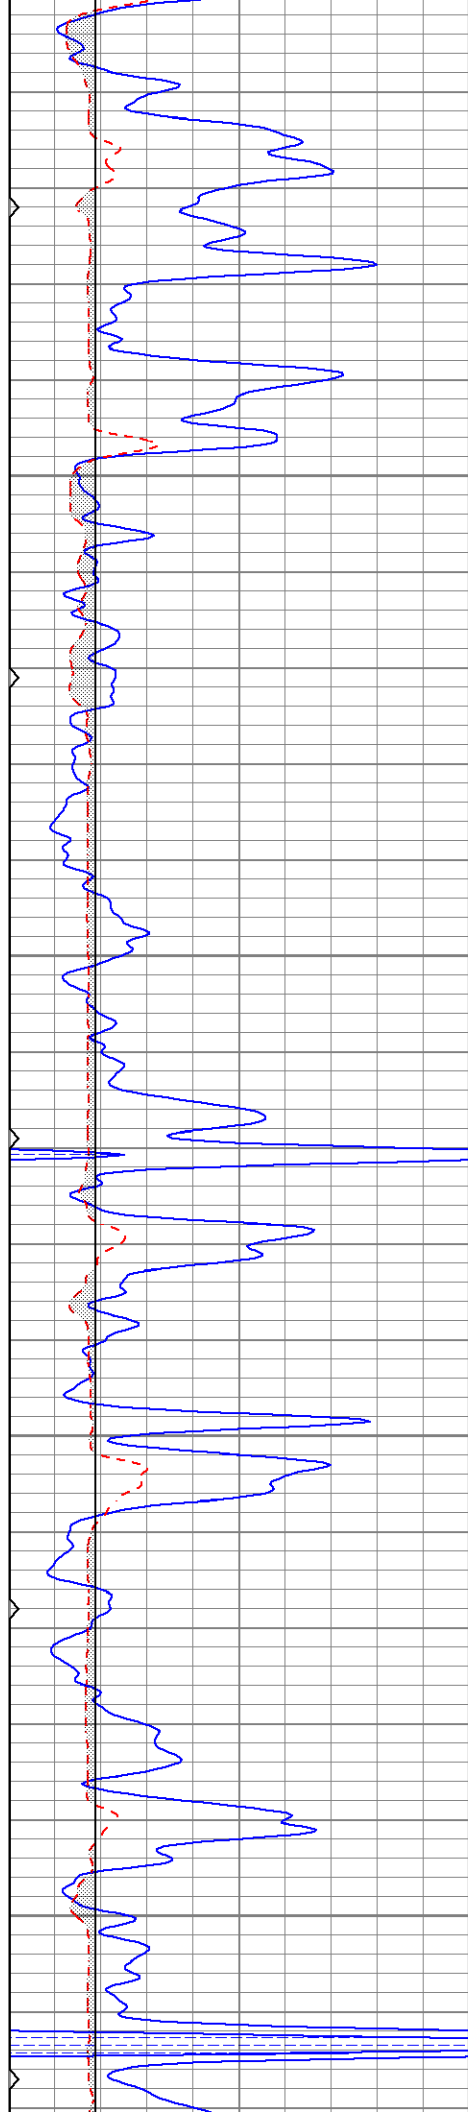

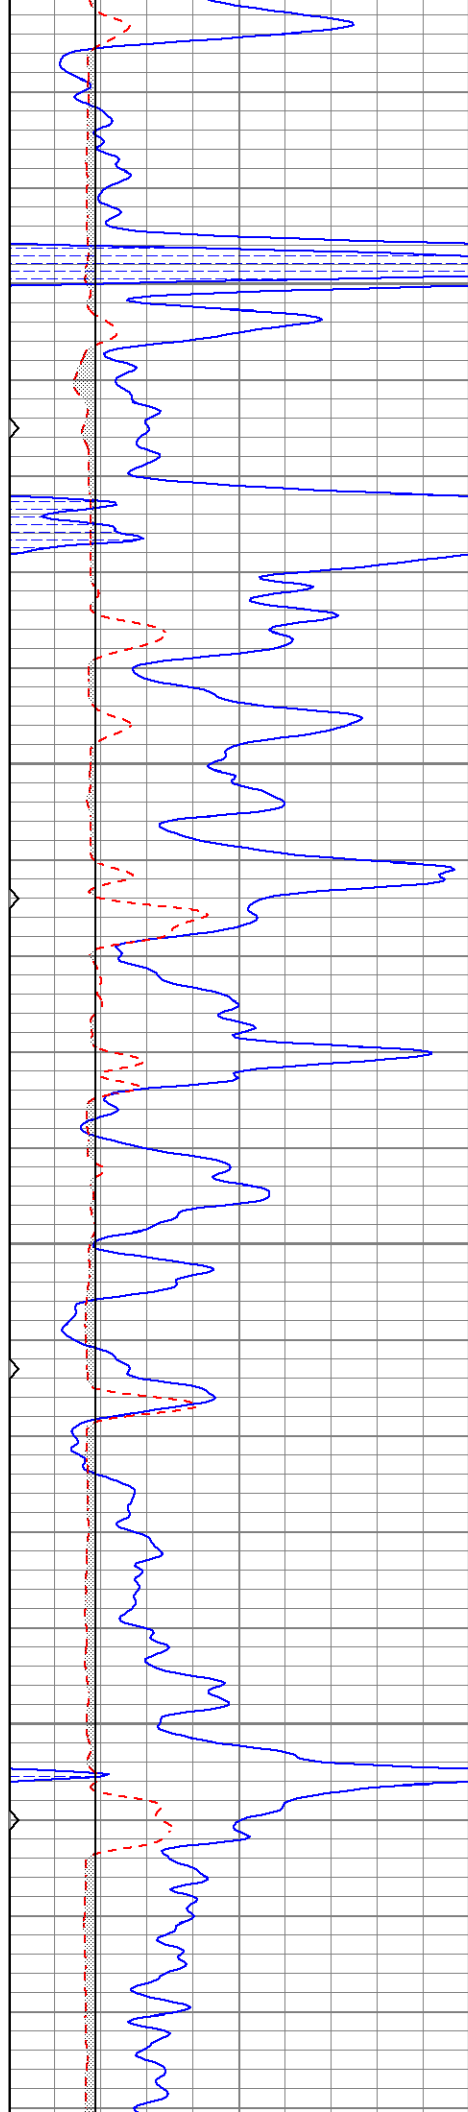



4250

4300

4350

4400

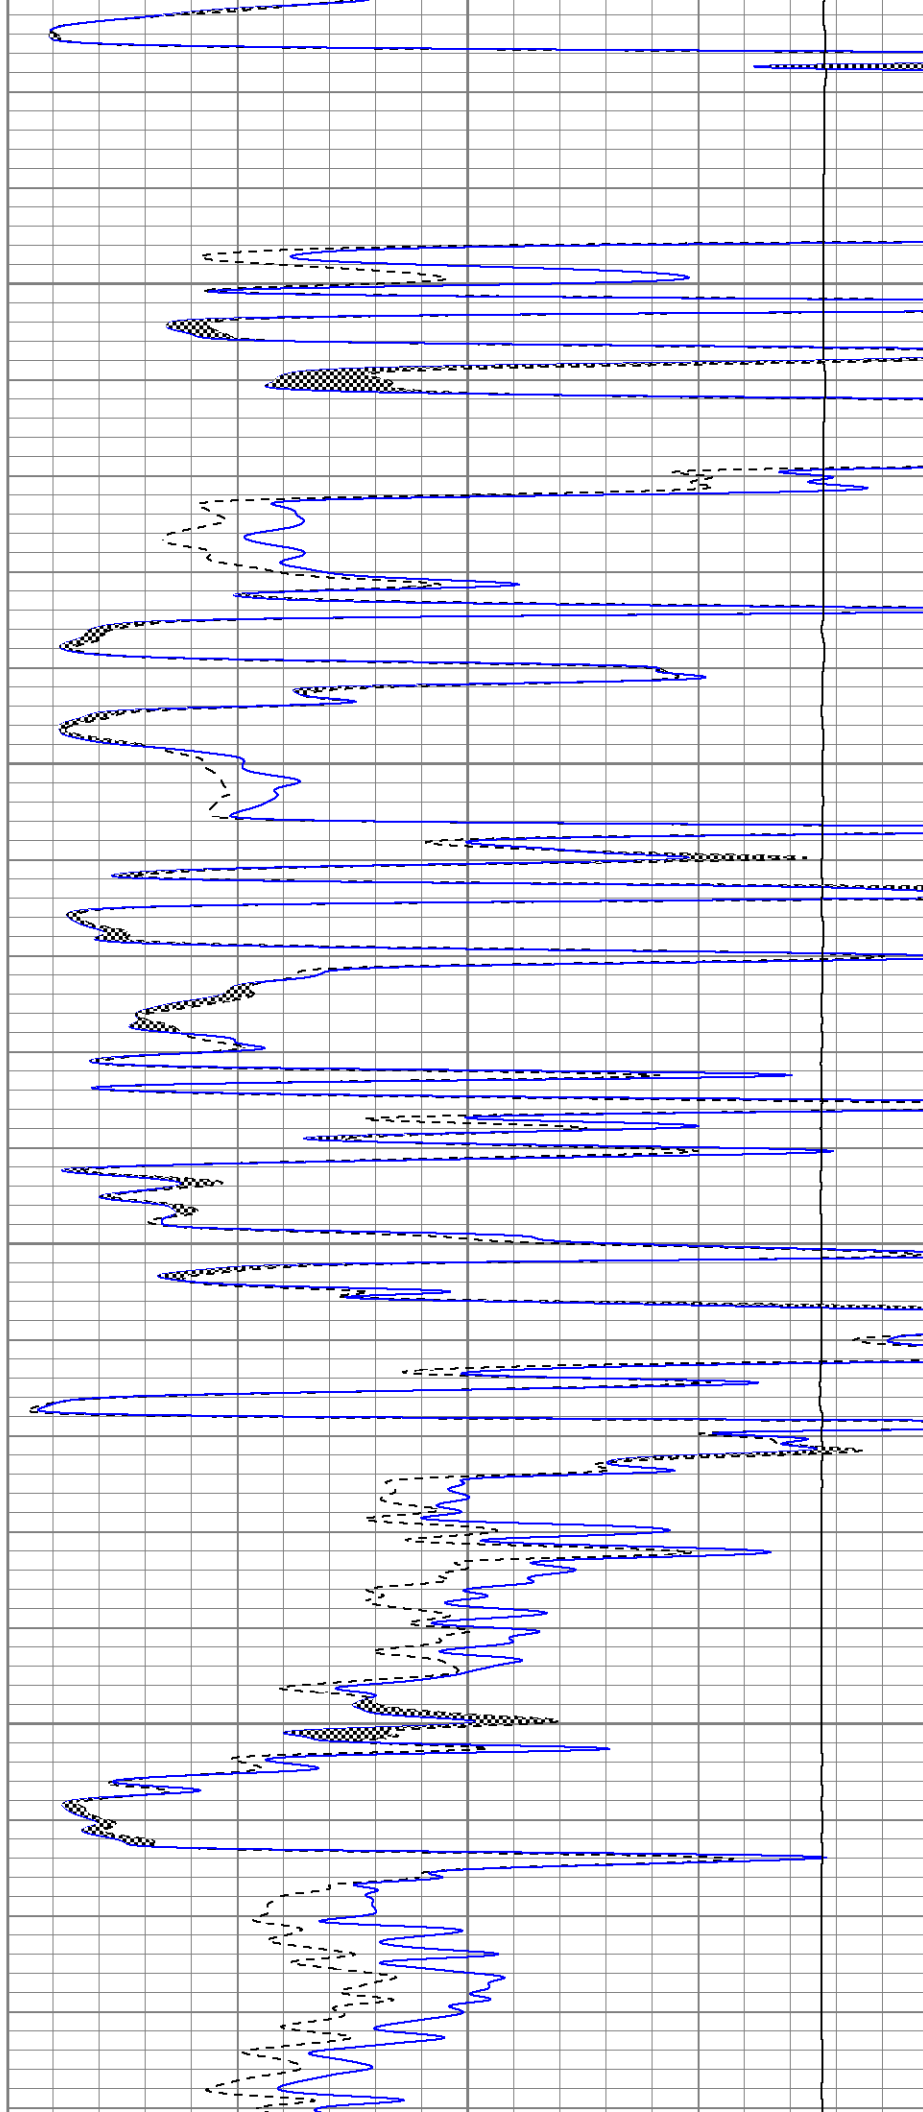

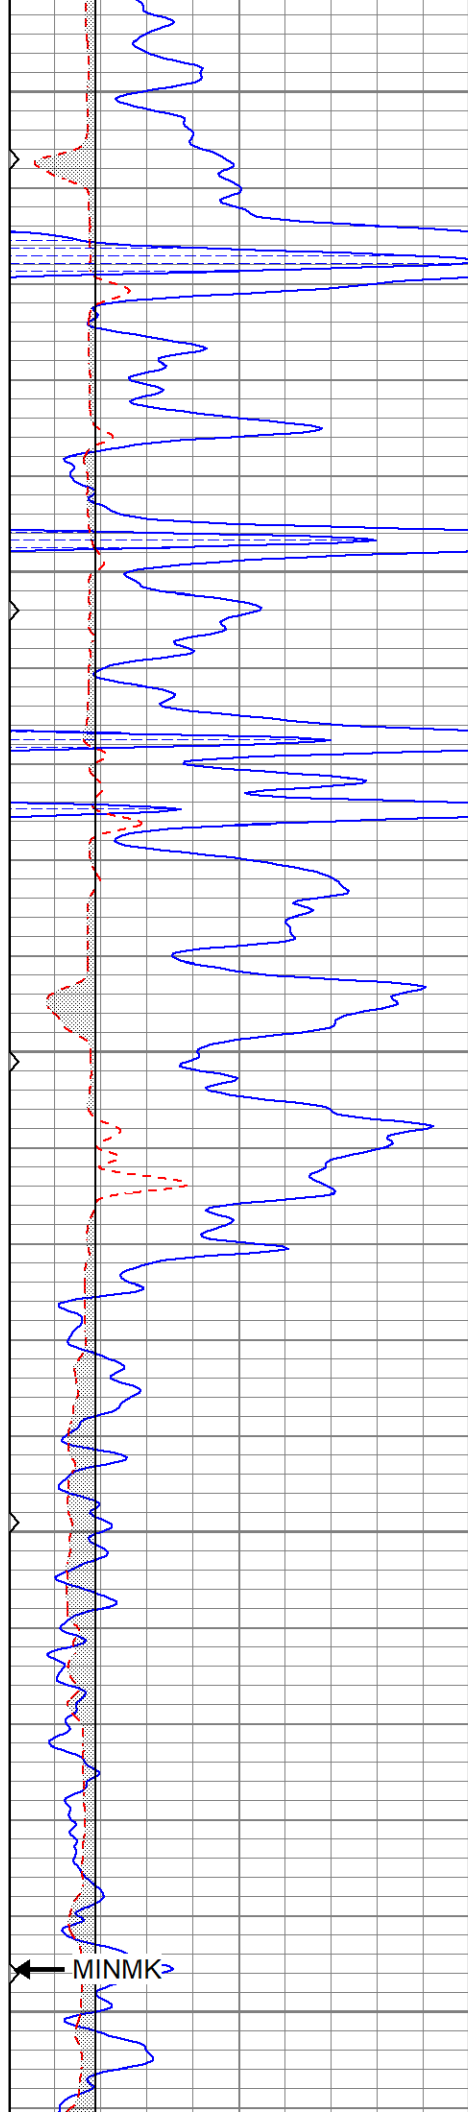


4450



4500

4550

4600

4650

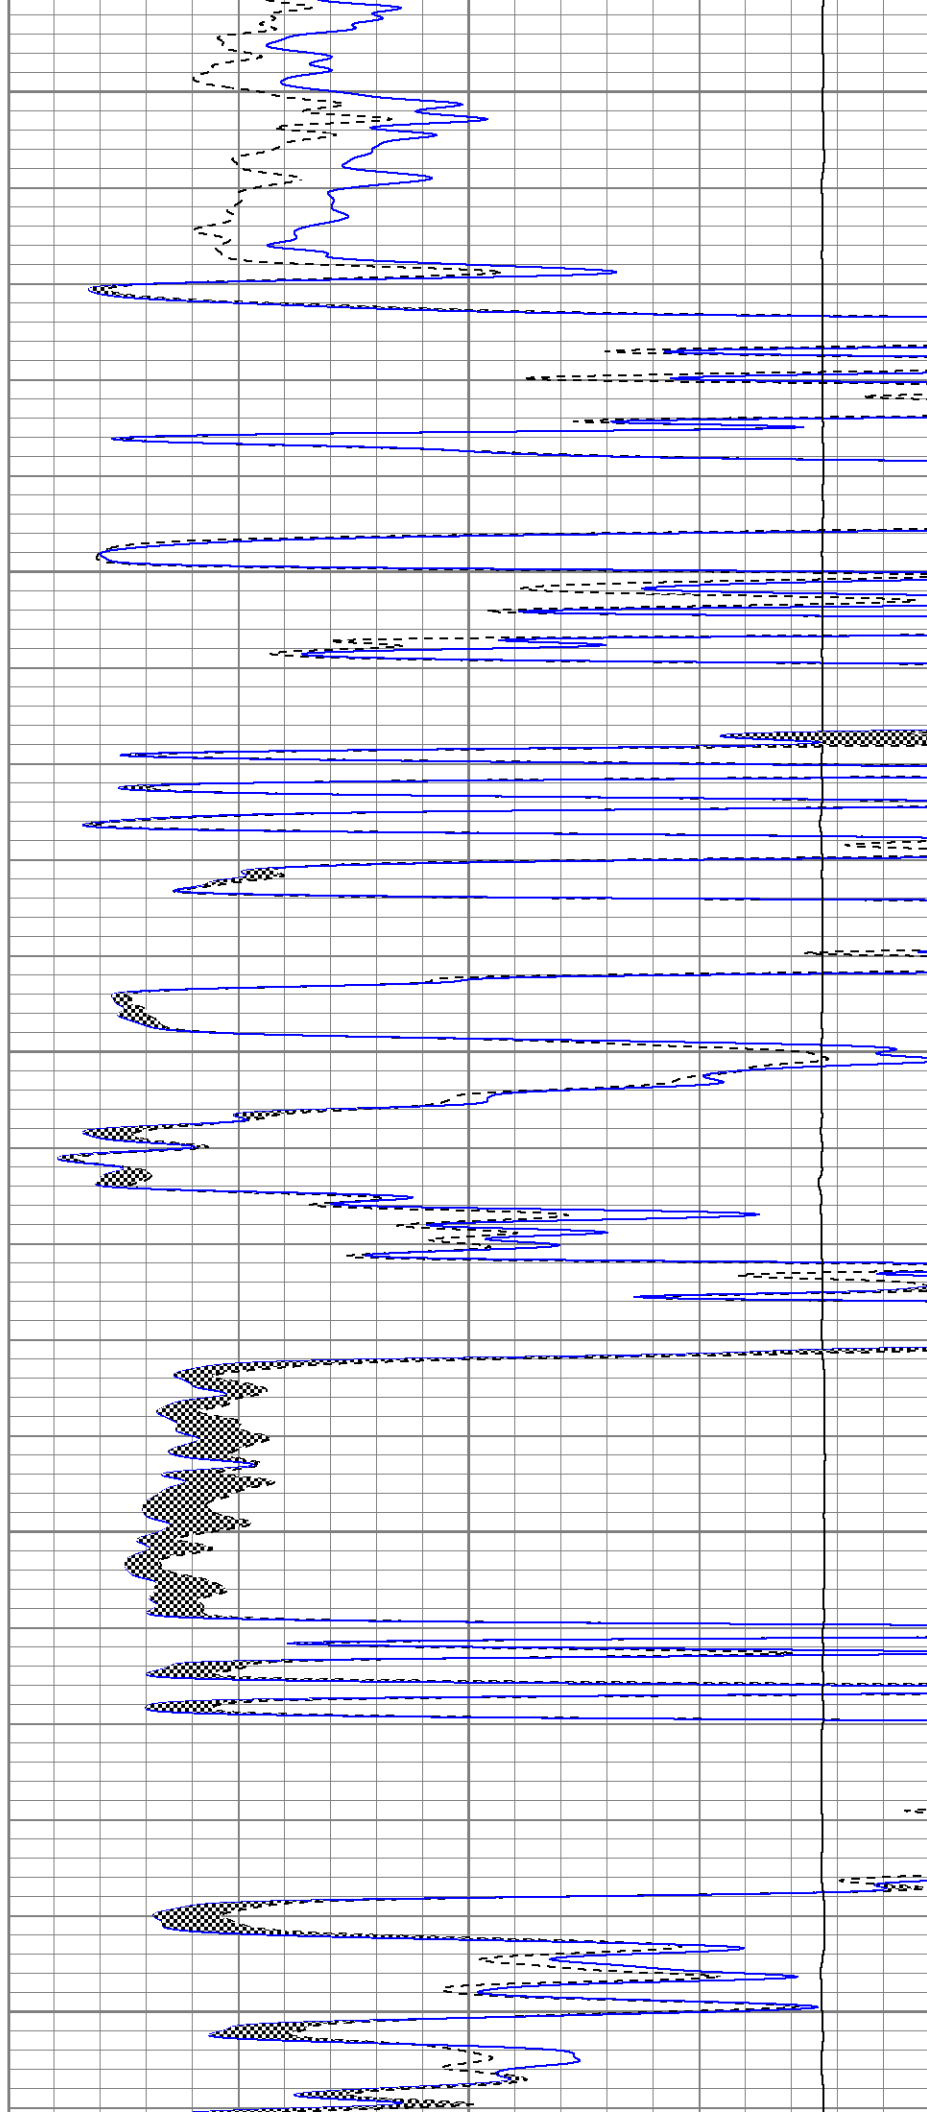

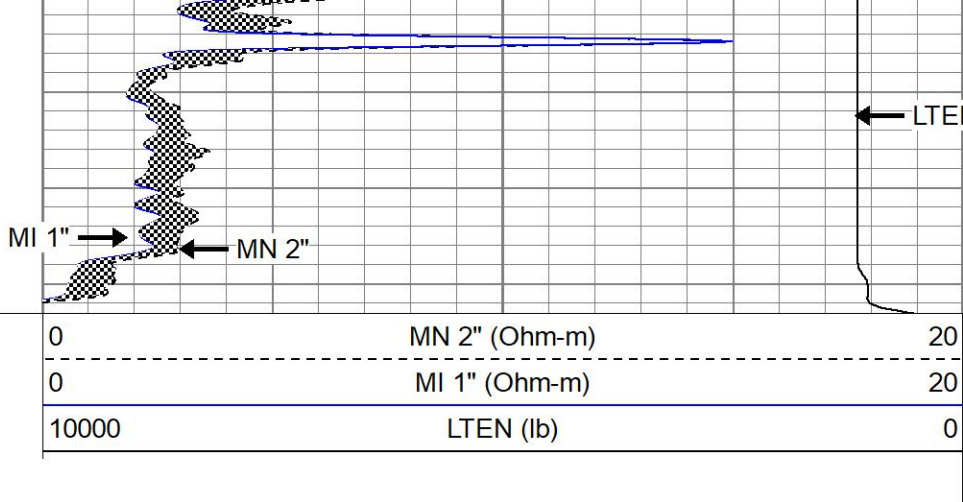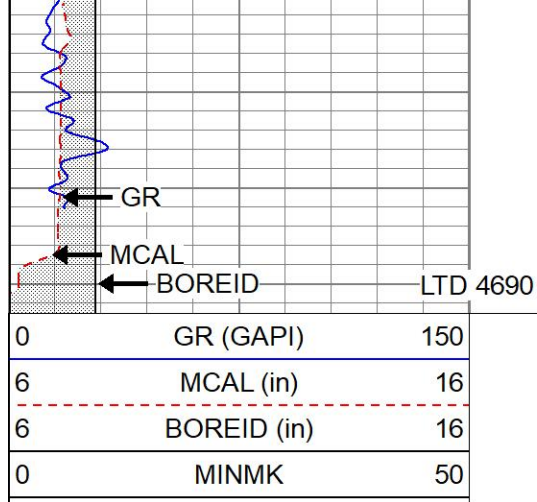


REPEAT SECTION

Database File pprodeotime#1oh.db
 Dataset Pathname pass6.1
 Presentation Format kml
 Dataset Creation Mon Aug 15 18:57:40 2022
 Charted by Depth in Feet scaled 1:240


0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50


0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

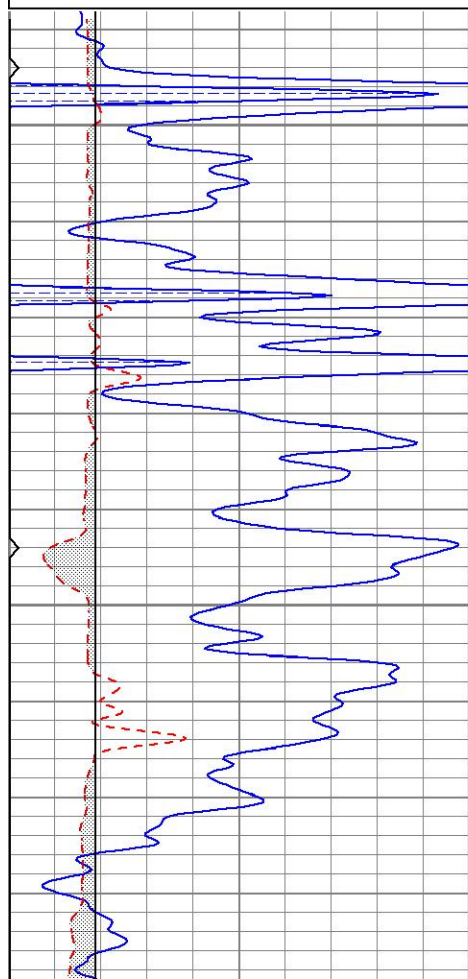

4500

4550

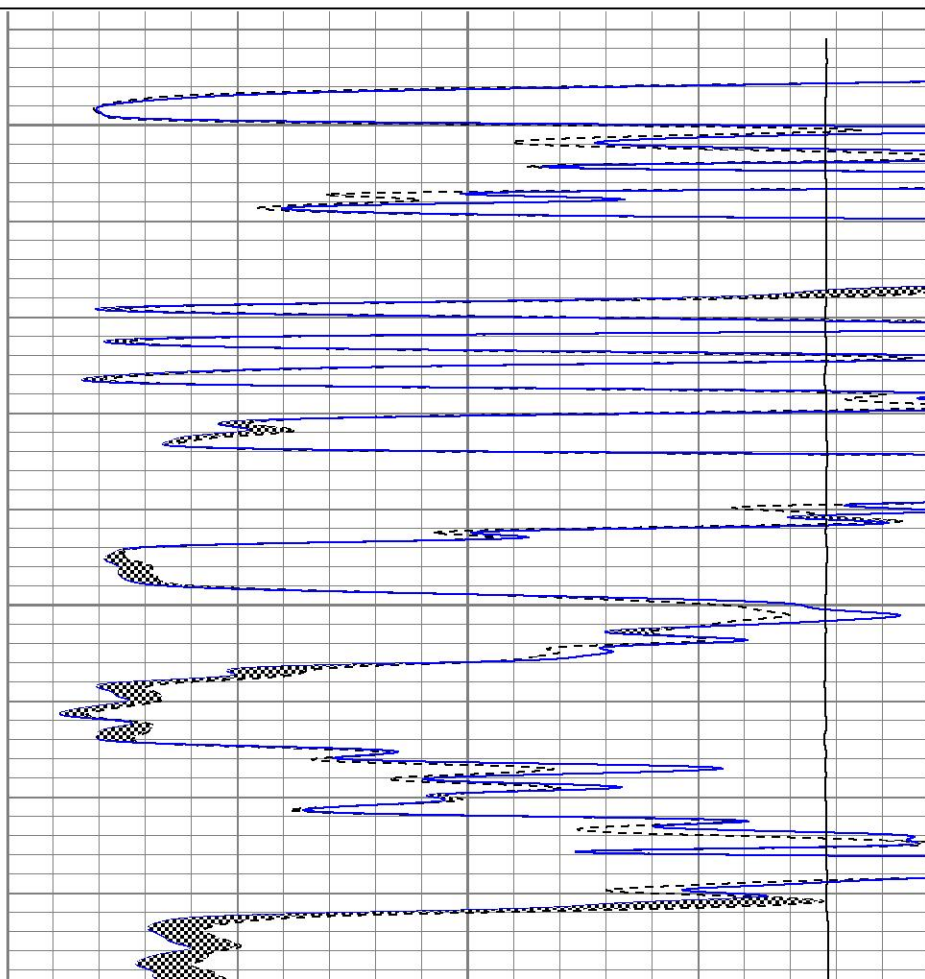

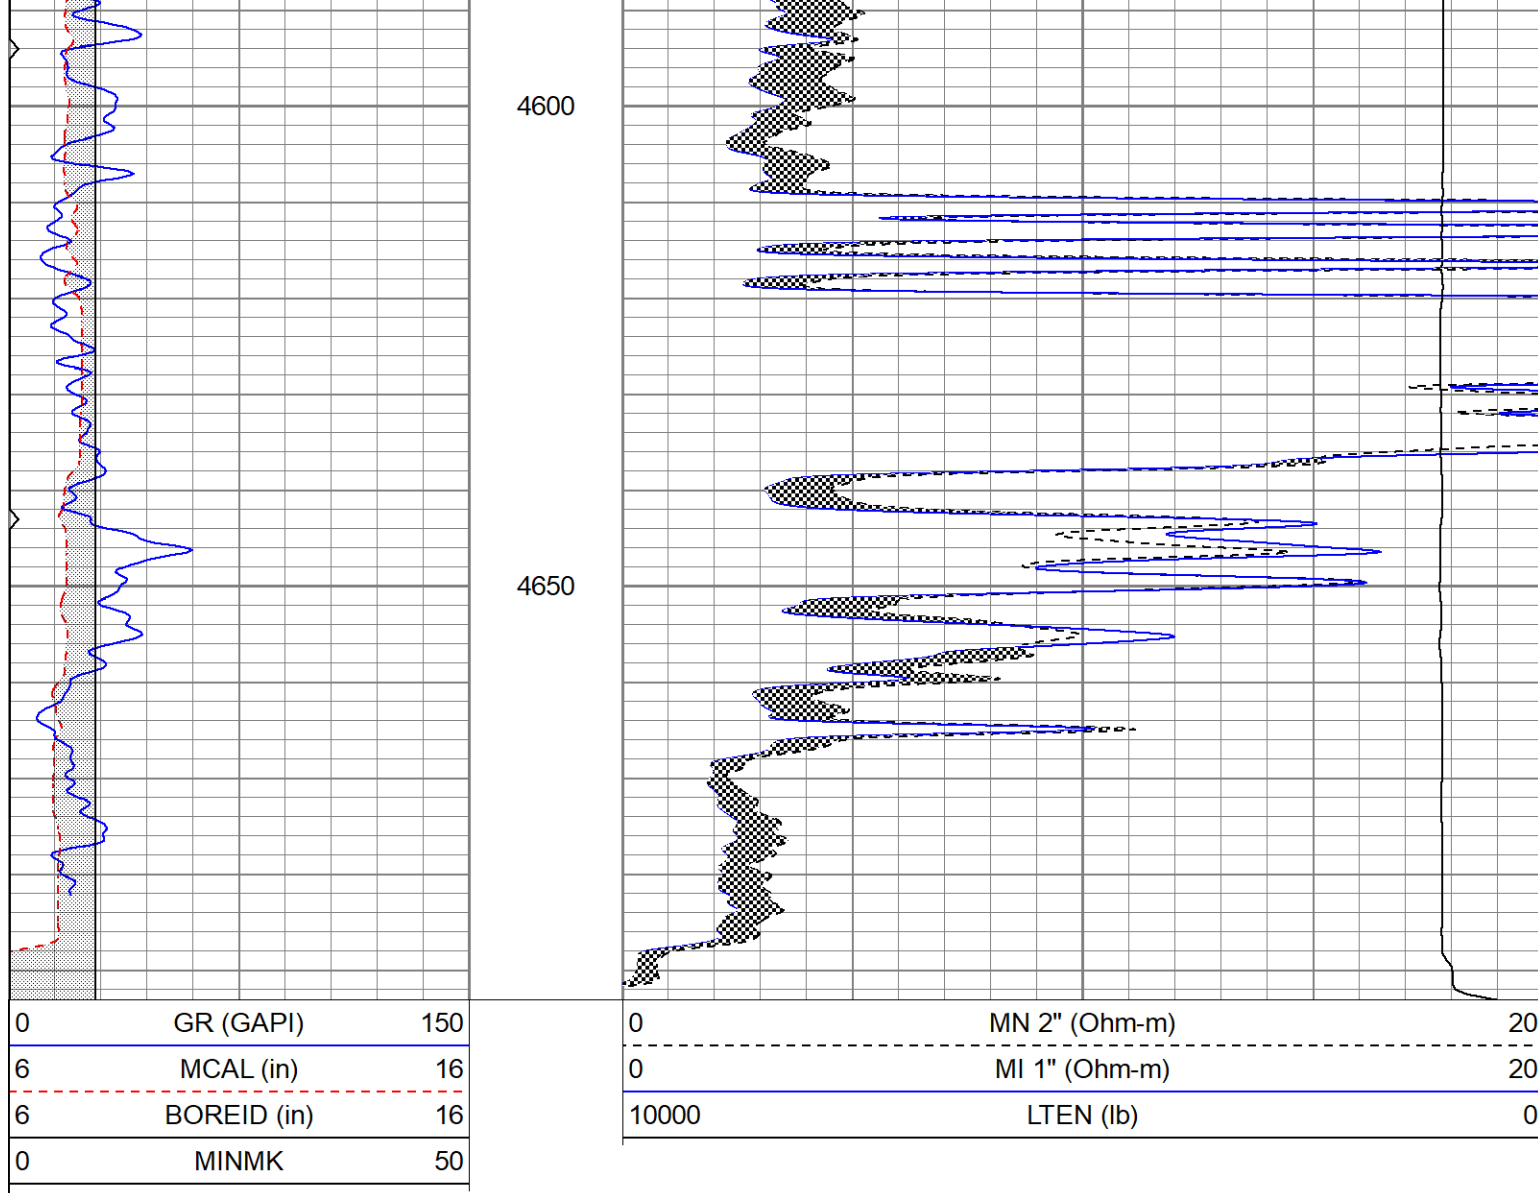

Calibration Report	
Database File	pprodeotime#1oh.db
Dataset Pathname	pass6.1
Dataset Creation	Mon Aug 15 18:57:40 2022

Microlog Calibration Report

Serial-Model:	G21-Pengo
Performed:	Mon Aug 15 18:26:38 2022

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0070	0.1000	V	0.0000	10.0000	Ohm-m	107.5140	-0.7478
Inverse	0.0096	0.1271	V	0.0000	10.0000	Ohm-m	85.1515	-0.8214
Caliper	2.4531	4.9625	V	7.9000	13.8000	in	2.3511	1.9325

Gamma Ray Calibration Report

Serial Number:	2000	
Tool Model:	P2000	
Performed:	Sun May 6 10:04:13 2018	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Calibrator Reading:

1.0

cps

Sensitivity:

1.1100

GAPI/cps