



DUAL RECEIVER CEMENT BOND LOG

Company	GRSND MESA OPERATING COMPANY		
Well	BIRKET TRUST #1-15		
Field			
County	RENO	Country	
State	KANSAS		
Company		GRSND MESA OPERATING COMPANY	
Well		BIRKET TRUST #1-15	
Field			
County		RENO	
State		KANSAS	Country
Location:		API # : 15-155-21790-00-00	Other Services
Permanent Datum		1270' FNL & 2310' FEL	
Log Measured From		S2-SW-NW-NE	
Drilling Measured From		SEC 15 TWP 24S RGE 8W	
		GROUND LEVEL Elevation 1640	Elevation
		KELLY BUSHING 5' A.G.L.	K.B. 1645
		KELLY BUSHING	D.F. 1643
			G.L. 1640
Date	8-23-22		
Run Number	ONE		
Depth Driller	4210		
Depth Logger	4142		
Bottom Logged Interval	4140		
Top Log Interval	2600		
Open Hole Size	7-7/8"		
Type Fluid	WATER		
Density / Viscosity			
Max. Recorded Temp.			
Estimated Cement Top			
Time Well Ready			
Time Logger on Bottom			
Equipment Number	4818		
Location	HAYS, KANSAS		
Recorded By	THOMASON		
Witnessed By			
Borehole Record		Tubing Record	
Run Number	Bit	From	To
		Size	Weight
			From
			To
Casing Record	Size	Mgt/Ft	Top
Surface String	8-5/8"		Bottom
Prot. String			134'
Production String	5-1/2"		
Liner			

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



THANK YOU FOR USING ELI WIRELINE SERVICES


Database File	grand mesa birket 1-15.db
Dataset Pathname	pass7.4
Presentation Format	dcbl02
Dataset Creation	Tue Aug 23 18:35:18 2022
Charted by	Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150
200	5' Travel Time (usec)	1000

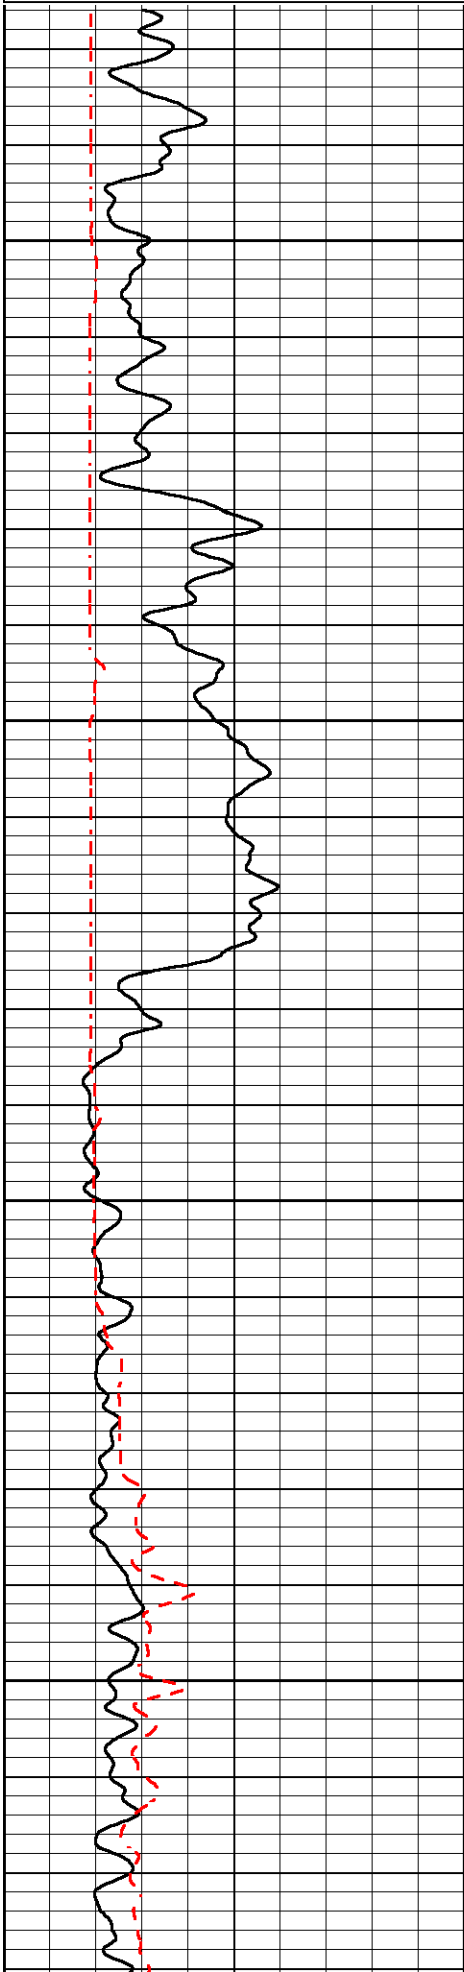

0	3' Amplitude (mV)	100
9	CCL	-1
0	Amplified Amplitude (mV)	20

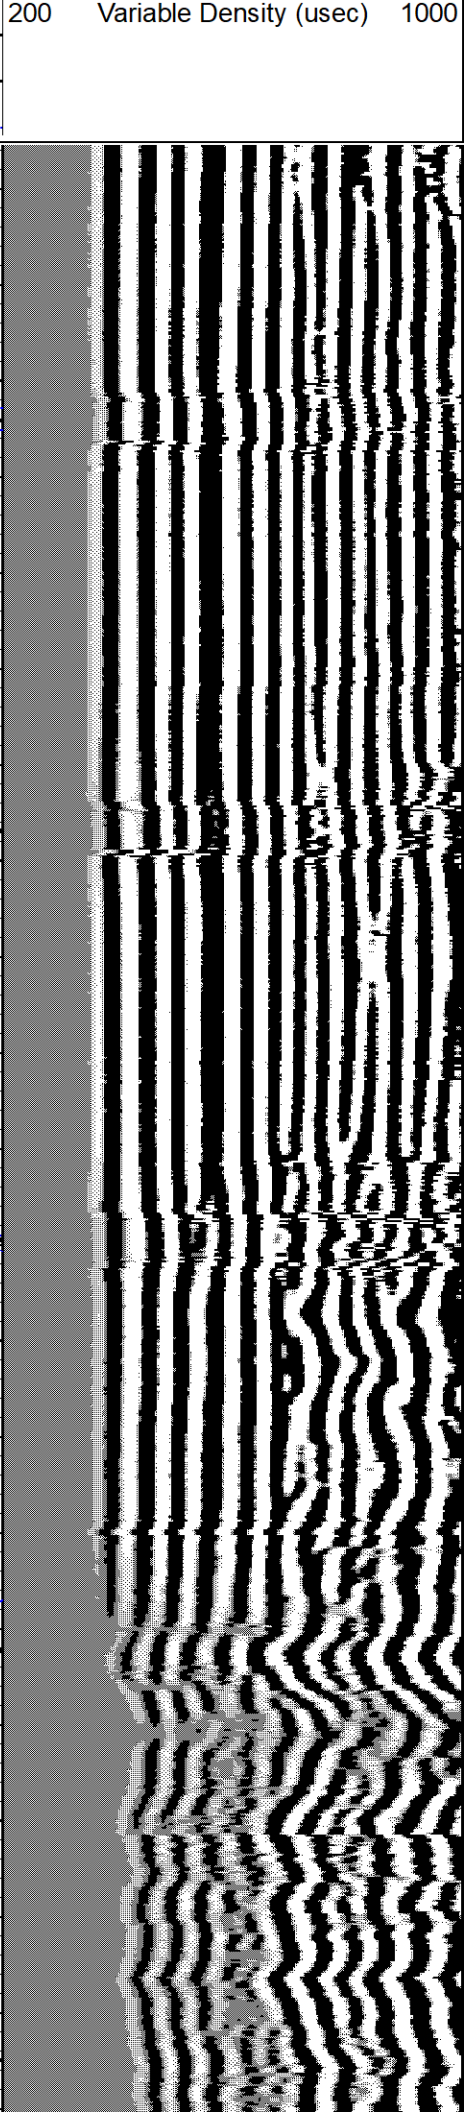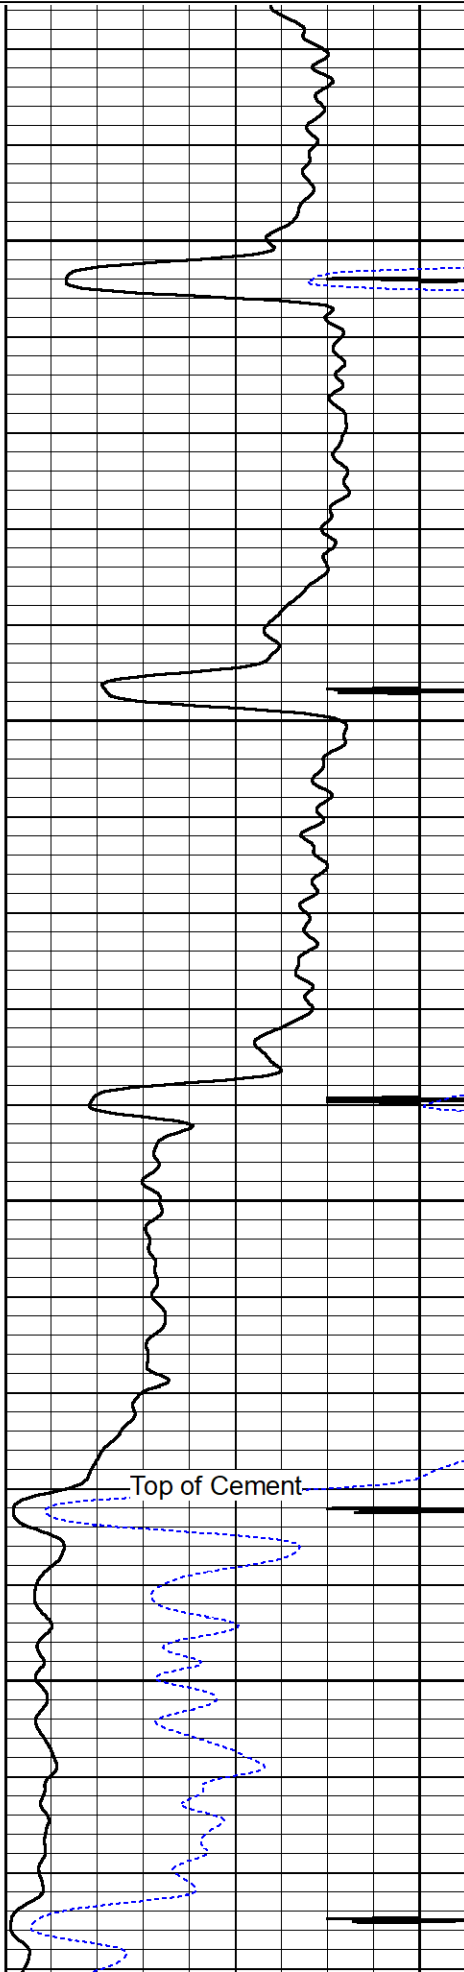

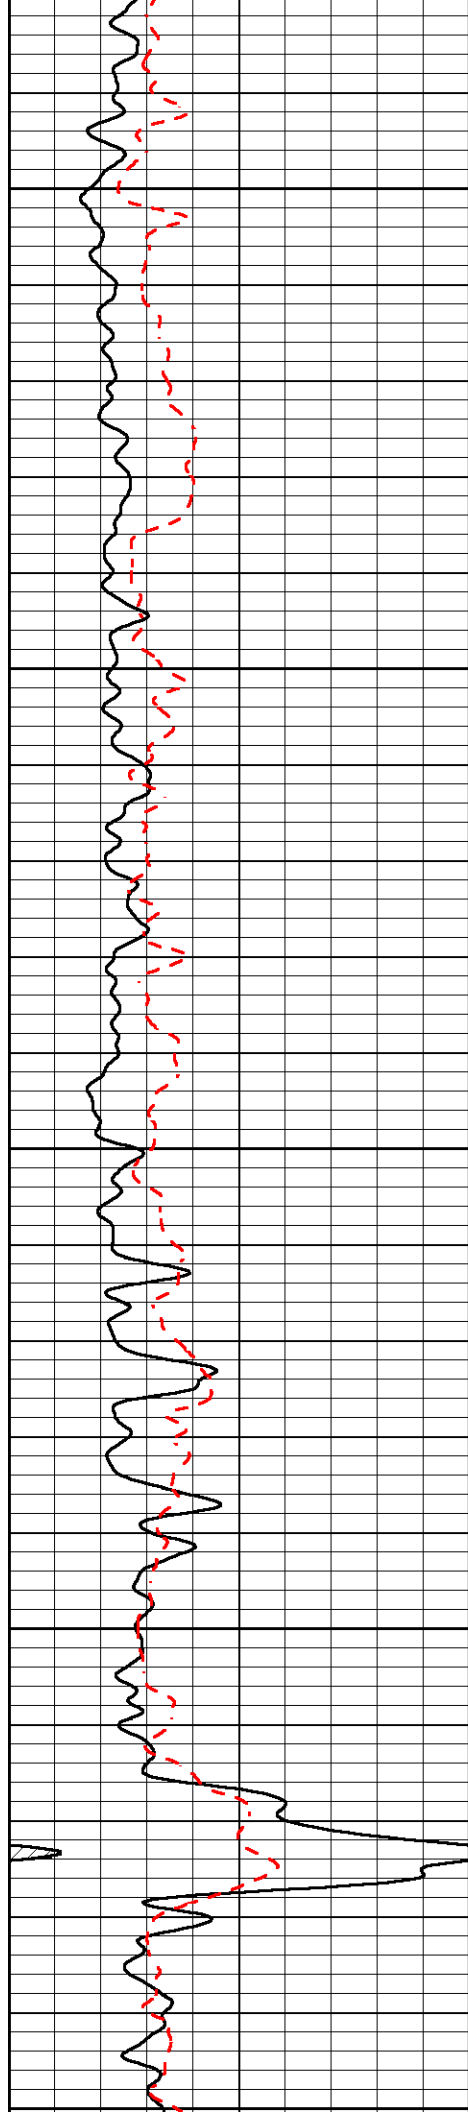



2800




2850


2900

2950

3000

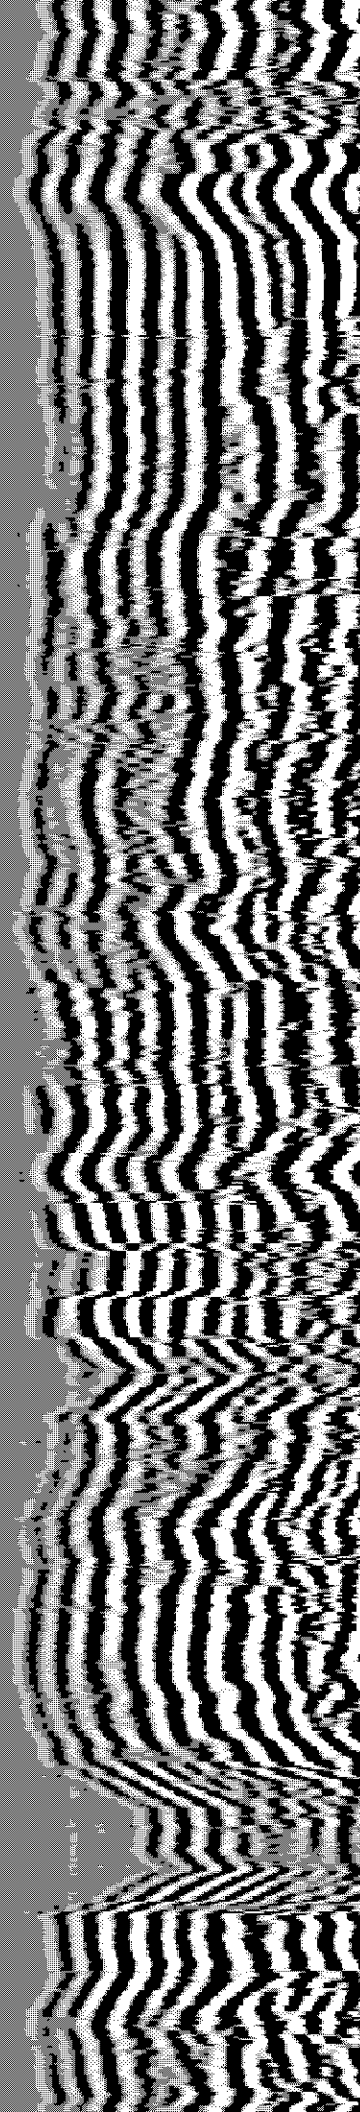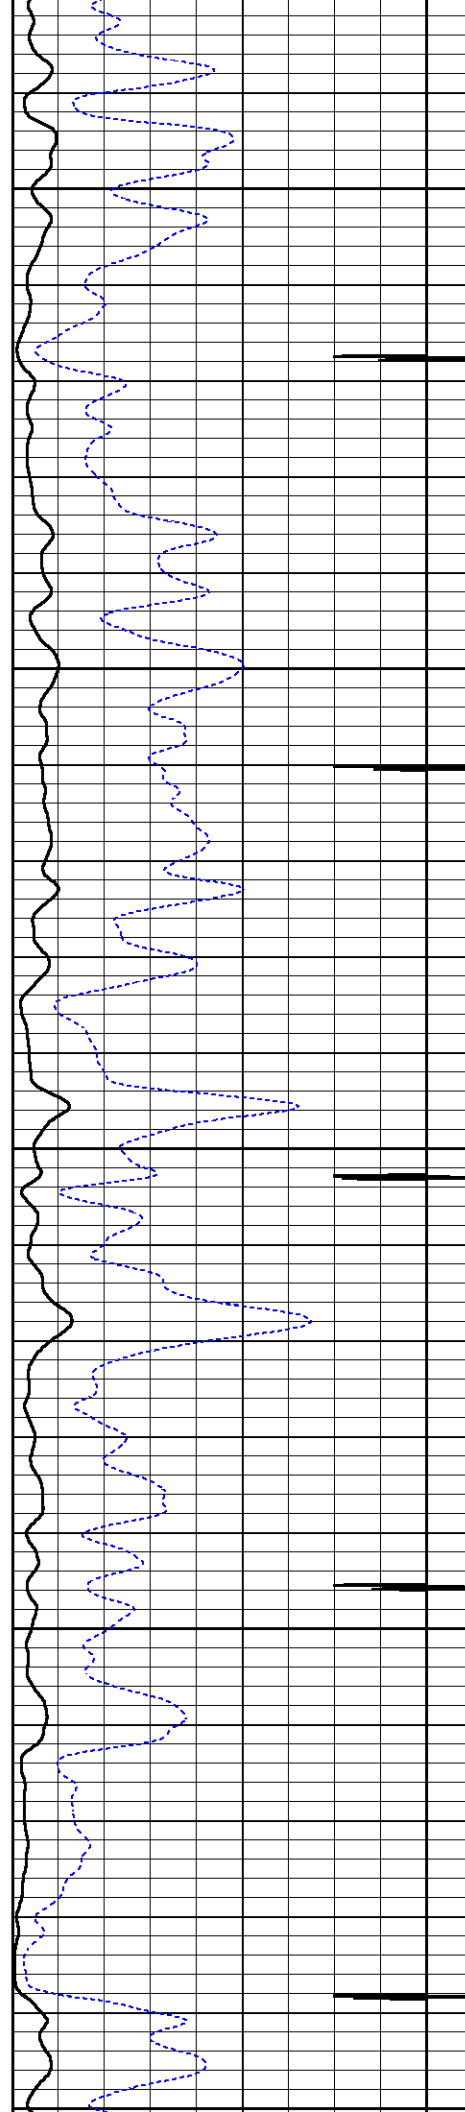

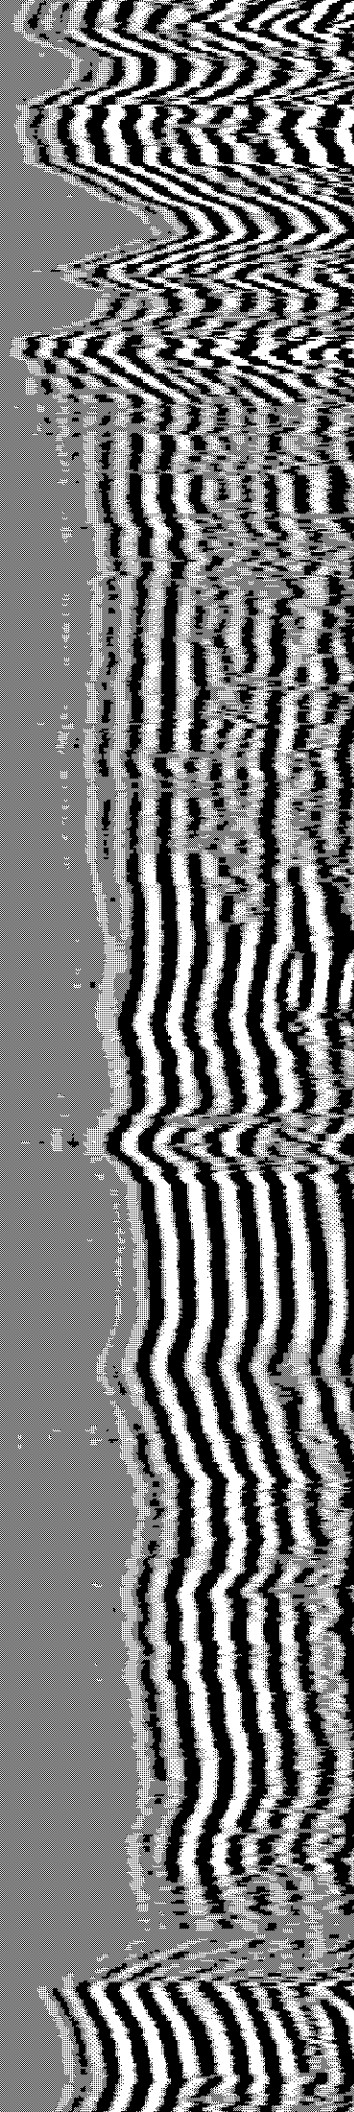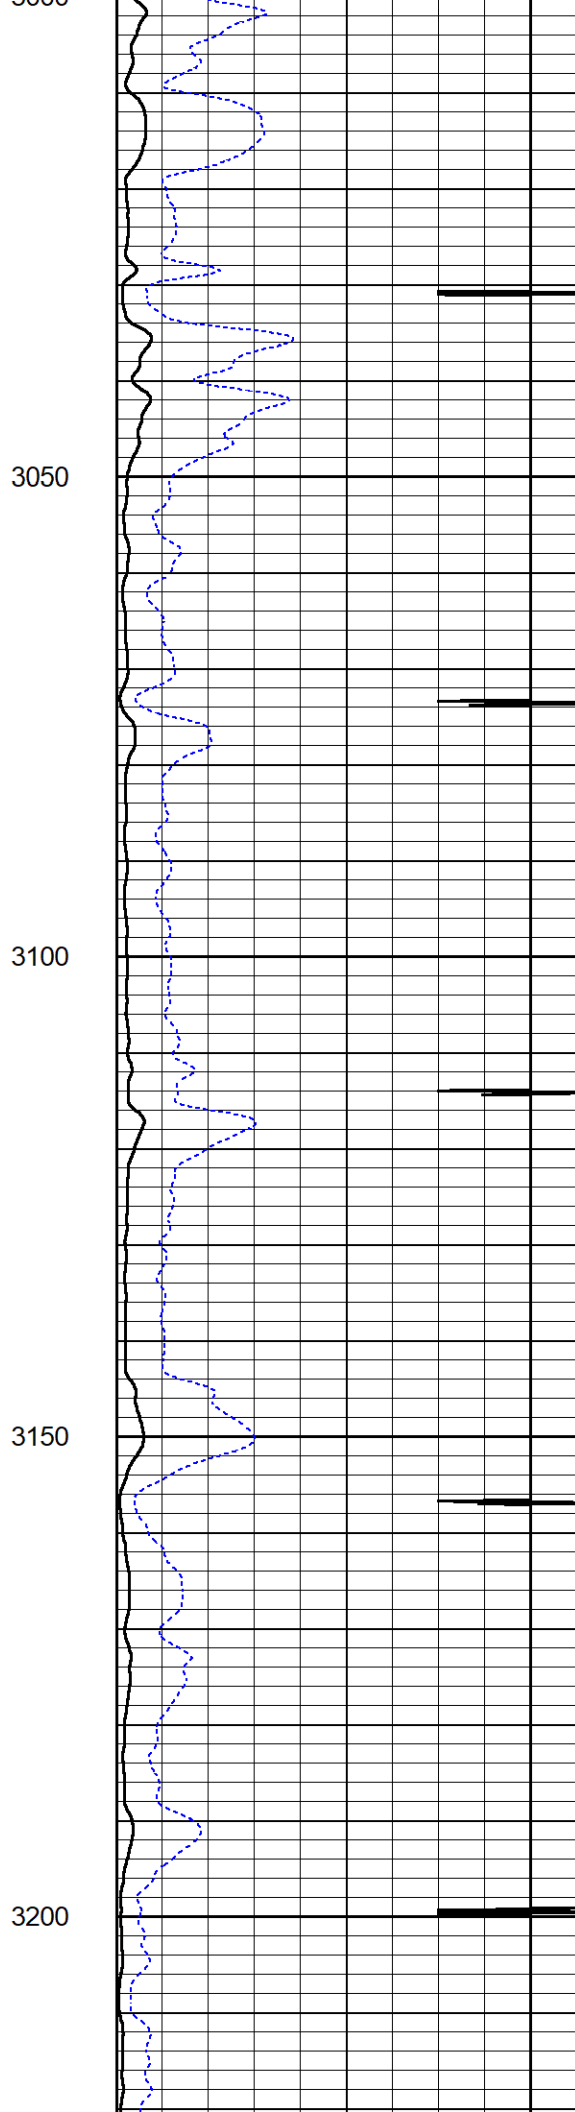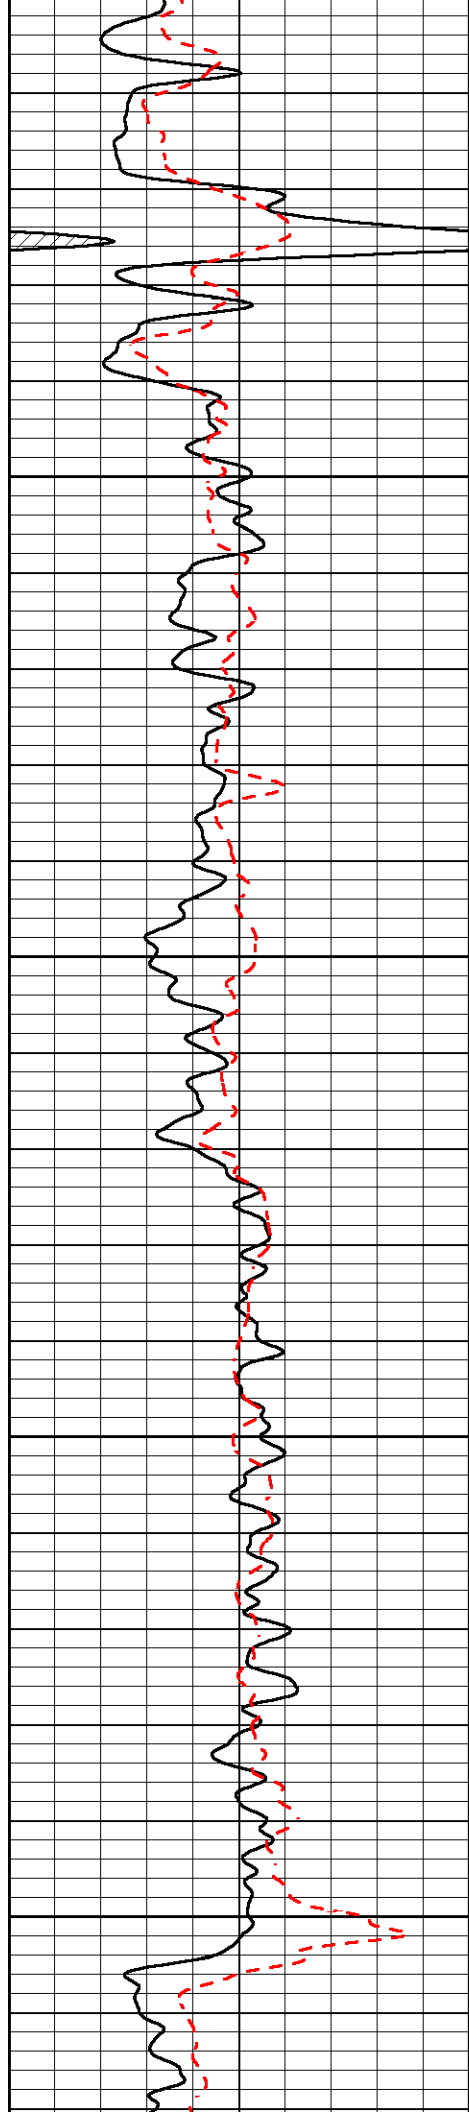


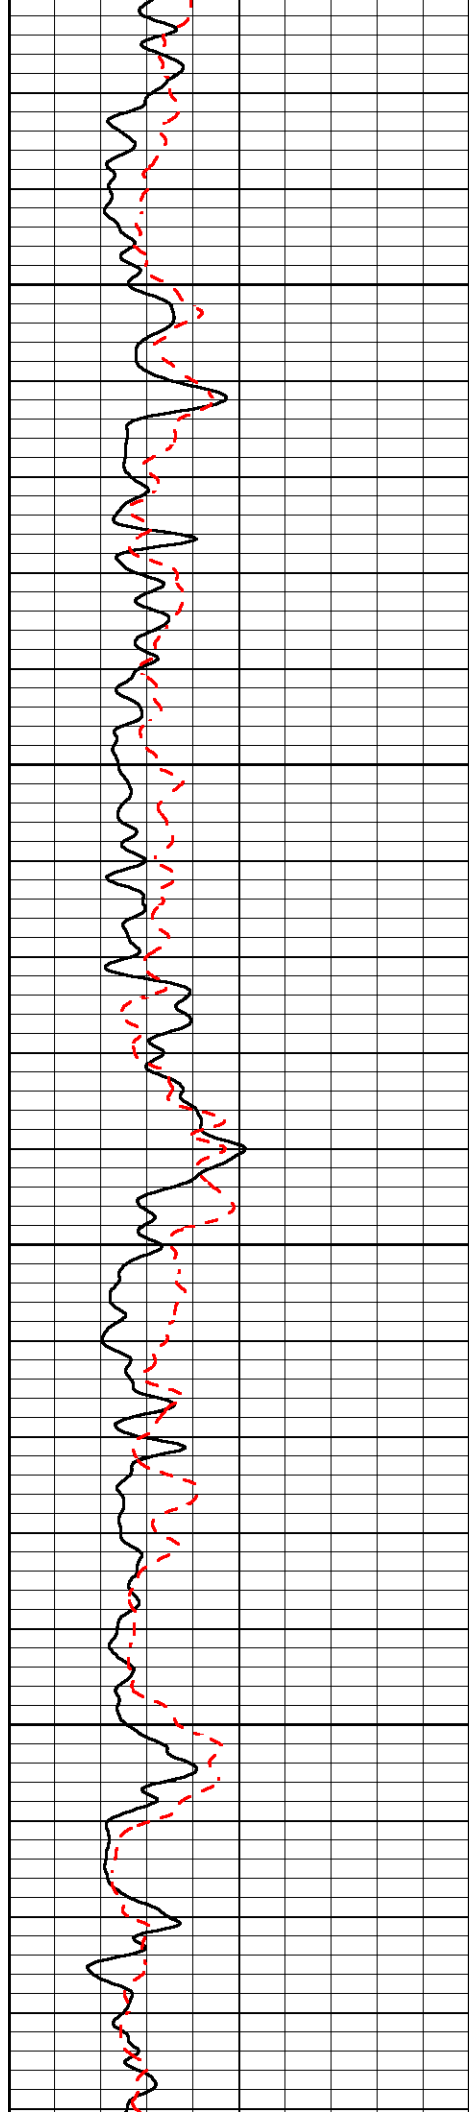



3250

3300

3350

3400

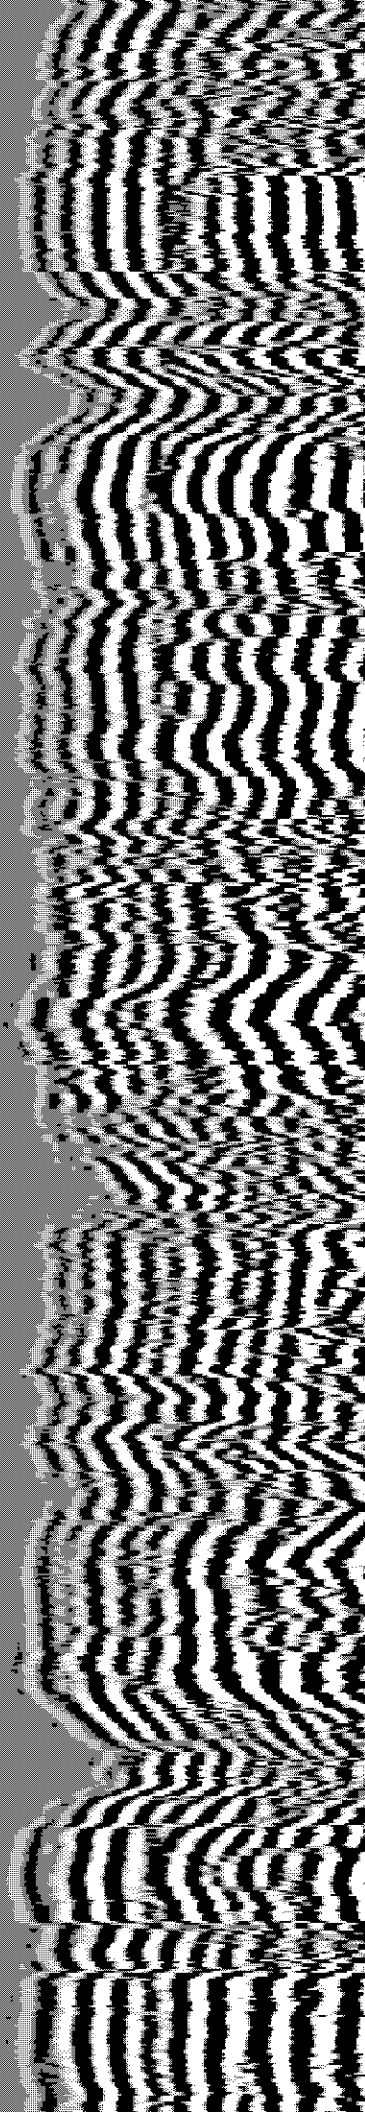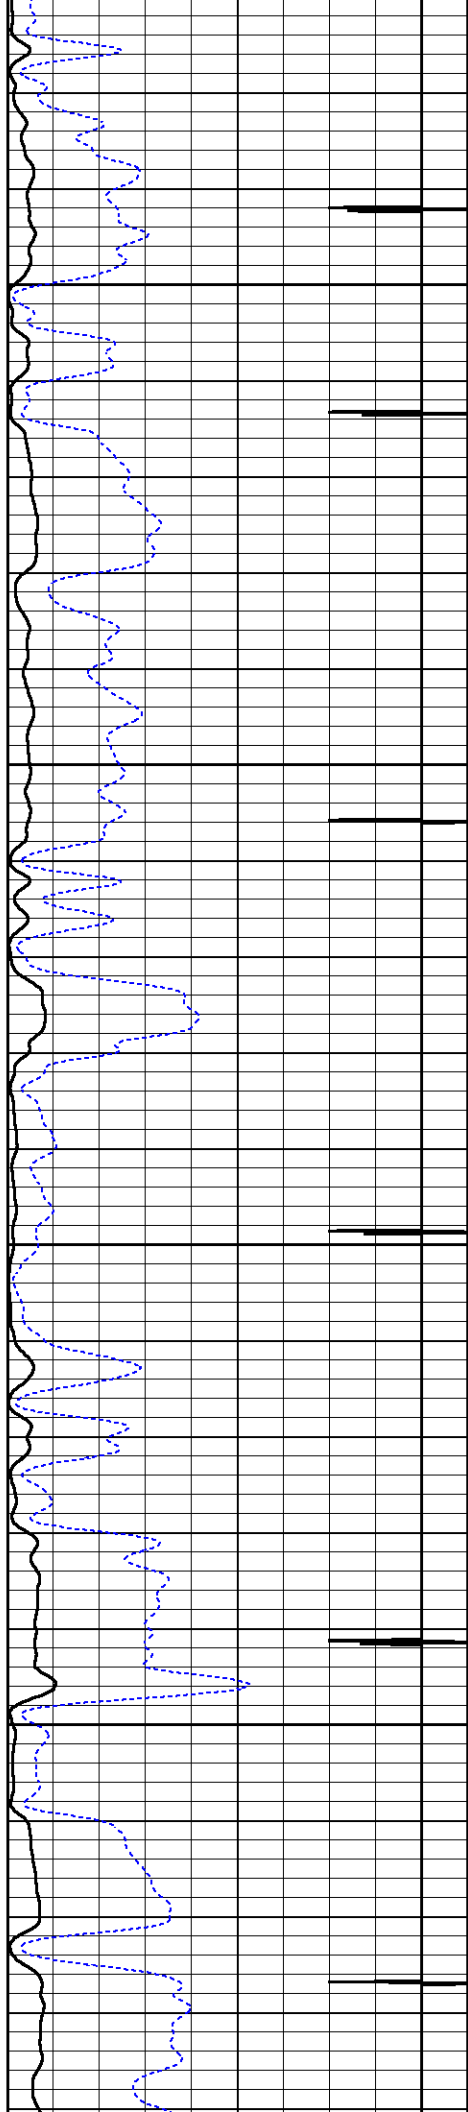

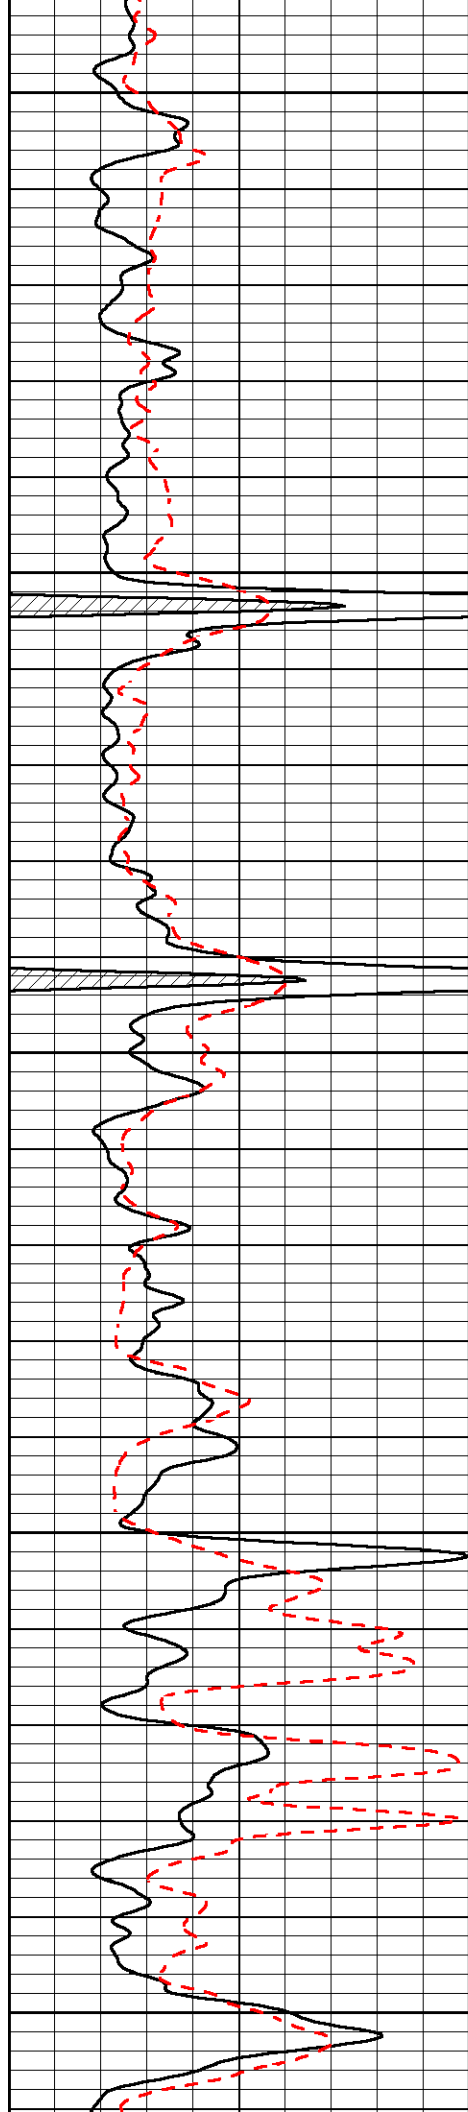



3450


3500

3550

3600

3650

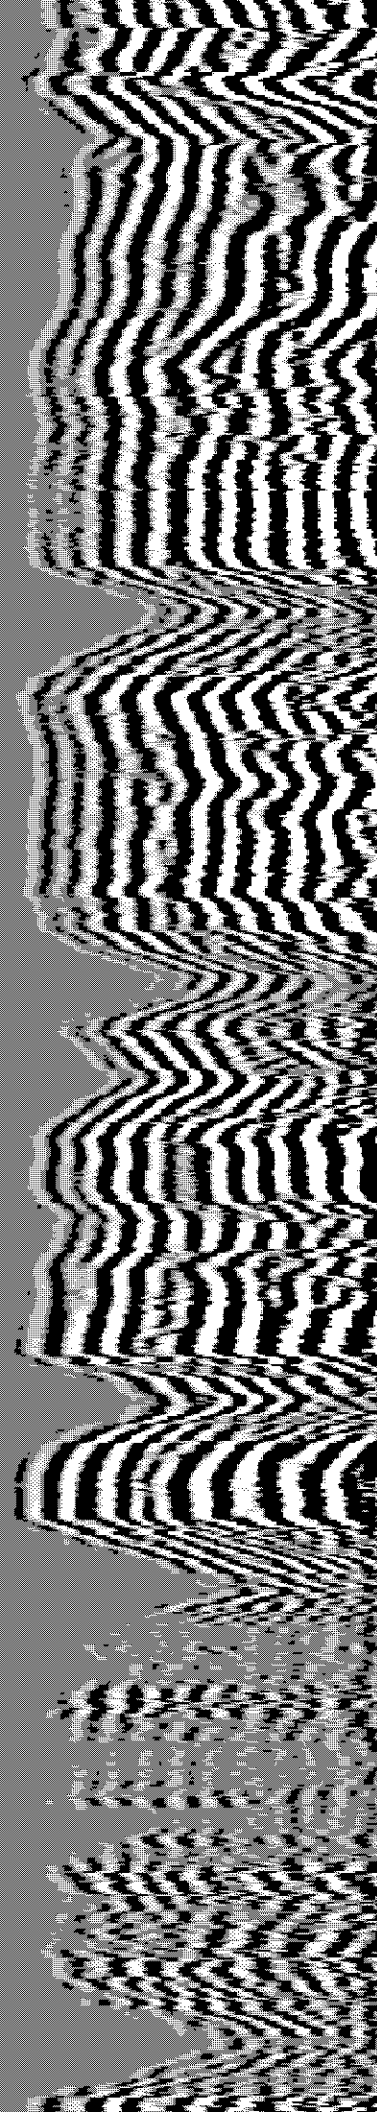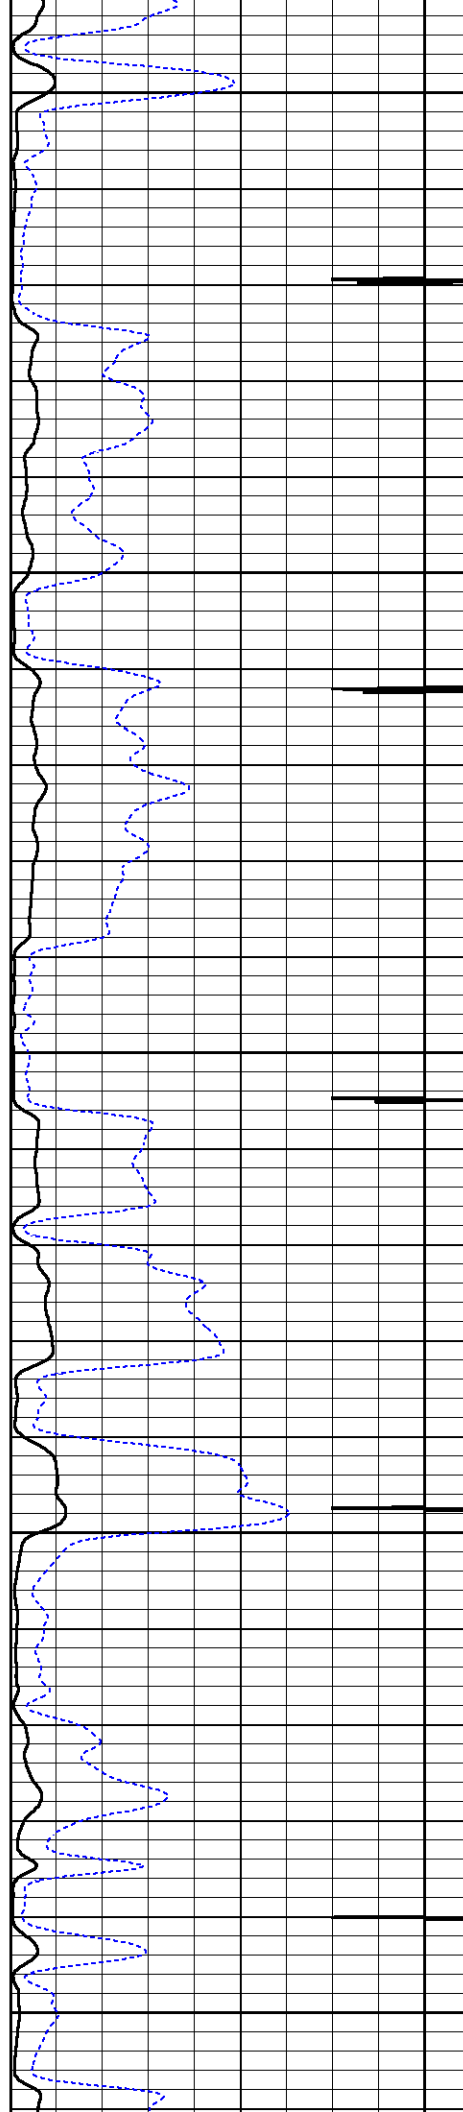


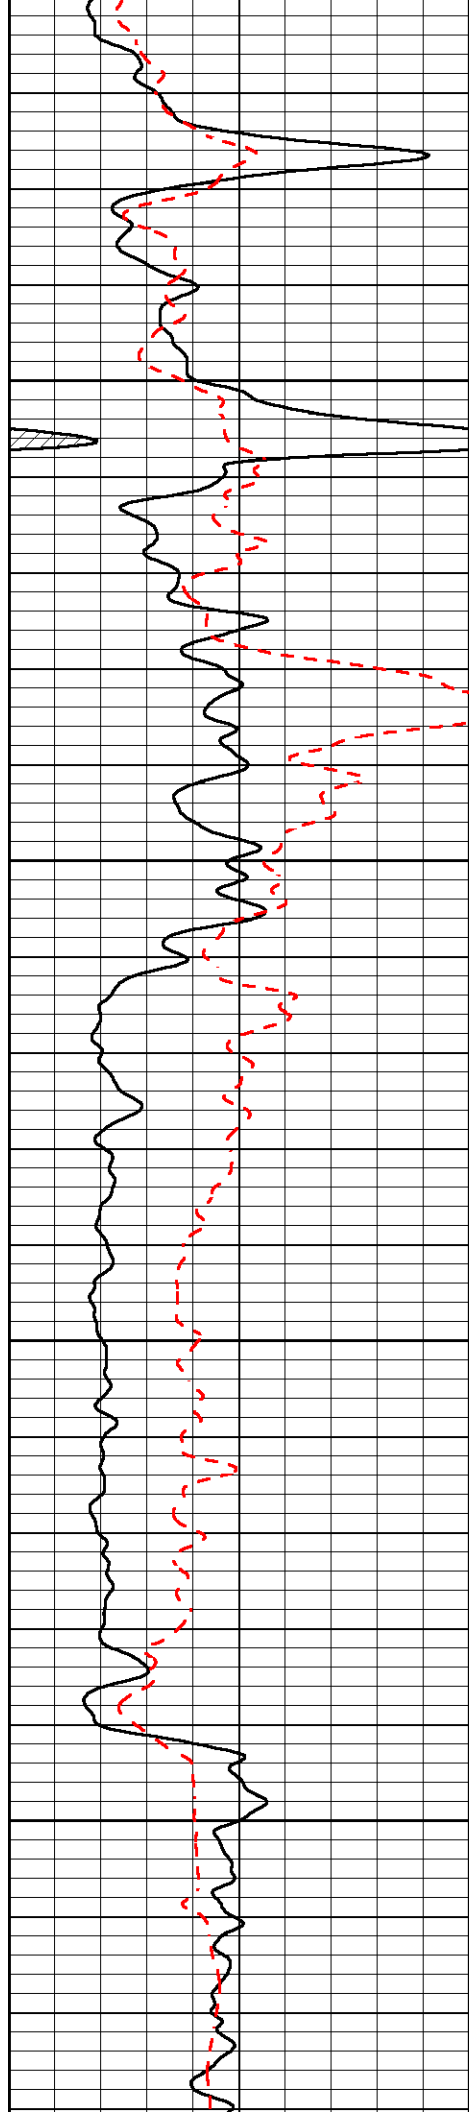



3700

3750

3800

3850

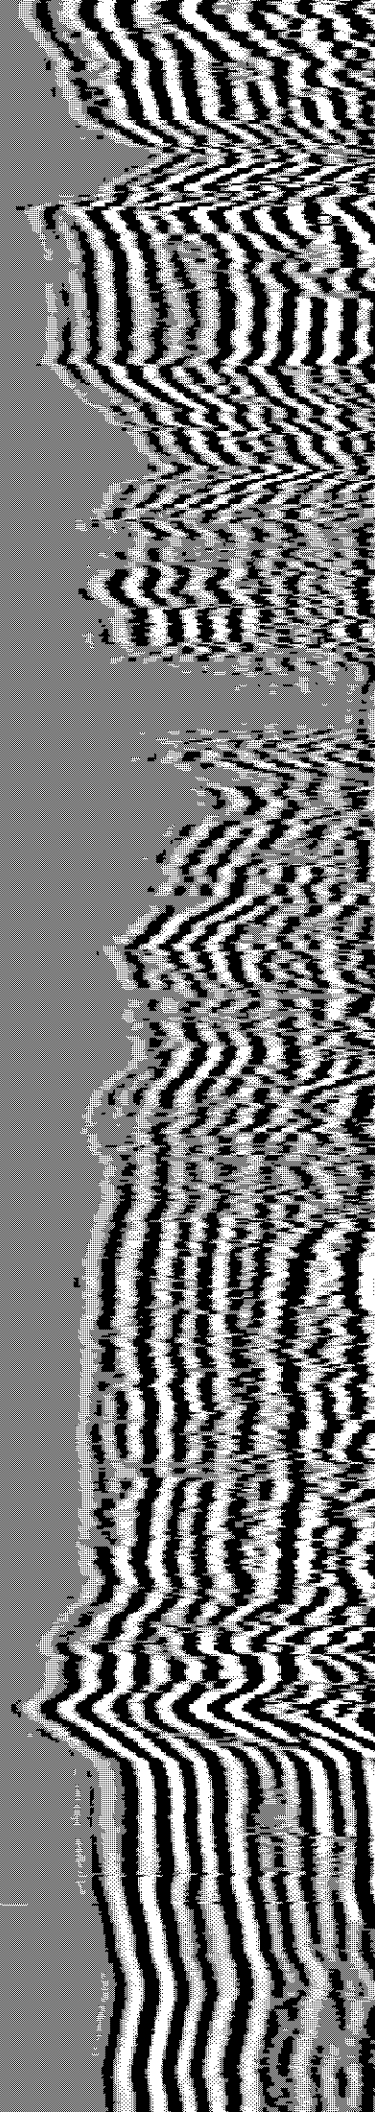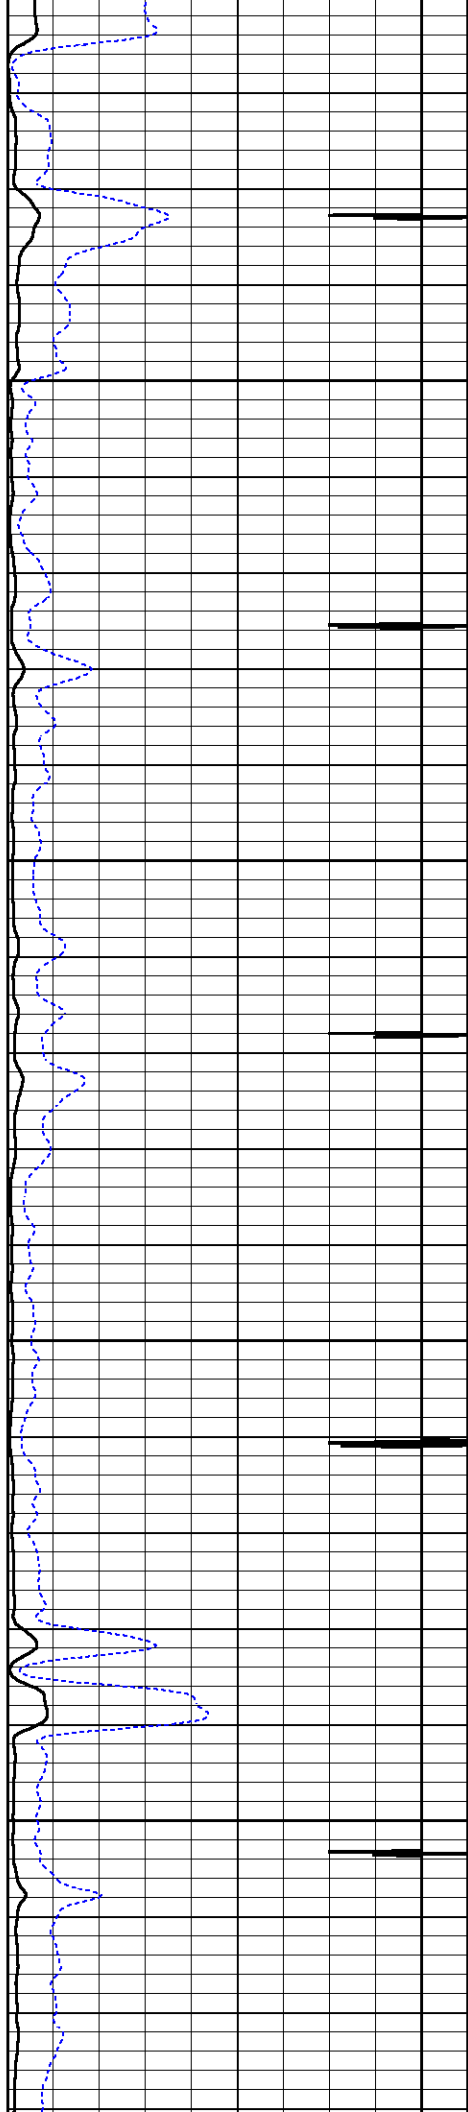

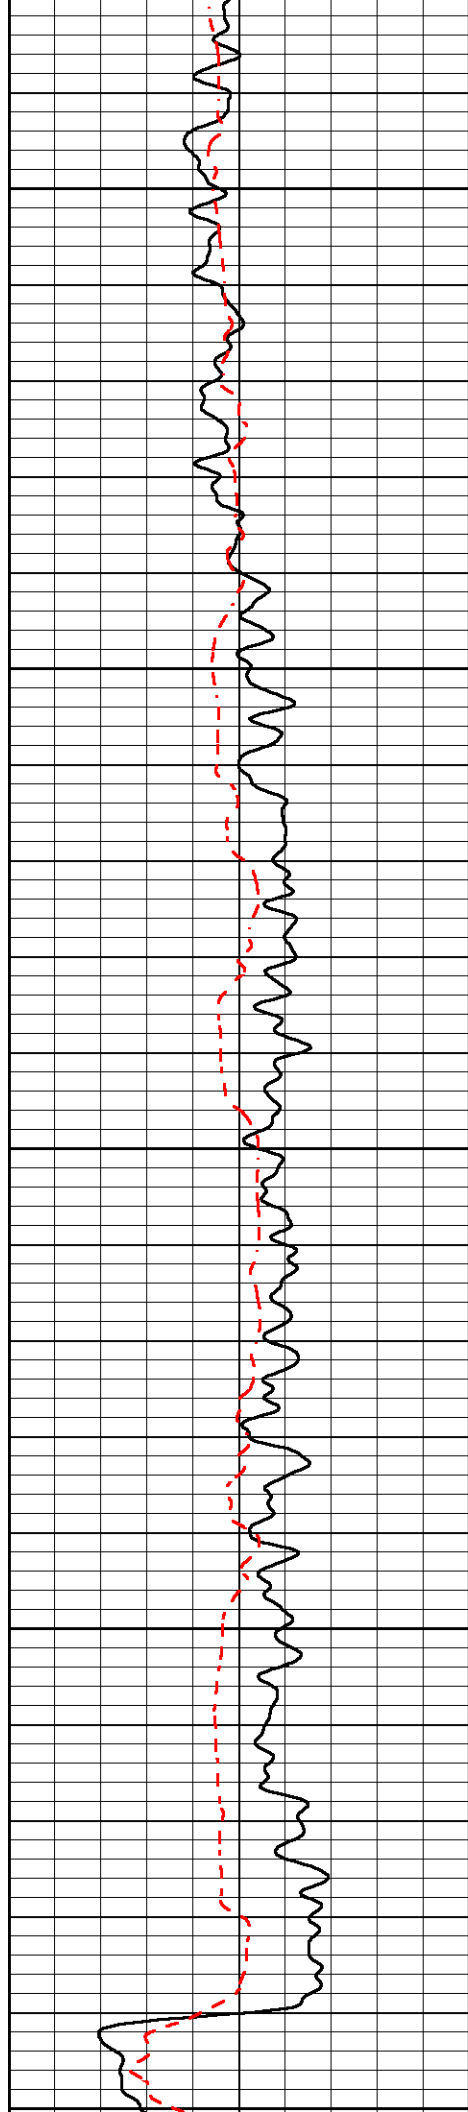


3900

3950


4000


4050

4100

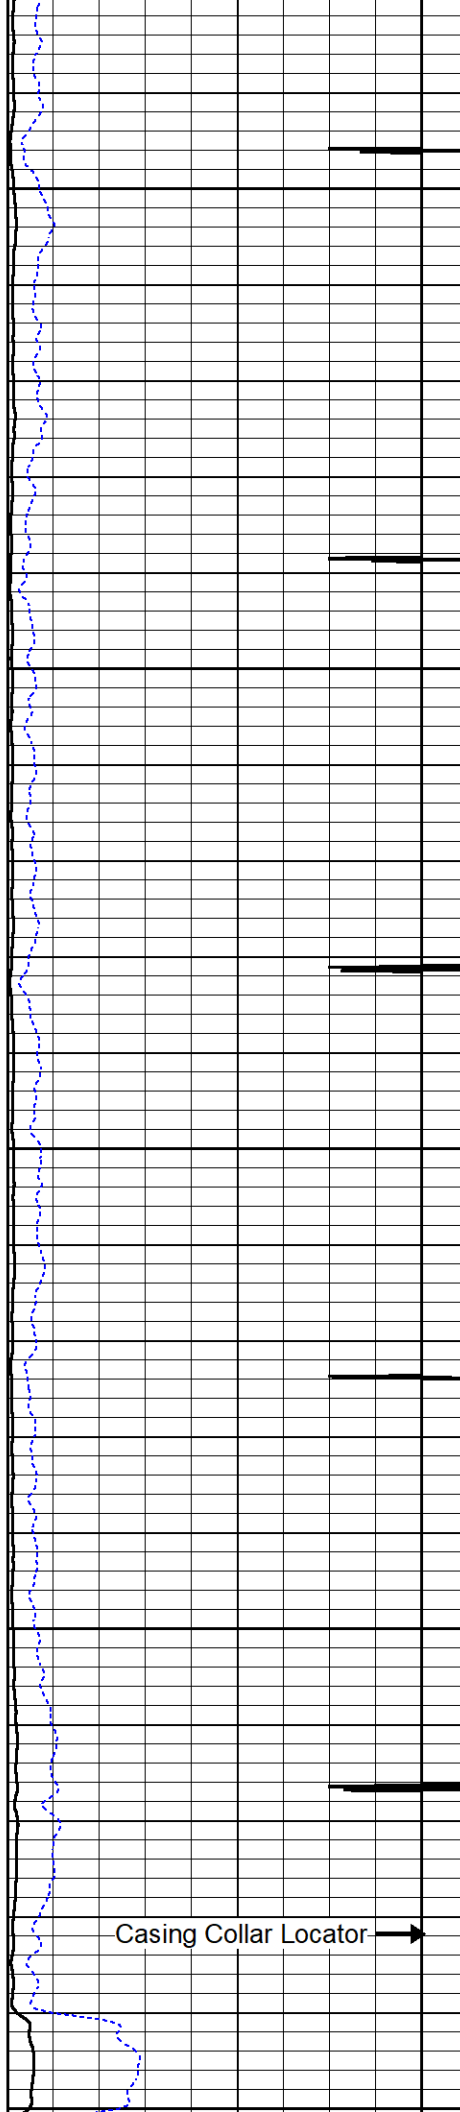

Casing Collar Locator →

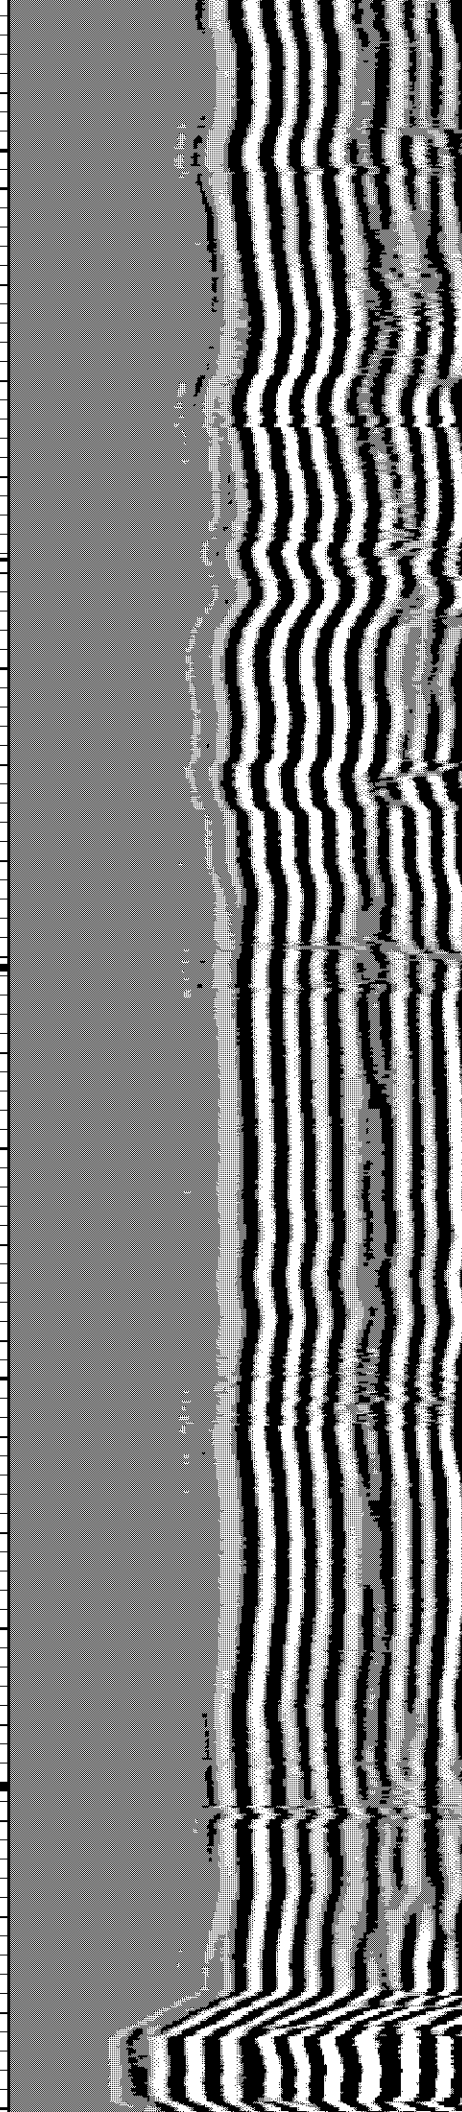

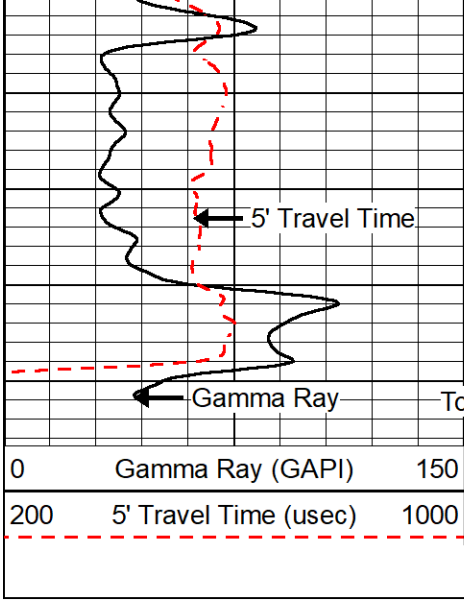

Total Depth 4142'

