

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Rooks County. Sec. 30 Twp. 9 Rge. 19 (E) (W) W

Location as "NE/CNW%SW%" or footage from lines C S/2 N/2 NE

Lease Owner S. and C. Drilling, Inc.

Lease Name C. R. Porter Well No. 1

Office Address Box 271 Hays, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) D & A

Date well completed 11-7 19 64

Application for plugging filed 11-7 19 64

Application for plugging approved 11-7 19 64


Plugging commenced 11-7 19 64

Plugging completed 11-7 19 64

Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

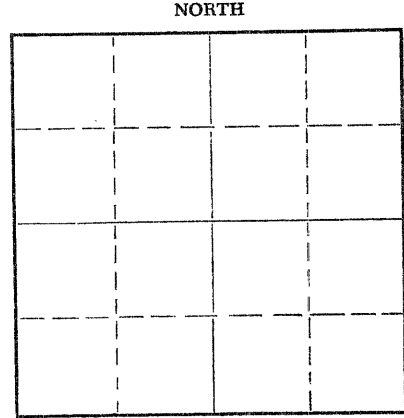

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Elson Petty

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3628 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

205' 8-5/8" surface casing. Cemented w/125 sks.  
Filled with heavy mud to 540'. Set plug. Mixed & poured 20 sks cement through drill pipe. Filled with heavy mud to 180 ft. Mixed & poured 20 sks. through drill pipe. Mud to 40'. Plug. & 1/2 sack hulls & 10 sks. cement.

Plugging completed 6:30 p.m. 11-7-64

RECEIVED  
STATE CORPORATION COMMISSION

JAN 13 1965  
1-13-65

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Co. tools

Address \_\_\_\_\_

STATE OF \_\_\_\_\_, COUNTY OF \_\_\_\_\_, ss.

\_\_\_\_\_, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

Box 271 Hays  
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of January, 1965

My commission expires March 24, 1968

[Signature]  
Notary Public.



CERTIFIED DRILLER'S LOG

COMPANY: S. and C. Drilling, Inc.  
Box 271  
Hays, Kansas

LEASE: C. R. Porter

LOCATION: C S/2 N/2 NE  
30-9-19W  
Rooks County

CONTRACTOR: CO. TOOLS

COMMENCED UNDER SURFACE: 10-27-64

CASING RECORD: 205' of 8-5/8"  
Cemented with 125 sks.

COMPLETED: 11-7-64

ELEVATION: 2119 D.F.  
2114 Gr. L.

Opened hole to deepen: 11-12-64

COMPLETED: 11-15-64

POTENTIAL: D & A

FIGURES DENOTE TOP OF FORMATION.

FORMATION:	DEPTH:	
Surface clay & sand	0	
Shale & shells	35	
Shale	180	
Sand	790	
Shale	870	
Sand & shale	950	
Shale	1020	
Sand	1040	
Shale & sand	1210	
Shale	1300	
Anhydrite	1530	
Shale & red bed	1568	
Shale & shells	1825	
Shale with lime streaks	2097	
Shale	2245	
Shale & lime	2379	
Lime & shale	2470	
Shale & lime	2930	
Lime	3208	
Conglomerate	3553	
Arbuckle	3582	
	3628 T.D	D & A
After opening hole:		
Arbuckle remainder of hole.	3653 T. D.	D & A

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 13 1965  
1-13-65  
CONSERVATION DIVISION  
Wichita, Kansas

I hereby certify that this is a true and correct copy of the above log to the best of my knowledge.

S. and C. Drilling, Inc.

*S & C Drilling Inc.*

*D. J. Sullivan*

By: *D. J. Sullivan*, Exec. Vice- Pres.