


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

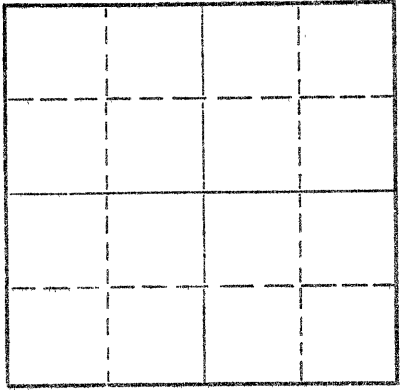

Locate well correctly on above  
Section Plat

Rooks County. Sec. 15 Twp. 9 Rge. 19 (E) (W) X  
Location as "NE/CNWKSWK" or footage from lines C of N/2 SE SW  
Lease Owner Chester Loving  
Lease Name Bartos Well No. #4  
Office Address Box 248 Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 6-5-72 19  
Plugging completed 6-8-72 19  
Reason for abandonment of well or producing formation  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 3539' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3535 1/2'	2944.00'
				8 5/8"	175'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3500'. Mixed and ran 5 sacks cement thru dump bailer.  
Squeezed hole with 3 sacks hulls - 22 sacks gel and 2 sacks hulls - 70 sacks cement and 8 sacks gel. Released plug and displaced with 50 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 12 1972  
6-12-72  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec  
Box 364 Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 9 day of June, 1972

My commission expires October 1972

Sidney D. Miller  
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock,  
Wichita, Kansas

COPY

15-163-19327-00-00

Company: CHESTER LOVING  
Farm- Bartos

No. 4

SEC. 15 T. 9 R. 19W  
C N/2 SE SW

Total Depth. 3539'

Comm. 2-27-63

Comp. 3-6-63

Shot or Treated.


Contractor. Woodman & Iannitti Drilling Co.

Issued. 6-22-63

County

Books

KANSAS



Elevation. 2113' KB

Production. 50 BOPD

Figures Indicate Bottom of Formations.

clay	30
rock & shale	150
shale blue	180
shale	750
sand	780
shale	980
sand	1190
red bed	1489
Anhydrite	1530
shale & shells	2110
lime & shale	2200
lime	3534
Arbuckle	3537
Arbuckle ?	3539
Total Depth	

TOPS: SAMPLE

Anhydrite	1489
Heebner	3255
Toronto	3278
Lansing/Kansas City	3296
Arbuckle	3535

RECEIVED  
STATE CORPORATION COMMISSION

MAY 26 1972

CONSERVATION DIVISION  
Wichita, Kansas