

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

Rooks County, Sec. 15 Twp. 9S Rge. (E) 19 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SW/4

Lease Owner Phillips Petroleum Company

Lease Name Cecilia Well No. 1

Office Address Bartlesville, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 6-5-1944

Application for plugging filed 6-13-1944

Application for plugging approved 6-13-1944

Plugging commenced 6-14-1944

Plugging completed 6-17-1944

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production None 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation None Depth to top Bottom Total Depth of Well 3560 Feet

Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Anhydrite	Dry	1429'	1495'	8 5/8"	1464'	None
Lansing Kansas City	Dry	3250'		5 1/2"	3530'	2374'
Arbuckle	Water	3512'	3560'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with mud from 3560' to 1450'. Set wood plug at 1450' and ran 14' rock and 15 sacks of cement on top of plug, filled with mud to 28', set wood plug at 28', ran 10 sacks of cement in filling to base of cellar.

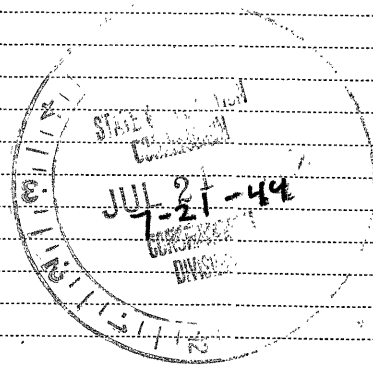

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Ralph McKnight
Address Box 528 - Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ralph McKnight
Box 528 - Russell, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 19th day of July, 1944

My commission expires June 14, 1948

Robert J. Mason
Notary Public.

Slater

Formation Record

Lease **Cecilia**Well No. **1**

FROM	TO	Formation	REMARKS
0	290	Earth Clay & Sand	<u>Elevation 2085' D.F.</u>
290	560	Shale & Sand Streaks	
560	939	Shale & Shells	
939	1120	Sand & Shells	
1120	1200	Shale	
1200	1429	Shale & Shells	
1429	1495	Anhydrite	Top Anhydrite 1429' D.F.
1495	1675	Red Bed & Shale	
1675	2077	Shale & Shells	
2077	2264	Lime & Shale	
2264	2366	Lime	
2366	2664	Lime & Shale	
2664	2751	Lime & Shale Breaks	
2751	2862	Shale & Shells	
2862	3026	Lime & Shale	
3026	3205	Lime	
3205	3273	Lime & Shale	
3273	3560	Lime	Top LKC 3250' D.F.-No Shows. Top Arbuckle 3512' D.F. Had good porosity & saturation from 3518'-3519'. 3521'-3521' Had No Shows. 3521'-3522' Very Slight Show Oil. 3522'-3523' Very Slight Show Oil 3523'-3524' No Shows. 3524'-3526' Hole started filling with water. Had 2300' water in hole when ordered to plug.

PLUGGING

FILE

15 9-194

BOOK

PAGE

120

PAGE

37