



MICRO LOG

Company		BEREXCO, LLC.	
Well		JAGQUART #2-1	
Field		U.S. 83	
County		HASKELL	
State		KANSAS	
Location:		API # : 15-081-22251-0000	
Permanent Datum		GROUND LEVEL Elevation 2937	
Log Measured From		KELLY BUSHING 12' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 1		TWP 29S RGE 33W	
Other Services		CDL/CNL/PE DIL/SONIC	
Elevation		K.B. 2949 D.F. 2947 G.L. 2937	
Date	7/18/22		
Run Number	TWO		
Depth Driller	5750		
Depth Logger	5748		
Bottom Logged Interval	5732		
Top Log Interval	3400		
Casing Driller	8 5/8"@1680'		
Casing Logger	1680		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.3/65		
pH / Fluid Loss	10.0/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.30@85F		
Rmf @ Meas. Temp	.975@85F		
Rmc @ Meas. Temp	1.56@85F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.837@132F		
Time Circulation Stopped	5.5 HOURS		
Time Logger on Bottom	11:00 A.M.		
Maximum Recorded Temperature	132F		
Equipment Number	8916		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	BRYAN BYNOG		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
SUBLETTE, KS., N. TO (HWY 83 & 160 JUNCTION), 1W., 1S., E. INTO




MAIN SECTION

Database File	6714pe.db
Dataset Pathname	pass6.4
Presentation Format	_micro
Dataset Creation	Mon Jul 18 12:40:38 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

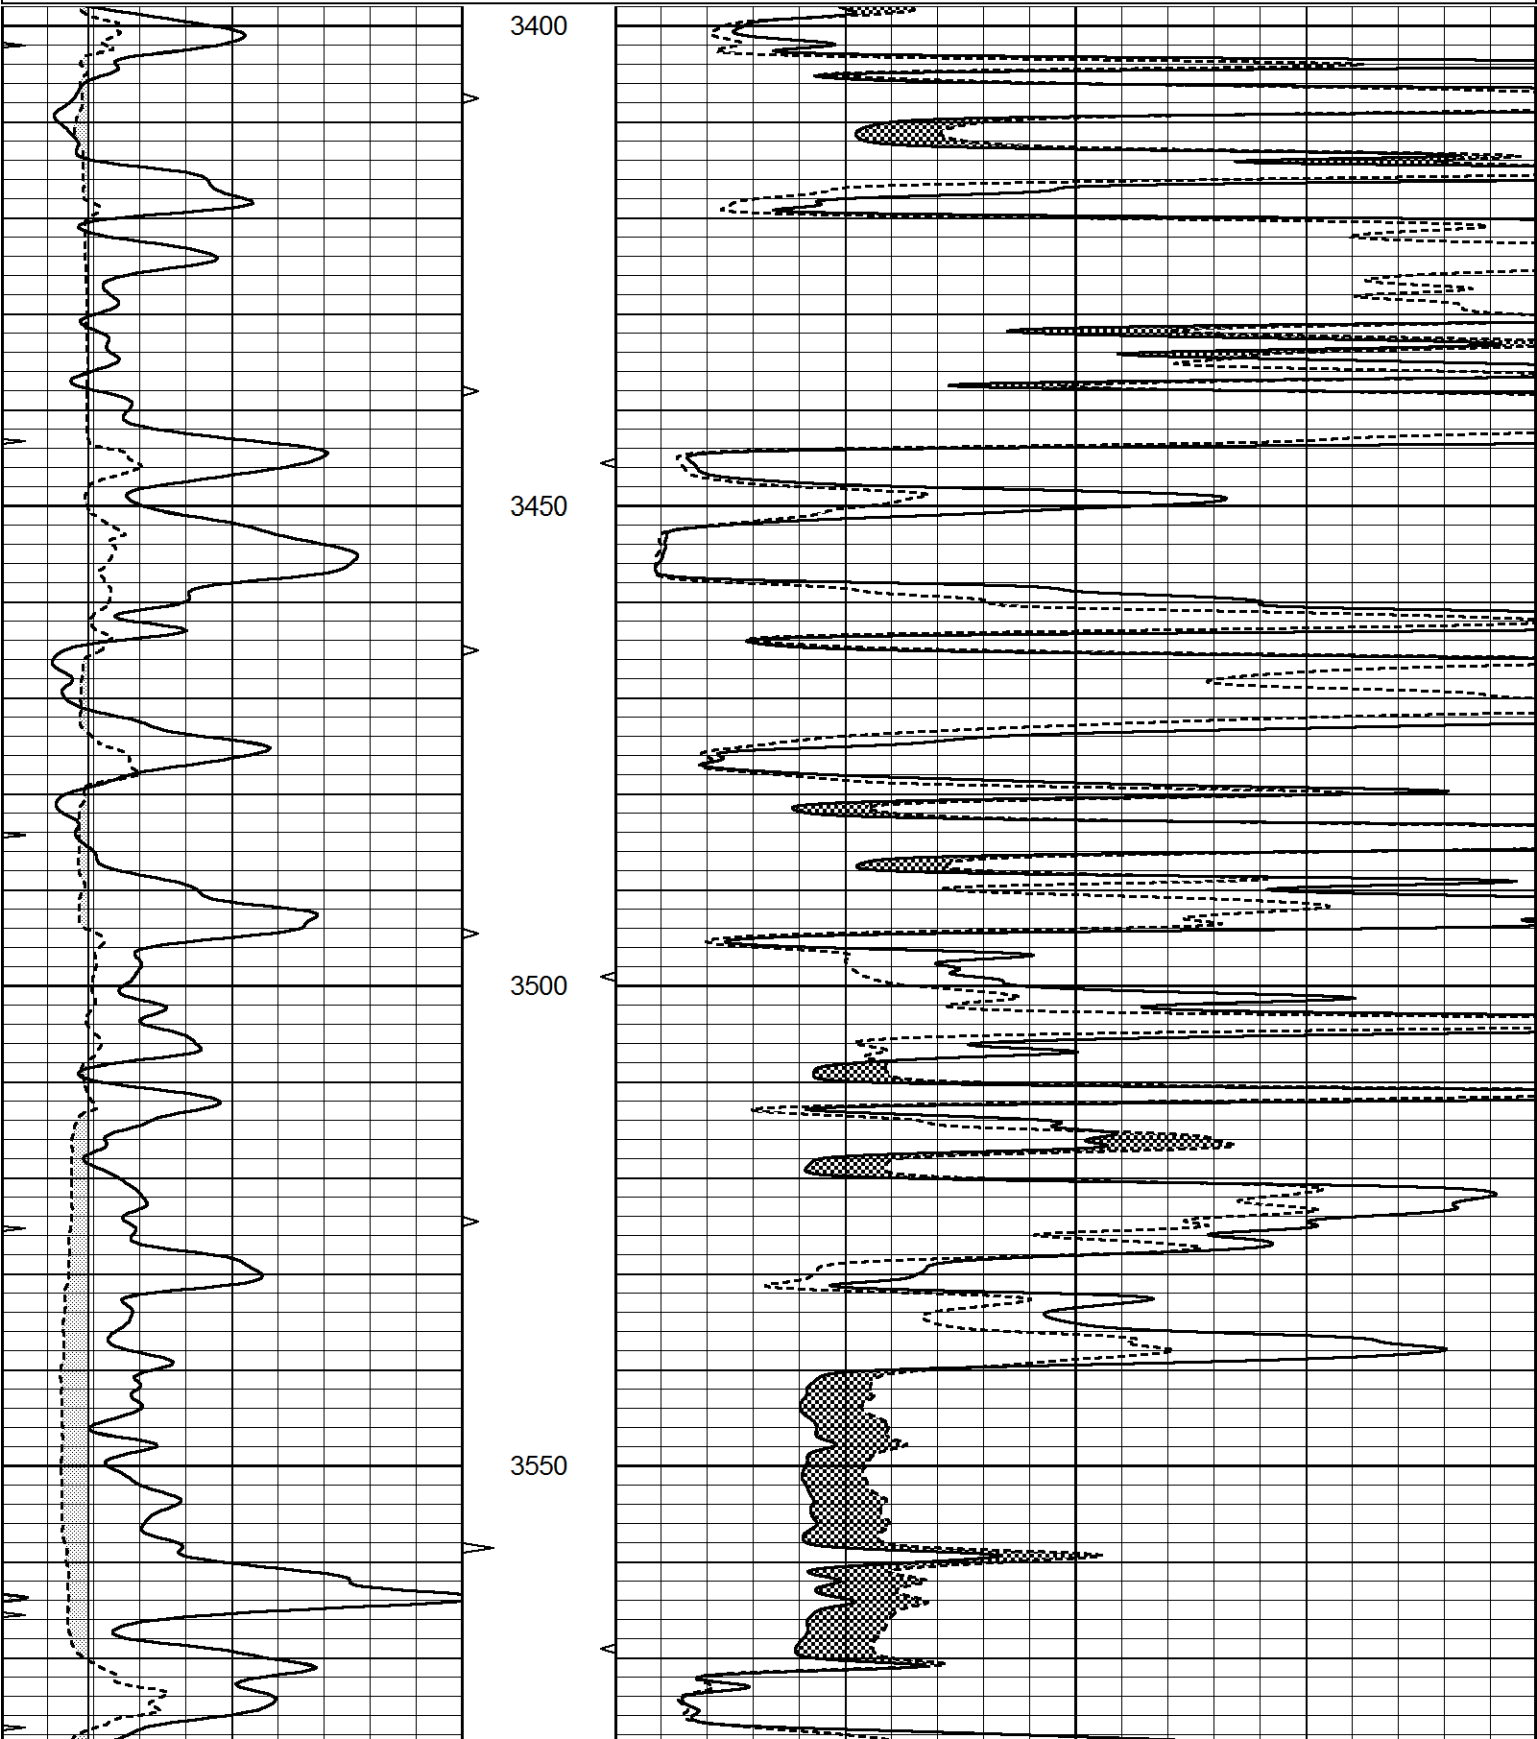

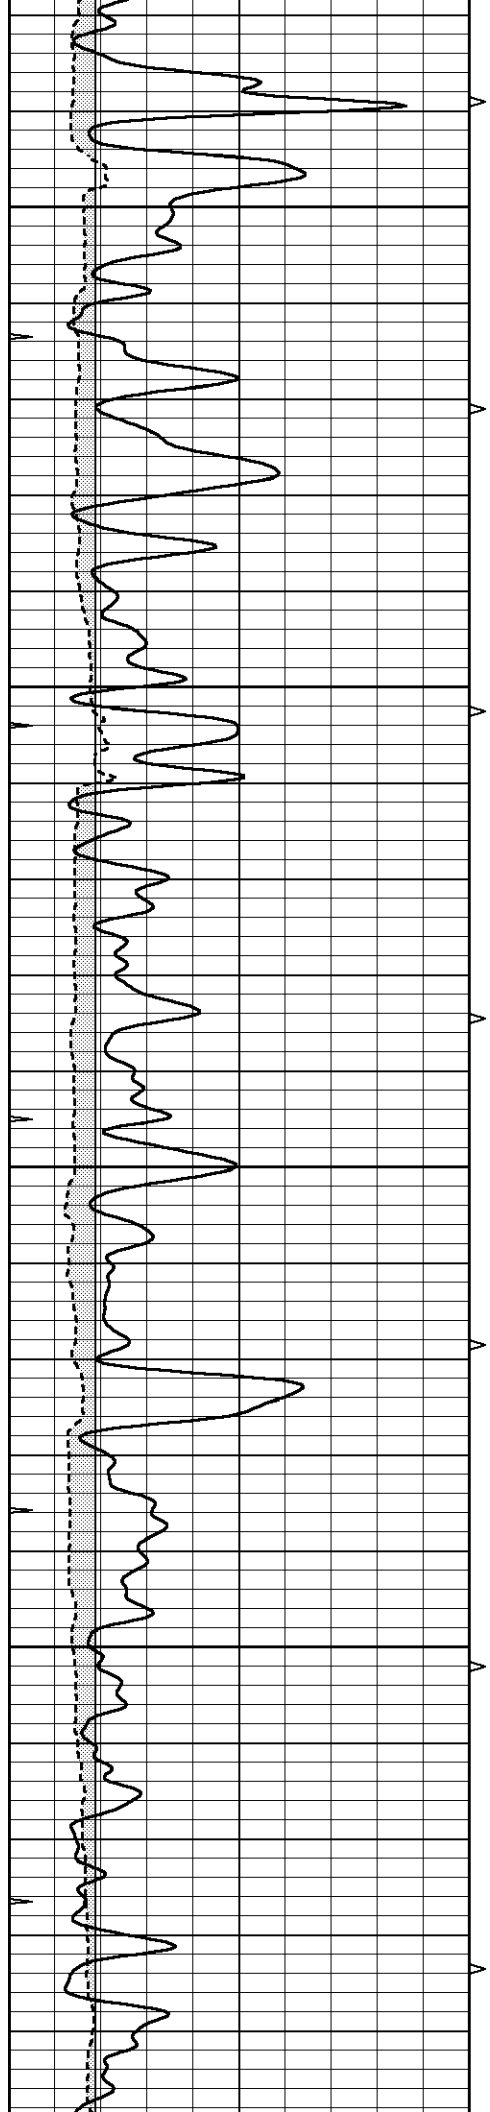




3600


3650

3700

3750

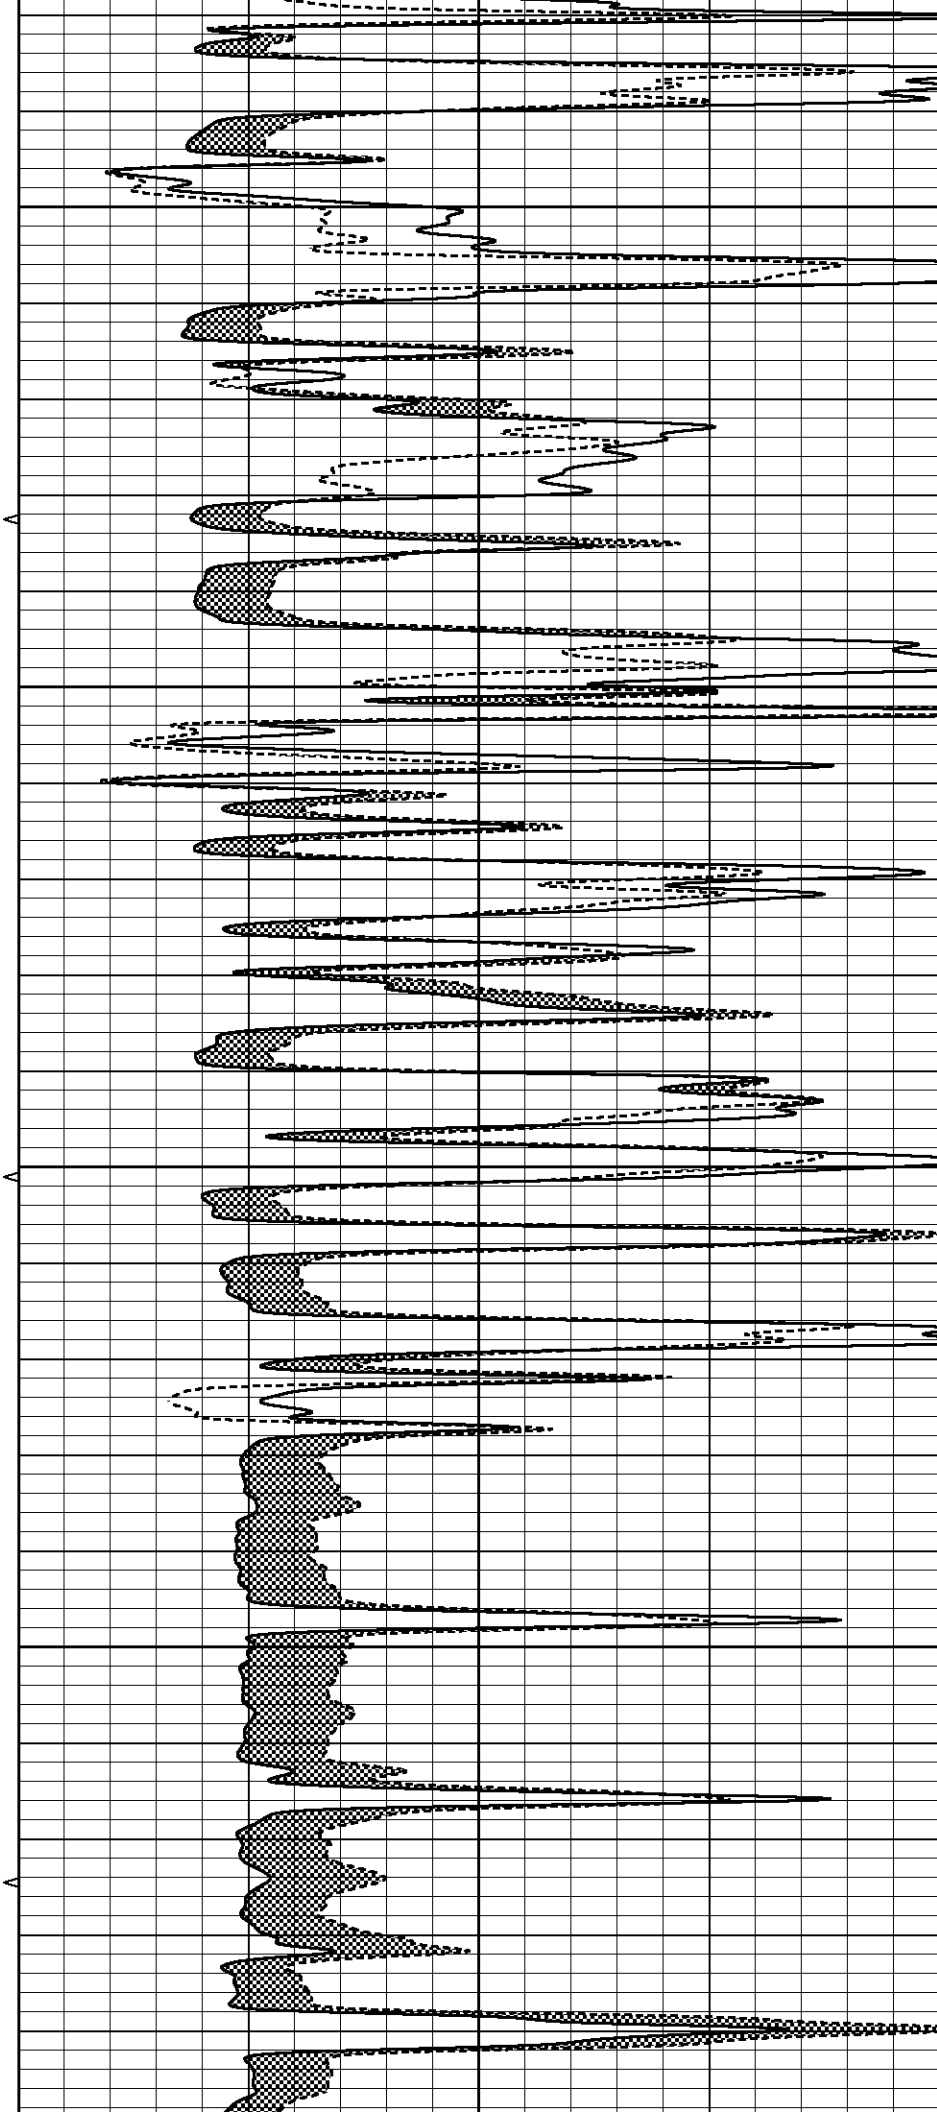

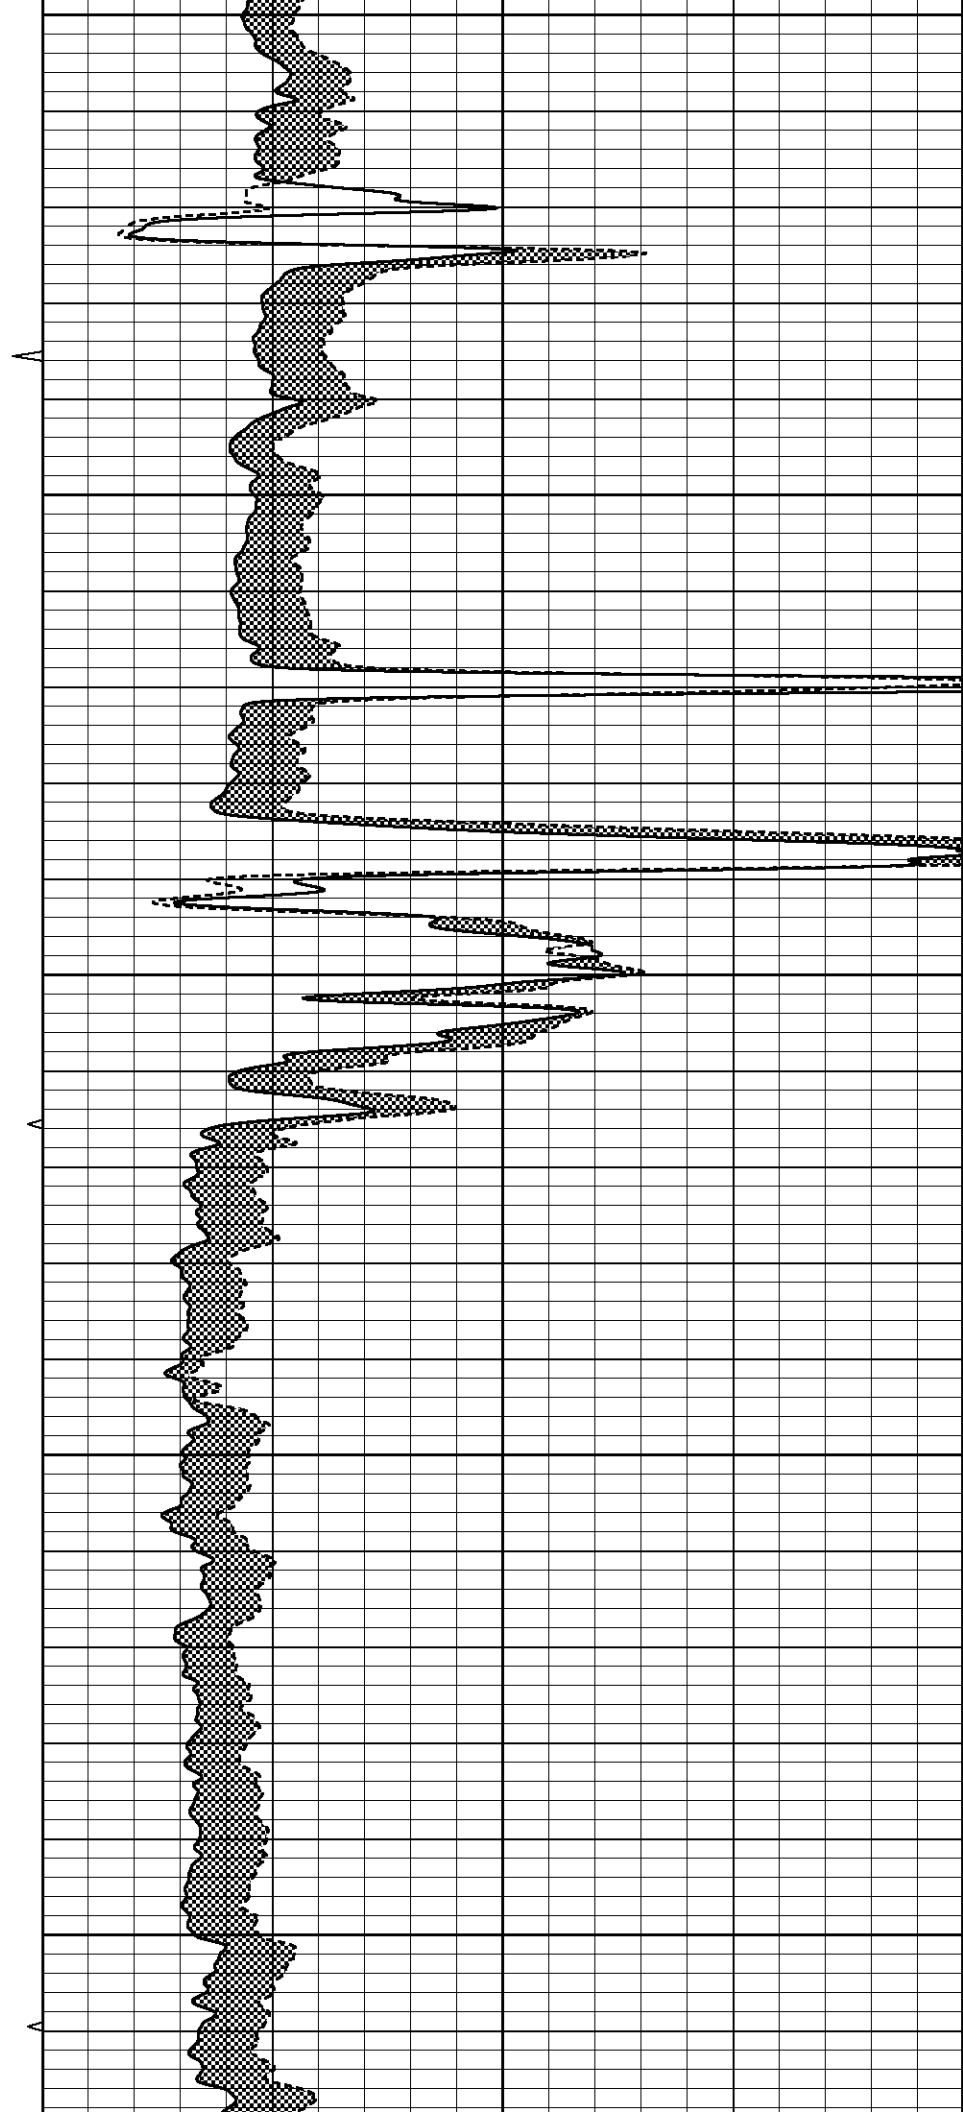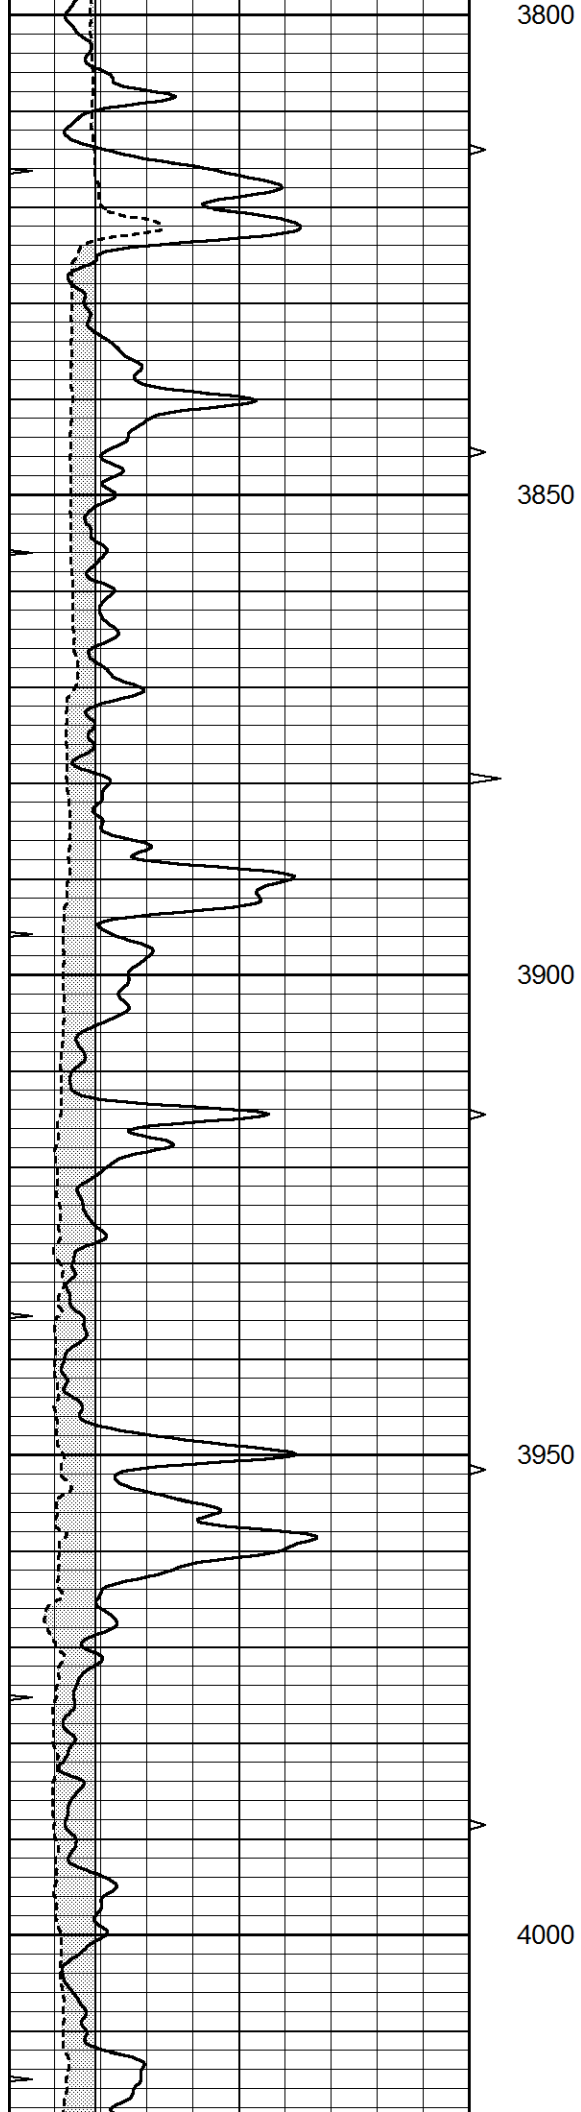

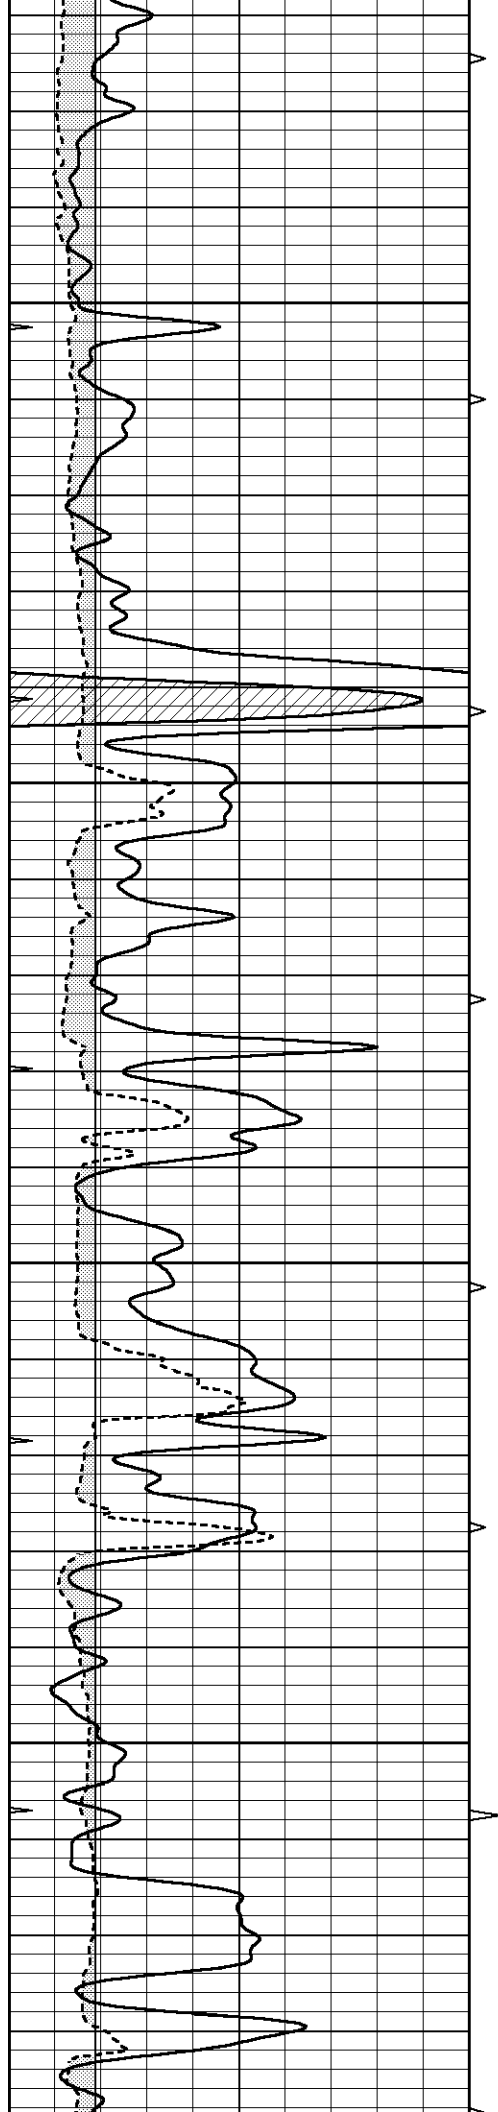



4050


4100

4150

4200

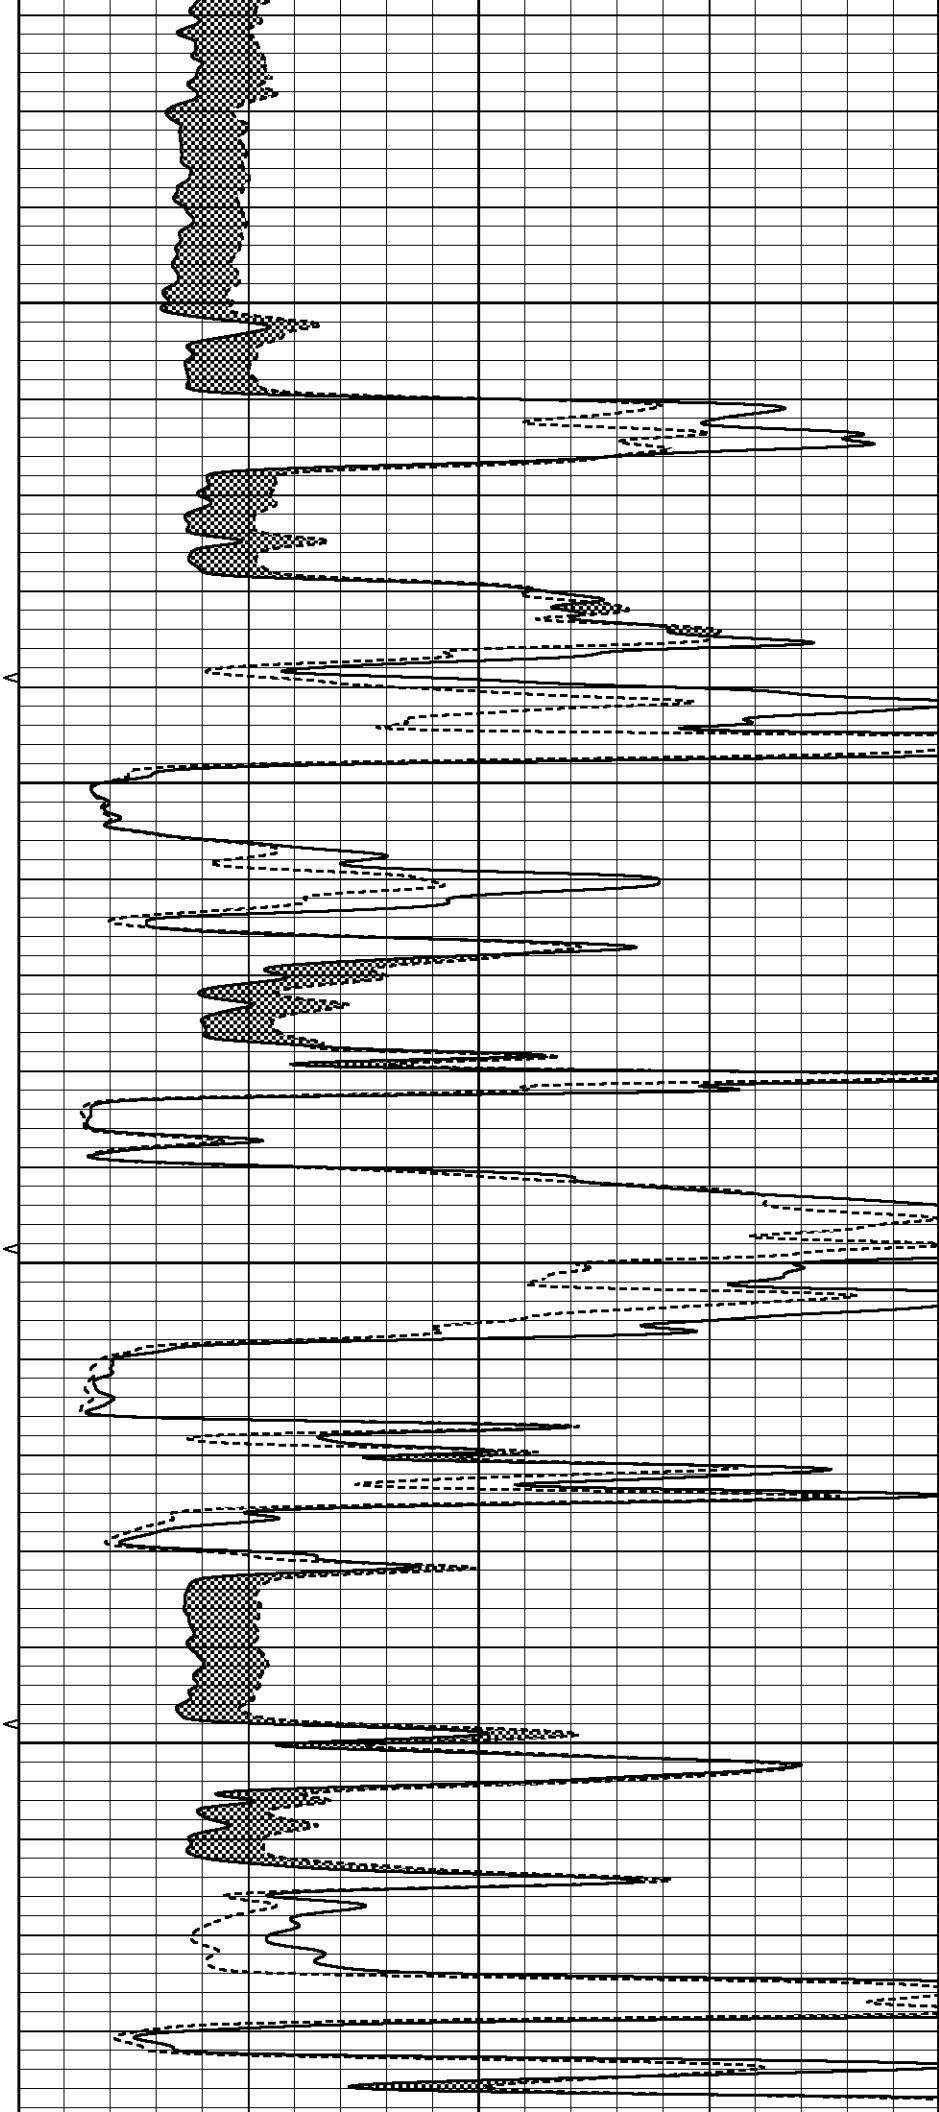

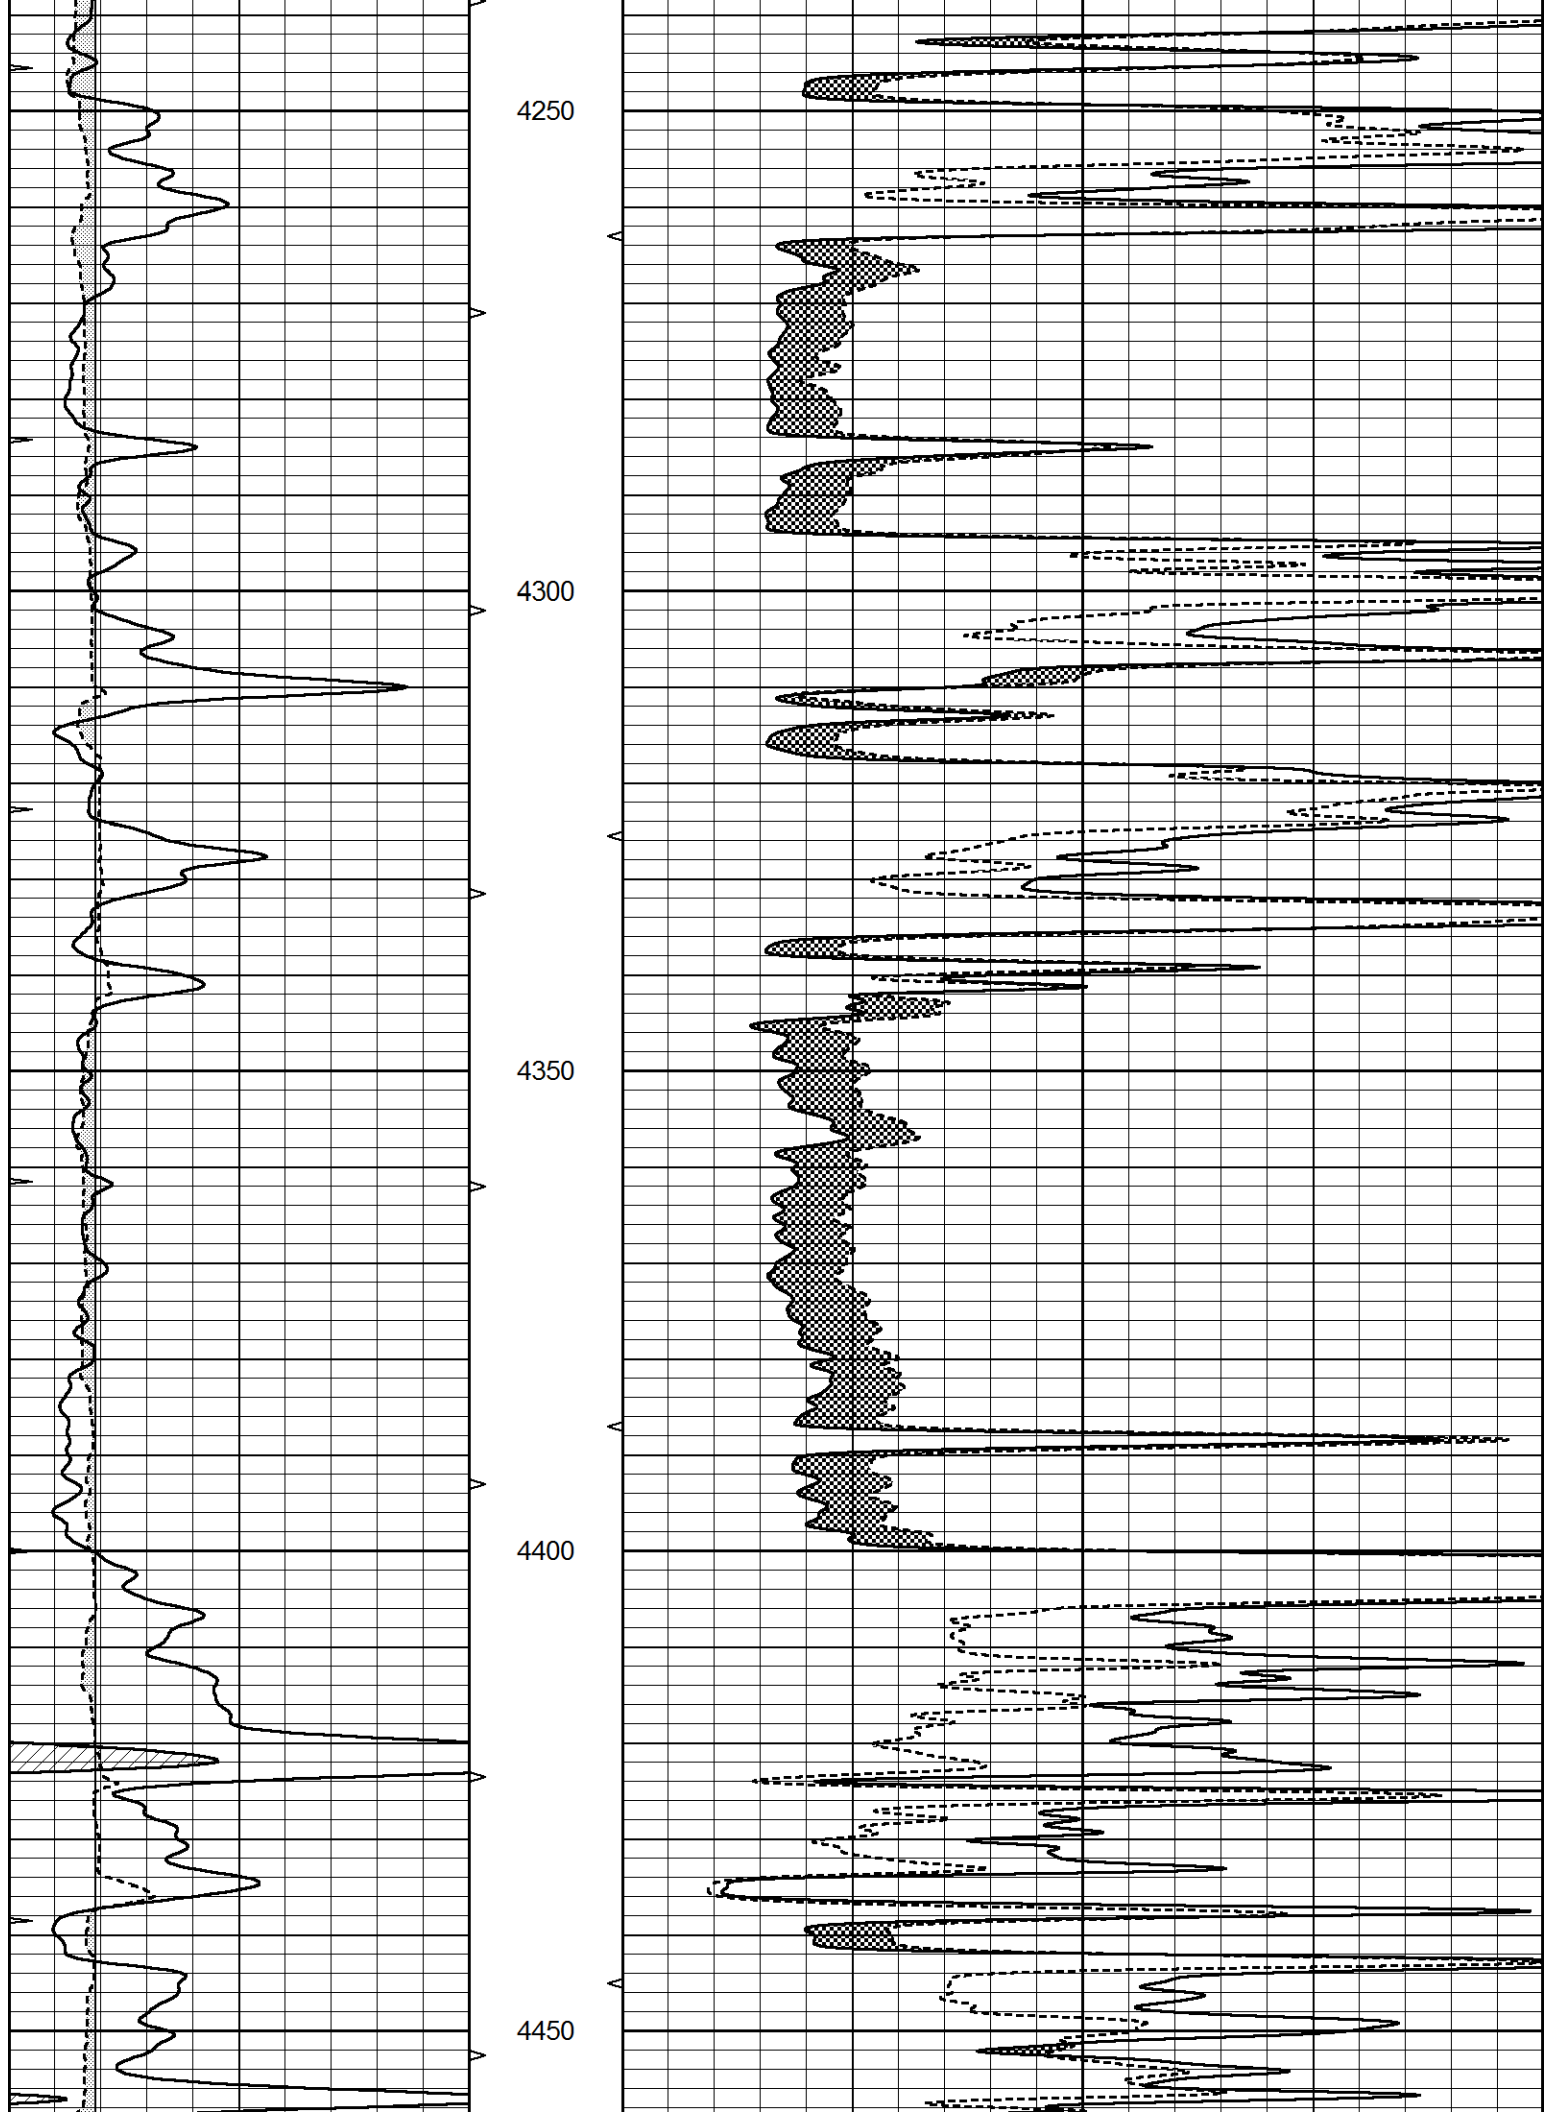

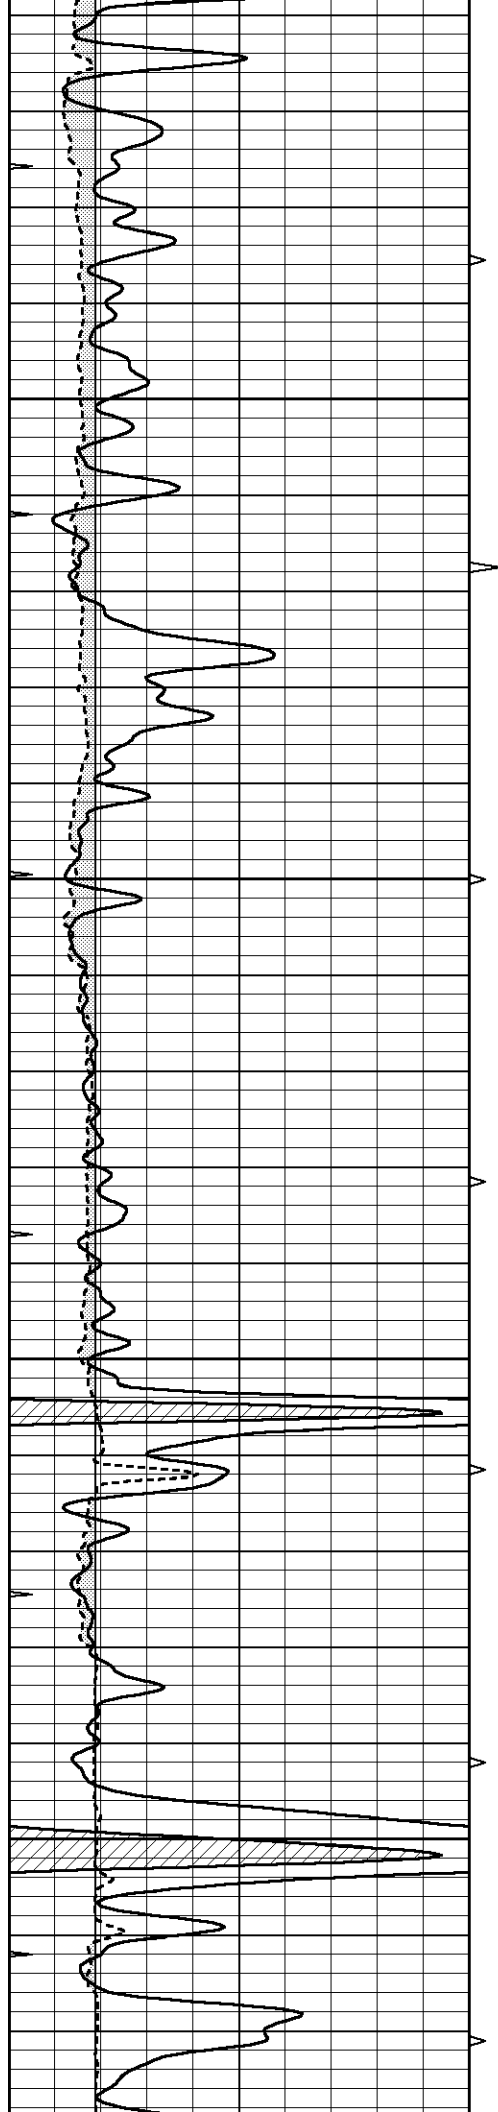



4500

4550

4600

4650

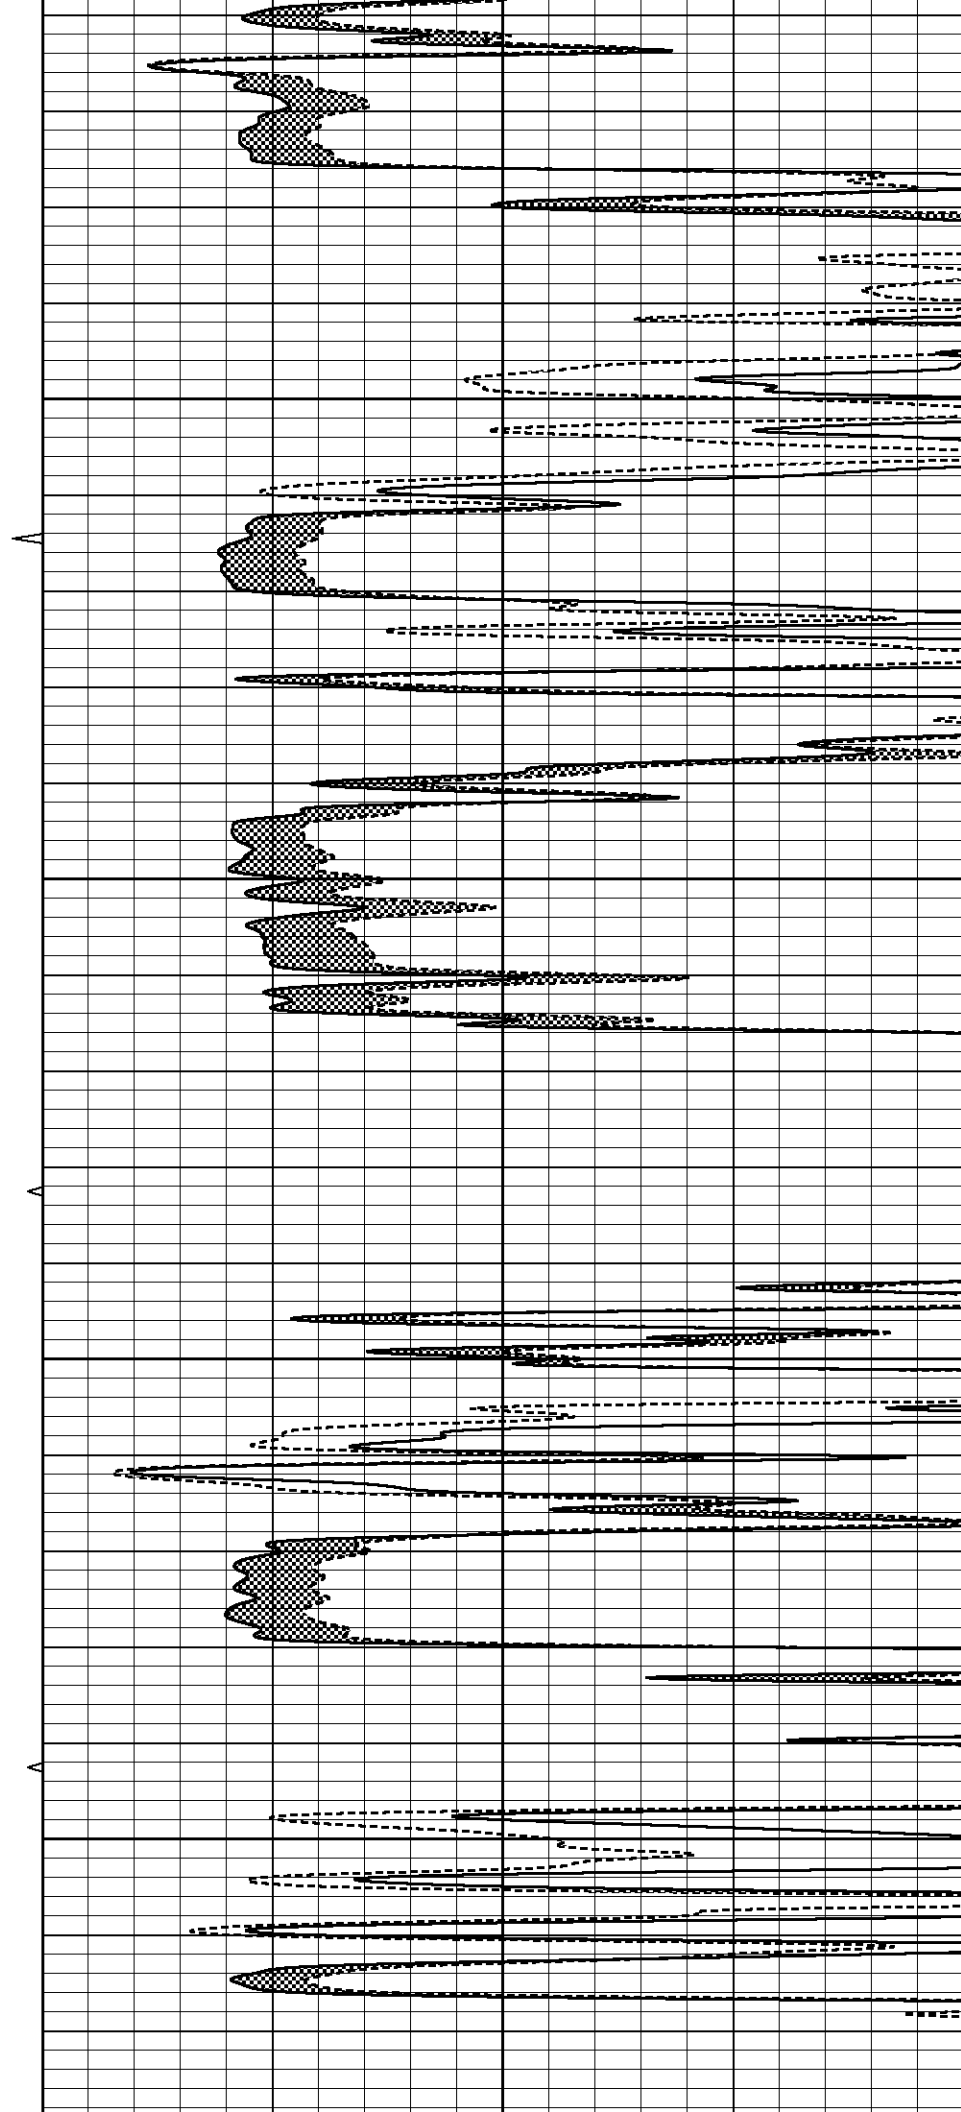

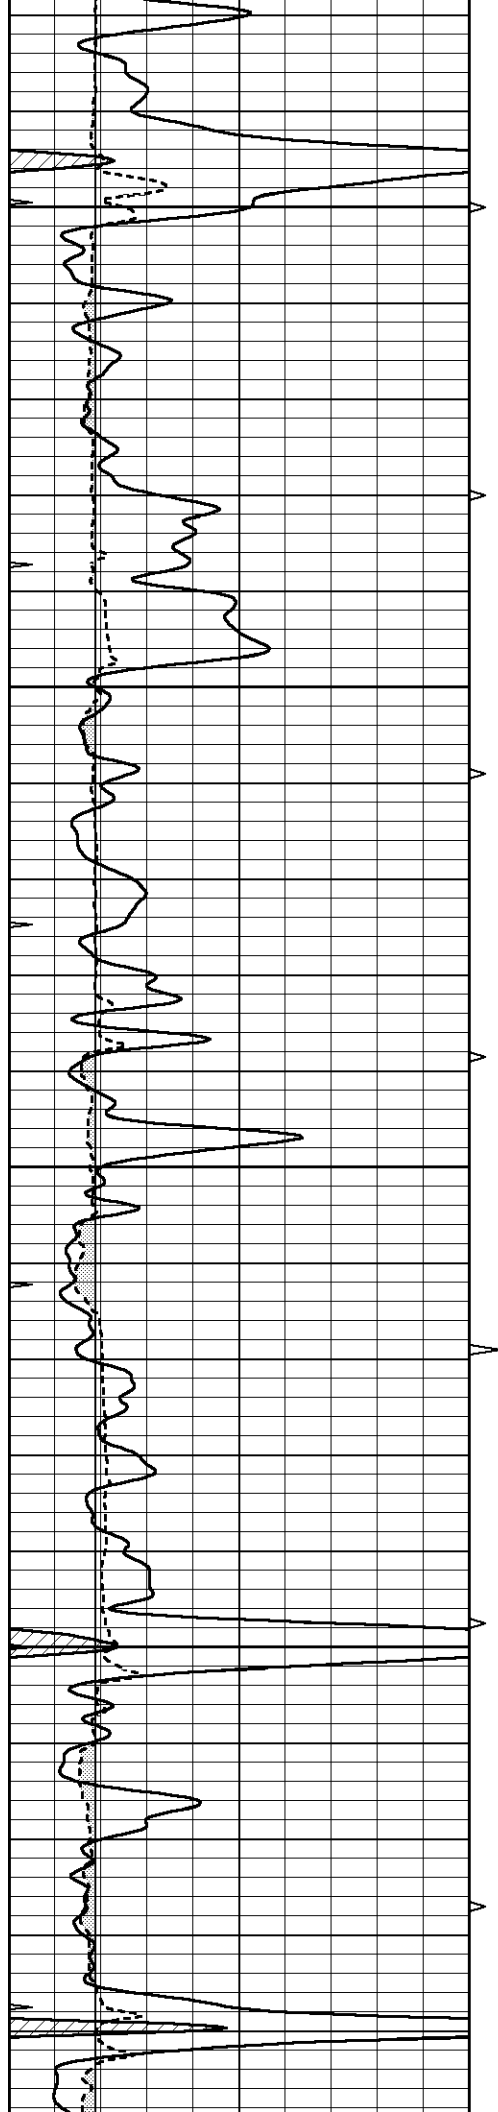



4700

4750

4800

4850

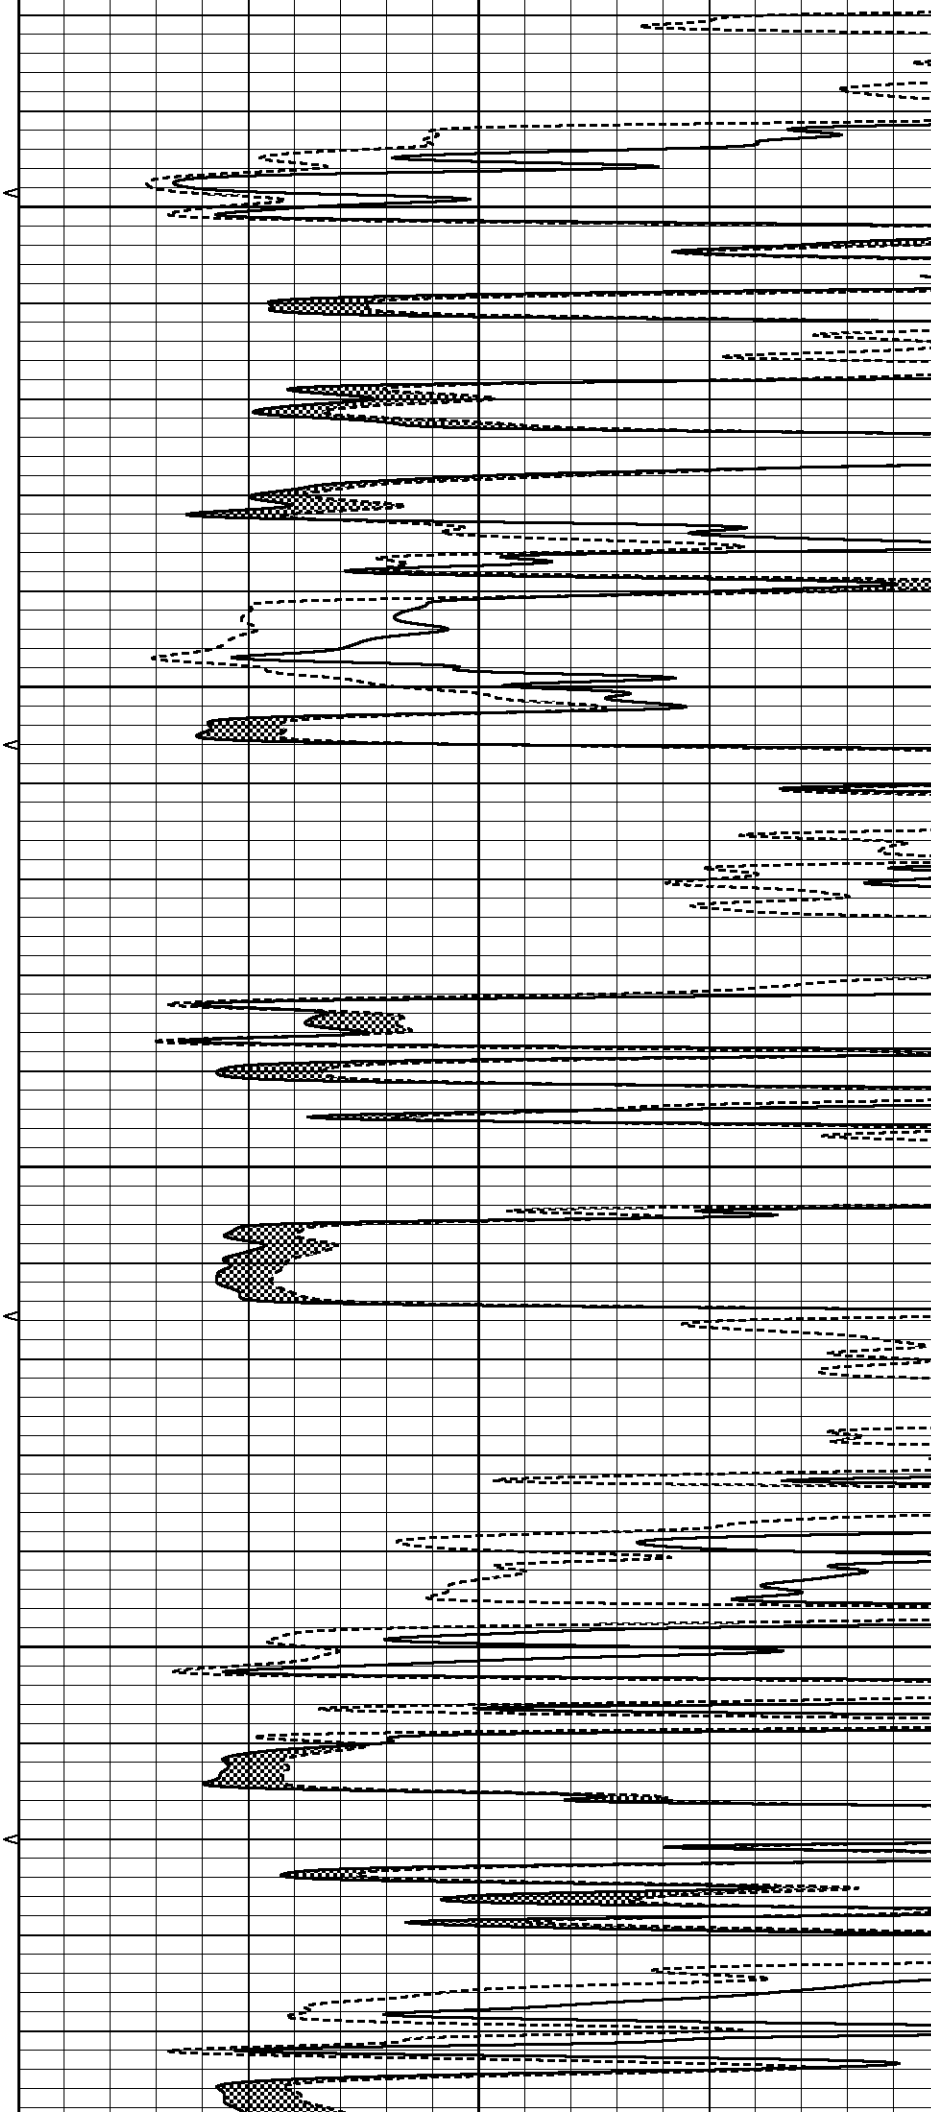

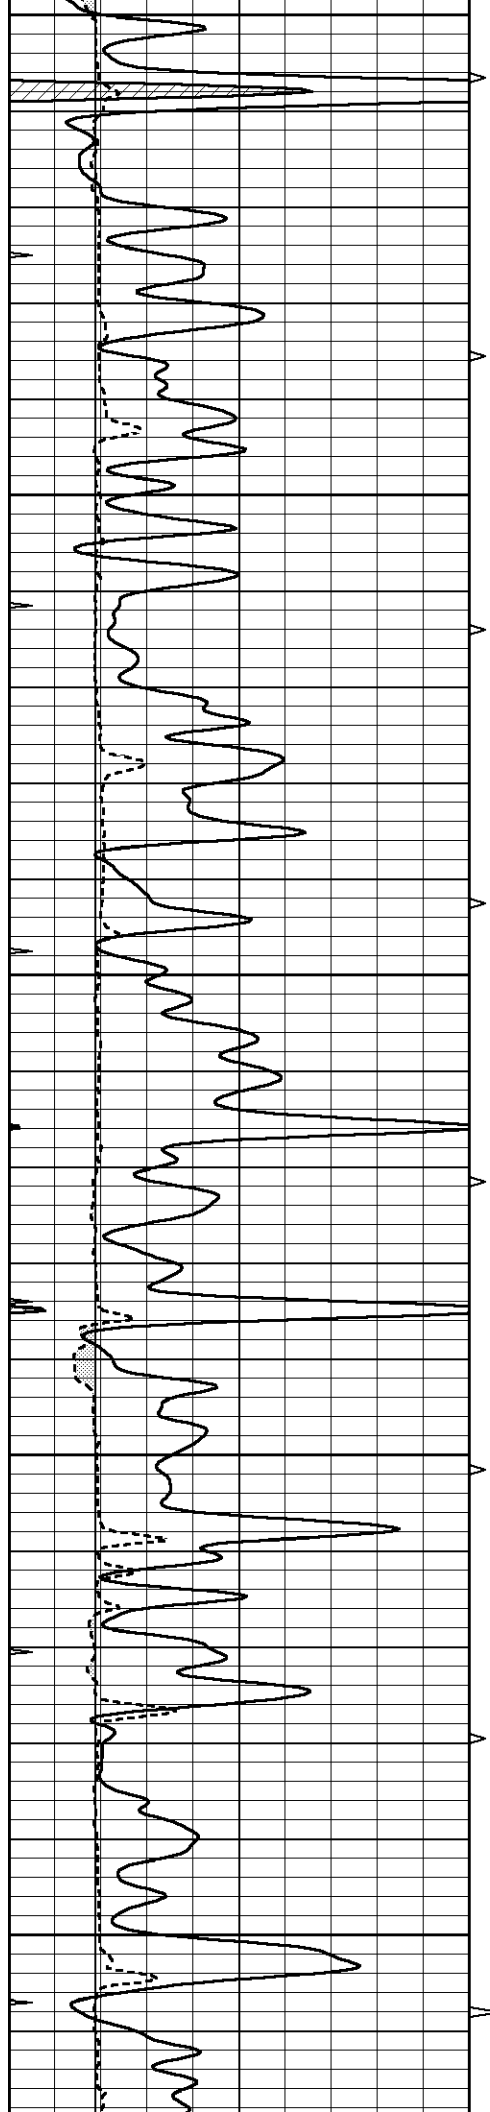


4900


4950

5000

5050

5100

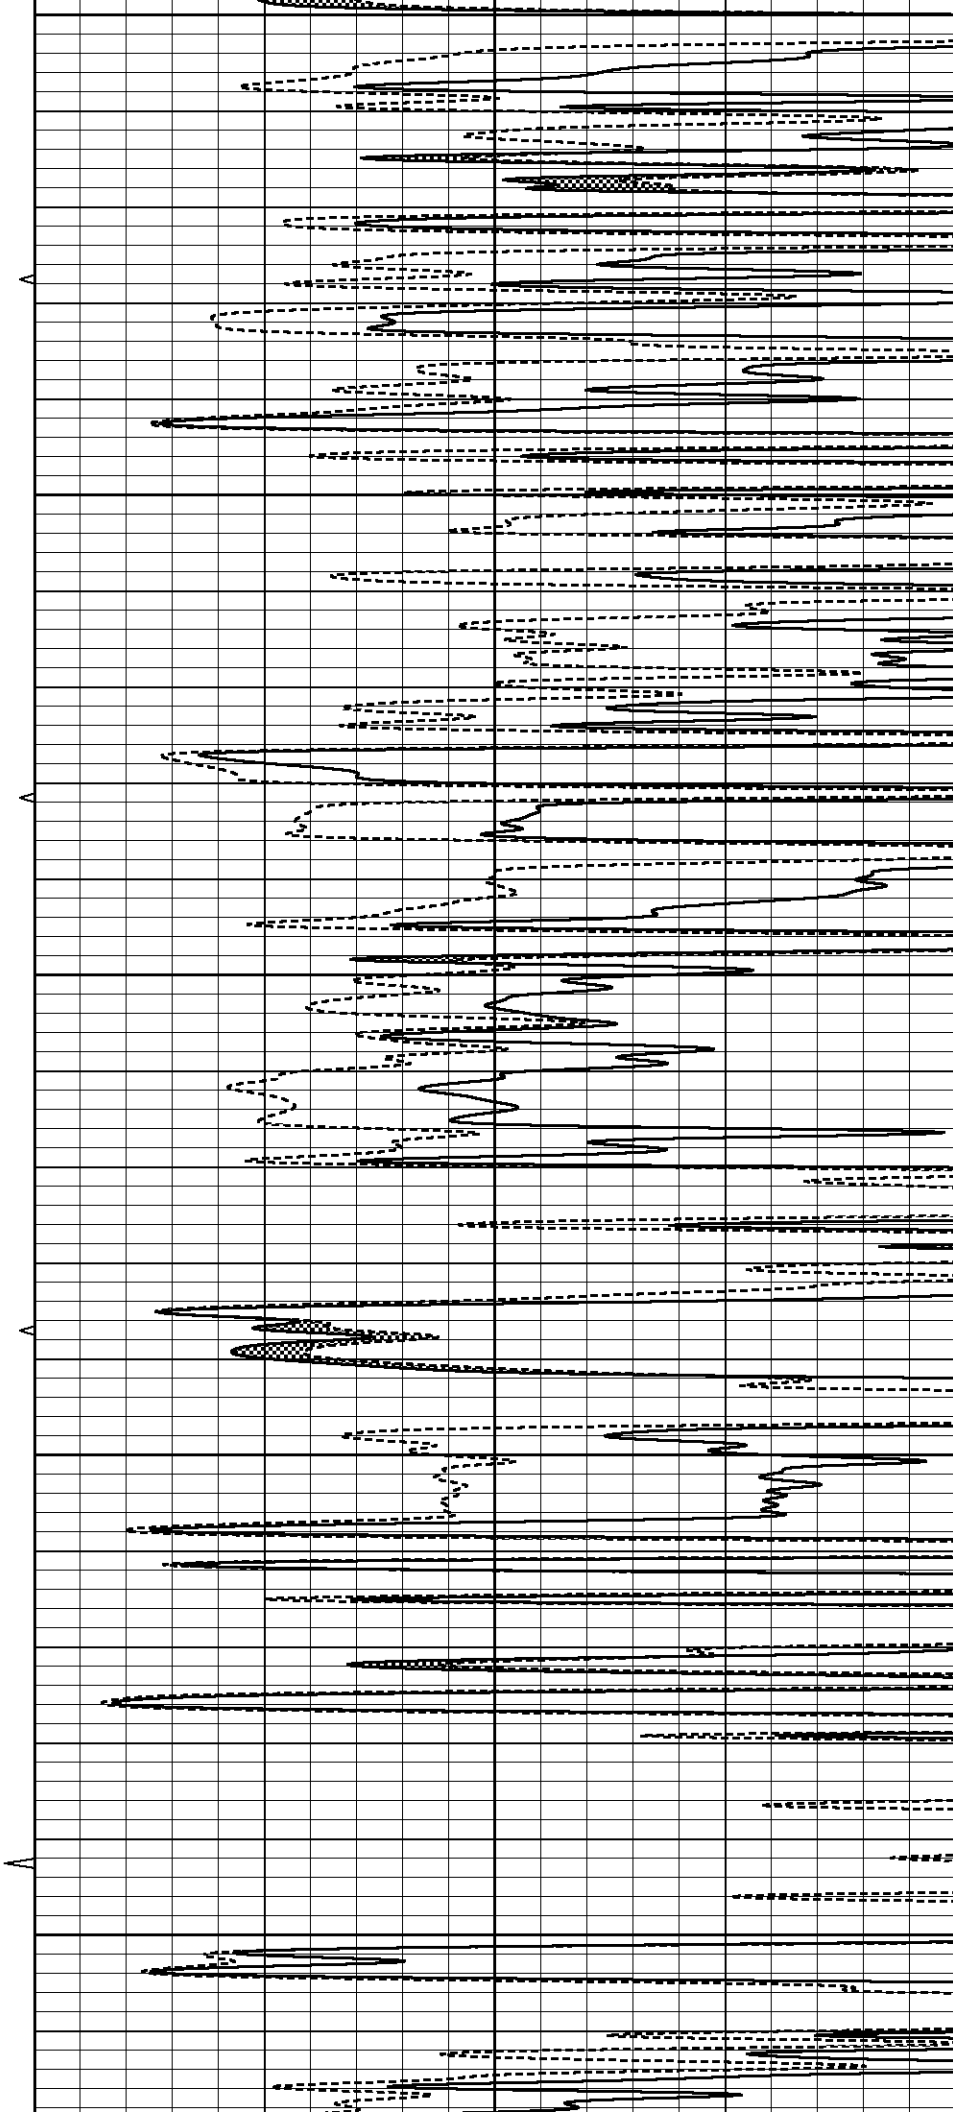

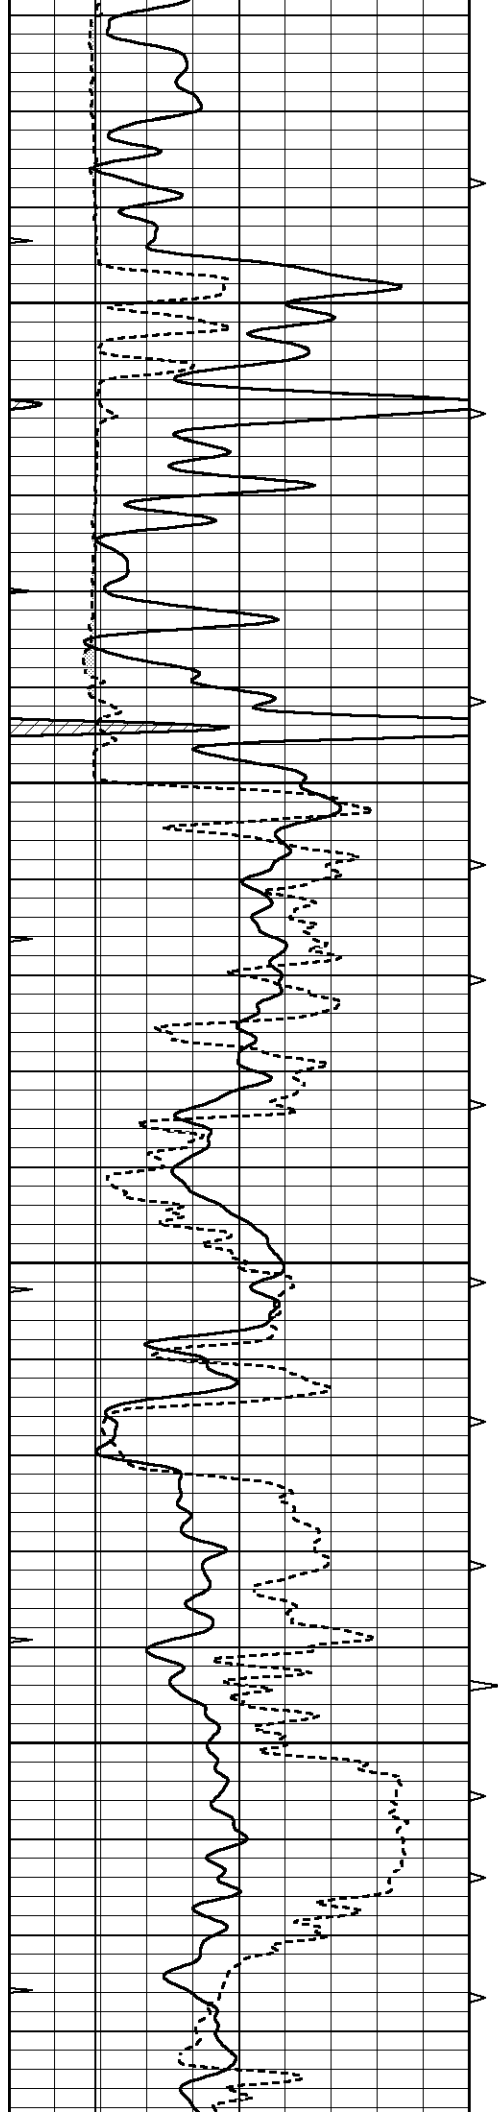



5150


5200

5250

5300

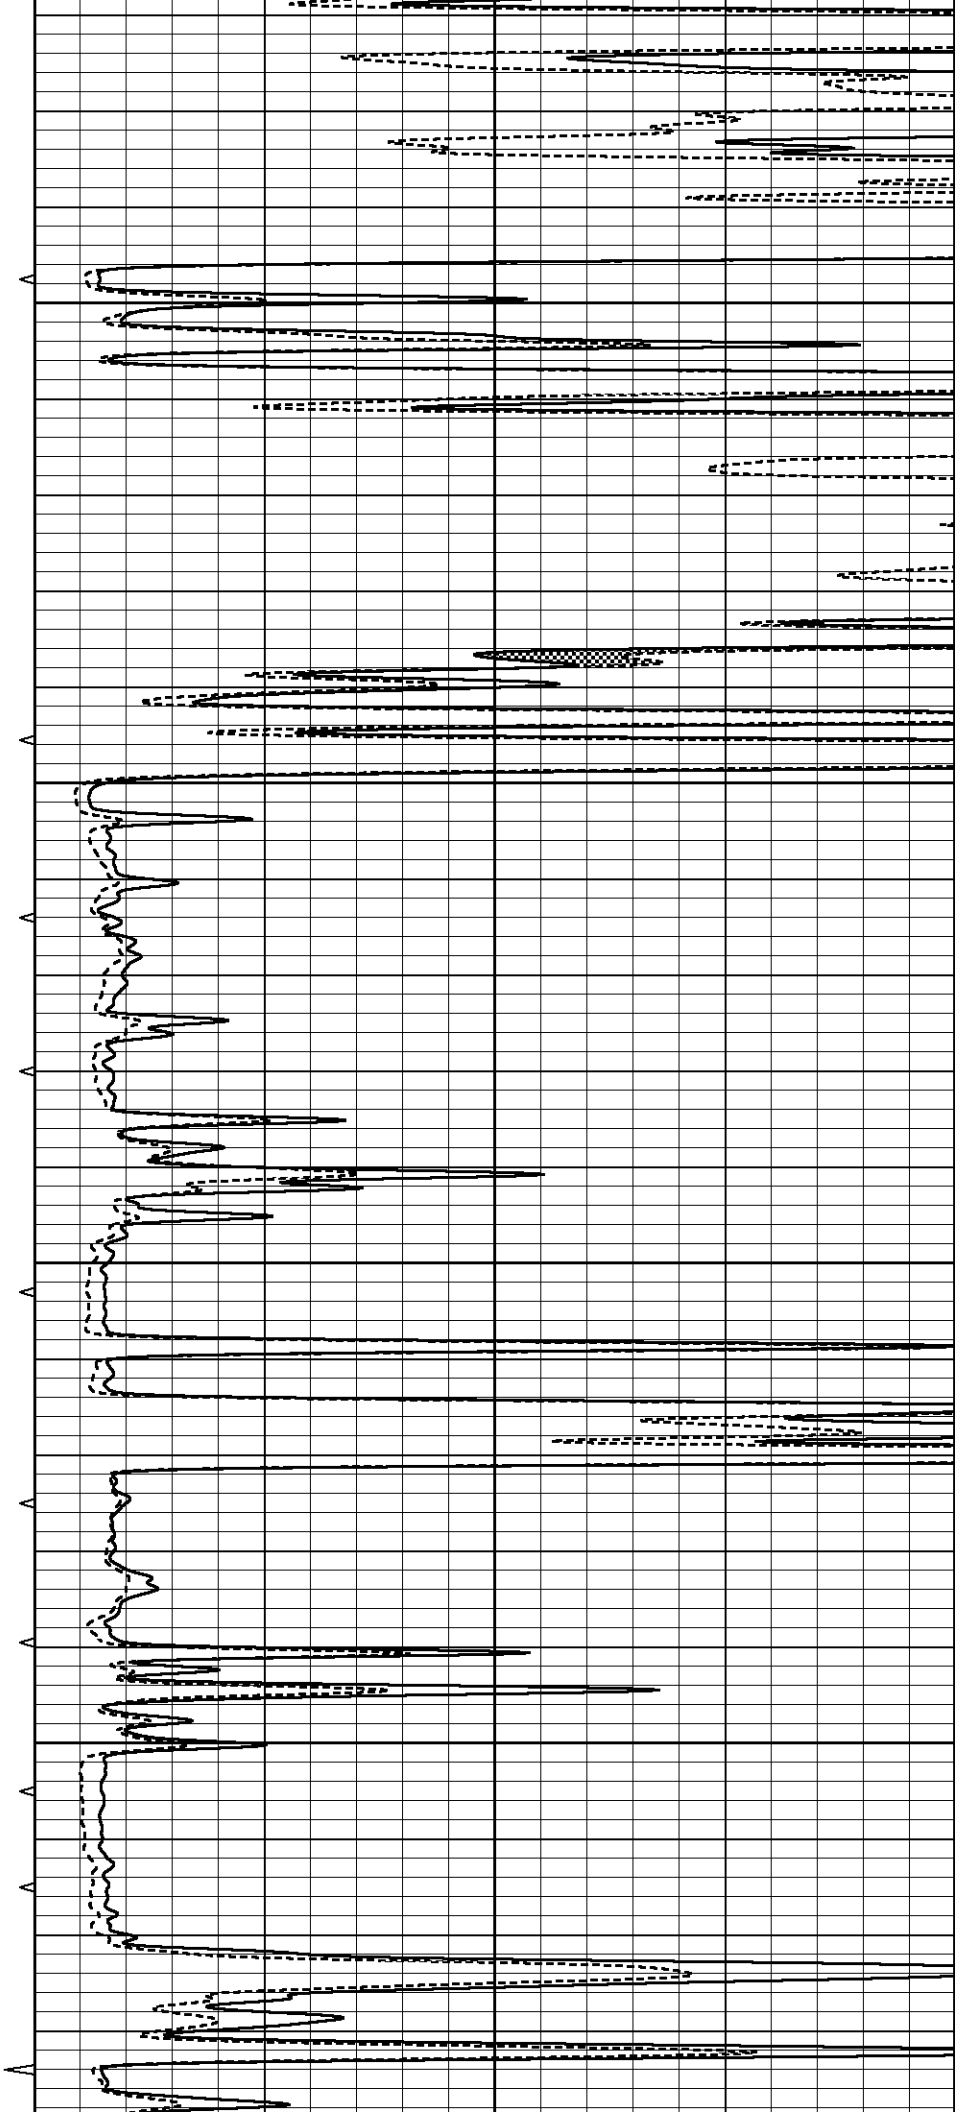

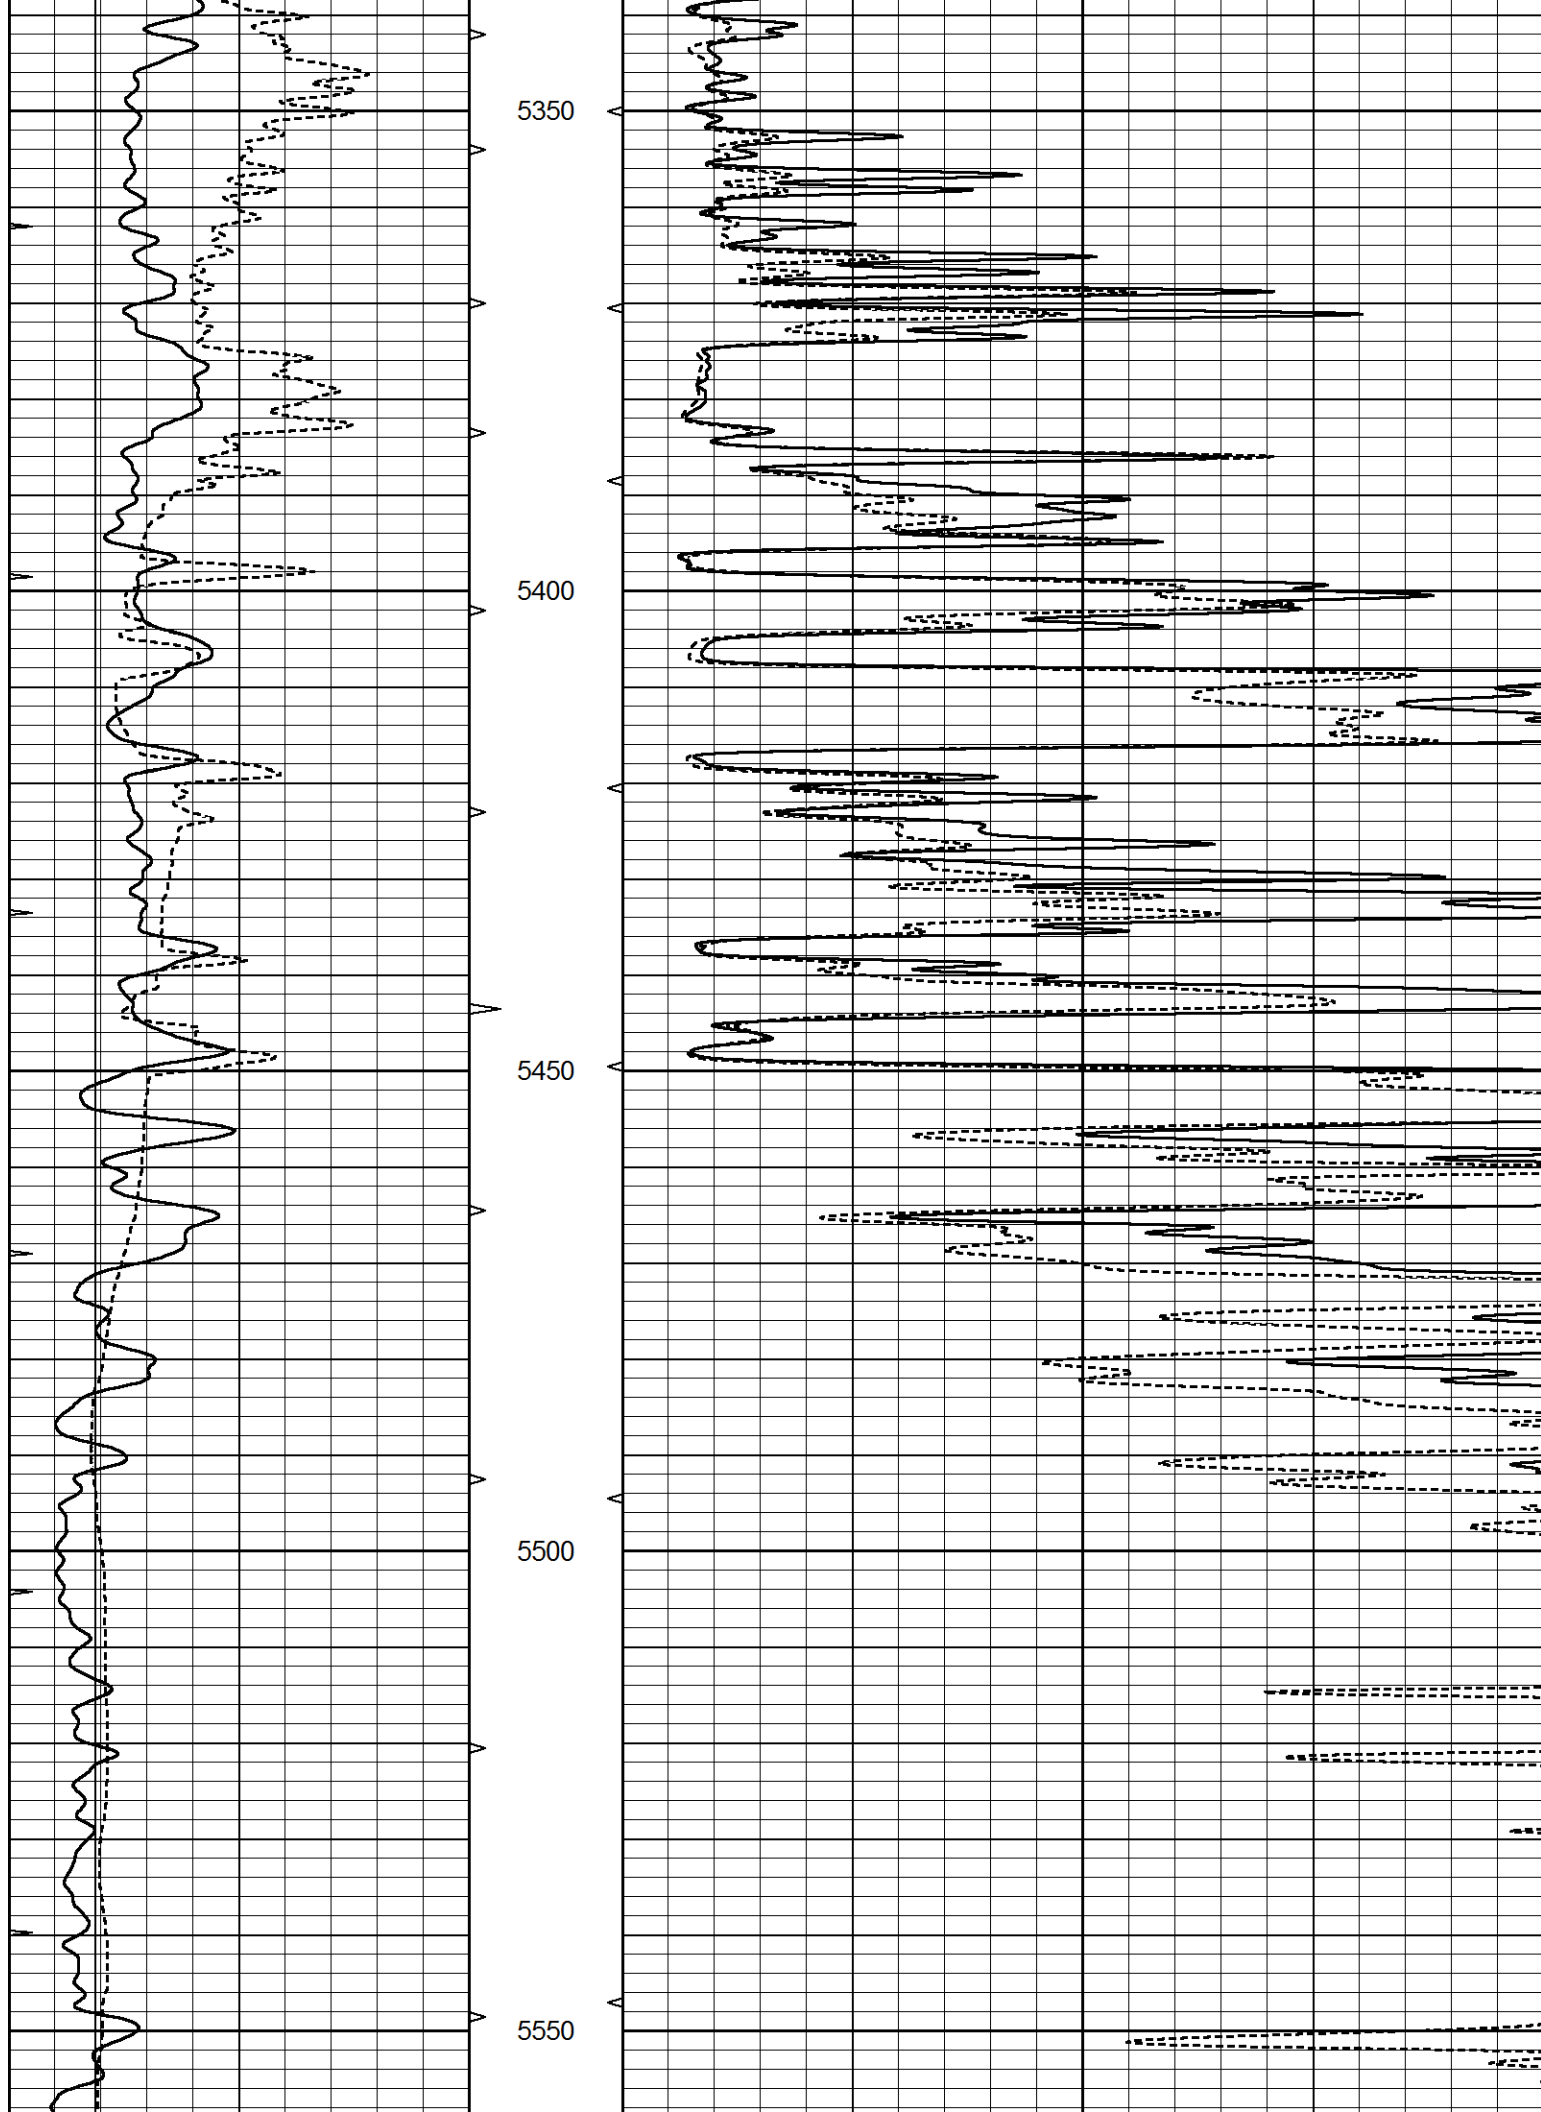

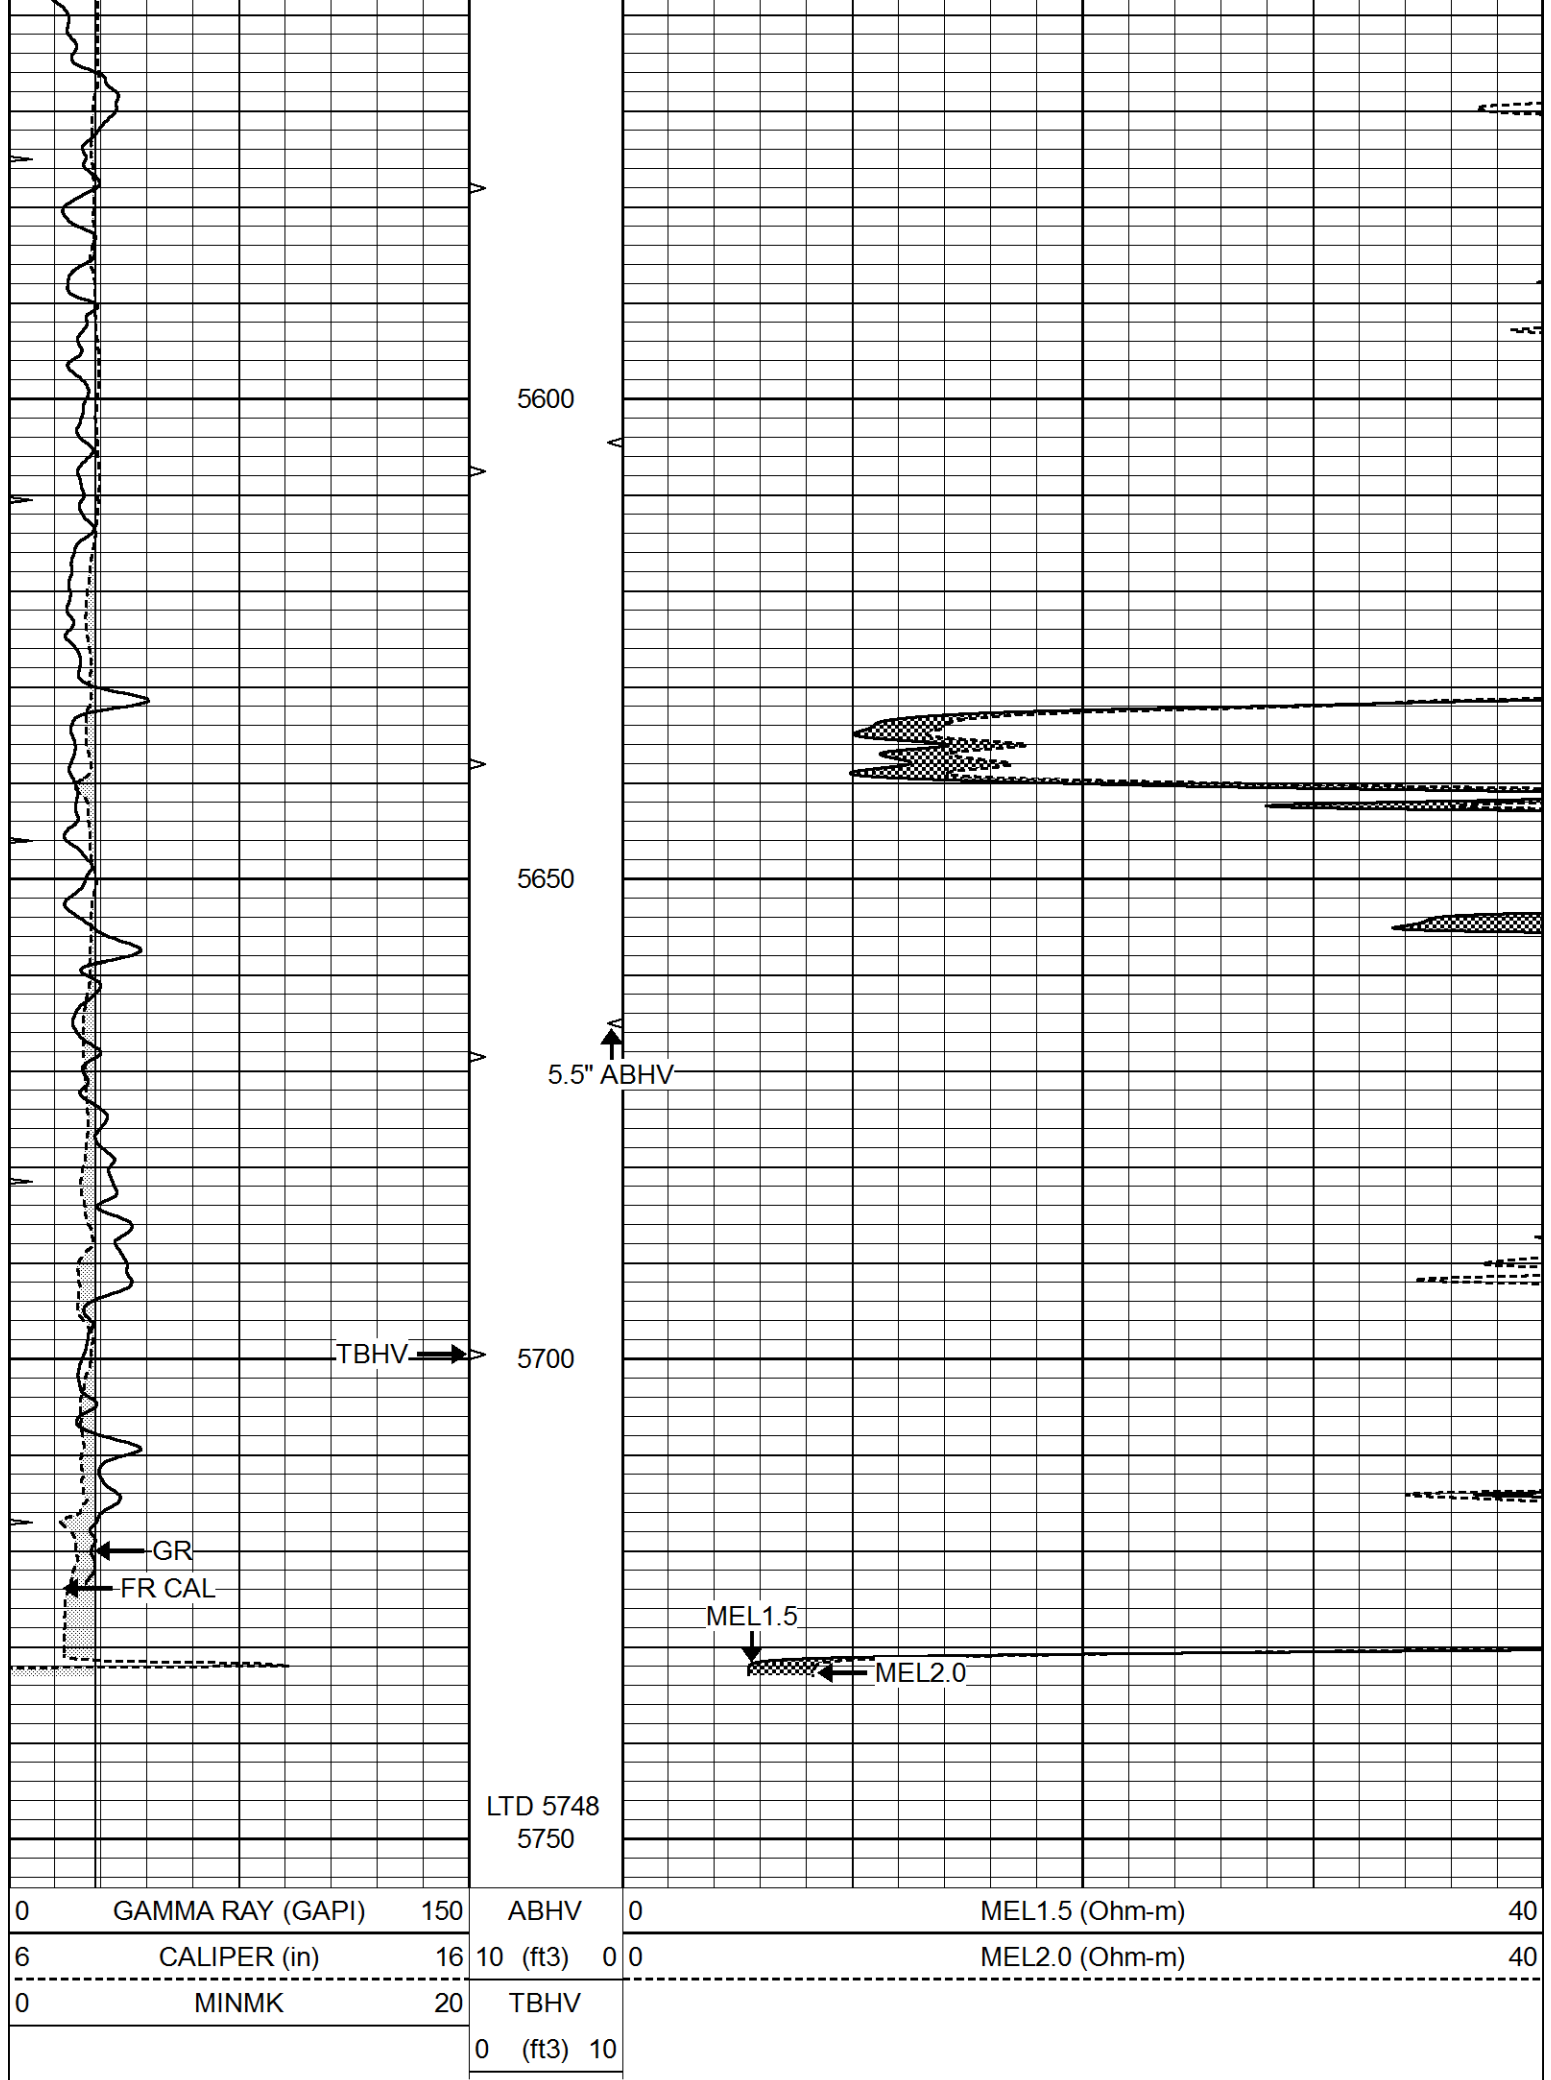





REPEAT SECTION

Database File 6714pe.db
Dataset Pathname pass5.3
Presentation Format _micro
Dataset Creation Mon Jul 18 12:44:25 2022
Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

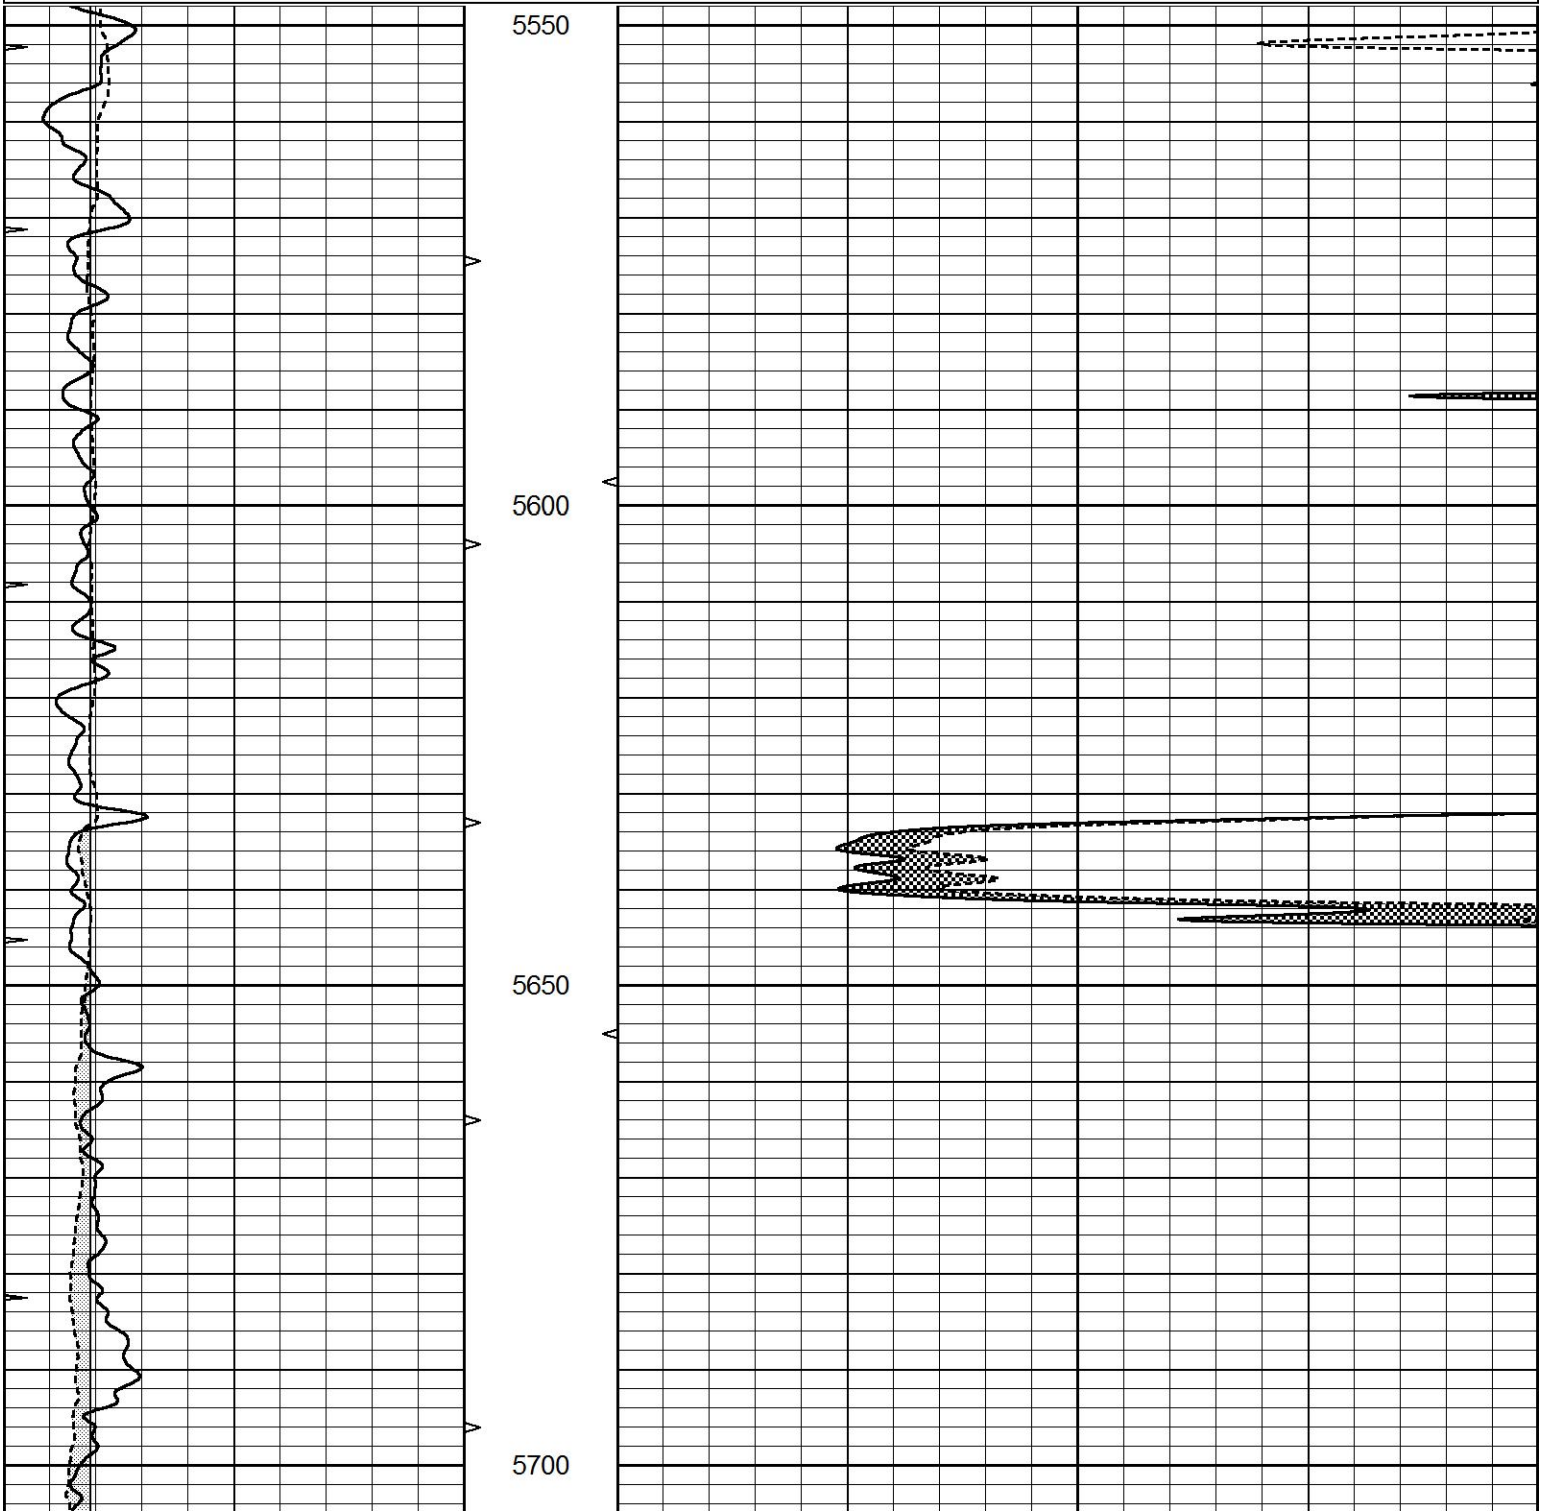

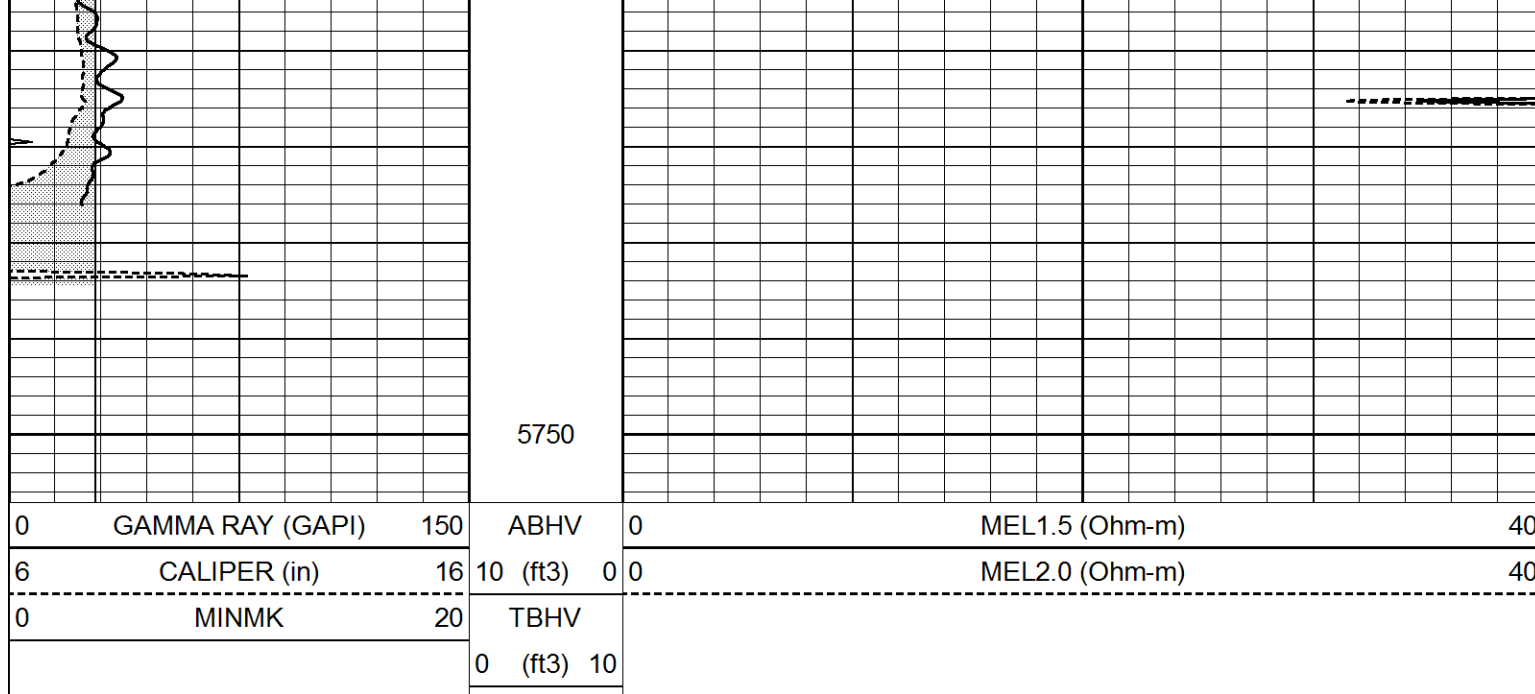

Database File		6714pe.db		Calibration Report	
Dataset Pathname		pass6.4			
Dataset Creation		Mon Jul 18 12:40:38 2022			
MICRO Calibration Report					
Serial Number:		MICRO6			
Tool Model:		PROBE			
Performed:		Mon Jul 18 11:25:25 2022			
Caliper Calibration:		Gain=4.211	Offset=3.368		
References		Low Cal	High Cal		
Readings		8.000	16.000		
		1.100	3.000		
1.5" Calibration:		Gain=46.000	Offset=0.000		
References		Low Cal	High Cal		
Readings		0.000	20.000		
		0.002	0.624		
2" Calibration:		Gain=46.000	Offset=0.000		
References		Low Cal	High Cal		
Readings		0.000	20.000		
		0.006	0.468		
Gamma Ray Calibration Report					
Serial Number:		GR5			
Tool Model:		OPEN			
Performed:		Sun Jul 03 15:33:05 2022			
Calibrator Value:		1.0	GAPI		
Background Reading:		0.0	cps		
Calibrator Reading:		1.0	cps		
Sensitivity:		0.5600	GAPI/cps		