


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County. Sec. 15 Twp. 9S Rge. 19W (E) (W)
Location as "NE/CNW/SW" or footage from lines. 330 FN & EL, SE/4
Lease Owner Phillips Petroleum
Lease Name Nech Well No. 2
Office Address Box 287, Gt. Bend, Kan
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed March, 1951 19____
Application for plugging filed 1-12-67 19____
Application for plugging approved 1-12-67 19____
Plugging commenced 1-23-67 19____
Plugging completed 1-27-67 19____
Reason for abandonment of well or producing formation unconformal

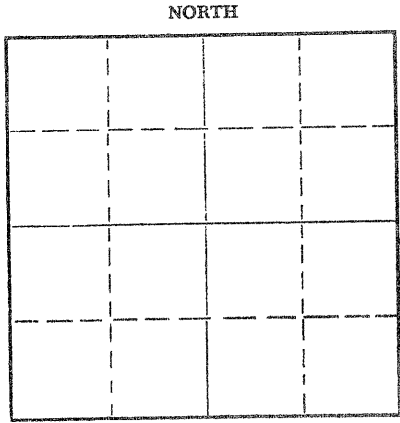

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 5-2-63 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey,
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3511 Feet
Show depth and thickness of all water, oil and gas formations. PTD 3501

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	1483	none
				5 1/2"	3526	2631

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PB 3501 to 3480 w/sand, 5 sx cement to 3433'. Worked casing.
Shot at 2686 and 2625', pulled 2631' of 5 1/2" mudded hole to 300',
rock bridge 300 to 290', 6 yards Ready Mix concrete to surface.
Job complete 4 p.m. 1-26-67. Well P&A.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Knight Casing Pulling Company,
Address Chase, Kansas

STATE OF Kansas COUNTY OF Barton ss.
AT Slagle, Dist. Supt. (employee of owner) ~~an authorized person~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) AT Slagle
Box 287, Gt. Bend, Kan
(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of January, 19 67

My commission expires 10-27-69

Notary Public.

EXPLORATION RECORDLease NechWell 2

Formation Name		Top	Base	Remarks
0	130	Surface sand and clay		
130	1180	Sand and shale		
1180	1285	Red bed, gyp and pyrite		
1285	1404	Shale, shells, red bed and pyrite		
1404	1440	Shale and pyrite		
1440	1485	Anhydrite		
1485	2539	lime and shale		
2539	2619	Lime		
2619	3065	Shale		
3065	3150	Shale and lime		
3150	3349	Lime		
3349	3399	Lime and chert		
3399	3448	Lime and shale		
3448	3490	Lime		
3490	3511	Shale and lime.		

RECEIVED
 STATE GEOLOGICAL COMMISSION
 FEB 1 1967
 2-1-67
 CORRELATION DIVISION
 WICHITA, KANSAS