

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

Rocks

County. Sec. 15 Twp. 9 Rge. (E) 19 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SW $\frac{1}{4}$ NE $\frac{1}{4}$ NW $\frac{1}{4}$

Lease Owner. The Phil-Han Oil Company

Lease Name. Nech Well No. 1

Office Address. 1212 Union National Bank Bldg., Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed. October 19 19 45

Application for plugging filed. October 20 19 45

Application for plugging approved. " 19 45


Plugging commenced. " 19 45

Plugging completed. " 19 45

Reason for abandonment of well or producing formation. Dry Hole

If a producing well is abandoned, date of last production. 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

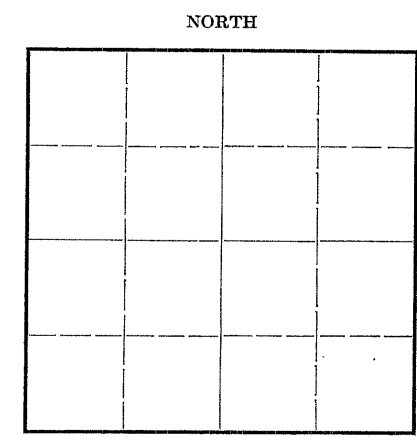

Locate well correctly on above
Section Flat

Name of Conservation Agent who supervised plugging of this well. Kerr - Great Bend, Kansas

Producing formation. Depth to top. Bottom. Total Depth of Well. 3545 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10-3/4"	150'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud from 3545' to bottom of surface pipe. Pushed bottom plug to 145' and cemented with 15 sacks cement. Pushed top plug to 20' and cemented with 10 sacks cement.

PLUGGING
FILE NO. 15 9 1949
BOOK PAGE 30 LINE 3

10-25-45

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. The Phil-Han Oil Company
Address. 1212 Union National Bank Bldg., Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, SS.
Perry R. Hanson

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Perry R. Hanson

1212 Union National Bank Bldg., Wichita, Kans.
(Address)

SUBSCRIBED AND SWORN to before me this 23rd day of October 19 45

My commission expires Oct. 4, 1949.

Notary Public

WELL LOG

#1 NECH
The Phil-Han Oil Company

SW NE SW Sec. 15-9-19W
Rocks County, Kansas

Comm: 10-3-45
Camp: 10-19-45

Elevation: 2079'
Production: D & A

surface	0
shale & shells	5
sand	95
shale	330
shells, sand & shale	525
shale & sand	925
shale & shells	960
sand	1190
shale & red bed	1462
Anhydrite	1509
red bed & shale	1650
shale, lime & shells	1845
salt & shale	1855
shale & lime	2055
lime	2730
lime & shale	3080
lime	3195
shale & lime	3260
lime	3470
shale & lime	3510
lime	3945

T.D.

CASING RECORD:

Set 10-3/4" Surface Casing at 150'
w/70 sacks cement.

STATE OF KANSAS)
) ss
SEDGWICK COUNTY)

FILE 15 9 19W
BOOK 30 3

We hereby affirm that the above and foregoing is a true and correct copy of the log of the #1 Nech, located in the SW NE SW of Section 15-9-19W, Rocks County, Kansas.

THE PHIL-HAN OIL COMPANY
By Perry D. Hanson

Subscribed and sworn to before me this 23rd day of October, 1945.

Allen A. Steuberg
Notary Public

My com. expires Oct. 4, 1949.