COMPENSATED DENSITY/NEUTRON LOG

Company PALOMINO PETROLEUM, INC.
Well FOLLOW THAT DREAM #1
Field WILDCAT
County LANE State KANSAS

Company PALOMINO PETROLEUM, INC.
Well FOLLOW THAT DREAM #1
Field WILDCAT
County LANE
State KANSAS

Location: API # : 15-101-22678-0000
1948' FNL & 472' FEL
SW - NE - SE - NE
SEC 11 TWP 17S RGE 27W

Other Services
DIL/MEL

Permanent Datum GROUND LEVEL Elevation 2605
Log Measured From KELLY BUSHING 5' A.G.L
Drilling Measured From KELLY BUSHING

Elevation
K.B. 2610
D.F. 2608
G.L. 2605

Date	8/9/22		
Run Number	ONE		
Depth Driller	4600		
Depth Logger	4602		
Bottom Logged Interval	4578		
Top Log Interval	3400		
Casing Driller	8 5/8" @ 219		
Casing Logger	219		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3200 PPM	
Density / Viscosity	9.0/59		
pH / Fluid Loss	10.5/5.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.40 @ 70F		
Rmf @ Meas. Temp	1.05 @ 70F		
Rmc @ Meas. Temp	1.68 @ 70F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.803 @ 122F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	8:00 A.M.		
Maximum Recorded Temperature	122F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	COLE ROBBEN		
Witnessed By	KIM SHOEMAKER		

<<< Fold Here >>>

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:

FROM UTICA, KANSAS GO 5 MILES WEST ON HIGHWAY 4 TO WICHITA ROAD, THEN 2 MILES SOUTH TO 240 ROAD, 1/2 MILE WEST, THEN FOLLOW TRAIL SOUTH 1.8 MILES TO LOCATION

MAIN SECTION

Database File	6768ddn.db
Dataset Pathname	pass6DT
Presentation Format	_den_neu
Dataset Creation	Tue Aug 09 09:58:21 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	AVTX	30	COMPENSATED DENSITY (pu) -10
0	MINMK	20	10 (ft3) 0	30	COMPENSATED NEUTRON (pu) -10
6	CALIPER (in)	16	BVTX	-0.25	CORRECTION (g/cc) 0.25
			0 (ft3) 10		

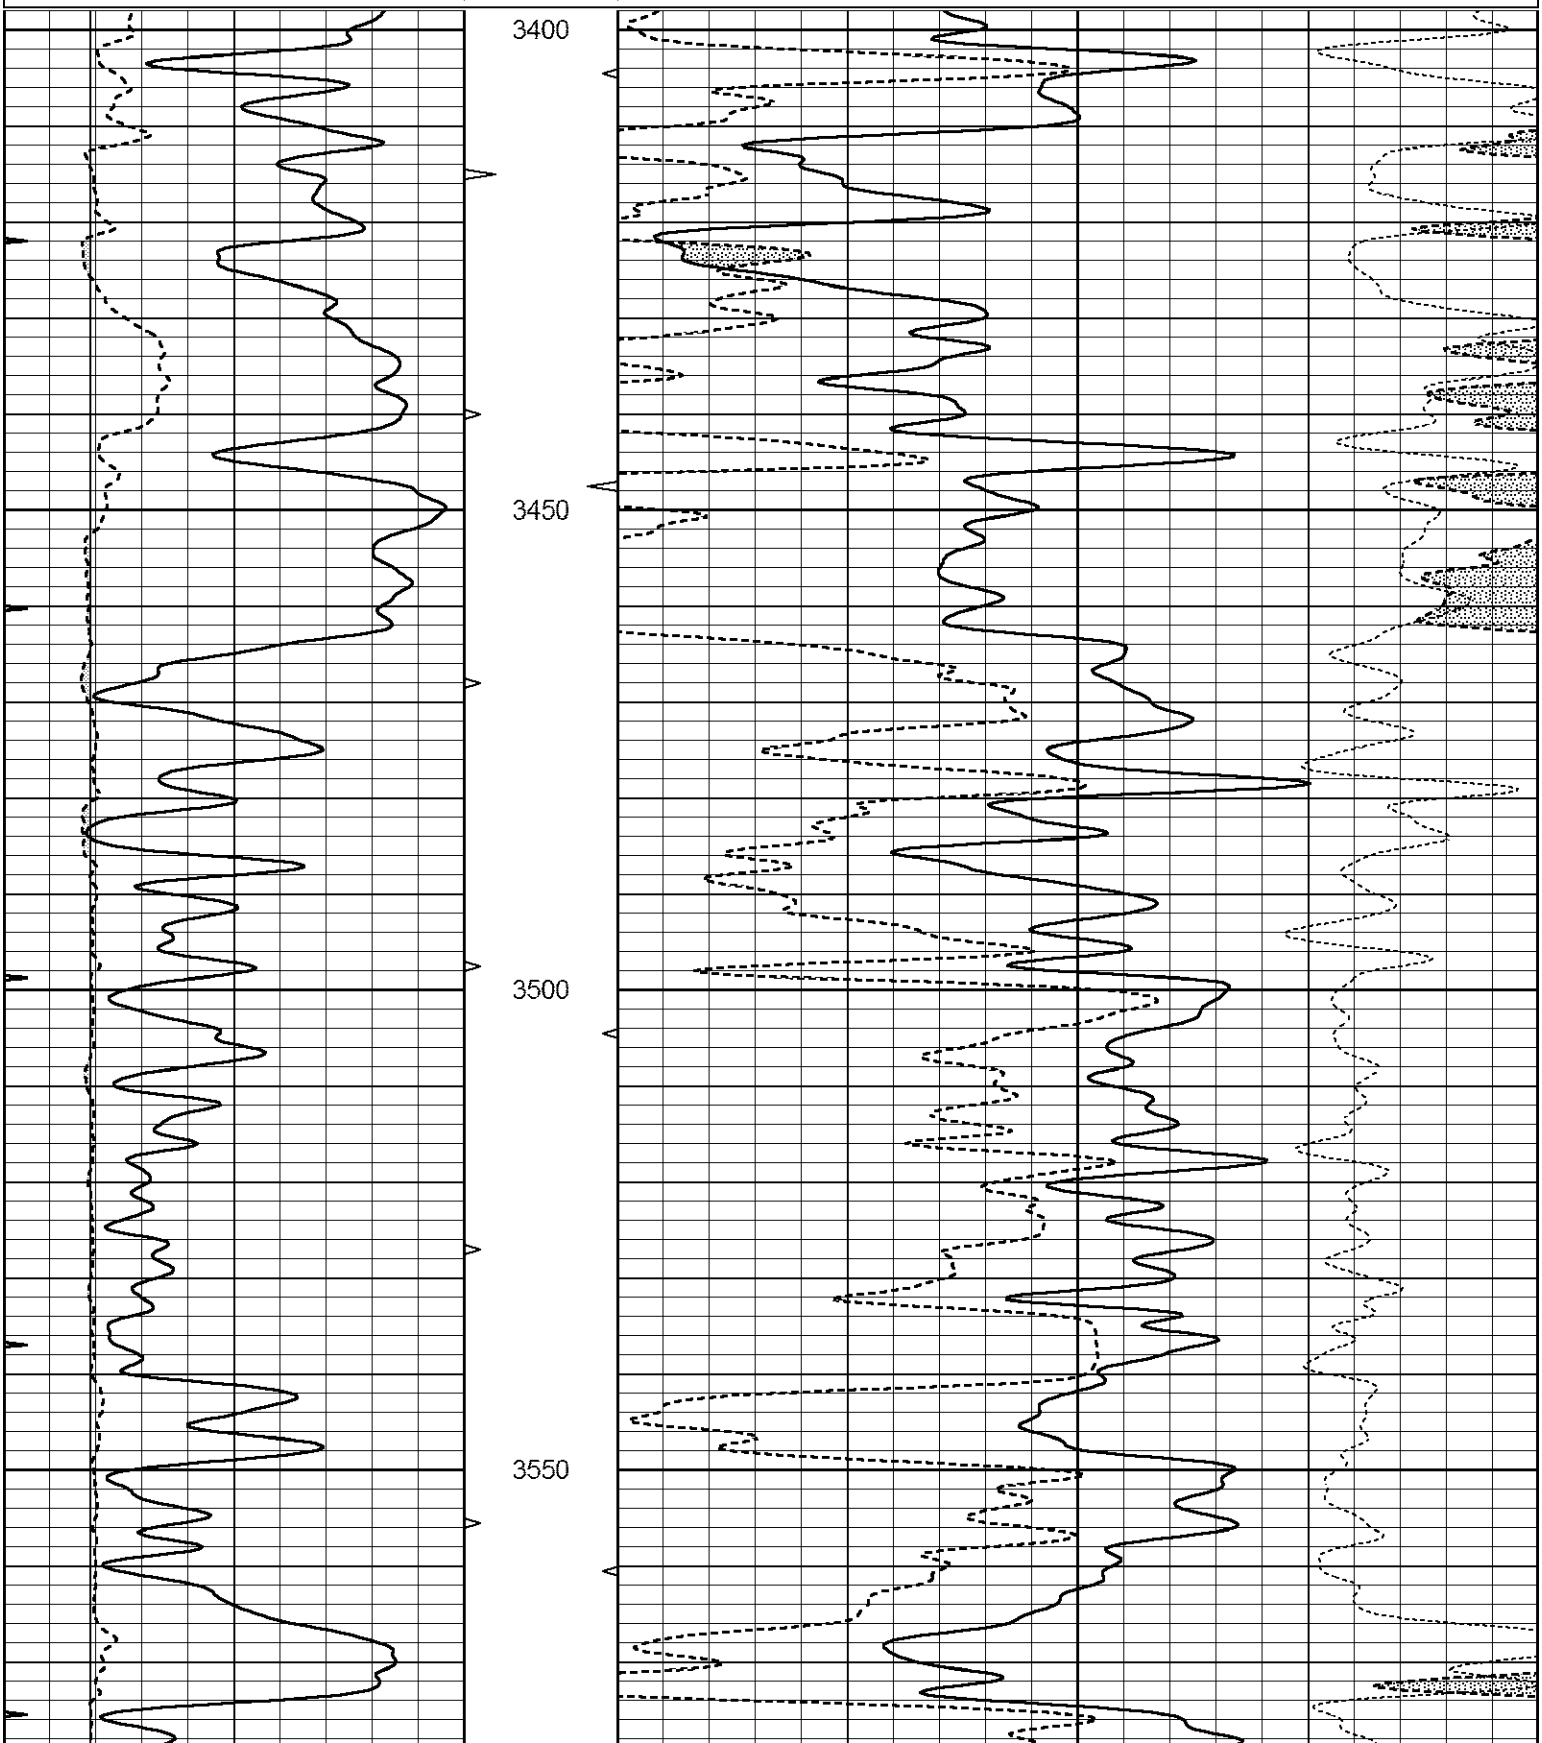

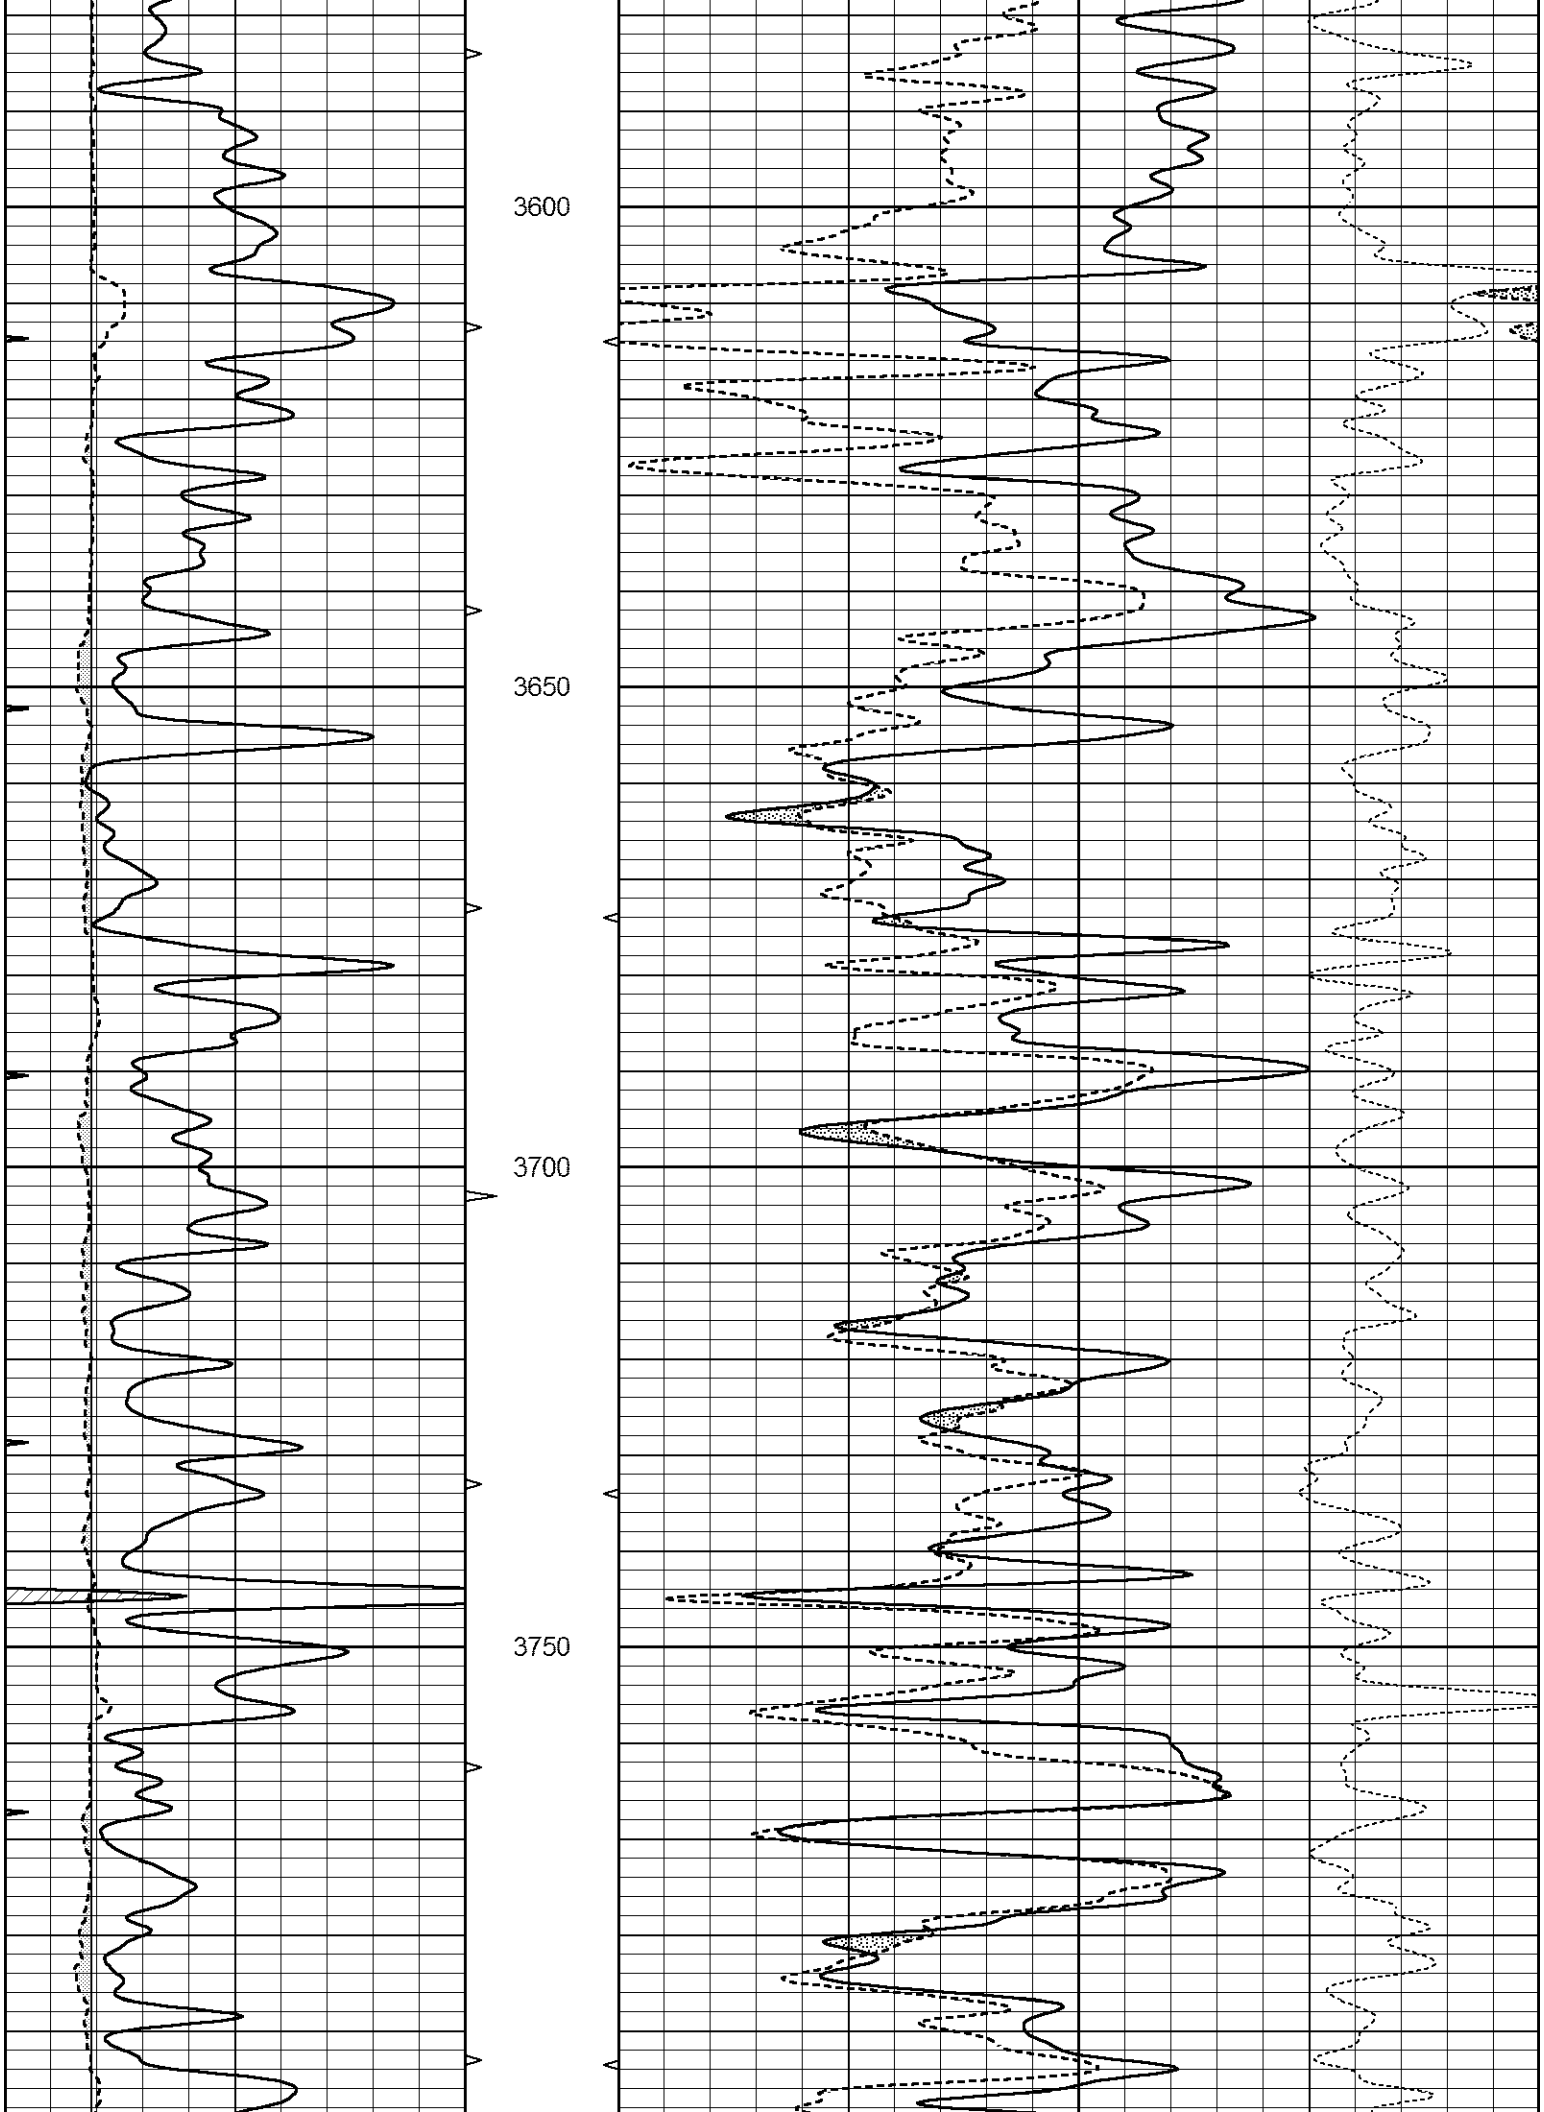
3600
3650
3700
3750

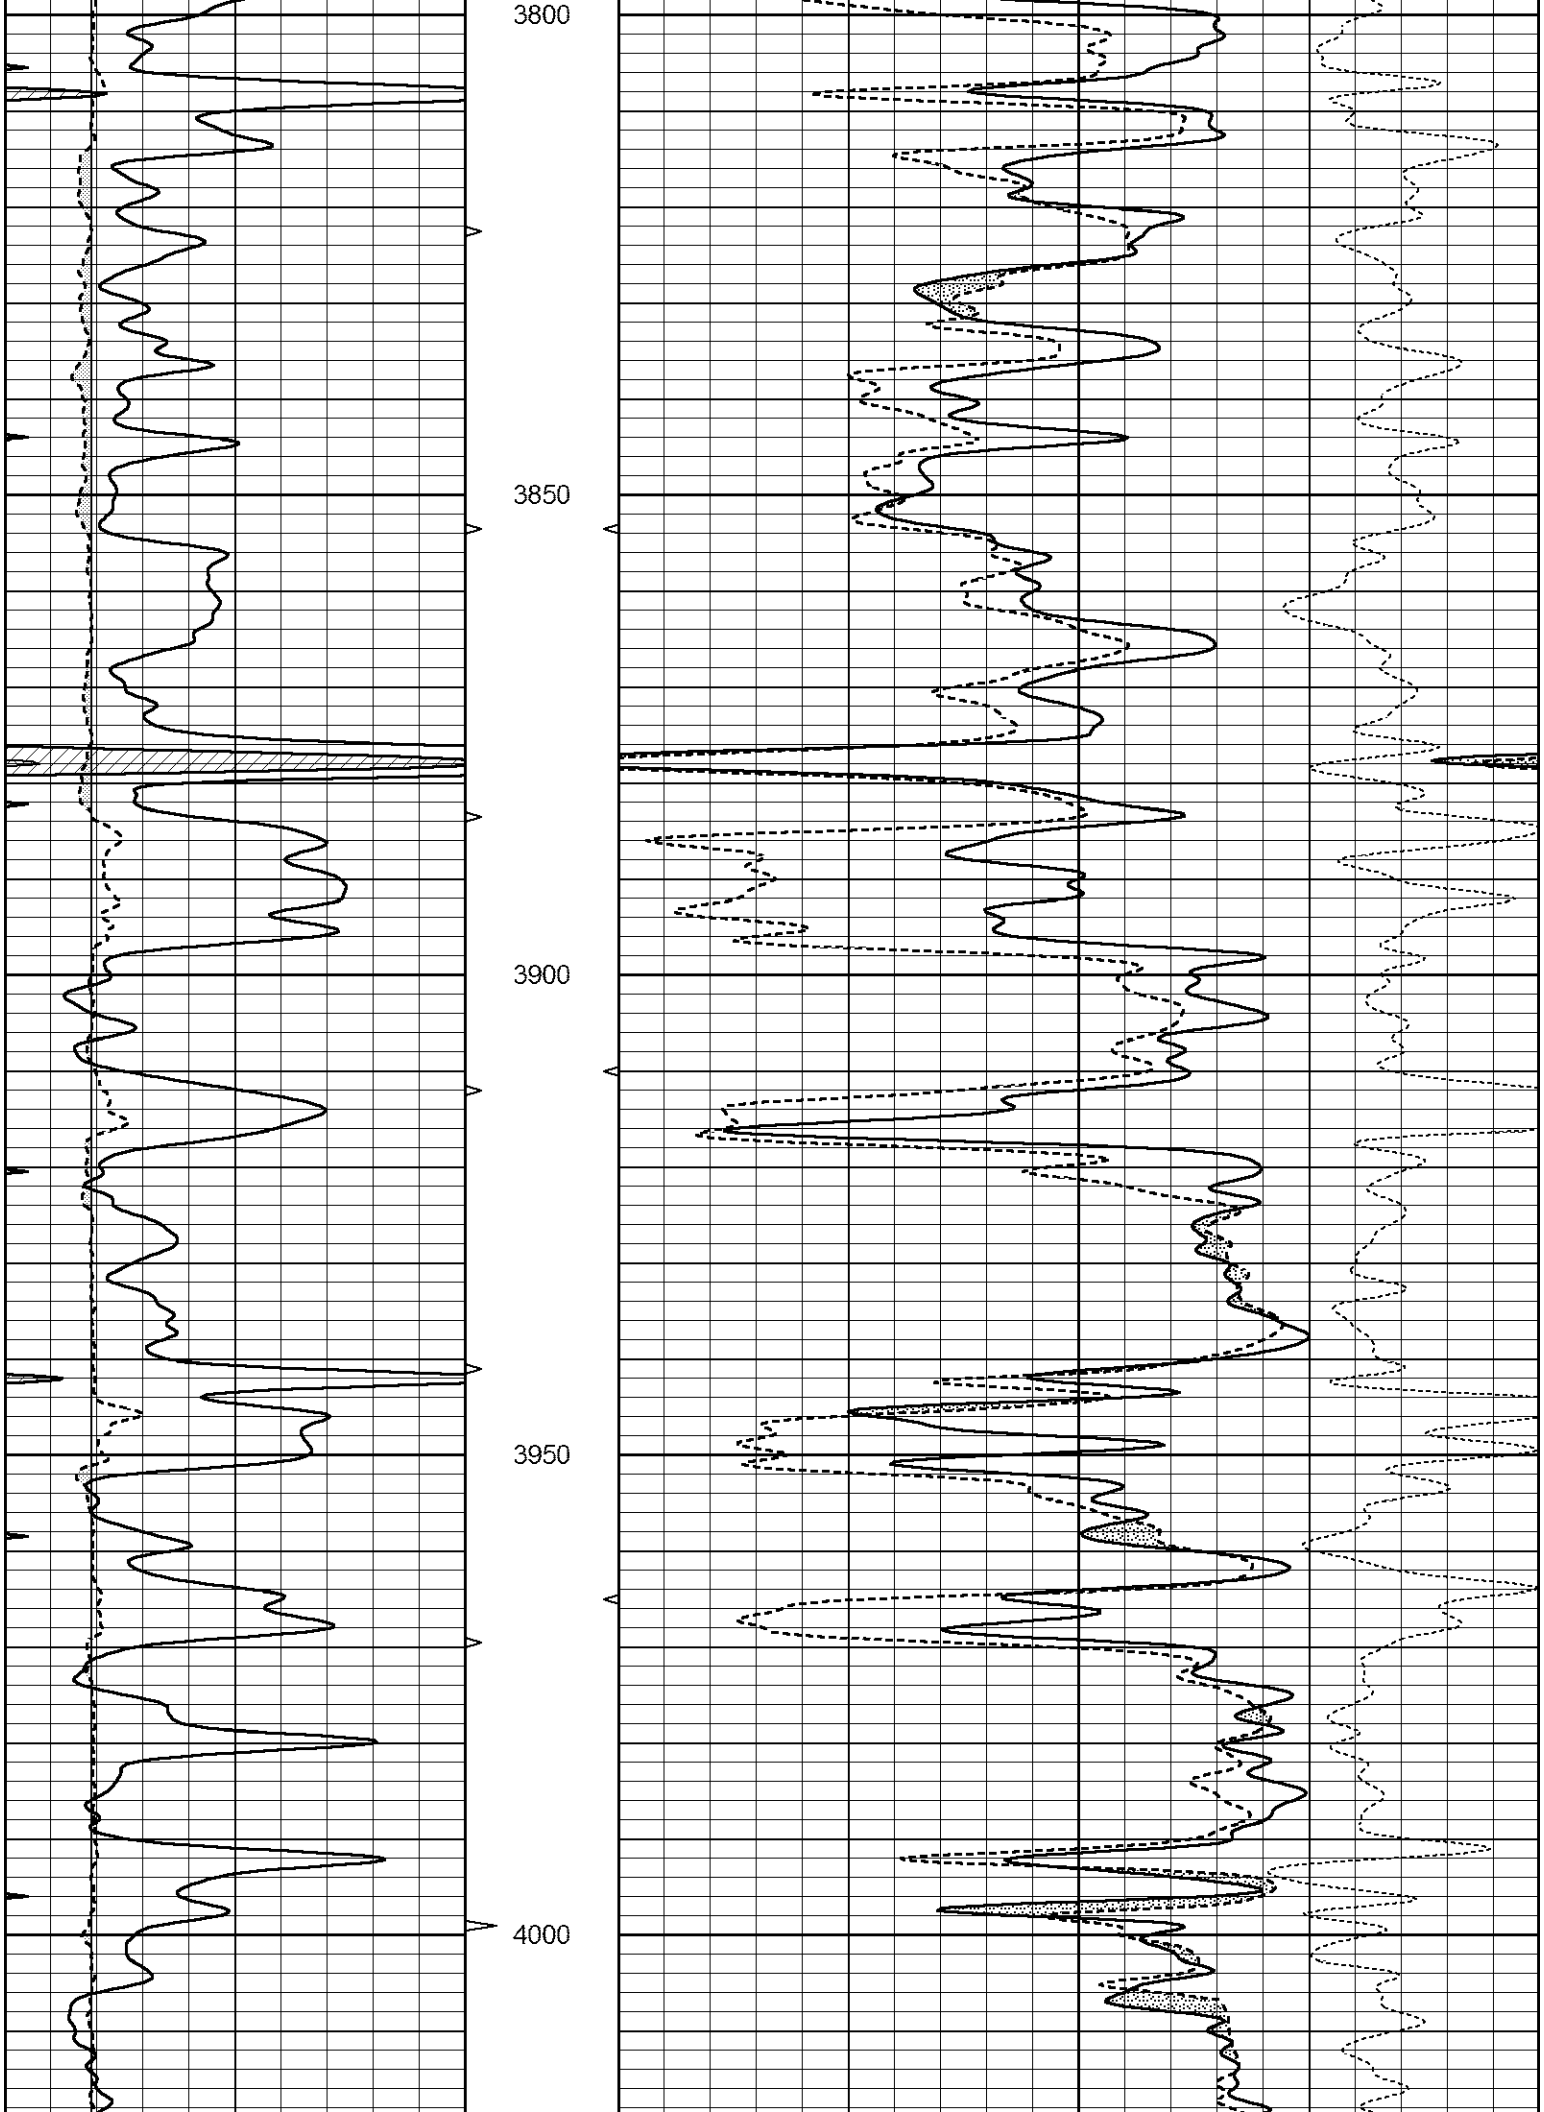
3800
3850
3900
3950
4000

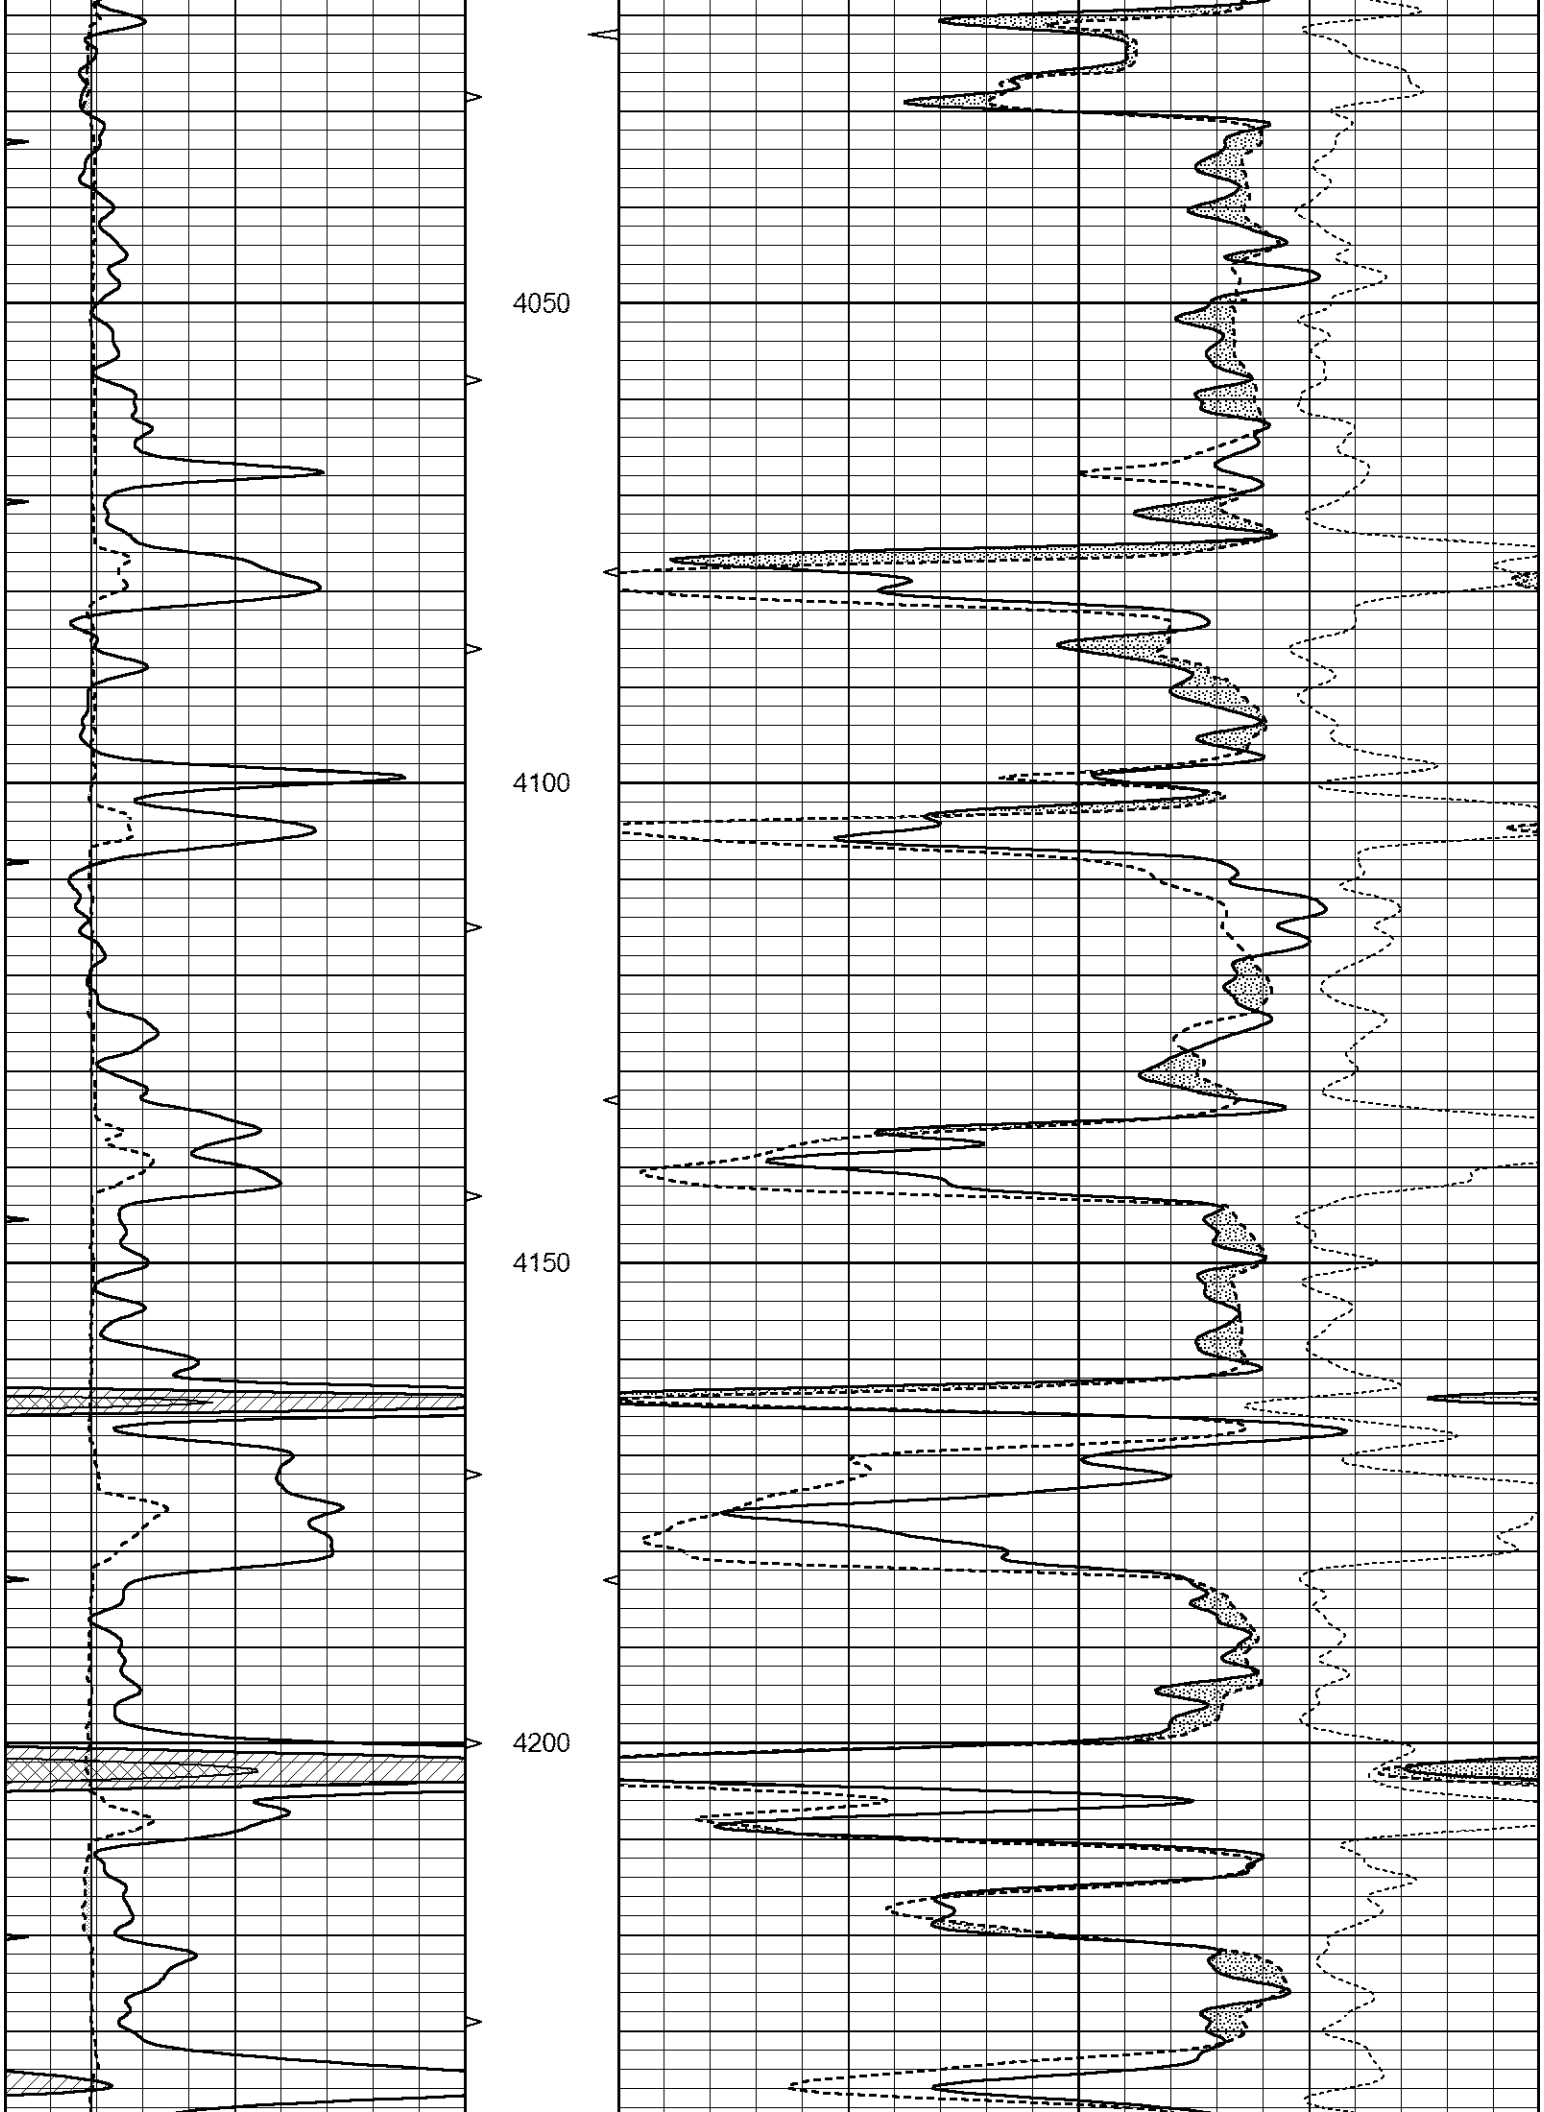
4050
4100
4150
4200

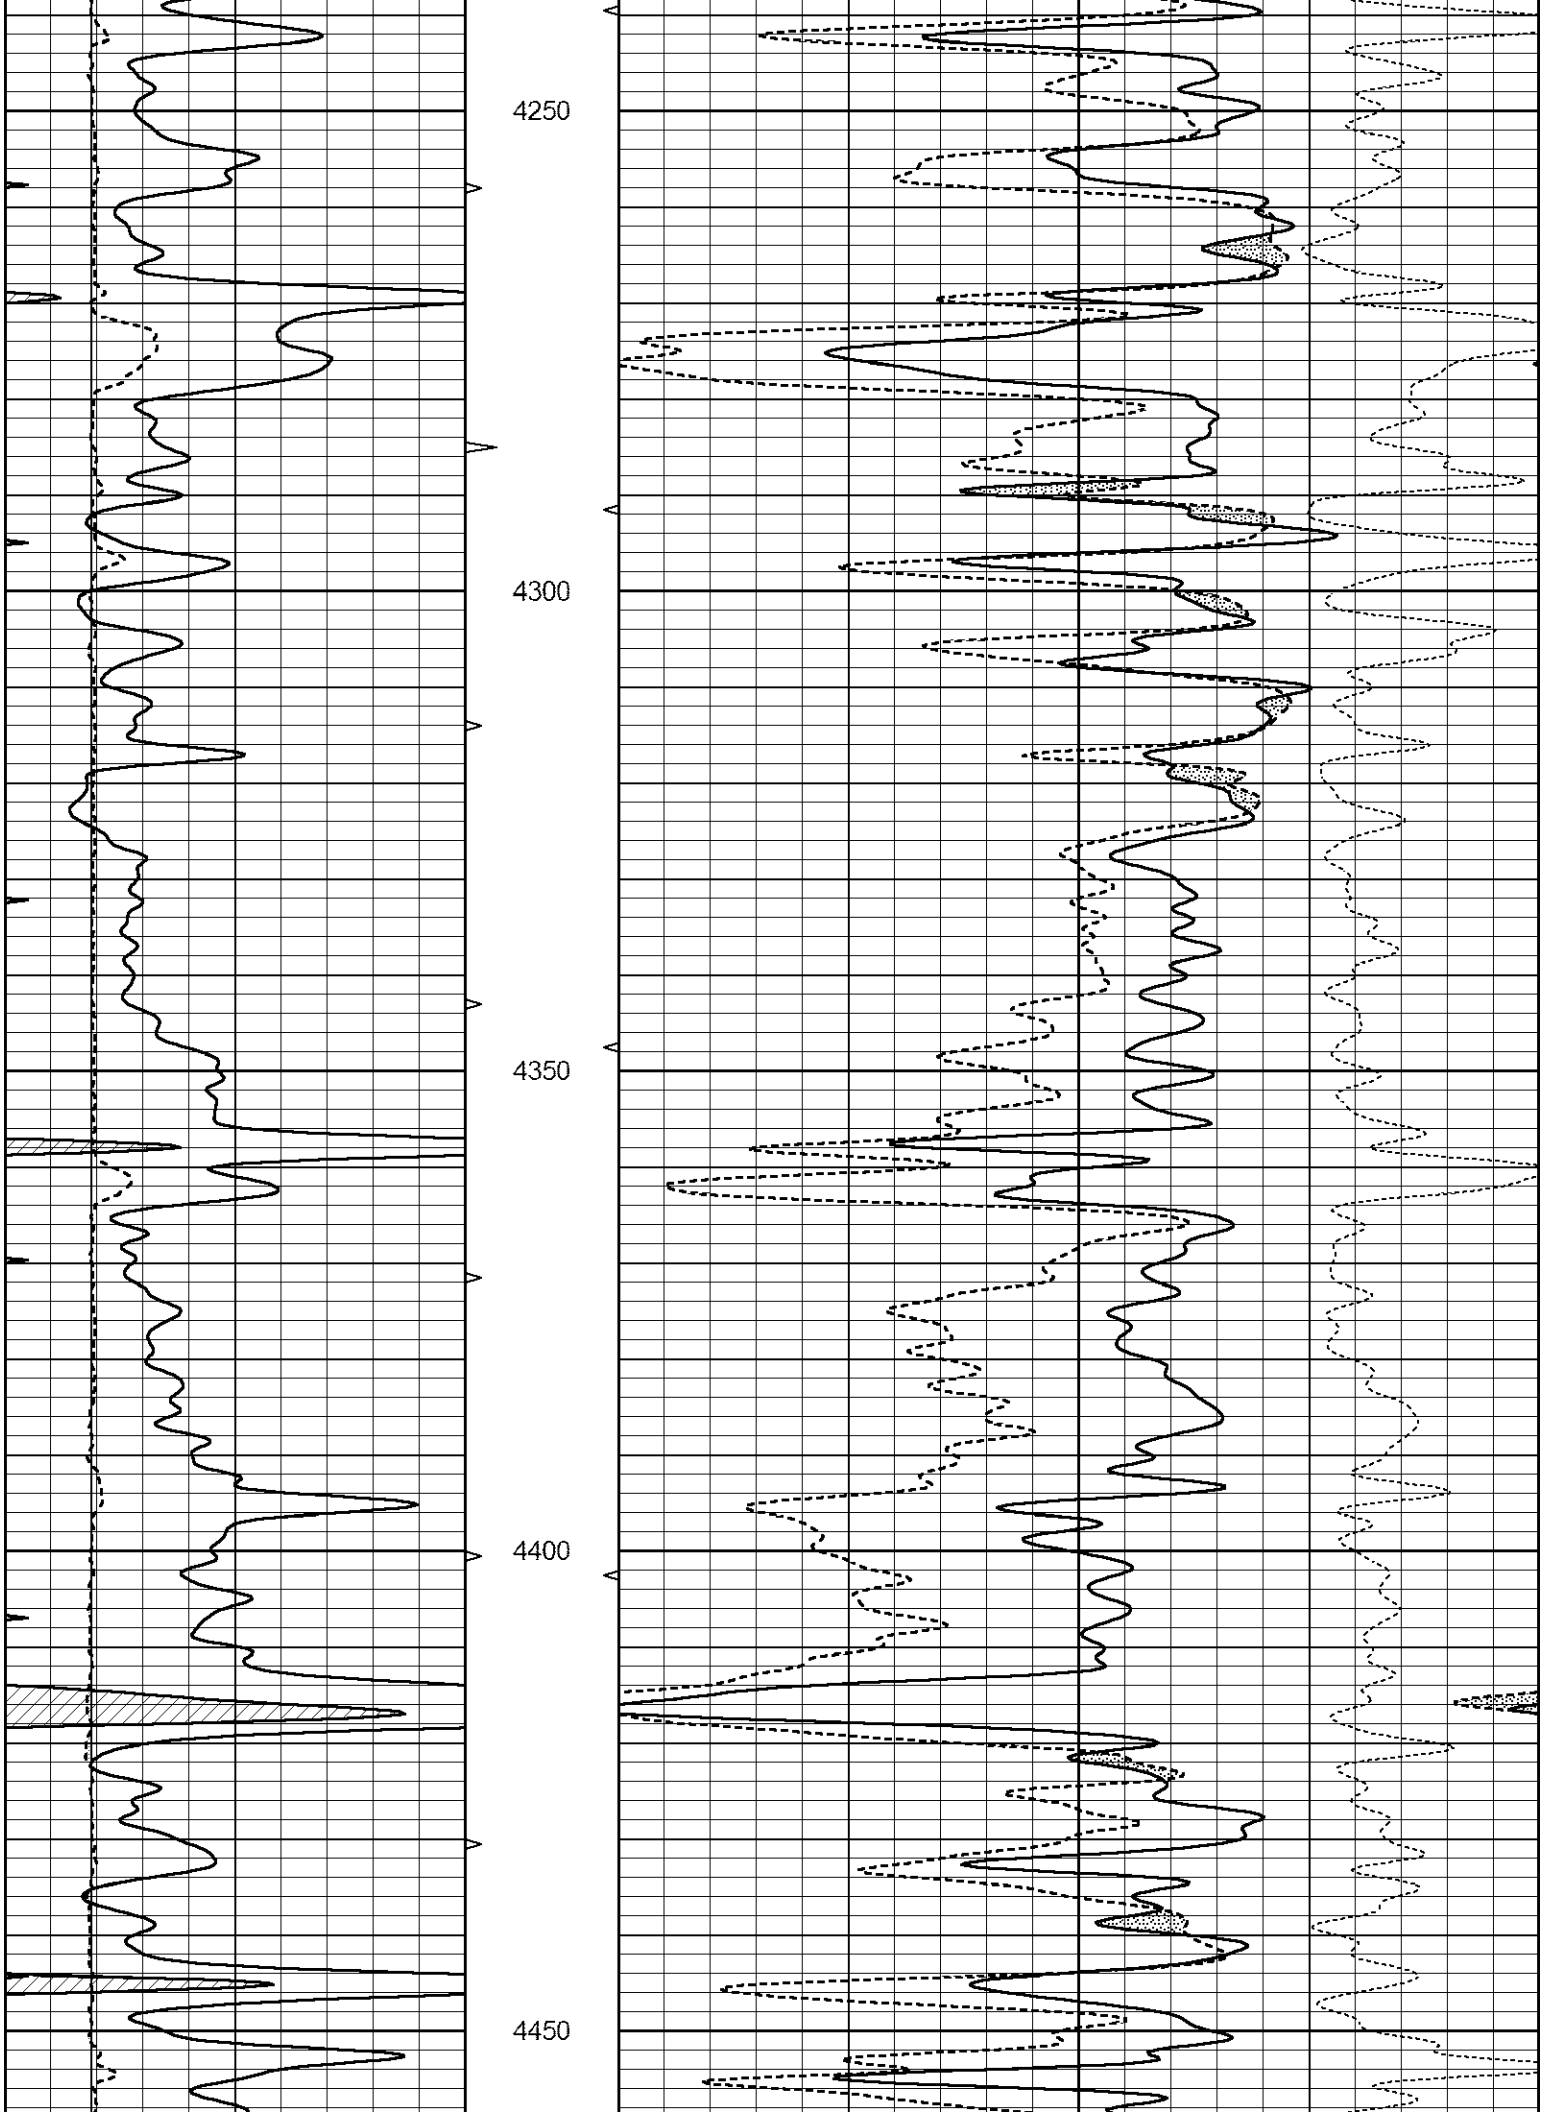
4250
4300
4350
4400
4450

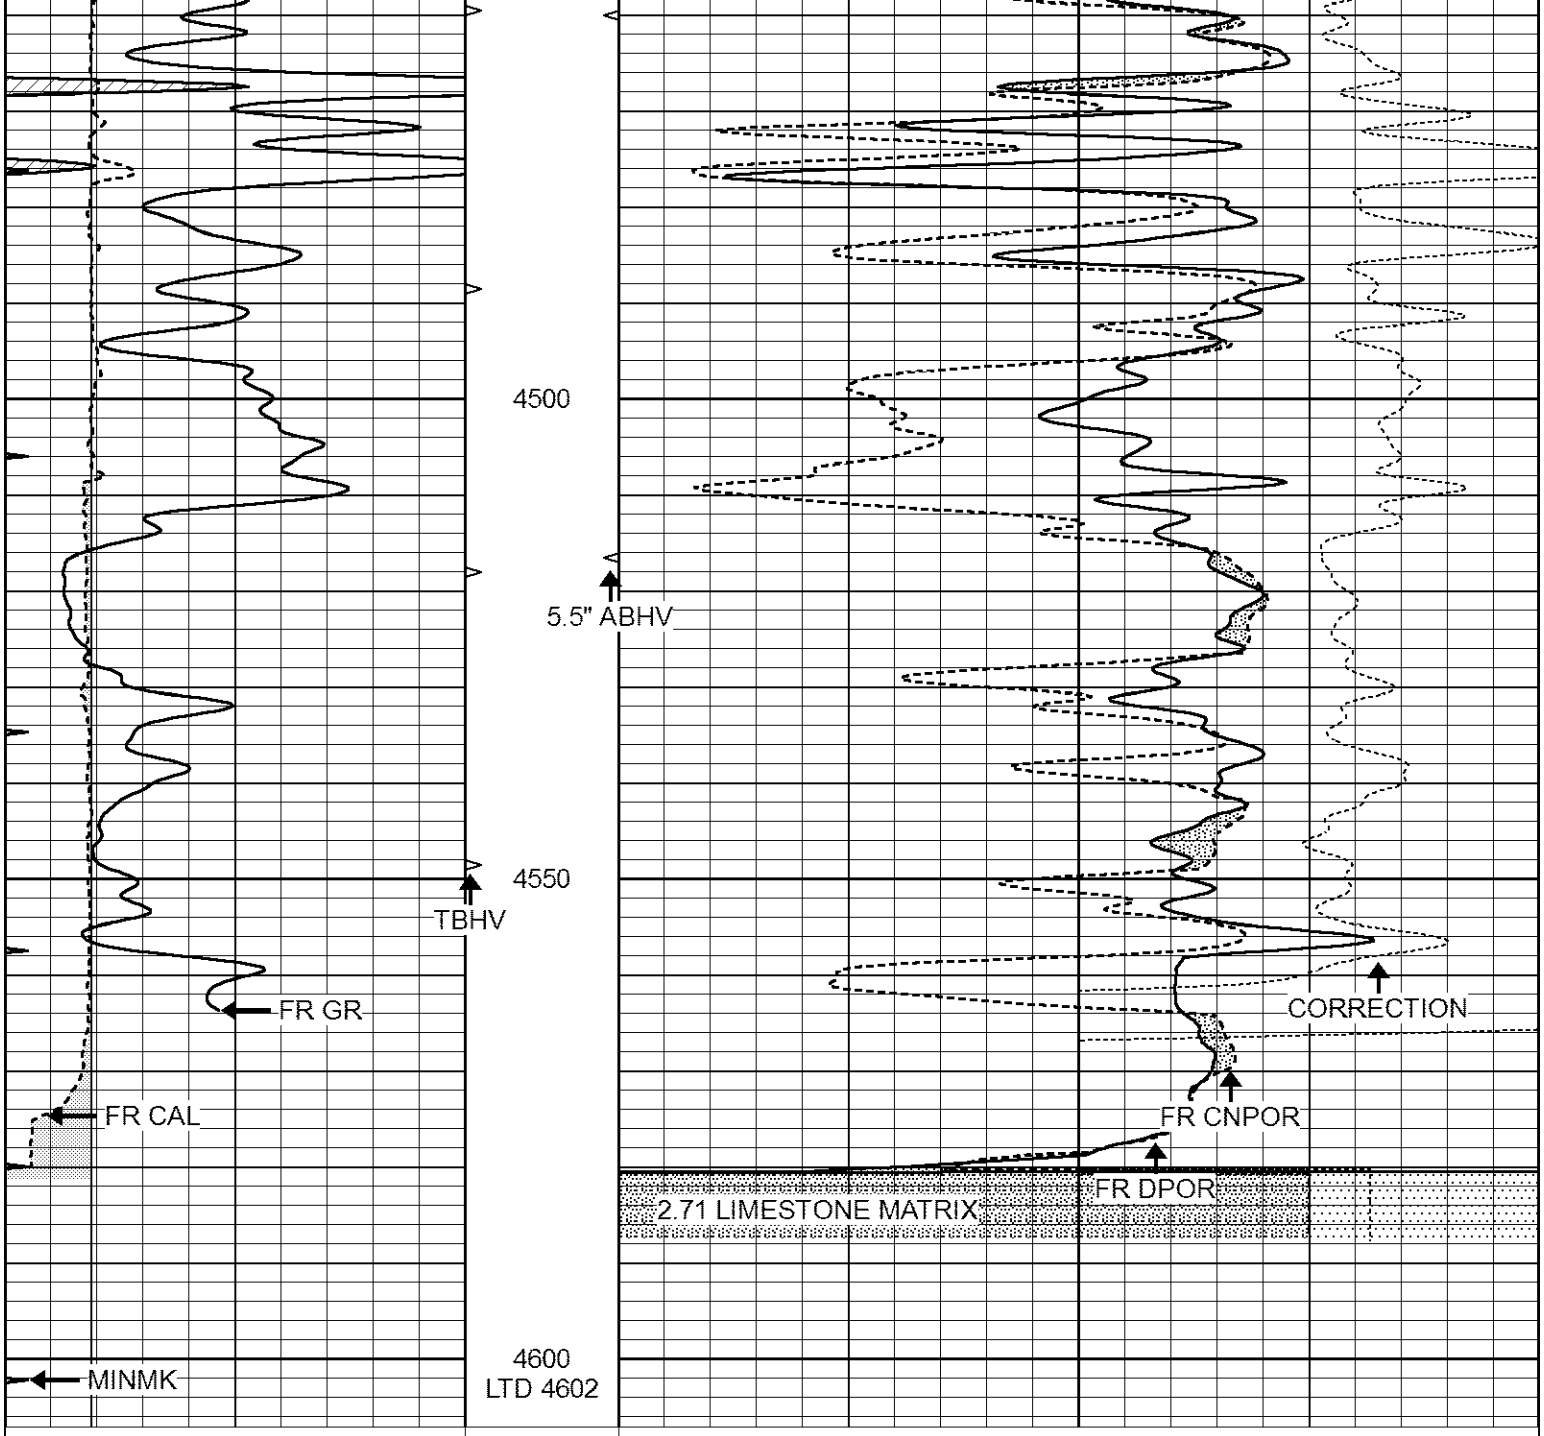

0	GAMMA RAY (GAPI) 150	AVTX	30	COMPENSATED DENSITY (pu)	-10
0	MINMK 20	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
6	CALIPER (in) 16	BVTX		-0.25 CORRECTION (g/cc)	0.25
		0 (ft3) 10			

REPEAT SECTION

Database File	6768ddn.db
Dataset Pathname	pass4.5
Presentation Format	_den_neu
Dataset Creation	Tue Aug 09 10:05:47 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI) 150	AVTX	30	COMPENSATED DENSITY (pu)	-10

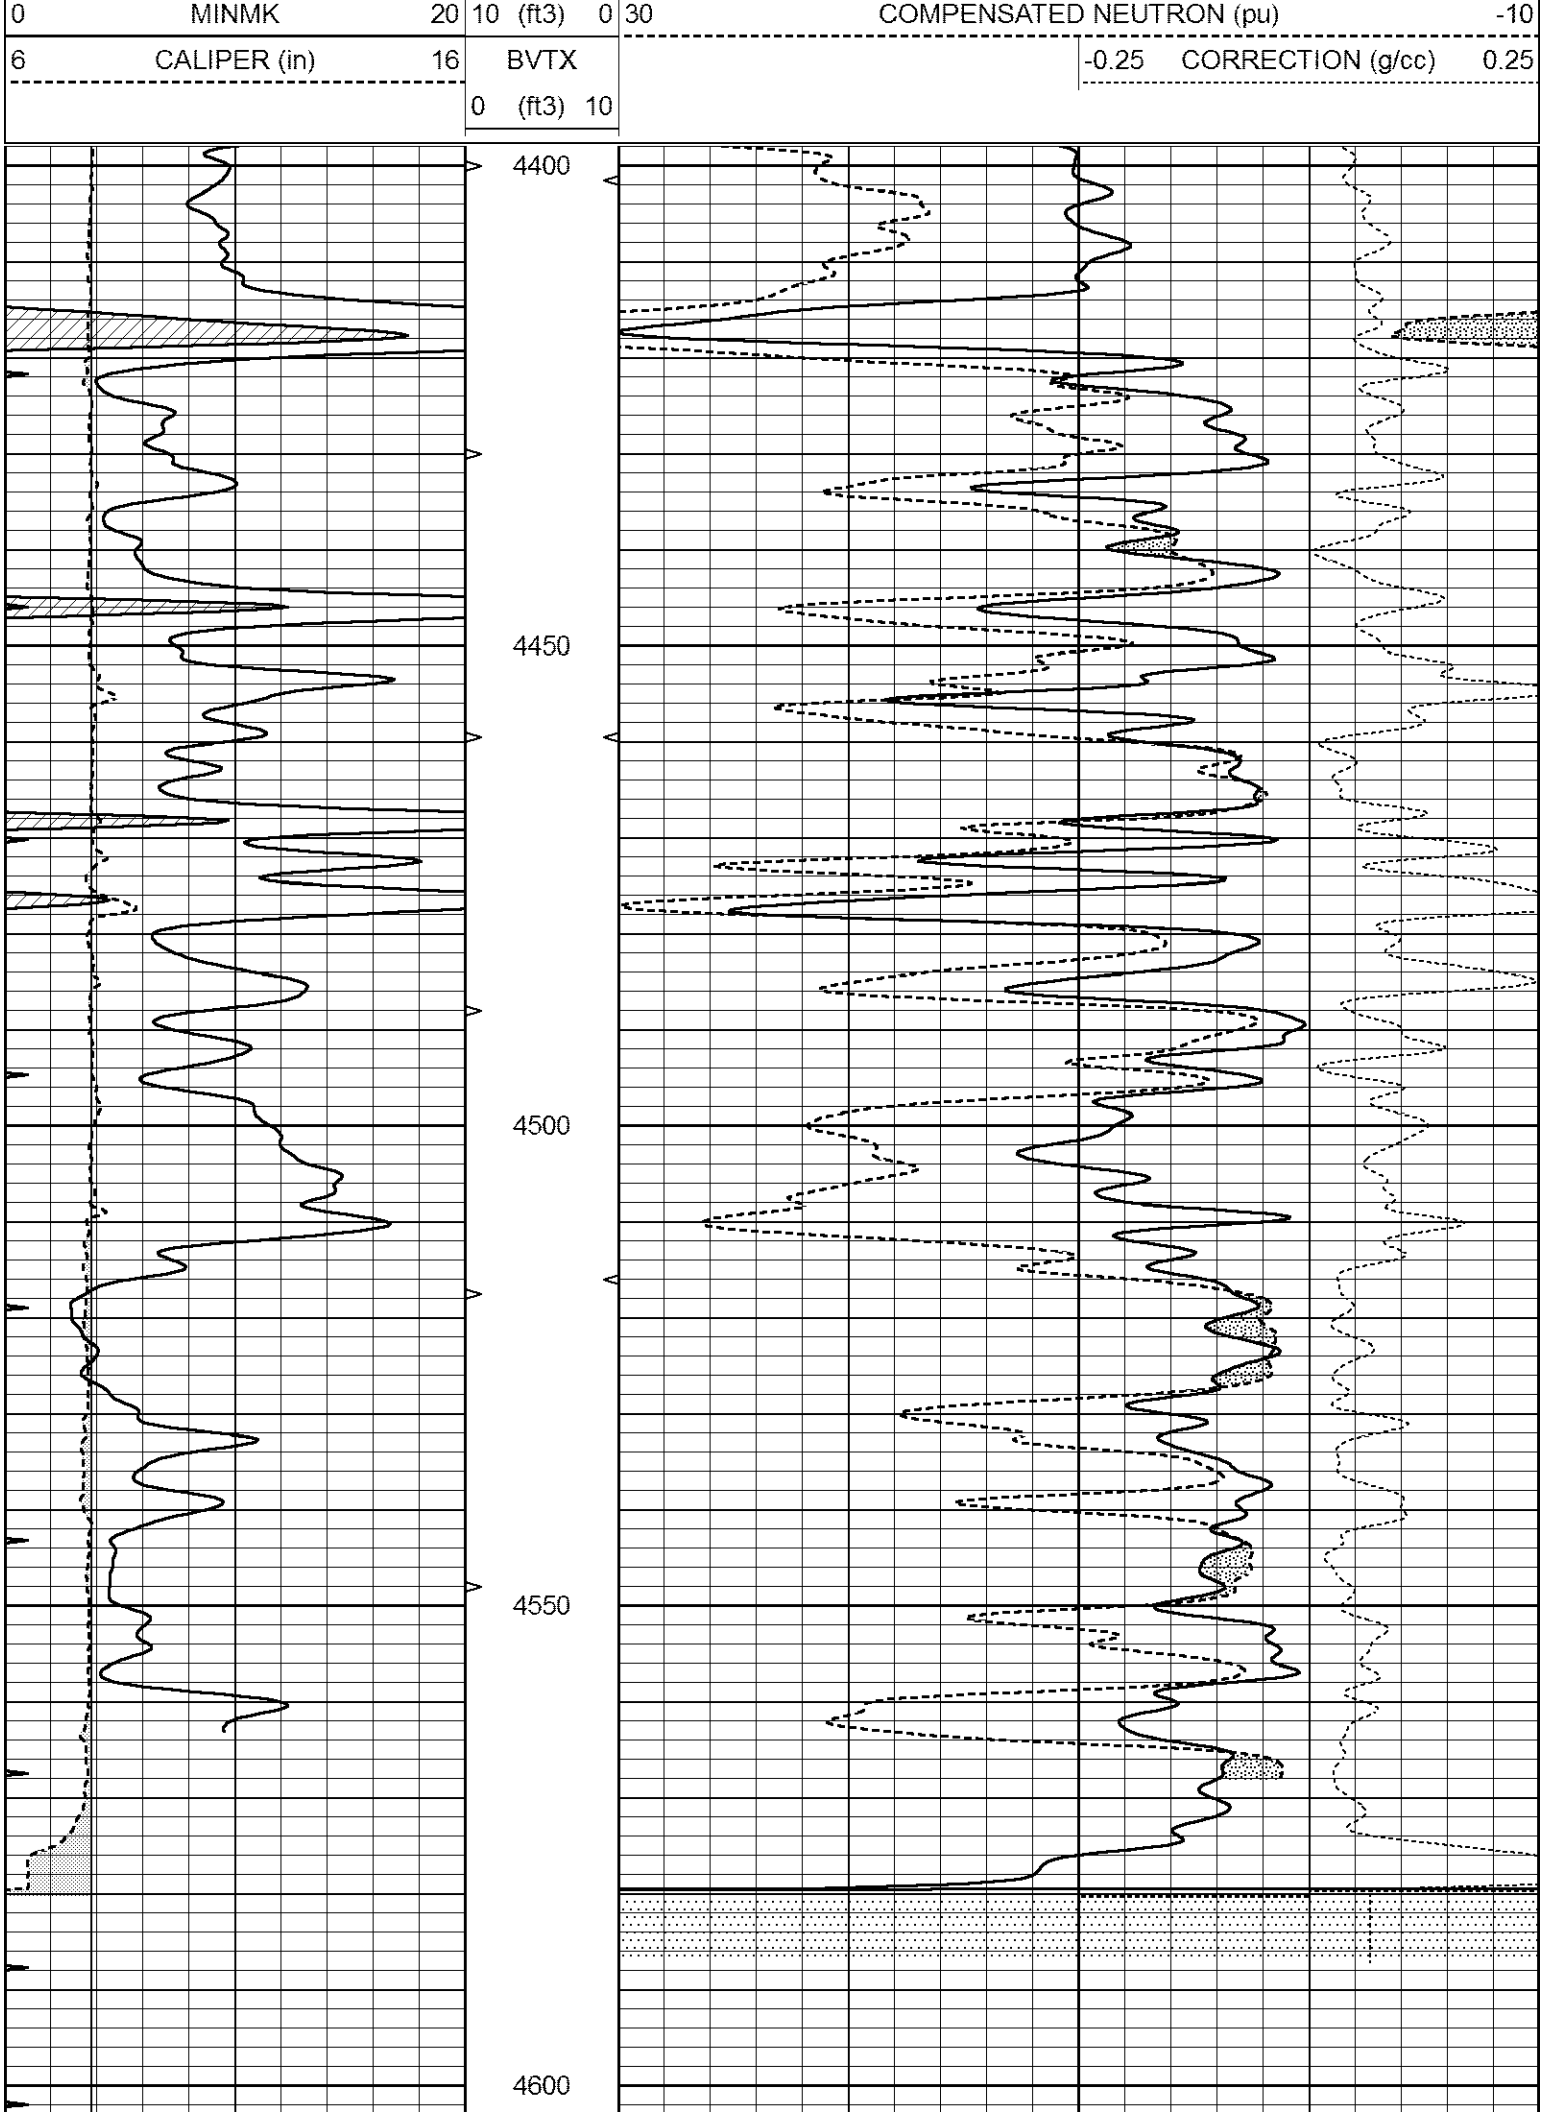
0 MINMK 20
10 (ft3) 0
30 COMPENSATED NEUTRON (pu) -10
6 CALIPER (in) 16
BVTX
0 (ft3) 10
-0.25 CORRECTION (g/cc) 0.25
4400
4450
4500
4550
4600

0	GAMMA RAY (GAPI)	150	AVTX	30	COMPENSATED DENSITY (pu)		-10
0	MINMK	20	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)		-10
6	CALIPER (in)	16	BVTX			-0.25 CORRECTION (g/cc)	0.25
			0 (ft3) 10				

Calibration Report

Database File 6768ddn.db
Dataset Pathname pass6.2
Dataset Creation Tue Aug 09 10:12:50 2022

Dual Induction Calibration Report

Serial-Model: FW1410-55-Probe
Surface Cal Performed: Thu Jun 30 01:48:00 2022
Downhole Cal Performed: Tue Feb 19 11:44:24 2019
After Survey Verification Performed: Tue Feb 19 11:44:27 2019

Surface Calibration

	Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.011	0.656	V	1.000	400.000	mmho/m	650.000	-3.000
Medium	-0.000	0.731	V	1.000	464.000	mmho/m	632.856	-10.500
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.007	0.649	V	0.000	400.000	mmho/m	623.784	-4.595
Medium	0.004	0.743	V	0.000	464.000	mmho/m	627.284	-2.251

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	-0.824	395.917	mmho/m	-0.976	397.550	mmho/m	1.004	-0.149
Medium	3.565	471.327	mmho/m	3.468	471.590	mmho/m	1.001	-0.099
LL3		7.503	V		1500.000	Ohm-m		
		0.001	V		20.000	Ohm-m		
		-7.481	V		3745.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	-0.824	395.917	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	3.565	471.327	mmho/m	1.000	0.000
LL3		0.000	Ohm-m		1500.000	Ohm-m		
		0.000	Ohm-m		20.000	Ohm-m		
		0.000	mmho-m		3745.000	mmho-m		

Litho Density Calibration Report

Serial: 140704
Model: V4_10P
Source Number: 74GBq-19

Master Calibration

Performed: Wed Jul 20 12:36:34 2022

	Background	Aluminum	Magnesium	
Window 1	503.67	5439.20	23645.11	cps
Window 2	40.11	1218.66	5702.60	cps
Window 4	221.18	1240.69	5295.43	cps

Window 5	542.56	7631.48	14305.13	cps
Window 6	41.67	1209.53	2345.40	cps
Window 8	256.91	2493.92	4591.85	cps
Bulk Density	-	2.6020	1.6830	g/cc
Pe	-	3.0000	2.5070	b/e

LS Alpha: : -1.8302 SS Alpha: : -0.7503 LS CPE: : 1.1699
LS Beta: : 122464.5983 SS Beta: : 16307.0478 SS CPE: : 1.6095

Before Survey Backround Counts Verification Performed: Wed Dec 31 18:00:00 1969

Window 1	0.00	cps
Window 2	0.00	cps
Window 4	0.00	cps
Window 5	0.00	cps
Window 6	0.00	cps
Window 8	0.00	cps

After Survey Background Counts Verification Performed: Wed Dec 31 18:00:00 1969

Window 1	0.00	cps
Window 2	0.00	cps
Window 4	0.00	cps
Window 5	0.00	cps
Window 6	0.00	cps
Window 8	0.00	cps

Lithodensity Caliper Calibration Performed: Wed Jul 20 12:36:34 2022

Results Readings		References (in)			
Low	High	Low	High	Gain	Offset
11331.0	15645.5	8.0	14.0	0.0	-7.7

Before Survey Caliper Verification Performed:

	Reference	Reading
Caliper (in)		

After Survey Caliper Verification Performed:

	Reference	Reading
Caliper (in)		

Compensated Neutron Calibration Report

Serial Number: 080621PMC
Tool Model: NABORS

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	7	
Tool Model:	Probe1	
Performed:	Thu May 26 08:56:46 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5500	GAPI/cps