

15-163-03427-00-06


STATE OF KANSAS
STATE CORPORATION COMMISSION

COPY OF
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Rooks County, Sec. 9 Twp. 9 Rge. (E) 20W (W)

Location as "NE/CNW/SW" or footage from lines NE SE SW
Lease Owner I. O. Miller Oil Company
Lease Name Whisman Well No. "A" # 1
Office Address P O Box 274 Ellis, Kansas

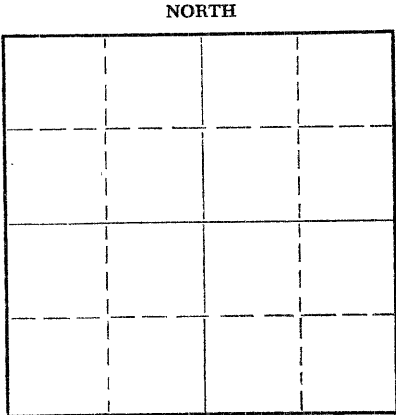

Locate well correctly on above Section Plat

Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed December 22 19 1957
Application for plugging filed yes 19
Application for plugging approved yes 19
Plugging commenced 1-4-61 19
Plugging completed 1-11-61 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes
Eldon Petty

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 3679' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		2,479'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugging commenced 1-4-61. Plugging completed 1-11-61.
Measured in to total depth: at 3679'.
Plugged off bottom: Sanded from 3679' to 3594' and dumped 4 sacks of cement.
Worked and shot casing. Spotted 75 barrels of oil. Worked and shot 5 1/2" casing free at 2,479'. Built rack and slide. Pulled and layed down casing.
Plugged well: Circulated mud at 500' and spotted 20 sacks of cement. Mudded hole up to 160' and spotted 20 sacks of cement. Mudded hole up to 35' and set 5' rockers bridge and capped the well with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
2/1/61
FEB 1

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor J. O. Forbes d/b/a Forbes Casing Pilling Company
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 16th day of January, 19 61

Kayann Jenkins
Notary Public.

My commission expires December 8th, 1963.

Whisman A # 1 - NE SE SW/4 Sec. 9-9-20 Neoka County, Kansas
Company - I. O. Miller
Contractor - Virginia Drig Co Inc.
Commenced - December 11, 1957
Completed rotary hole - December 22, 1957
Total depth - 3671
Elevation - 2149 BF - 2152 RB

8 5/8" surf. set at 245 ft w/235 sz
con. - 200# CC
5 1/2" set at 3671 ft.

FORMATION ----- DEPTH -----

Surface - clay	0- 70	
Shale	70- 725	TOPS:
Shale-shells	725-1085	
Sand	1085-1360	3142 - Topoka
Shale-shells	1360-1420	3344 - Heelmer
Shale	1420-1648	3366 - Toronto
Anhydrite	1648-1690	3383 - Lansing
Shale-shells	1690-1930	3602 - Bas sKC
Shale-lime-shells	1930-2119	3647 - Conglomerate
Shale-lime	2119-3315	3650 - Arbuckle
Lime	3315-3671 F. D.	

[Handwritten signature]

Subscribed and sworn to before me, this 21/57 day of
December, 1957.

[Handwritten signature]

My Commission expires: Feb 15, 1961