

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Rooks County, Sec. 13 Twp. 9S Rge. 19W (E) (W)

Location as "NE/CNW/SW" or footage from lines NW SW SW

Lease Owner Morris Sittin, Inc.

Lease Name Dietz Pursuit Well No. 42

Office Address Box 703 Hays, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 11-29-50 19

Application for plugging filed November 2, 1962 19

Application for plugging approved November 3, 1962 19


Plugging commenced November 5, 1962 19

Plugging completed November 7, 1962 19

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

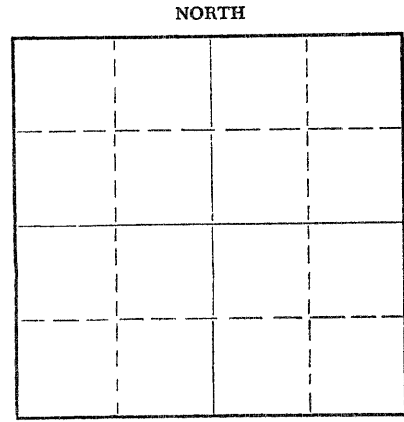

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3533 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	110	none
				5 1/2	none 3531	727

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Moved in and cleaned out cellar.  
Measured T.D. and sanded to 3100', dumped 4 sx. cement and worked pipe. Shot @ 2900'-1000'-800'-720'.  
Pulled pipe and mixed 7 sx. mud and 20 sx. cement. Pumped in at 480' and pulled 300' and pumped in 20 sx. cement @ 180' and out of hole with bailer. Built rock bridge and capped well with 10 sx. cement.

RECEIVED  
STATE CORPORATION COMMISSION  
NOV 19 1962  
11-19-62  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes  
Box 221 Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of November, 1962

My commission expires July 23, 1966  
Carolyn Herren Notary Public.



Well Log Copy...

Company . Wick Petroleum Co.  
Farm Boisvert # 2

Sec. 13 T. 9 R. 19W  
NW SW SW

Total Depth 3533  
Comm. 11-17-50 Comp. 11-29-50  
Contractor Overland Drlg. Co.  
Issued 11-29-52

County Rooks - Kansas

Casing 8" 140'  
5" 3531'

Elevation 2107

Surface 40  
Shale, shells 140  
Shale, Shells 650  
Red rock 1330  
shale 1405  
anhydrite 1515  
shale 1790  
shells, shale 2070  
shale 2780  
shale, lime 3060  
lime 3160  
lime, shale 3285  
lime 3533  
Total Depth

Tops: Scout.  
Topeka 3029  
Heebner 3245  
Toronto 3268  
Lansing 3284  
Arbuckle 3530

**RECEIVED**  
STATE CORPORATION COMMISSION

OCT 29 1962  
10-29-62  
CONSERVATION DIVISION  
Wichita, Kansas