

15-163-02724-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Pitting Building
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County. Sec. 26 Twp. 9 Rge. 20W (1/2) (W)

Location as "NE/CNW/SW" or footage from lines SW SE NW
Lease Owner Lowell J. Williamson
Lease Name Meade Well No. 1
Office Address 754 East Wichita Avenue, Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 21, 1954 19
Application for plugging filed August 21, 1954 19
Application for plugging approved August 21, 1954 19
Plugging commenced August 21, 1954 19
Plugging completed August 21, 1954 19
Reason for abandonment of well or producing formation Dry Hole

NORTH

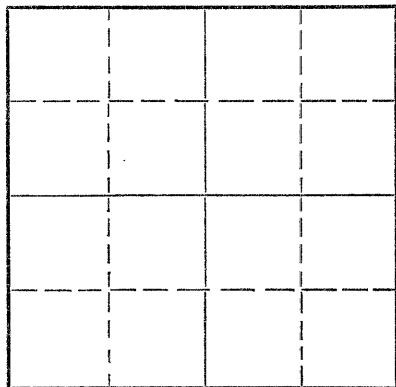

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Warren H. Horner
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3852 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	180	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged from 3852 feet to 170 feet with rotary mud. From 170 feet to 140 feet Halliburton plug, 1/2 sacks hulls and 15 sacks of cement. From 140 feet to 35 feet rotary mud. Hole plugged from 35 feet to surface with Halliburton plug, 1/2 sacks hulls and 10 sacks of cement.

12/14/54

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor United Drilling Company
Address 754 East Wichita Avenue, Russell, Kansas


STATE OF KANSAS, COUNTY OF RUSSELL, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Lowell J. Williamson*
Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of December, 1954

My commission expires 10-30-57
Marlene Zook
Notary Public.



W E L L L O G

LOWELL J. WILLIAMSON
Mohl Building
Russell, Kansas

MEADE #1
SW SE NW, Sec. 26-9-20
Rooks County, Kansas

Contractor: United Drilling, Inc.

Commenced: August 11, 1954

Completed: August 21, 1954

Production: Dry hole

Casing:

8 5/8" casing set at 180 feet.

Depth	Formation
100 feet	Clay, sand and shale
180 "	Shale
355 "	Shale and sand
1400 "	Redbed
1725 "	Shale
1735 "	Anhydrite
1765 "	Shale and shells
2310 "	Shale and lime
2675 "	Shale
2785 "	Lime and shale
3490 "	Lime
3540 "	Lime and shale
3585 "	Lime
3800 "	Lime and chert
3808 "	Chert
3824 "	Conglomerate
3847 "	Arbuckle
3852 "	Rotary total depth.

I hereby certify that the above information is true and correct to the best of my knowledge.

Joan Hanes
Joan Hanes, Sec. to Clyde G. Kissinger

SUBSCRIBED AND SWORN to before me this 24th day of September, 1954

Marlene Zuck
Notary Public

My Commission Expires: 10-30-57

