



MICRO LOG

Company	PALOMINO PETROLEUM, INC.	
Well	FOR WHAT ITS WORTH #1	
Field	BUERKLE NORTHWEST	
County	SCOTT	State KANSAS
Location:	API # : 15-171-21300-0000 1626' FNL & 1598' FEL	
Permanent Datum	SEC 30 TWP 20S RGE 33W	Other Services CDL/CNL DIL
Log Measured From	GROUND LEVEL Elevation 2961	
Drilling Measured From	KELLY BUSHING 11' A.G.L. KELLY BUSHING	Elevation K.B. 2972 D.F. 2970 G.L. 2961
Date	10/17/22	
Run Number	TWO	
Depth Driller	4860	
Depth Logger	4861	
Bottom Logged Interval	4859	
Top Log Interval	2100	
Casing Driller	8 5/8" @ 223	
Casing Logger	223	
Bit Size	7 7/8	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4.200 PPM
Density / Viscosity	9.4/57	
pH / Fluid Loss	10.5/8.0	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	1.40 @ 70F	
Rmt @ Meas. Temp	1.05 @ 70F	
Rmc @ Meas. Temp	1.68 @ 70F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.790 @ 124F	
Time Circulation Stopped	4 HOURS	
Time Logger on Bottom	1.45 P.M.	
Maximum Recorded Temperature	124F	
Equipment Number	3802	
Location	HAYS, KANSAS	
Recorded By	COLE ROBBEN	
Witnessed By	RYAN SIEB	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:


FROM SCOTT CITY GO SOUTH TO 40 ROAD, WEST TO FALCON ROAD, SOUTH TWO MILES,
EAST INTO

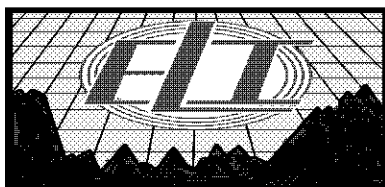


MAIN SECTION

Database File	7235ddn.db
Dataset Pathname	pass7M
Presentation Format	_micro
Dataset Creation	Mon Oct 17 16:00:09 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

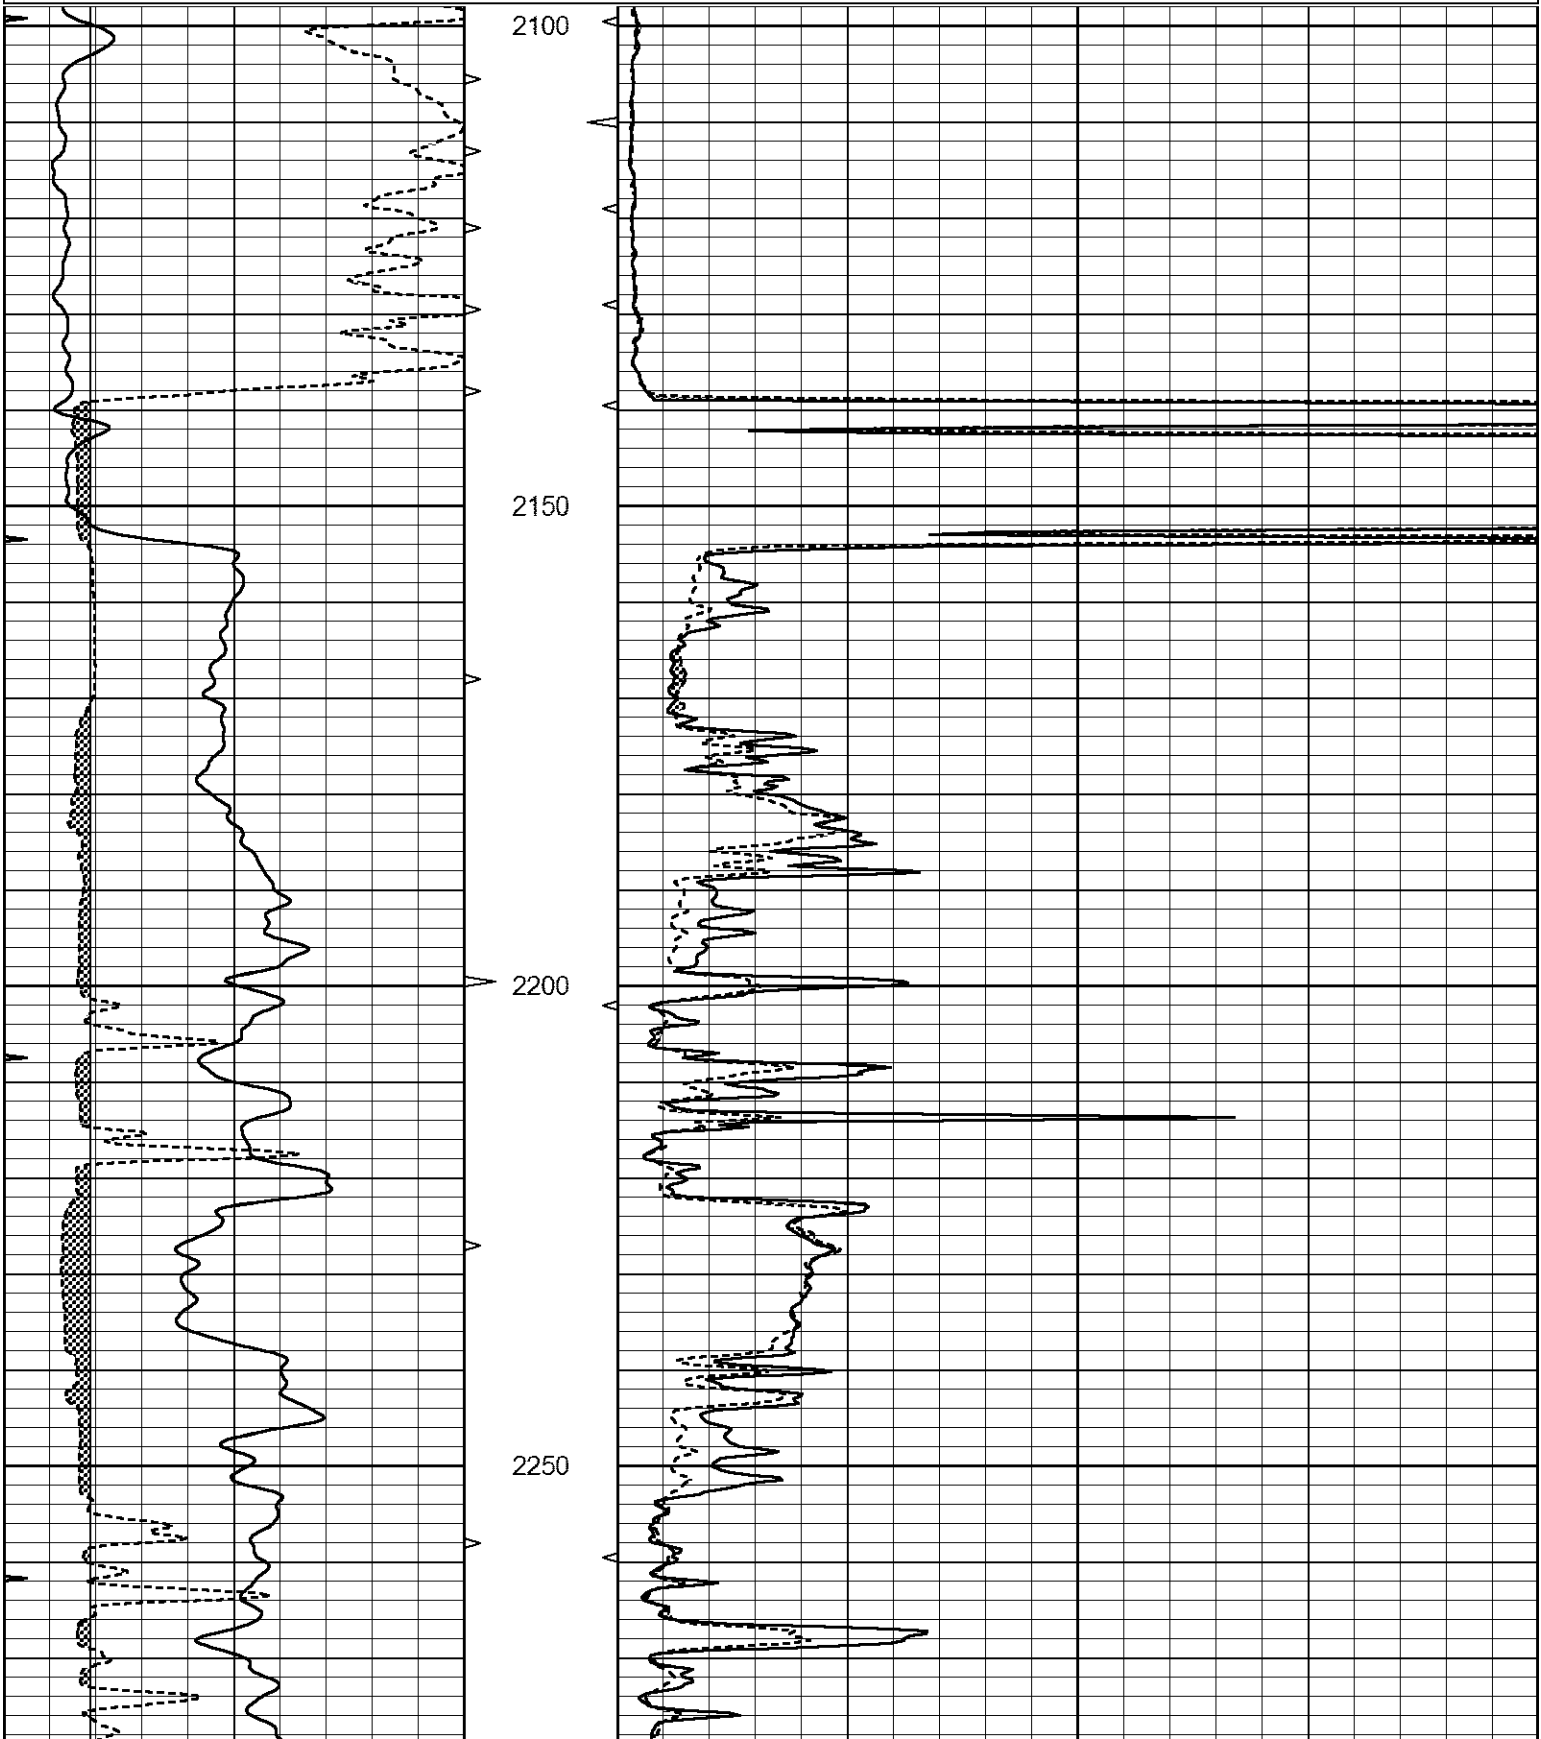

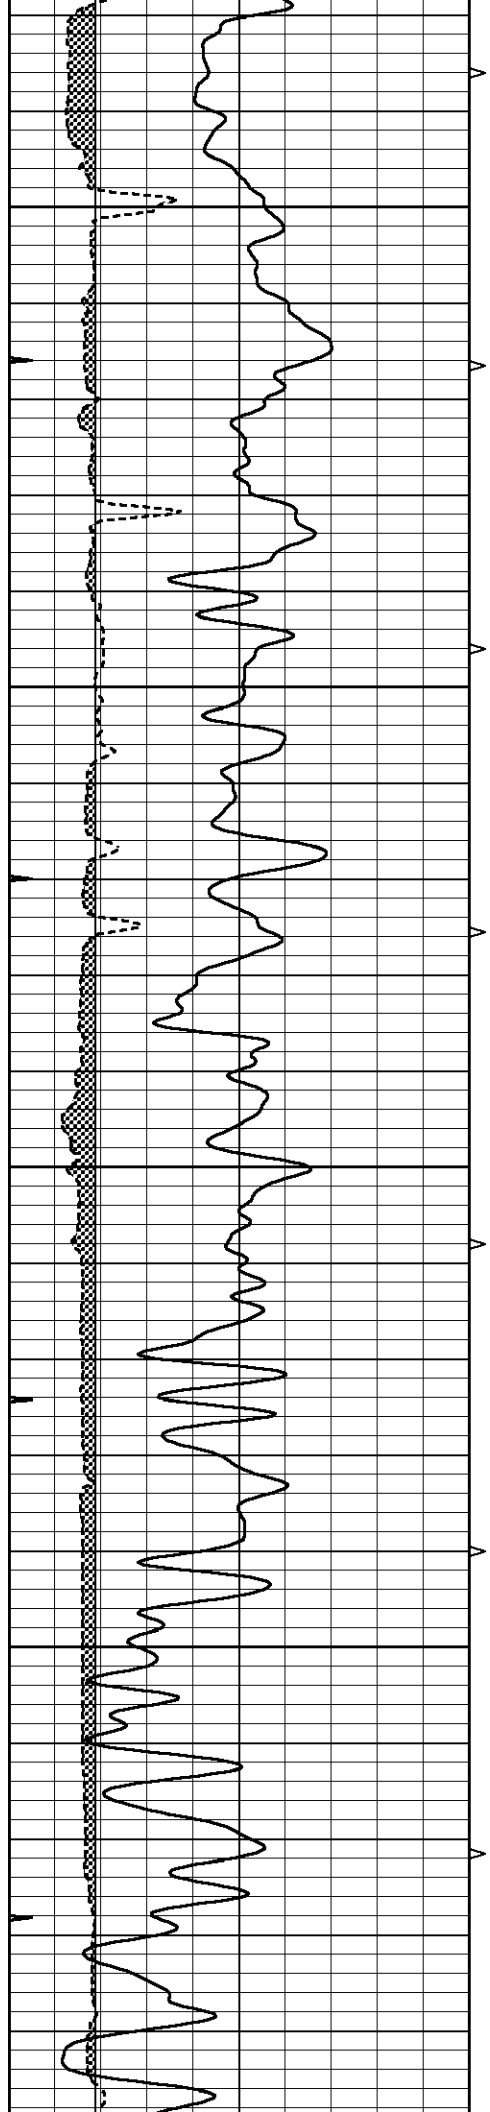



2300

2350

2400

2450

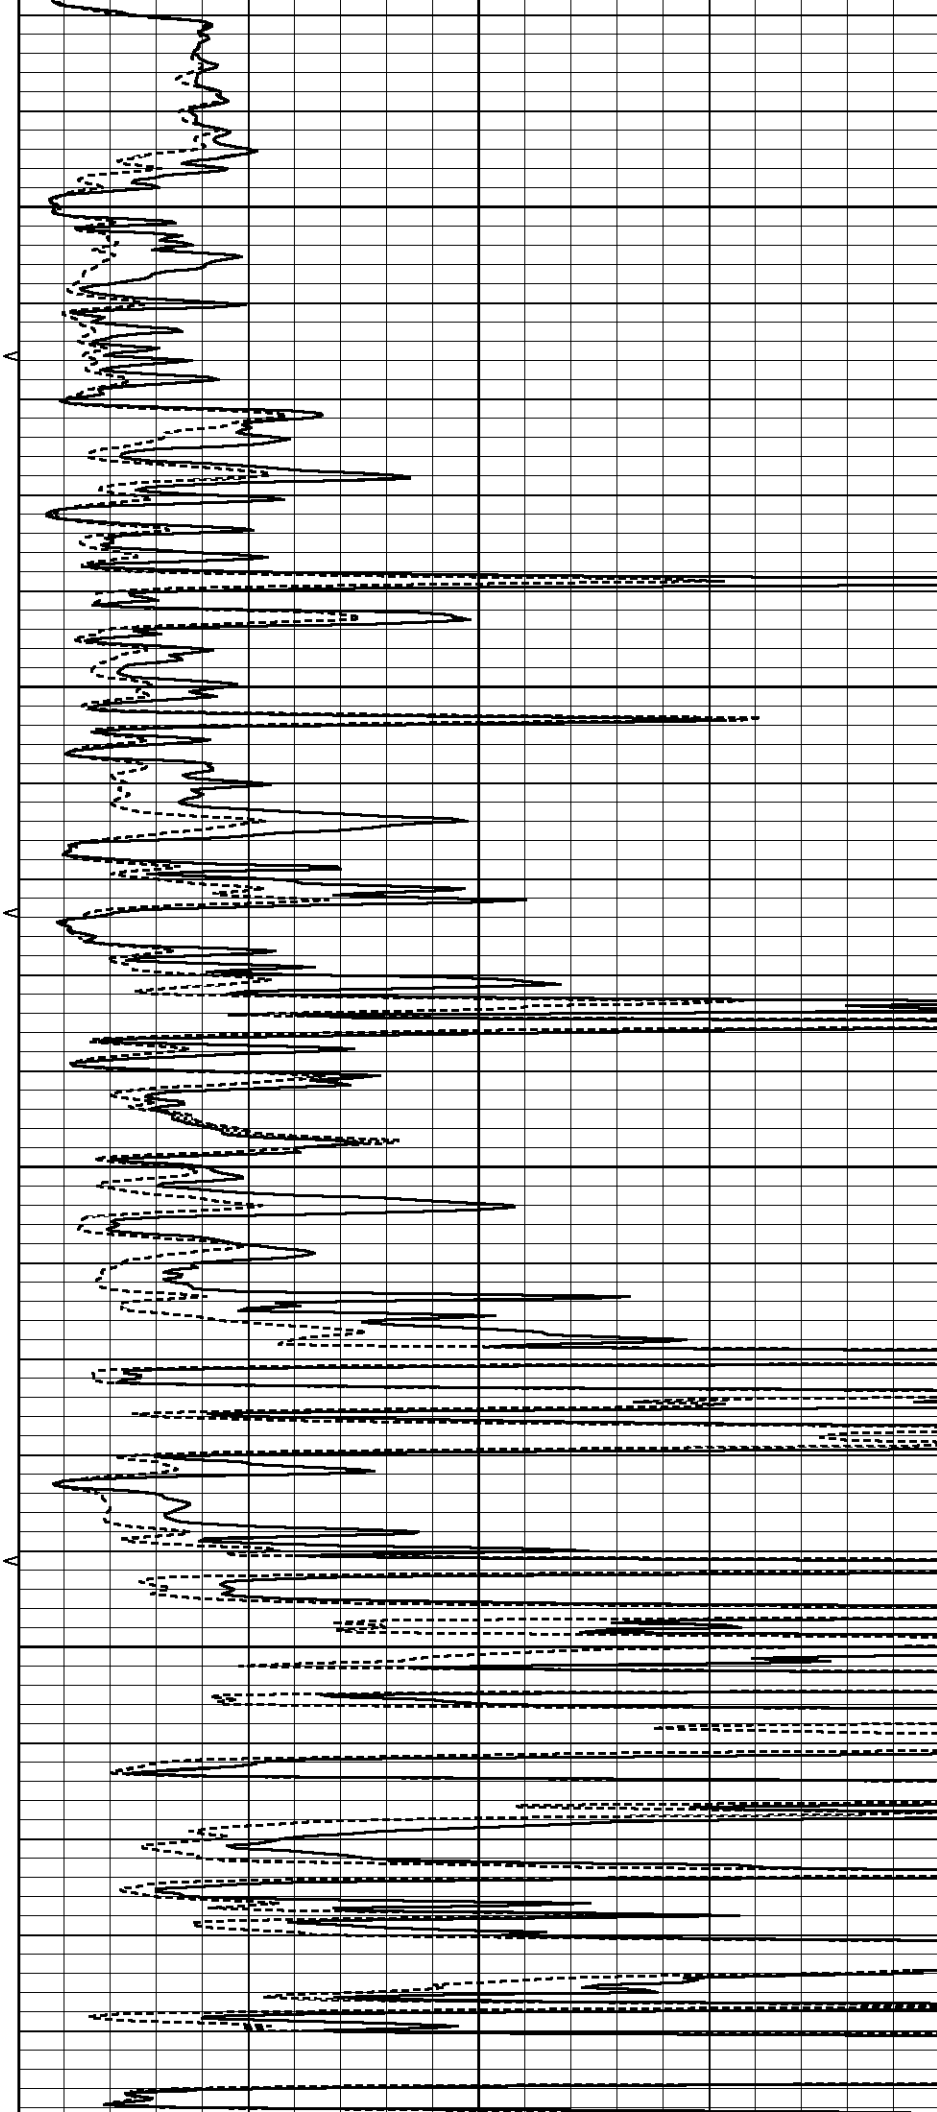

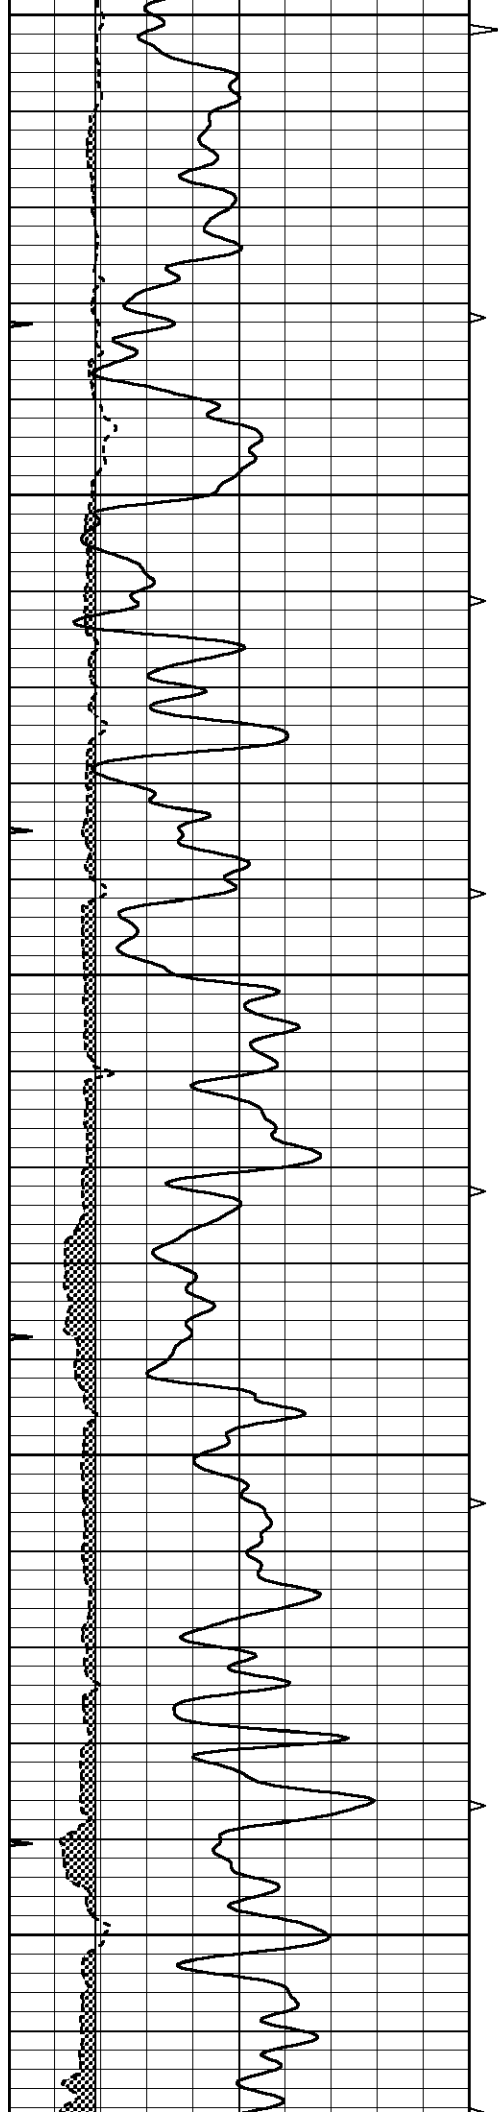


2500


2550

2600

2650

2700

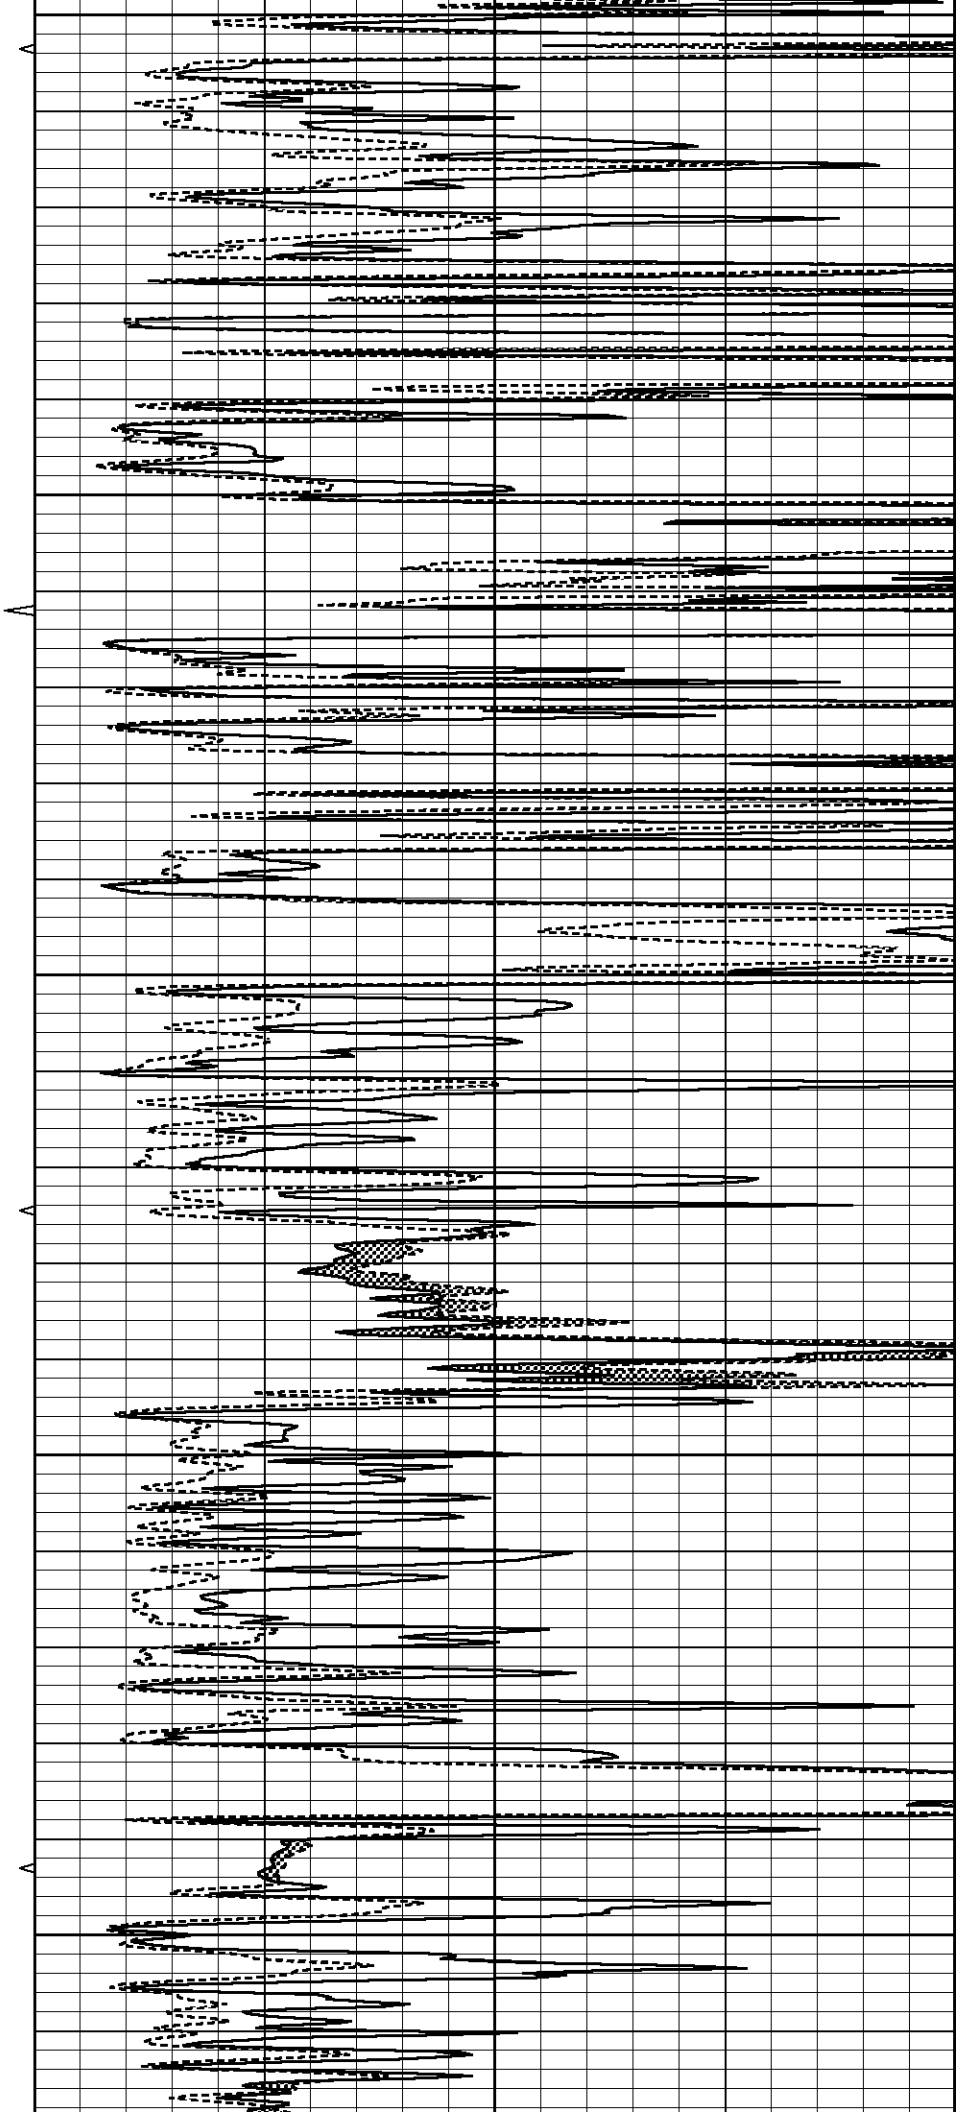

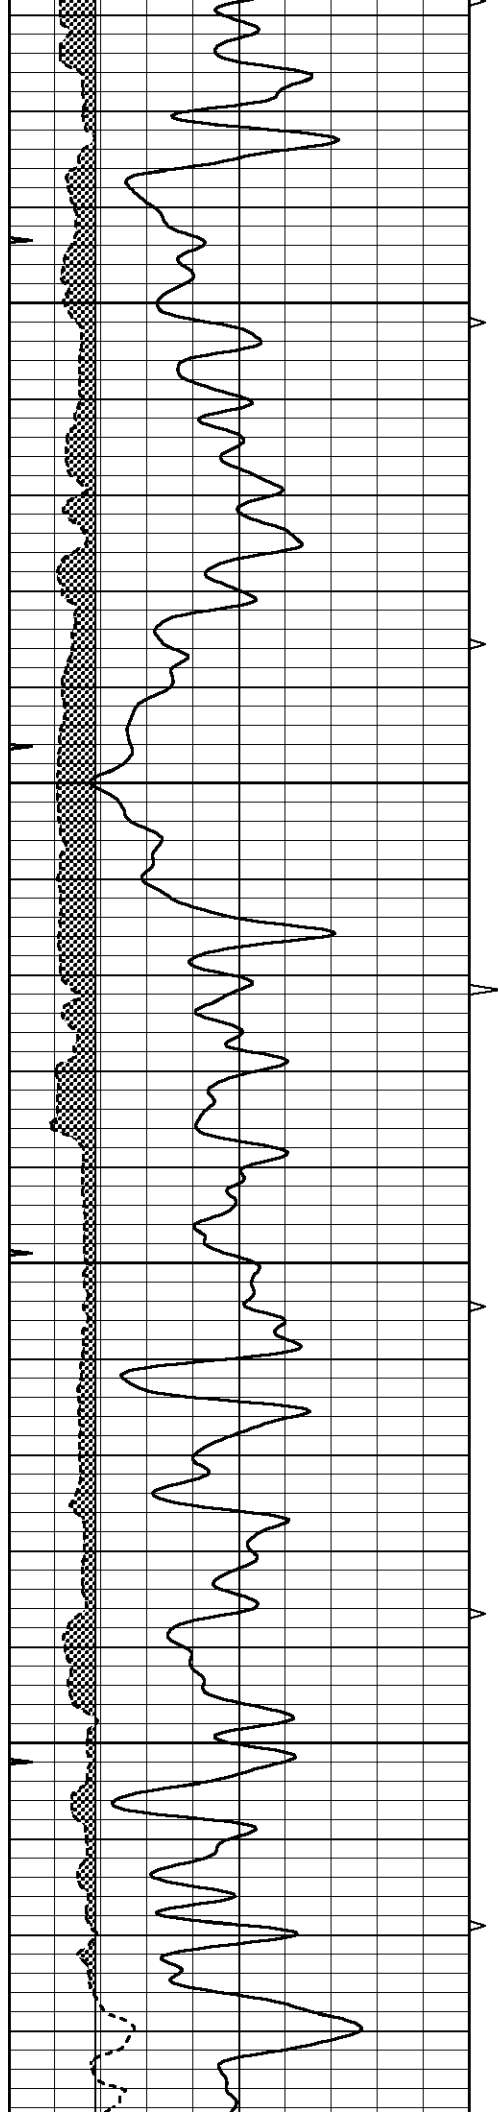



2750

2800

2850

2900

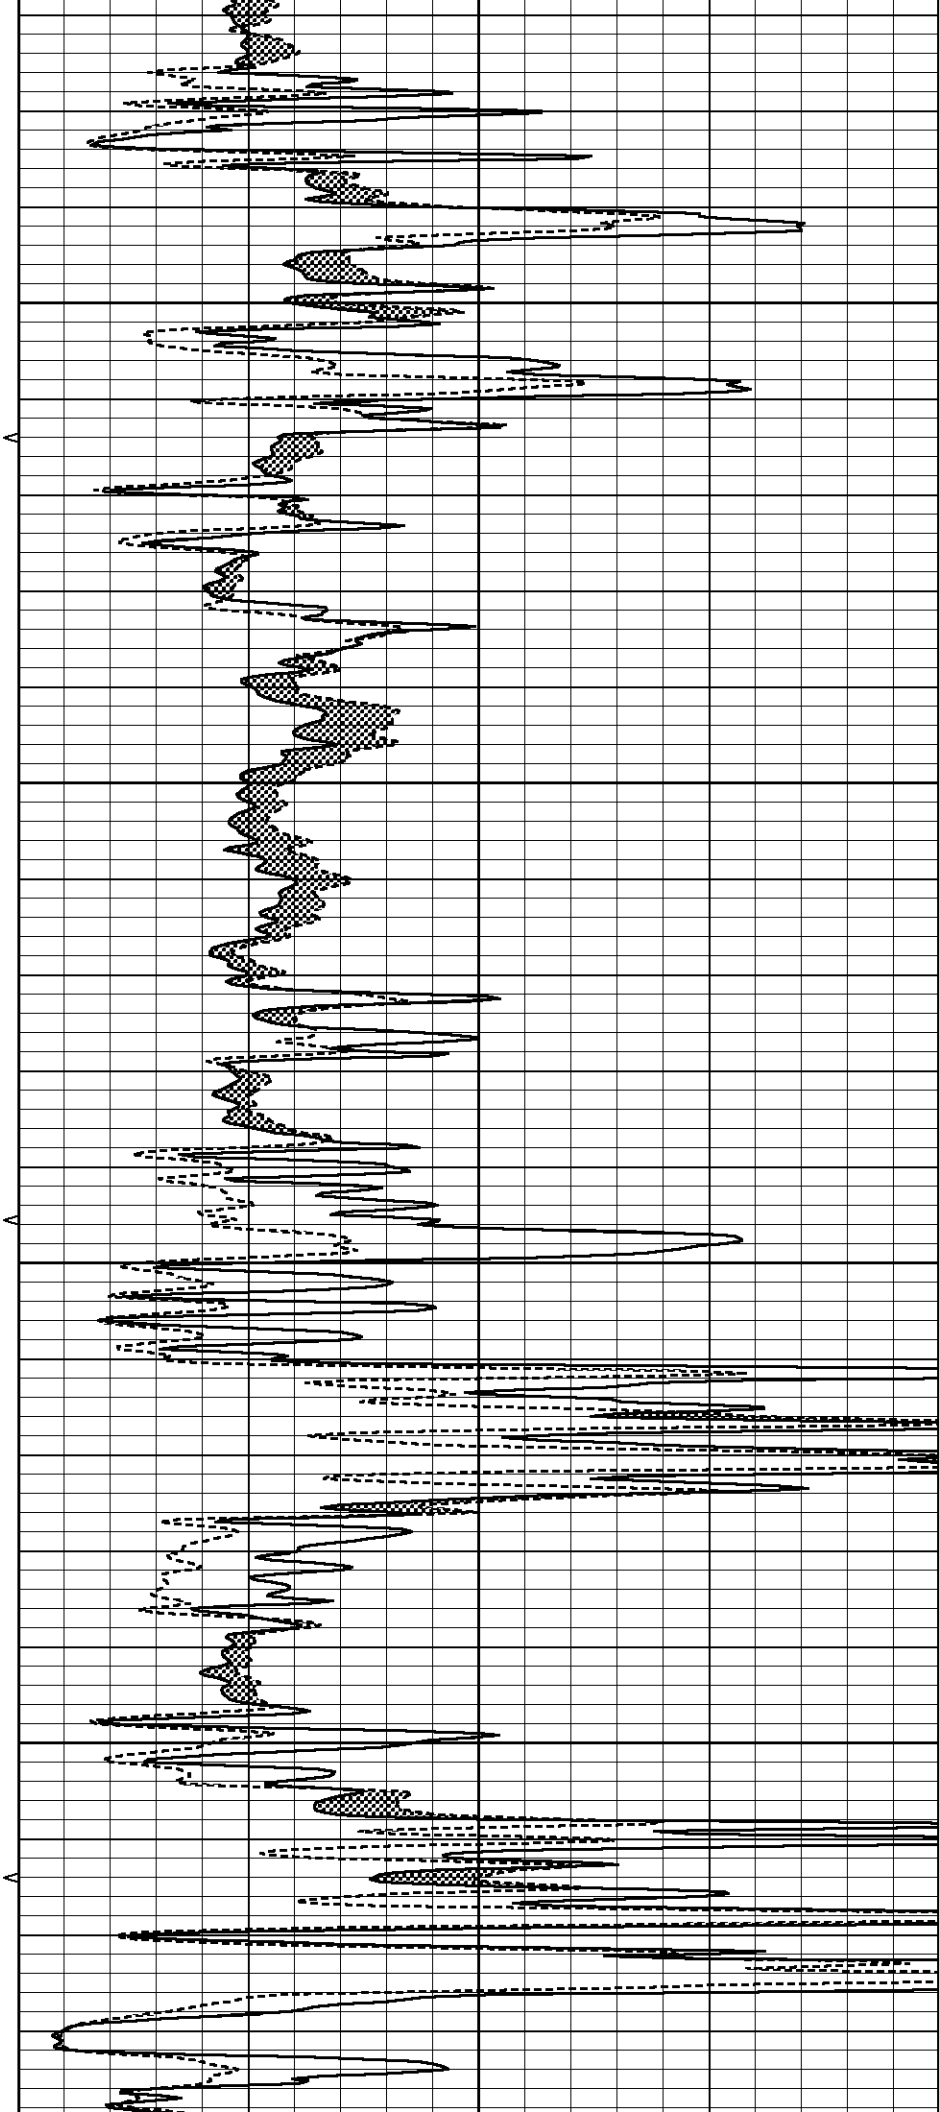

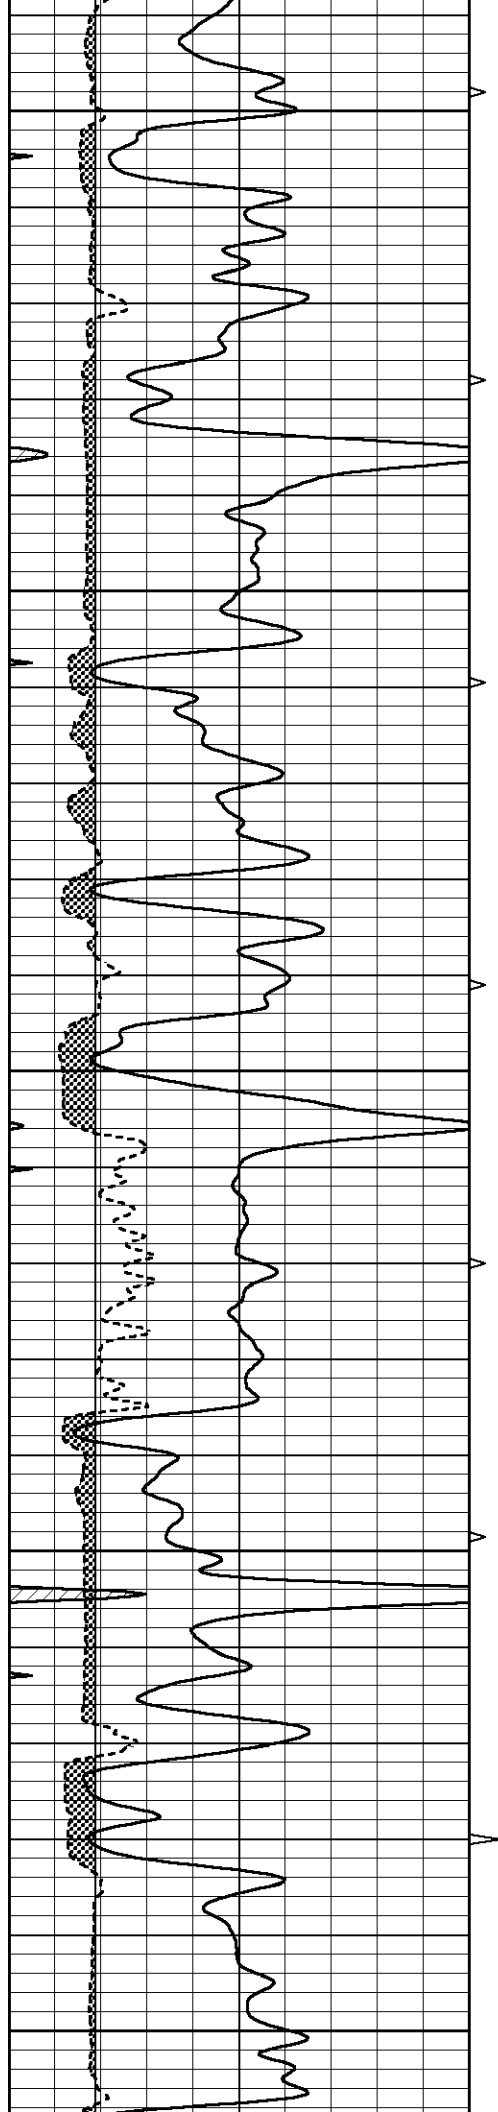


2950


3000

3050

3100

3150

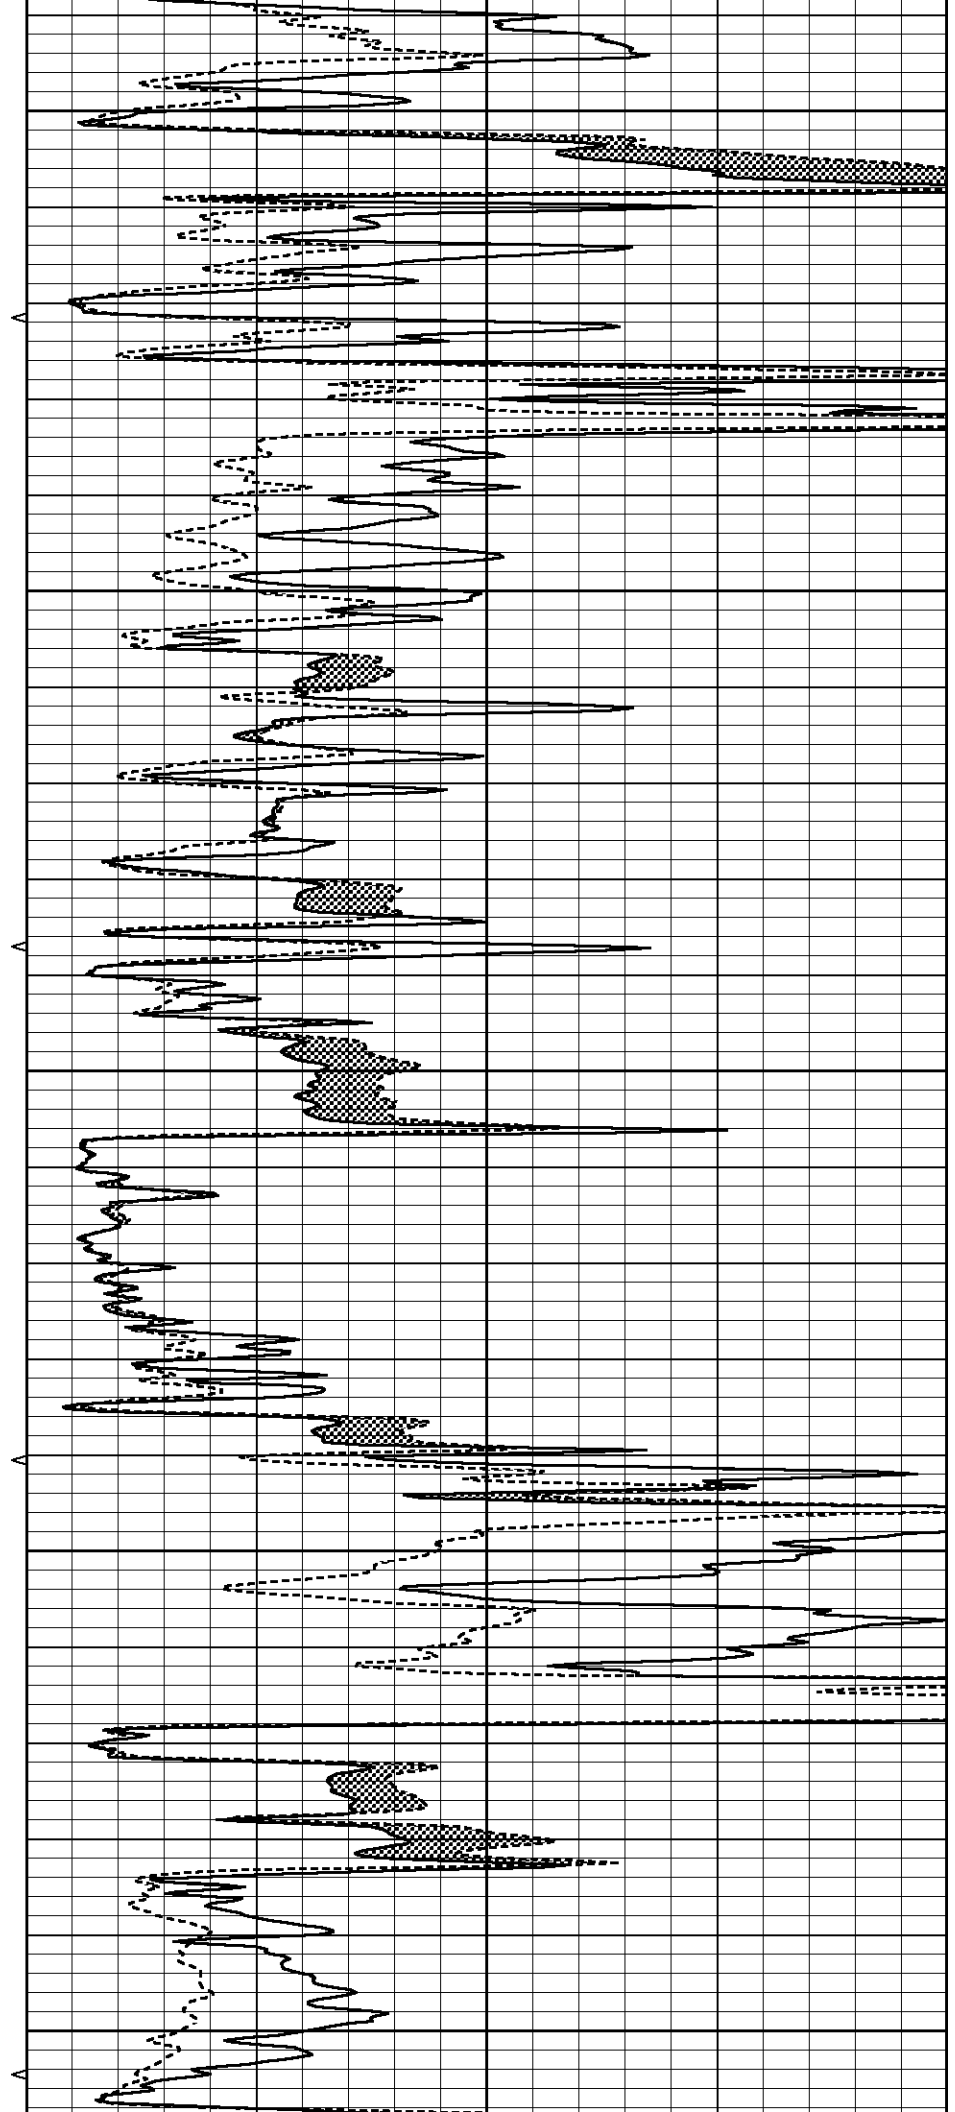

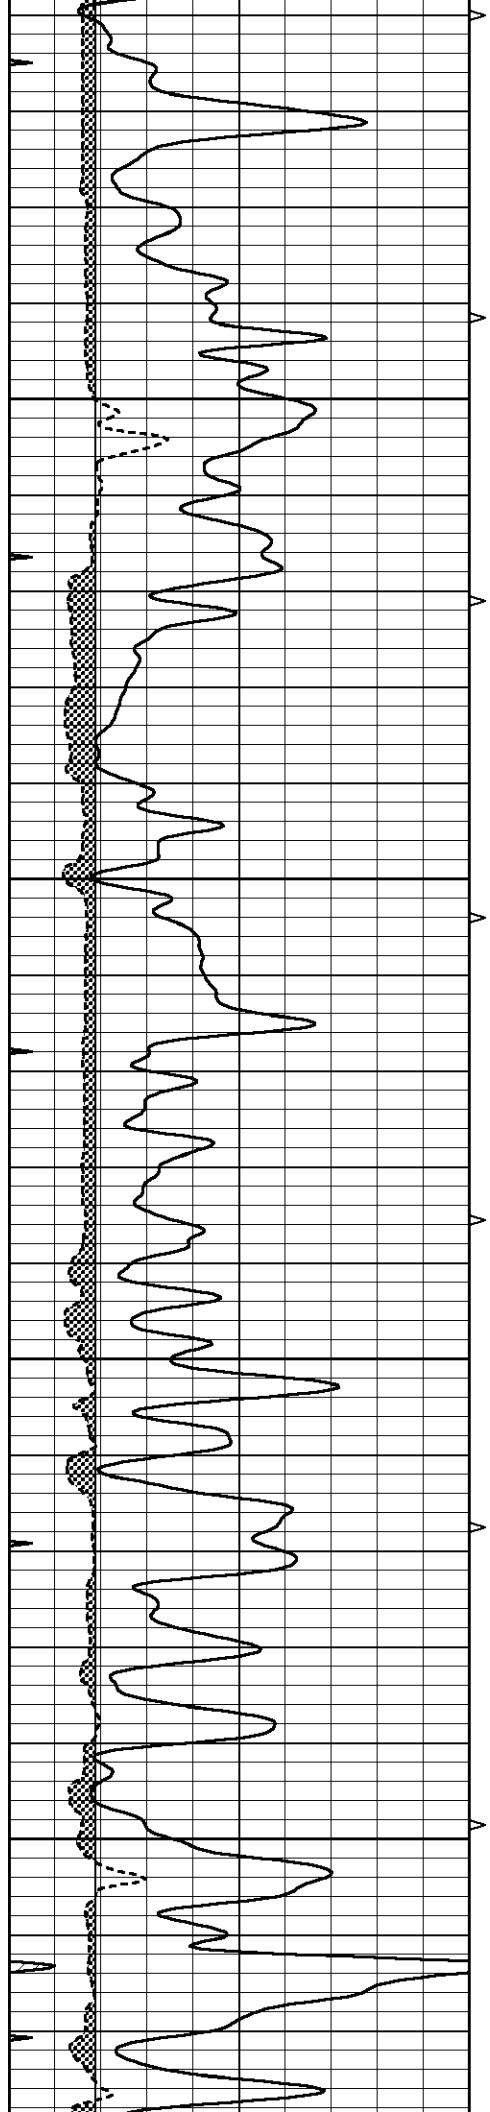



3200

3250

3300

3350

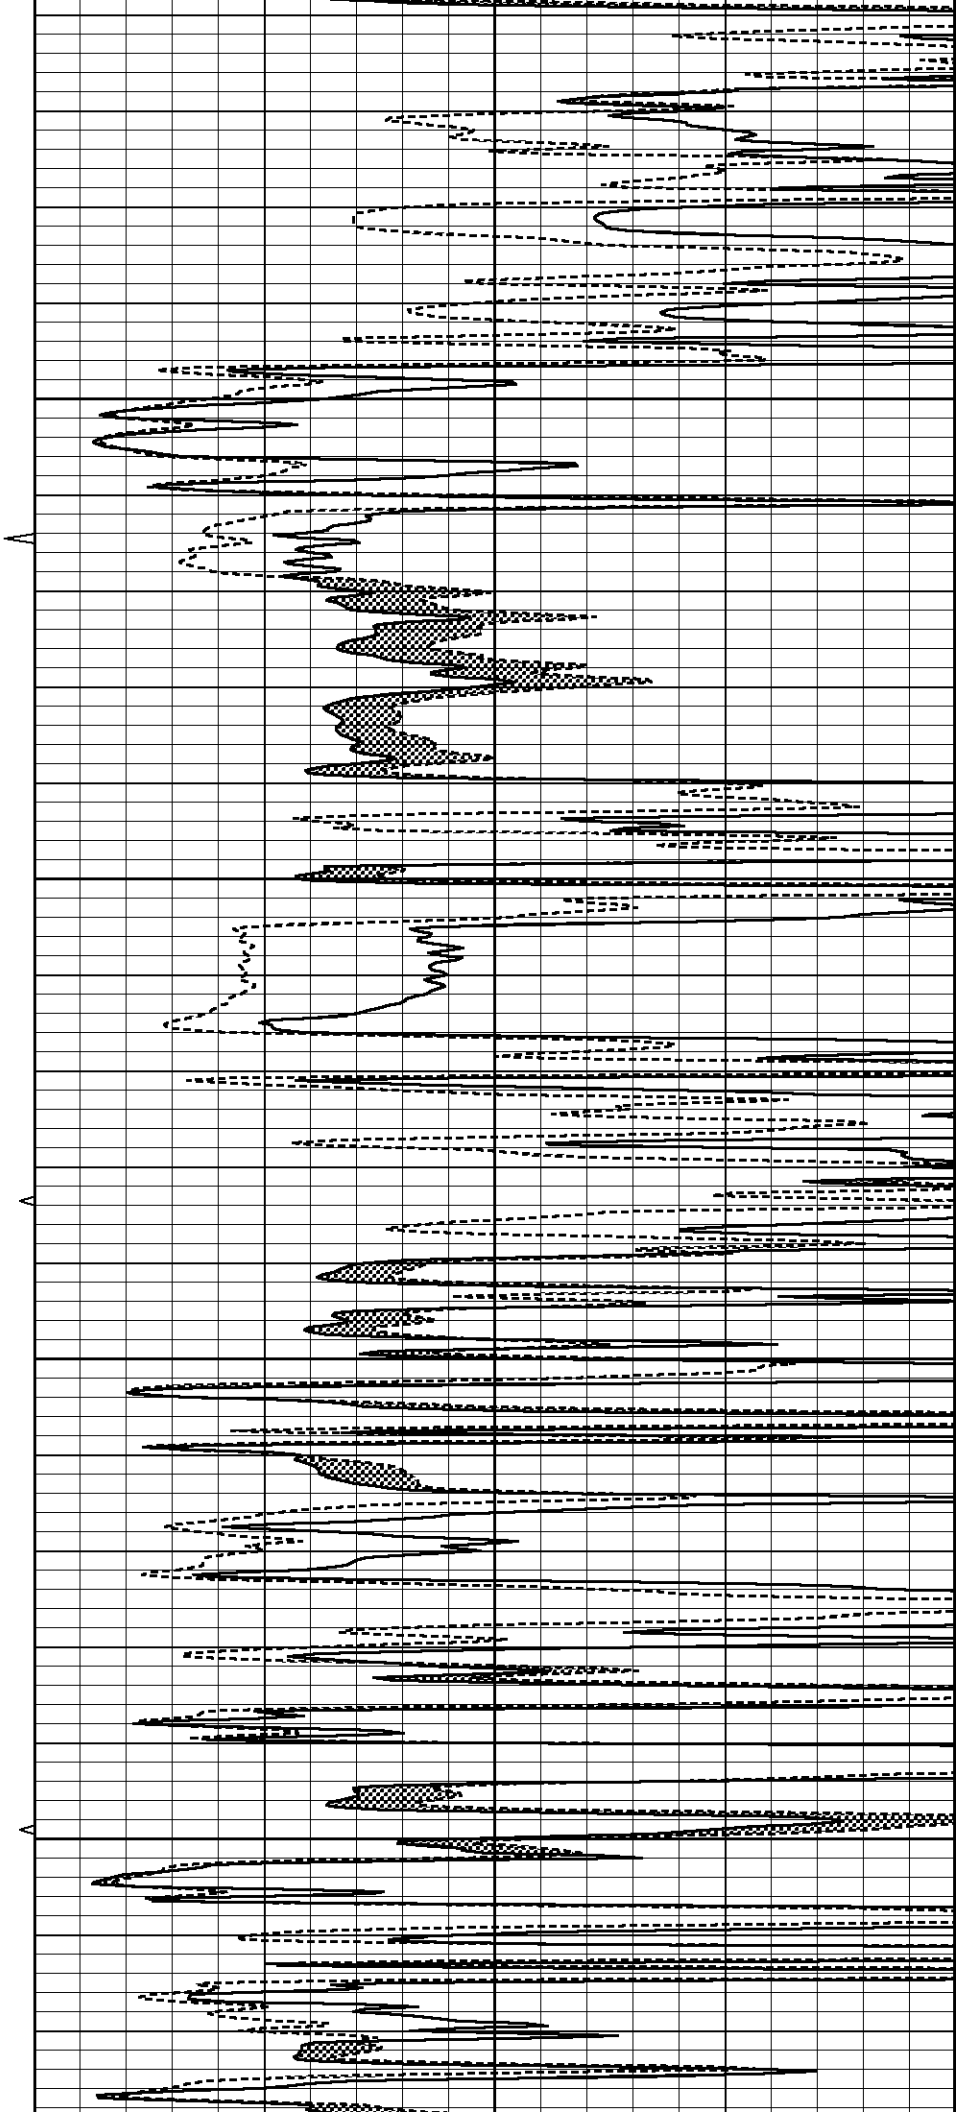

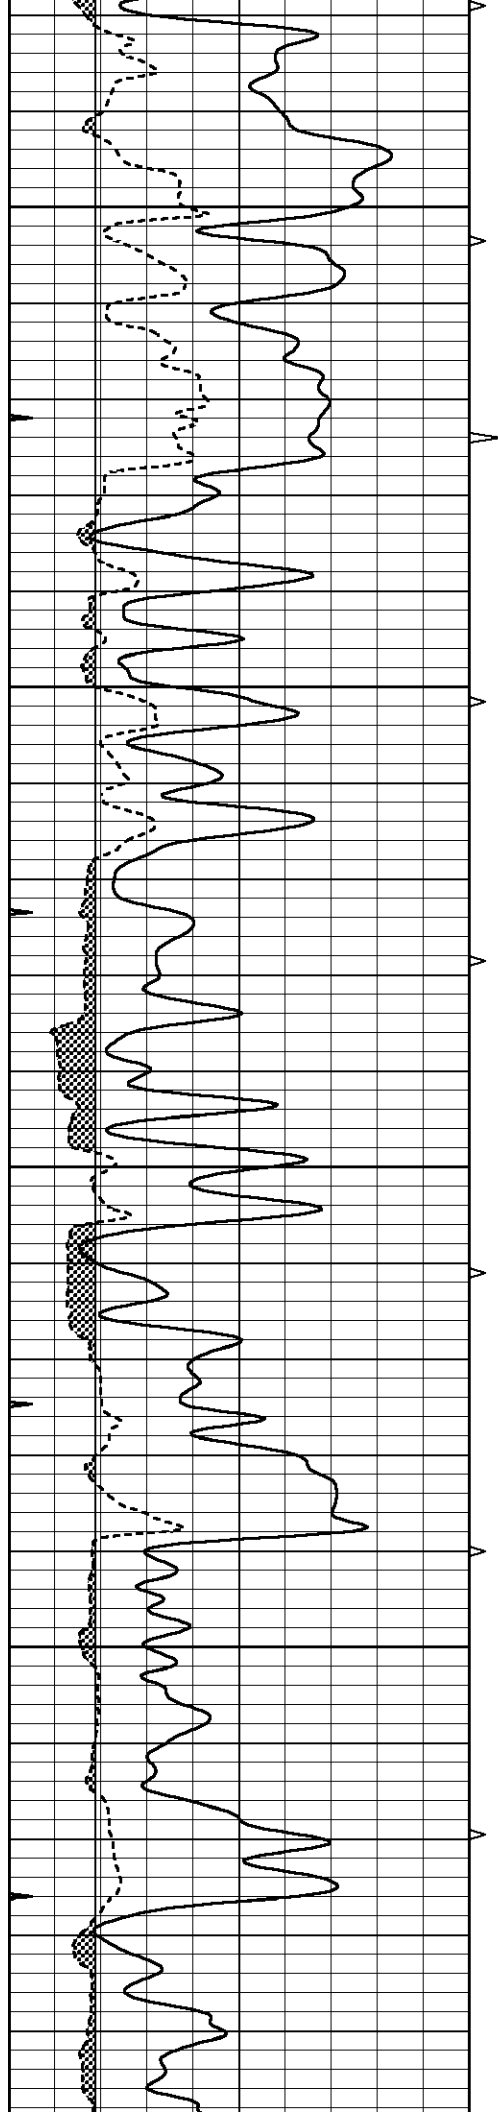



3400

3450

3500

3550

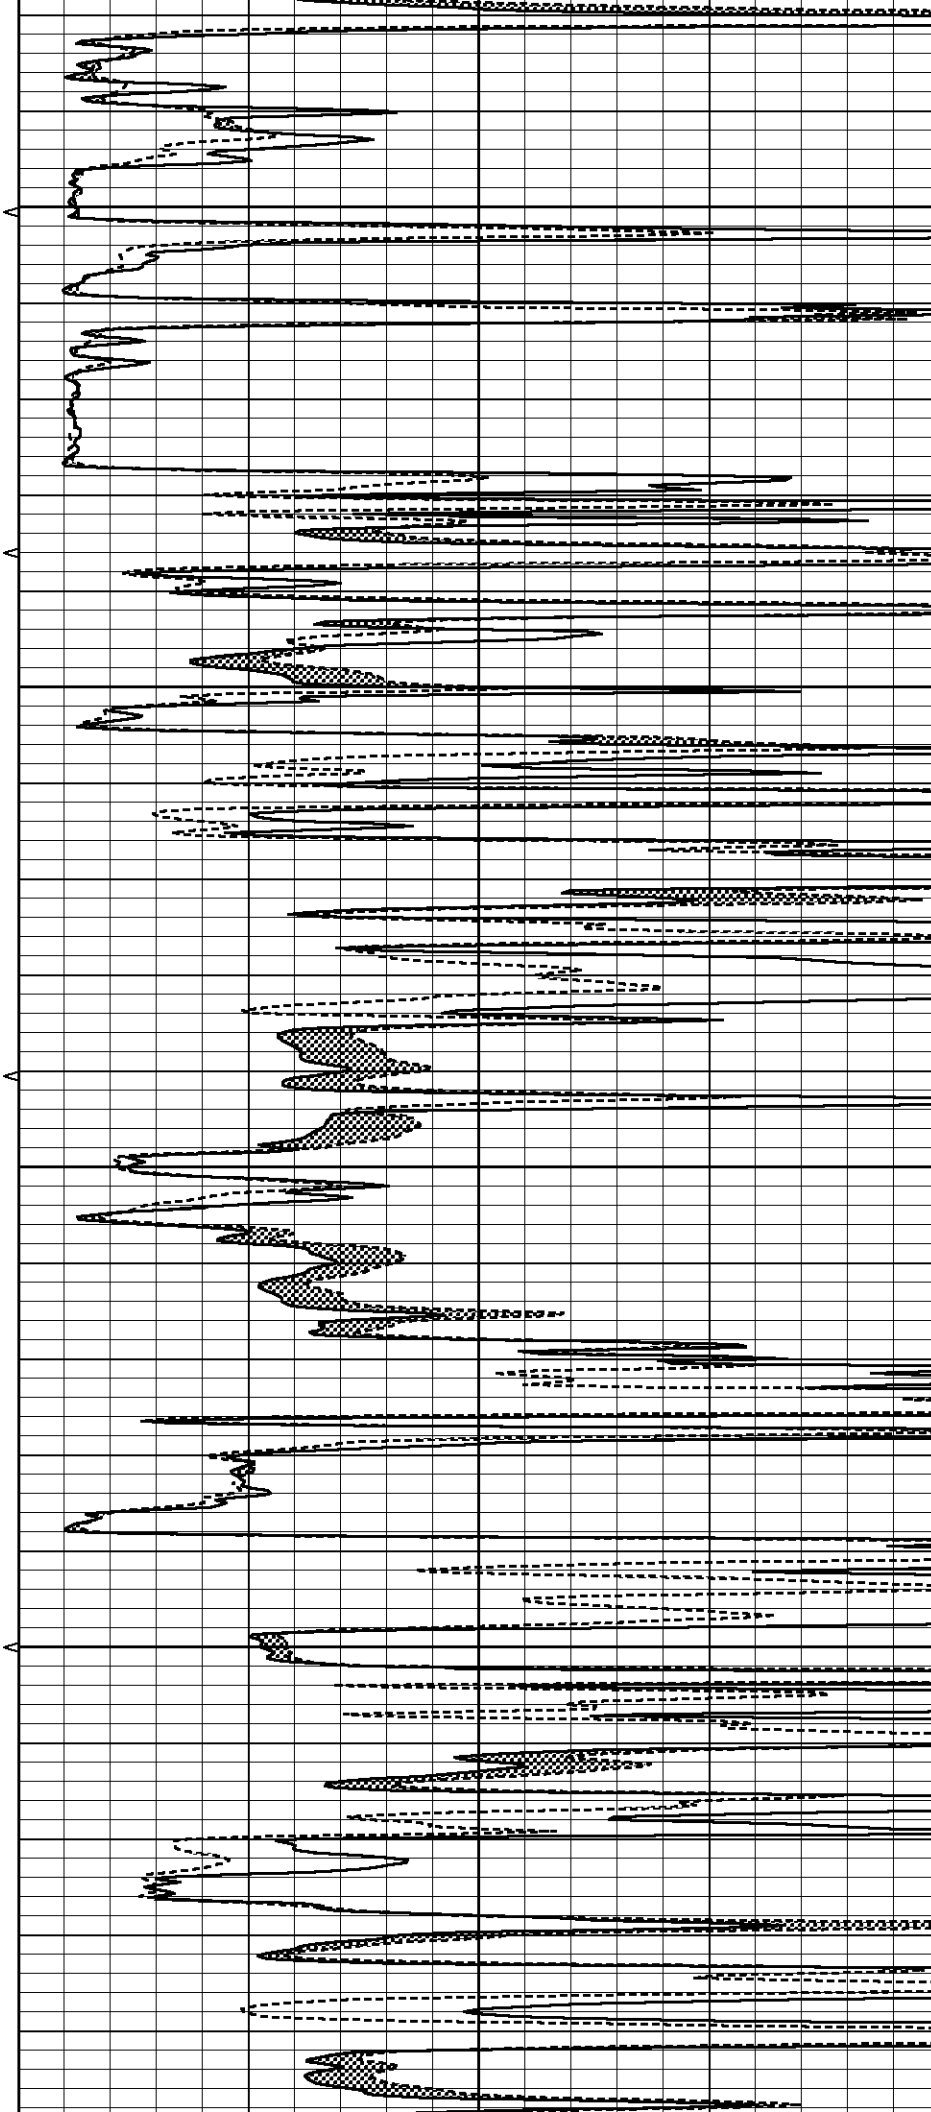

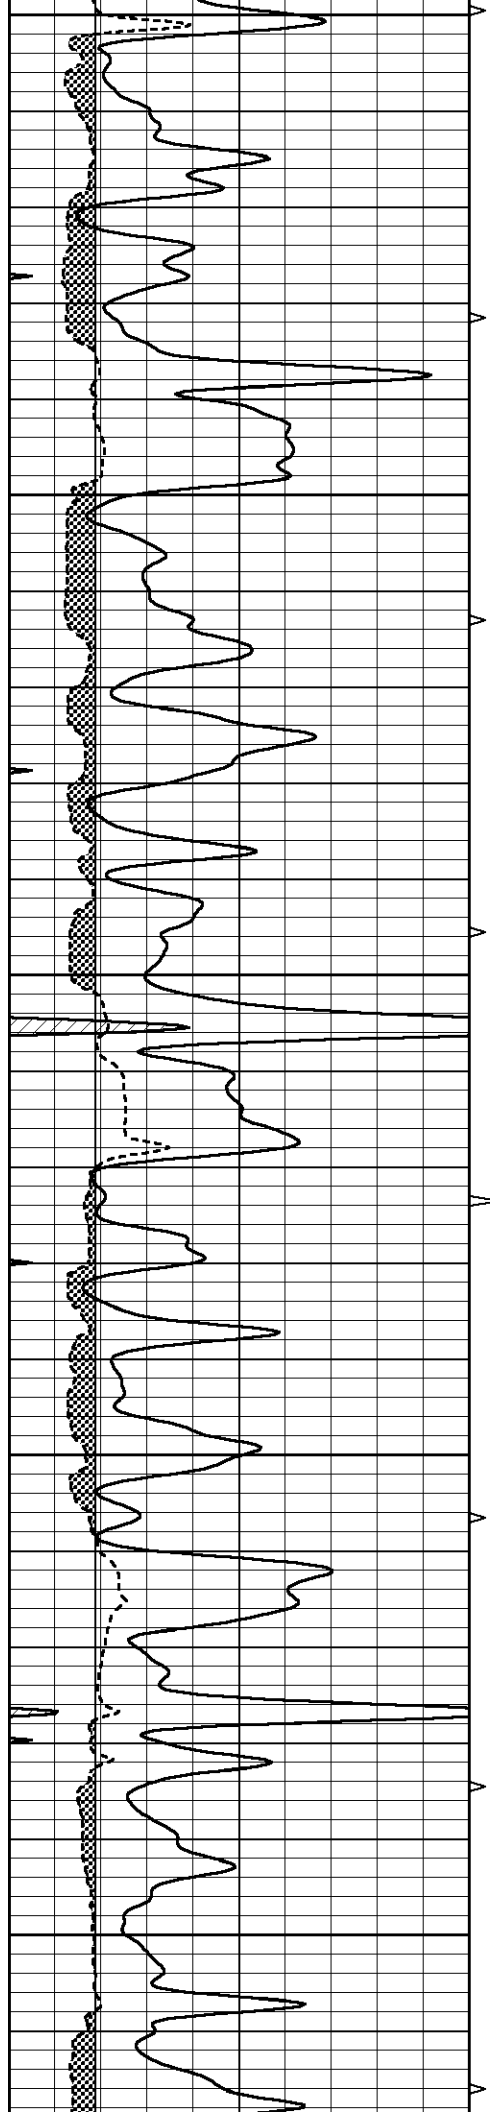


3600


3650

3700

3750

3800

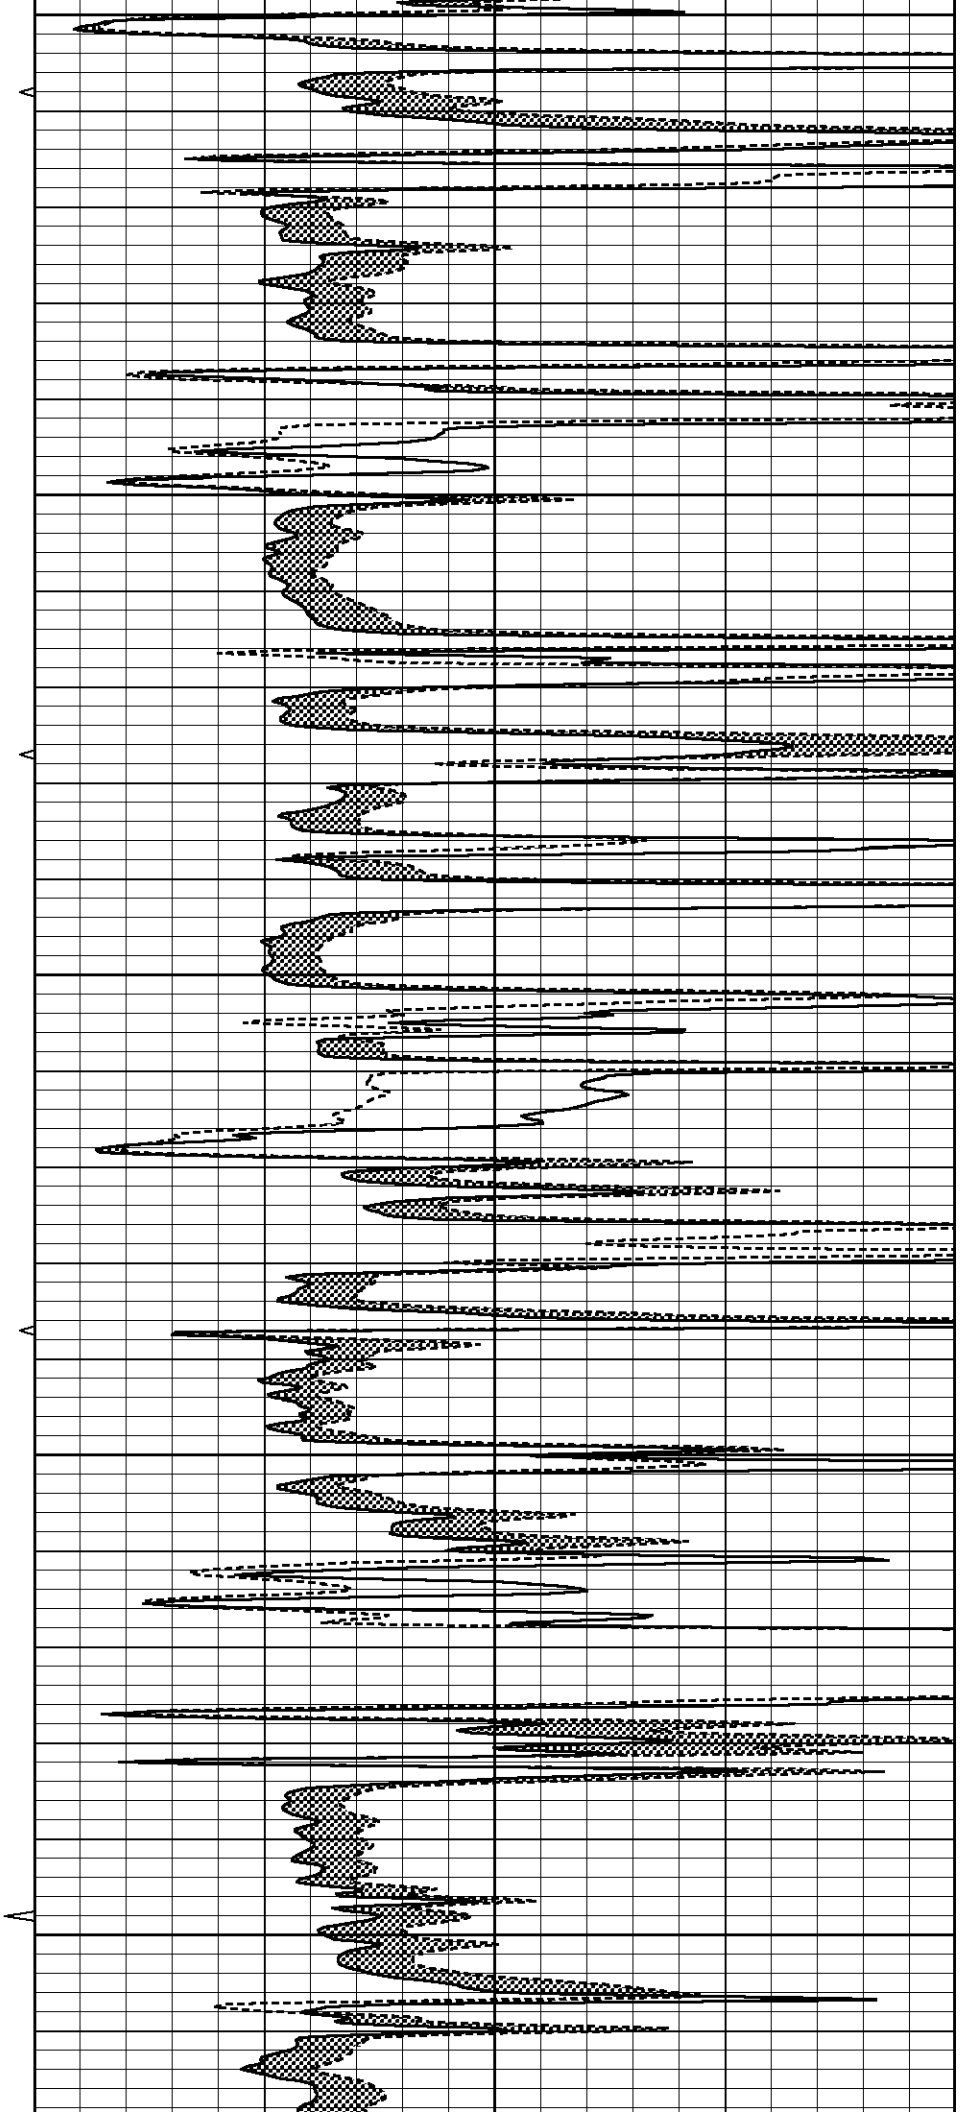

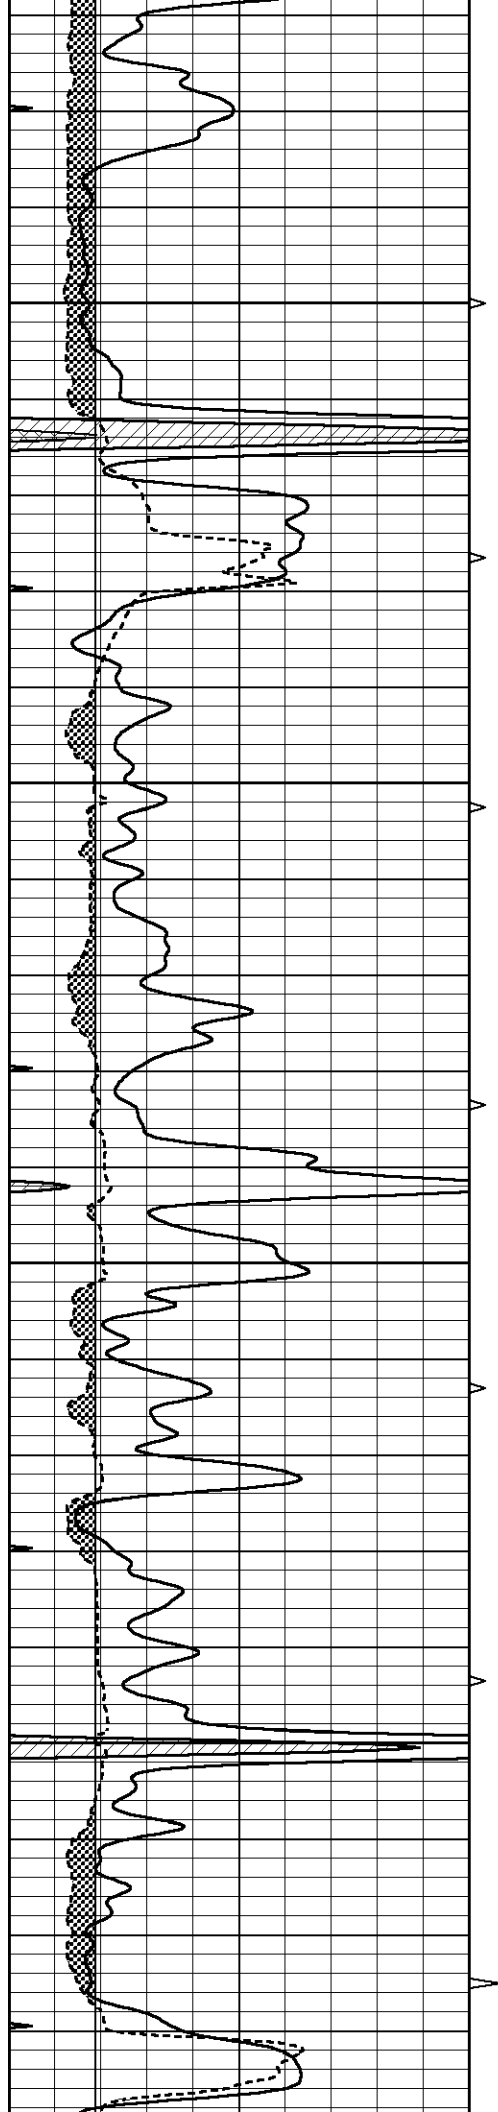



3850

3900

3950

4000

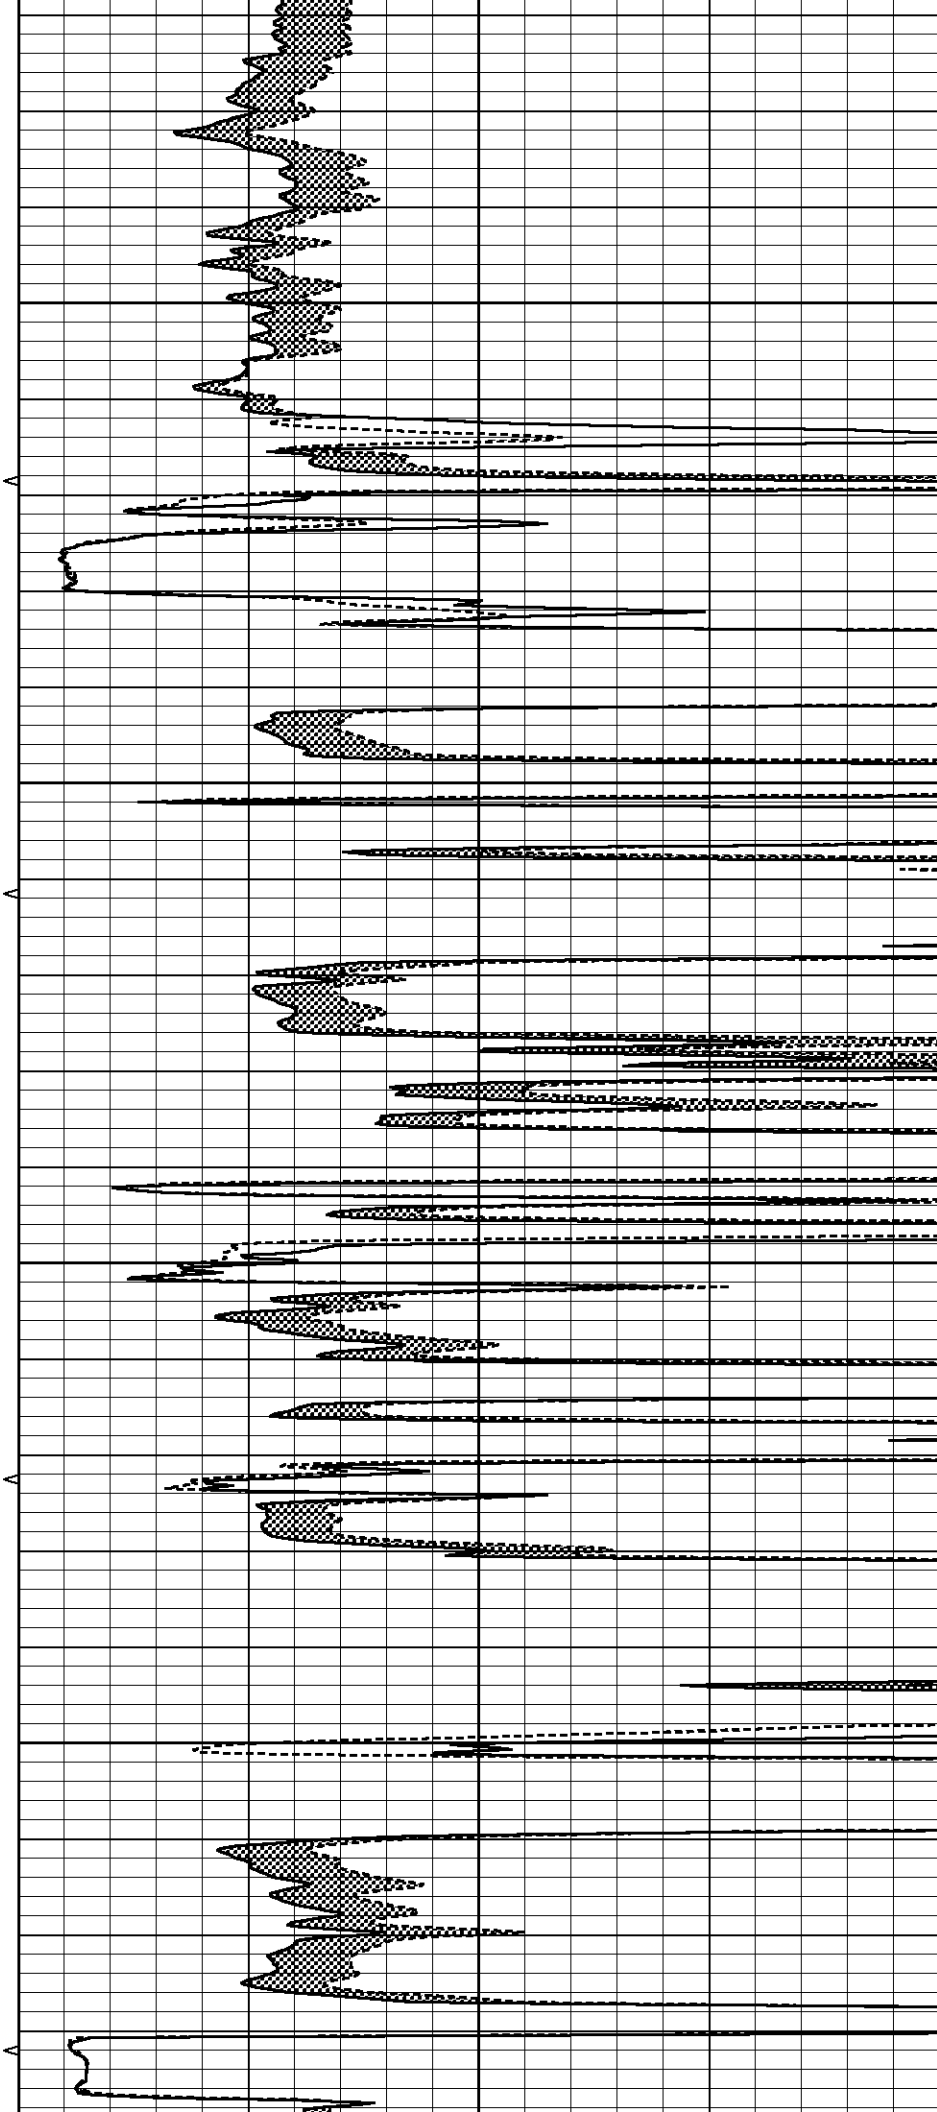

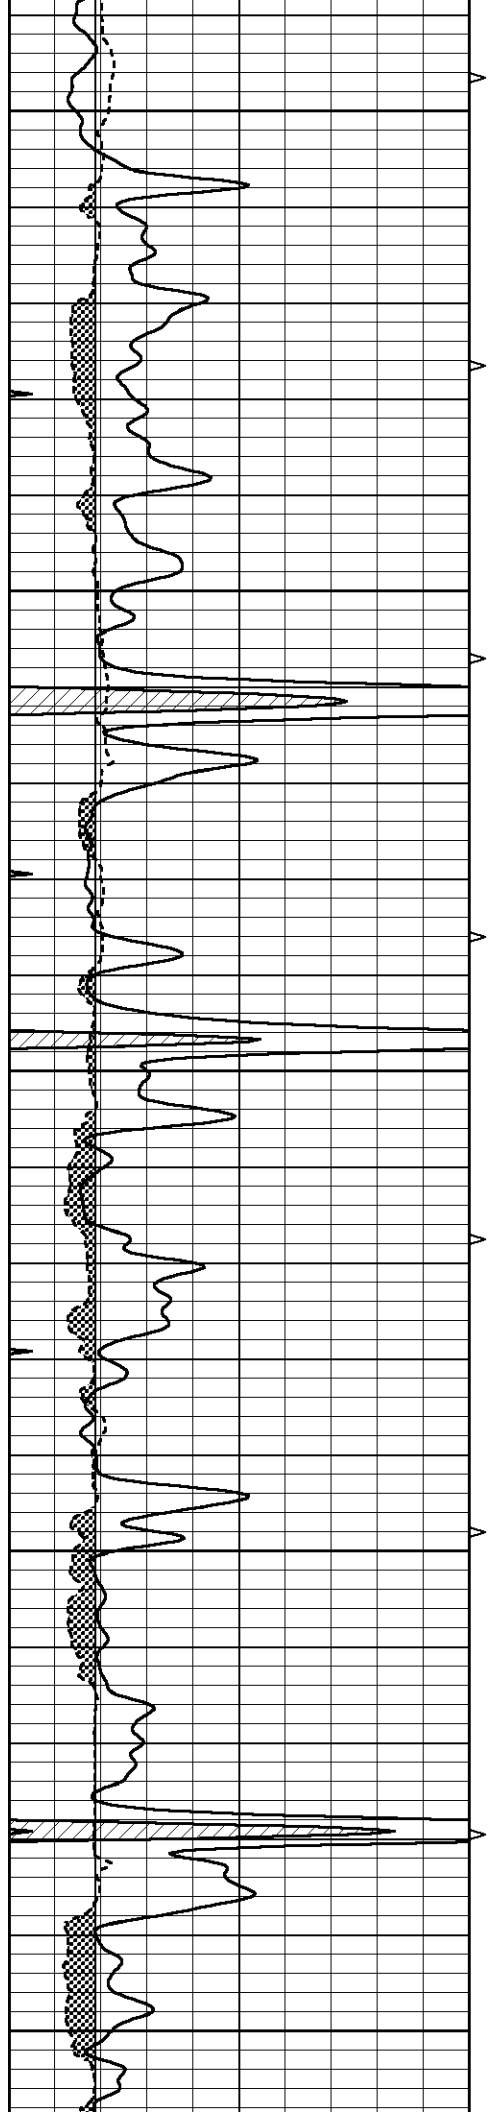


4050


4100

4150

4200

4250

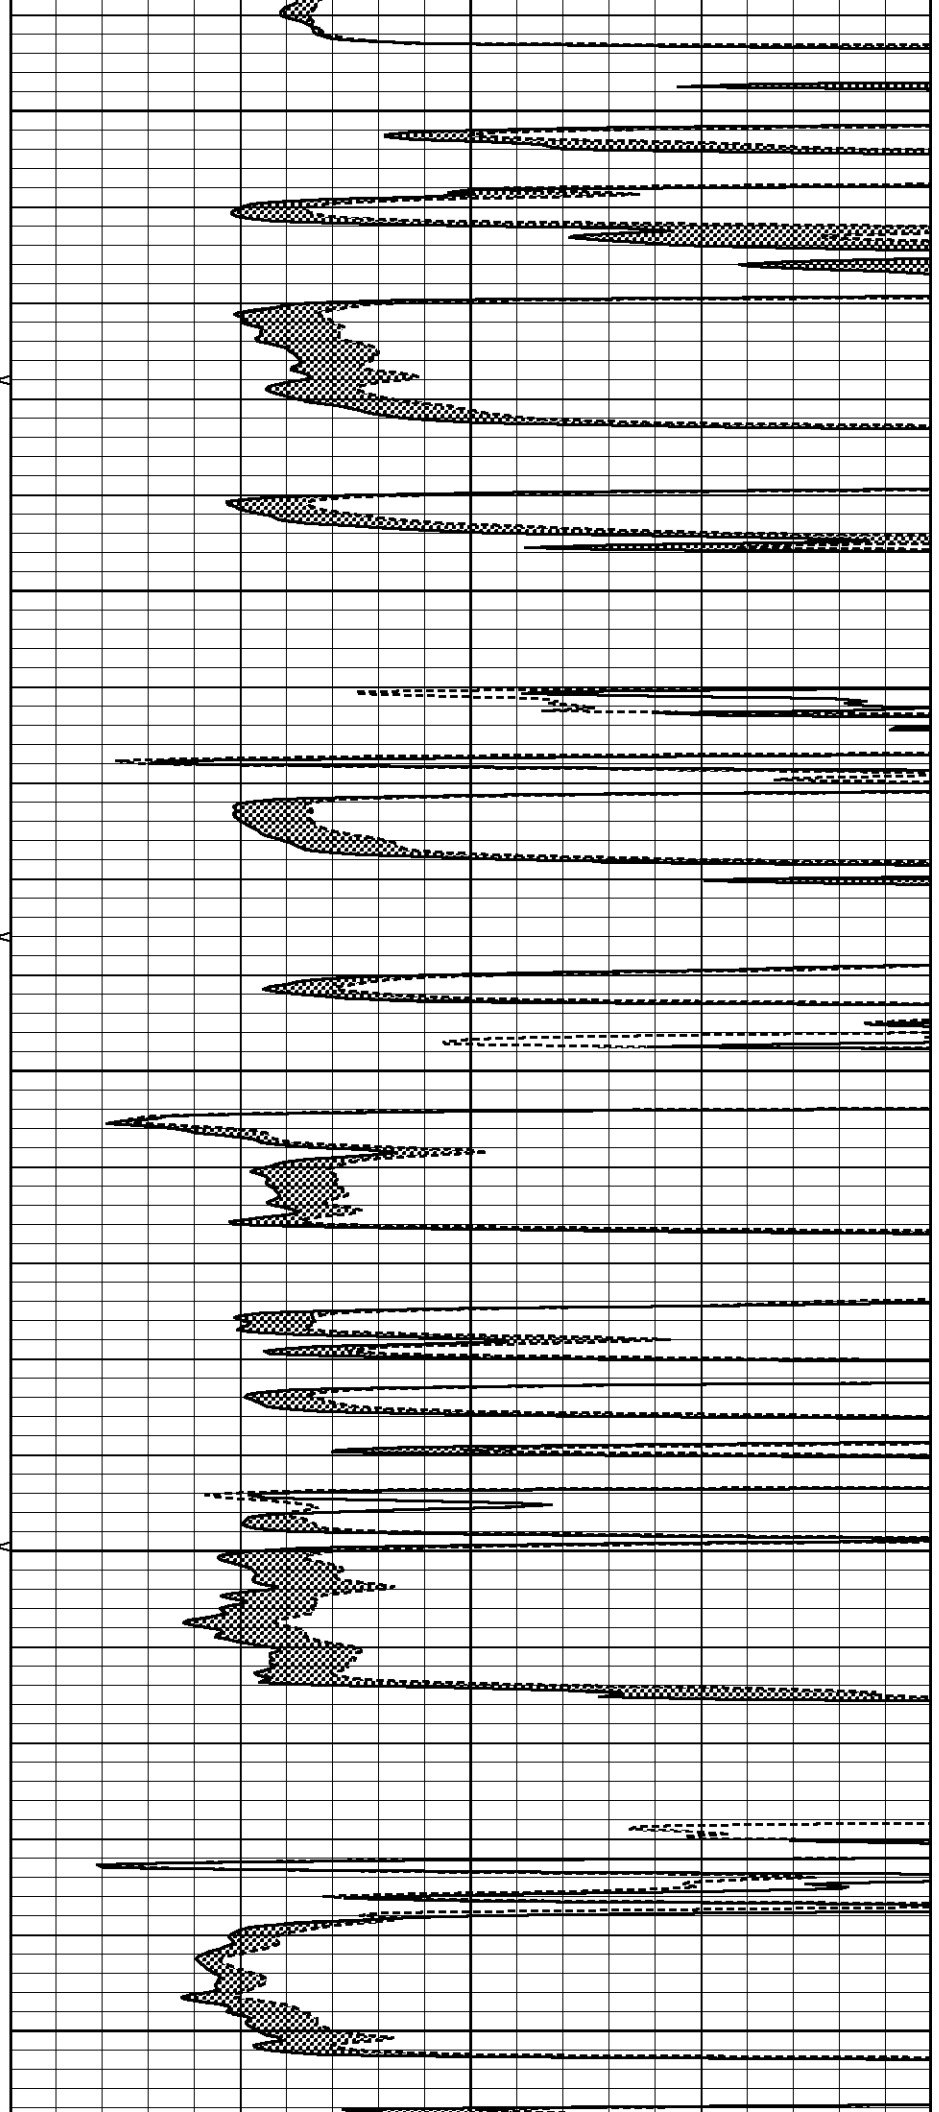

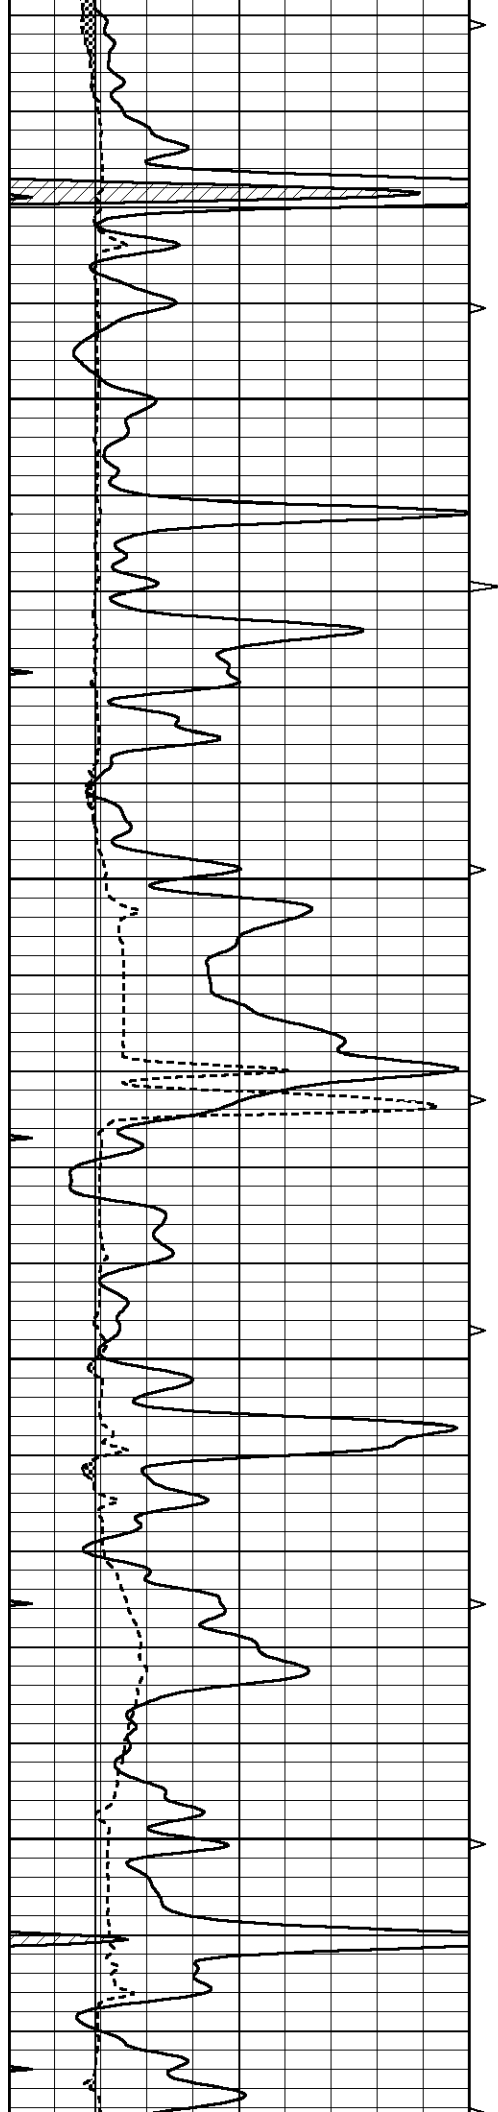



4300

4350

4400

4450

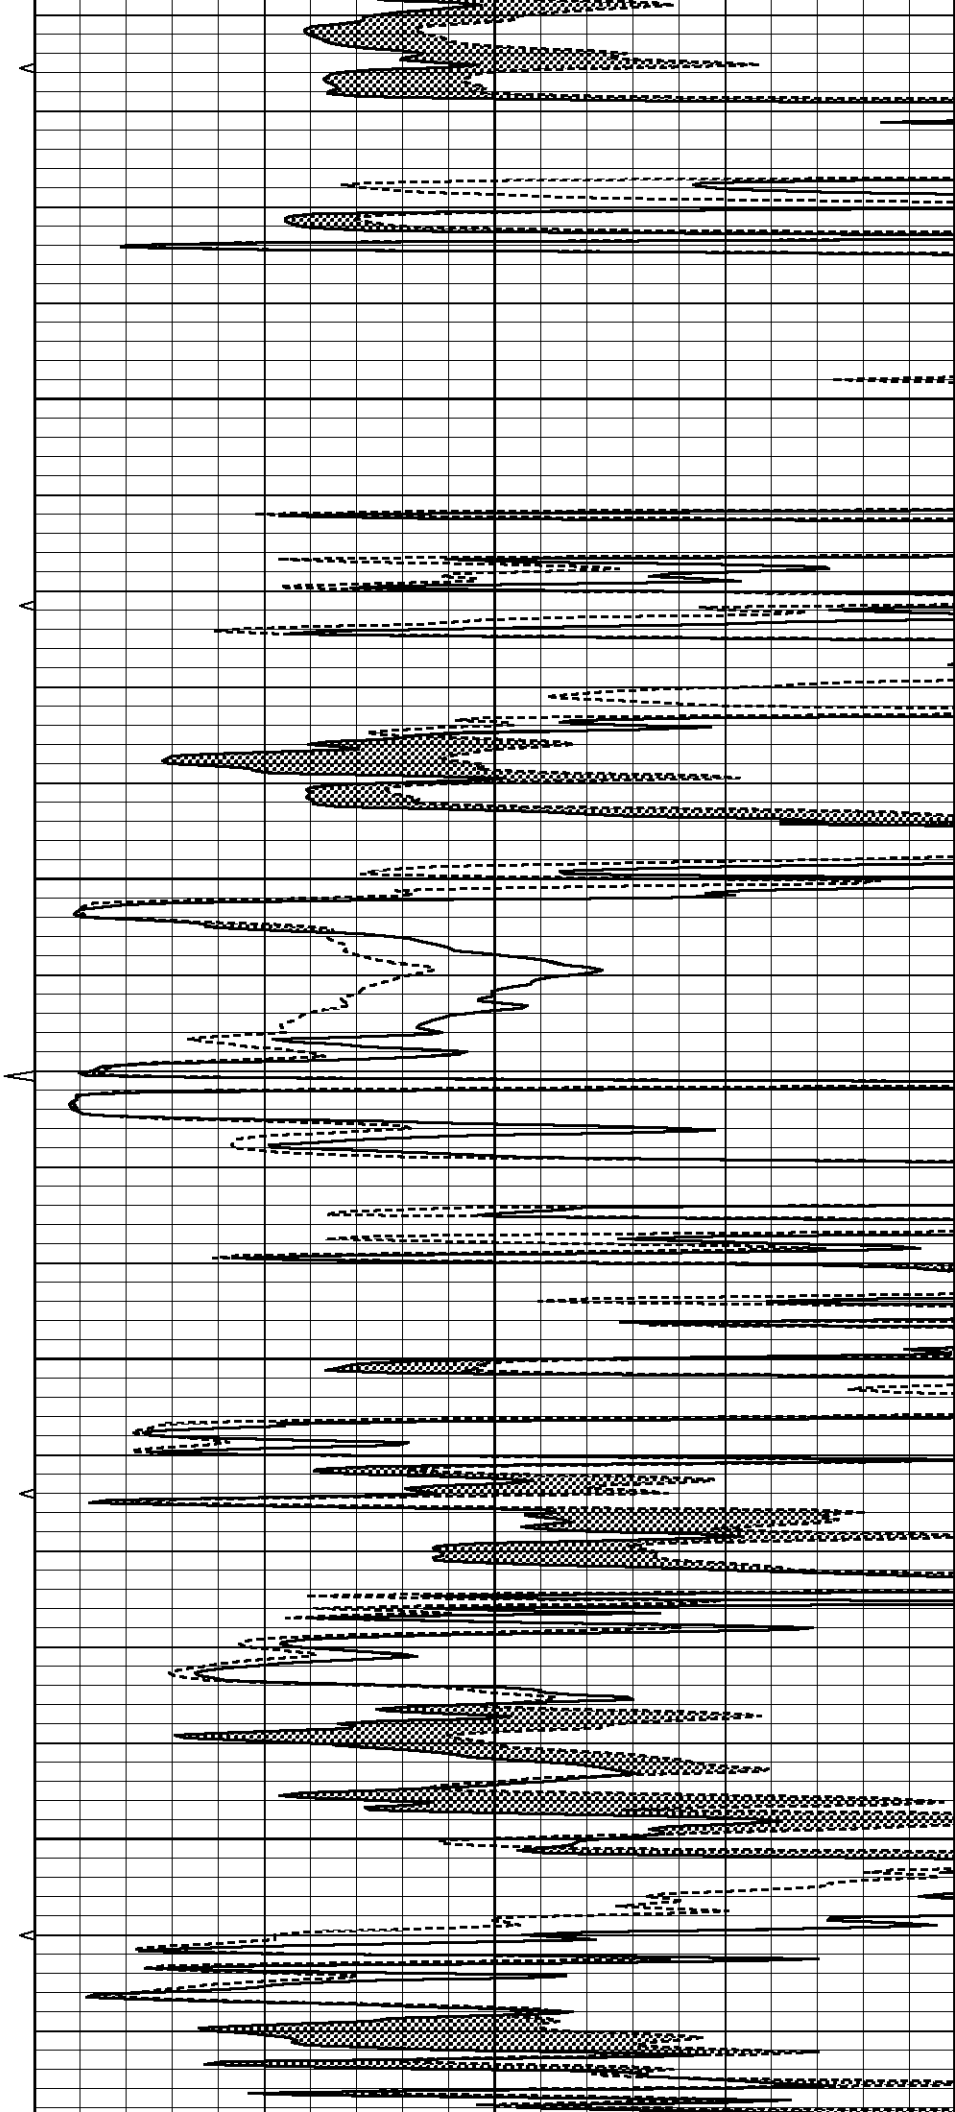

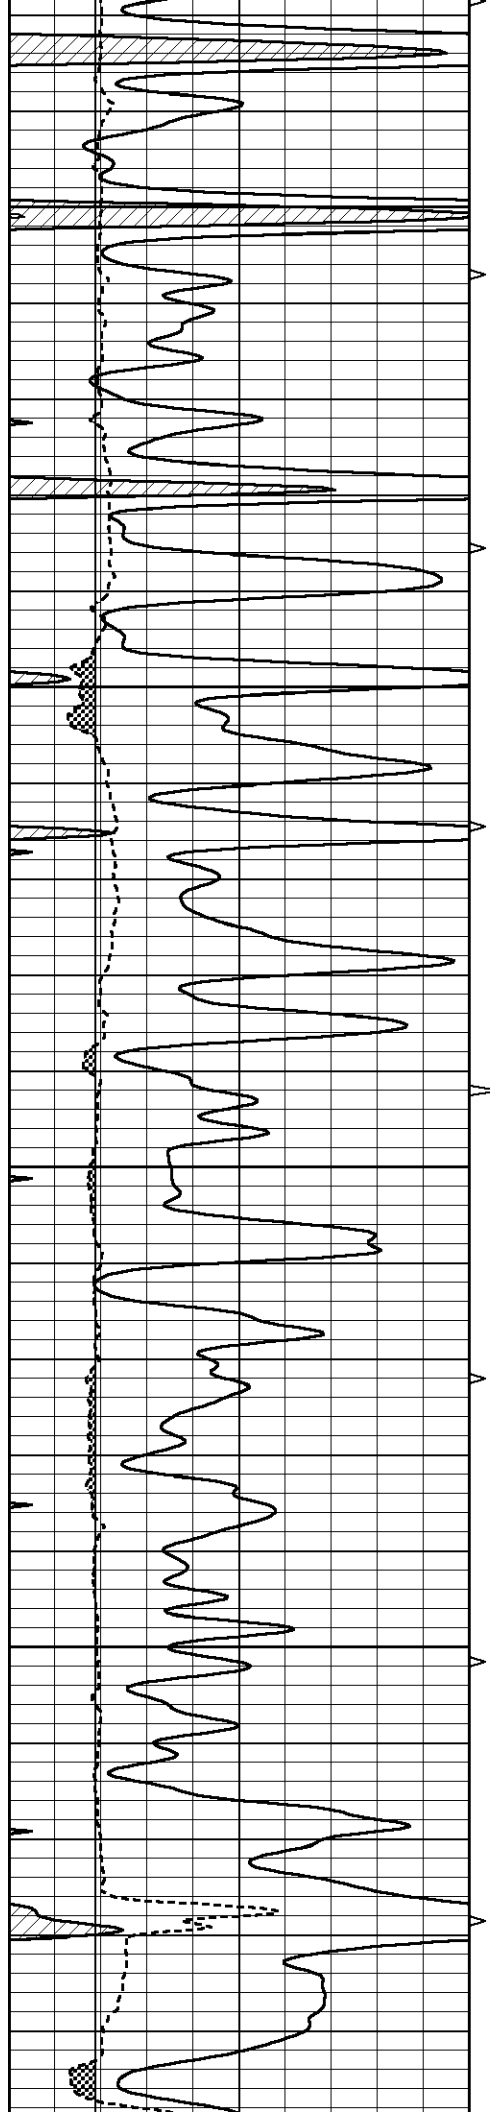



4500

4550

4600


4650

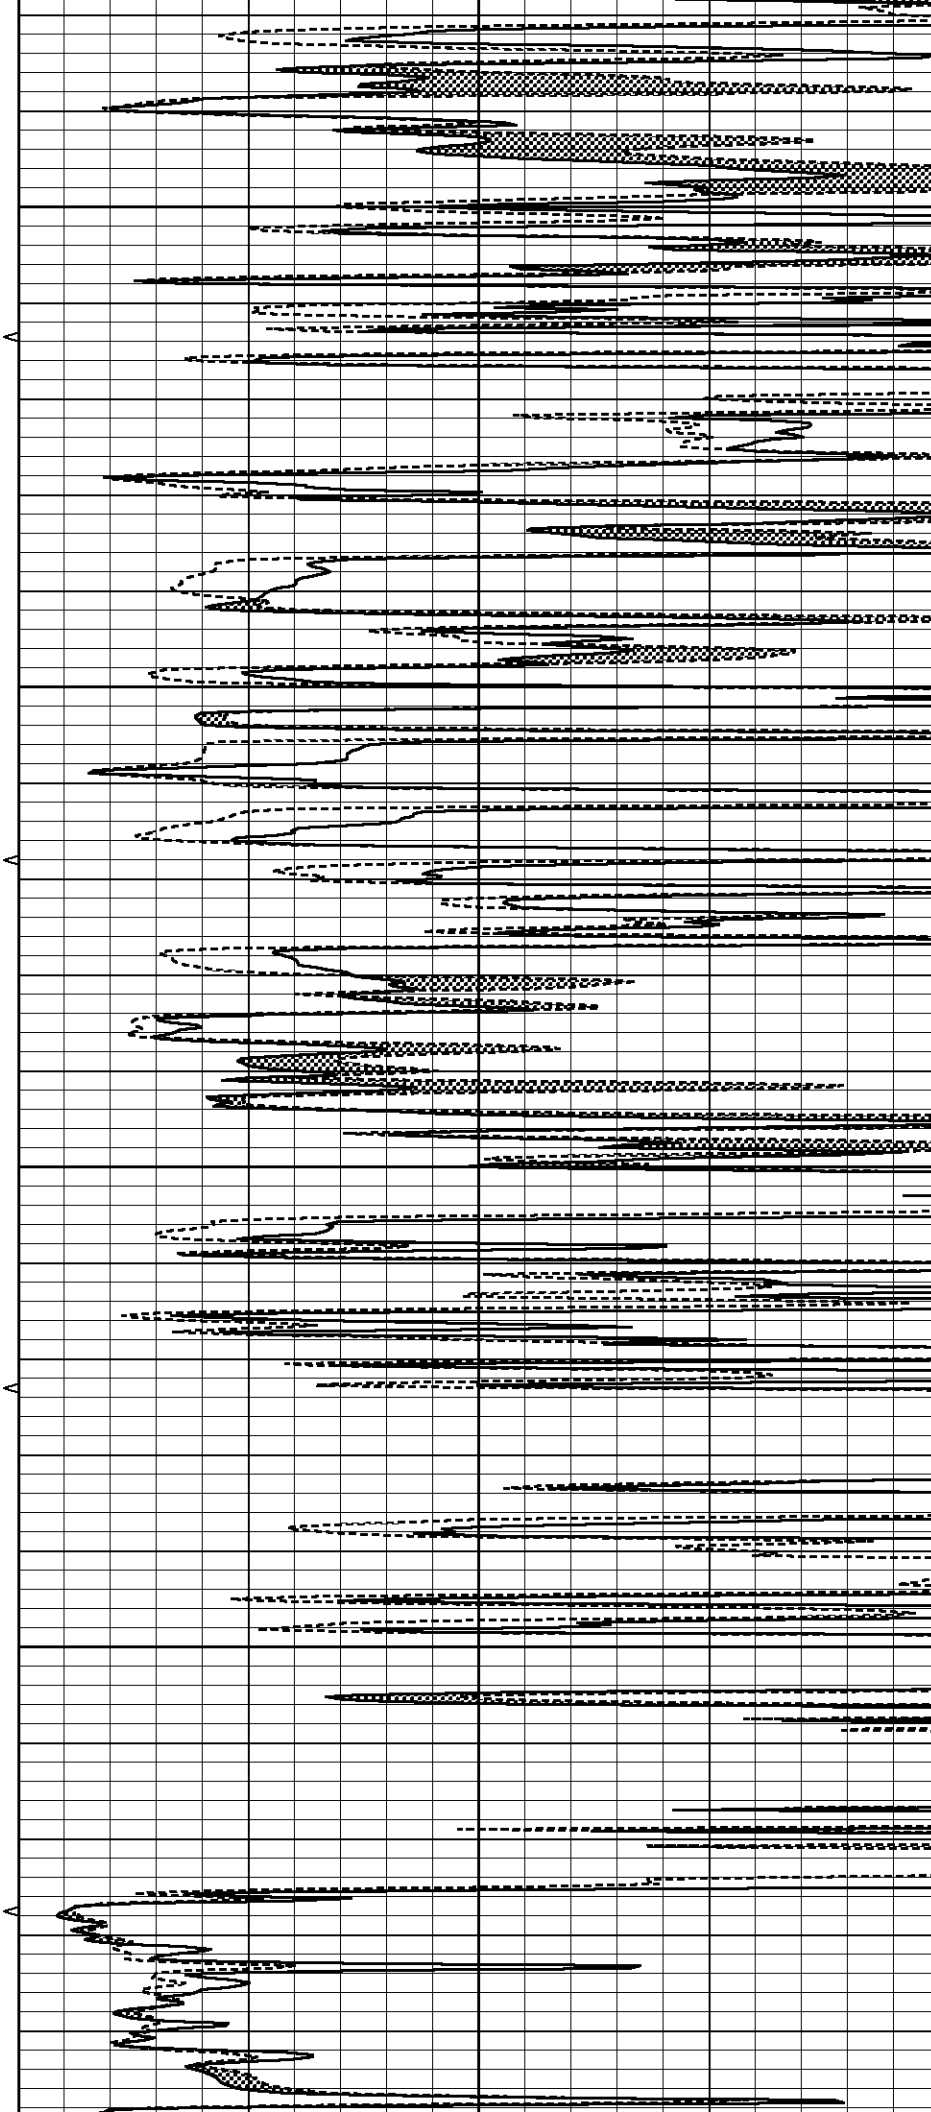


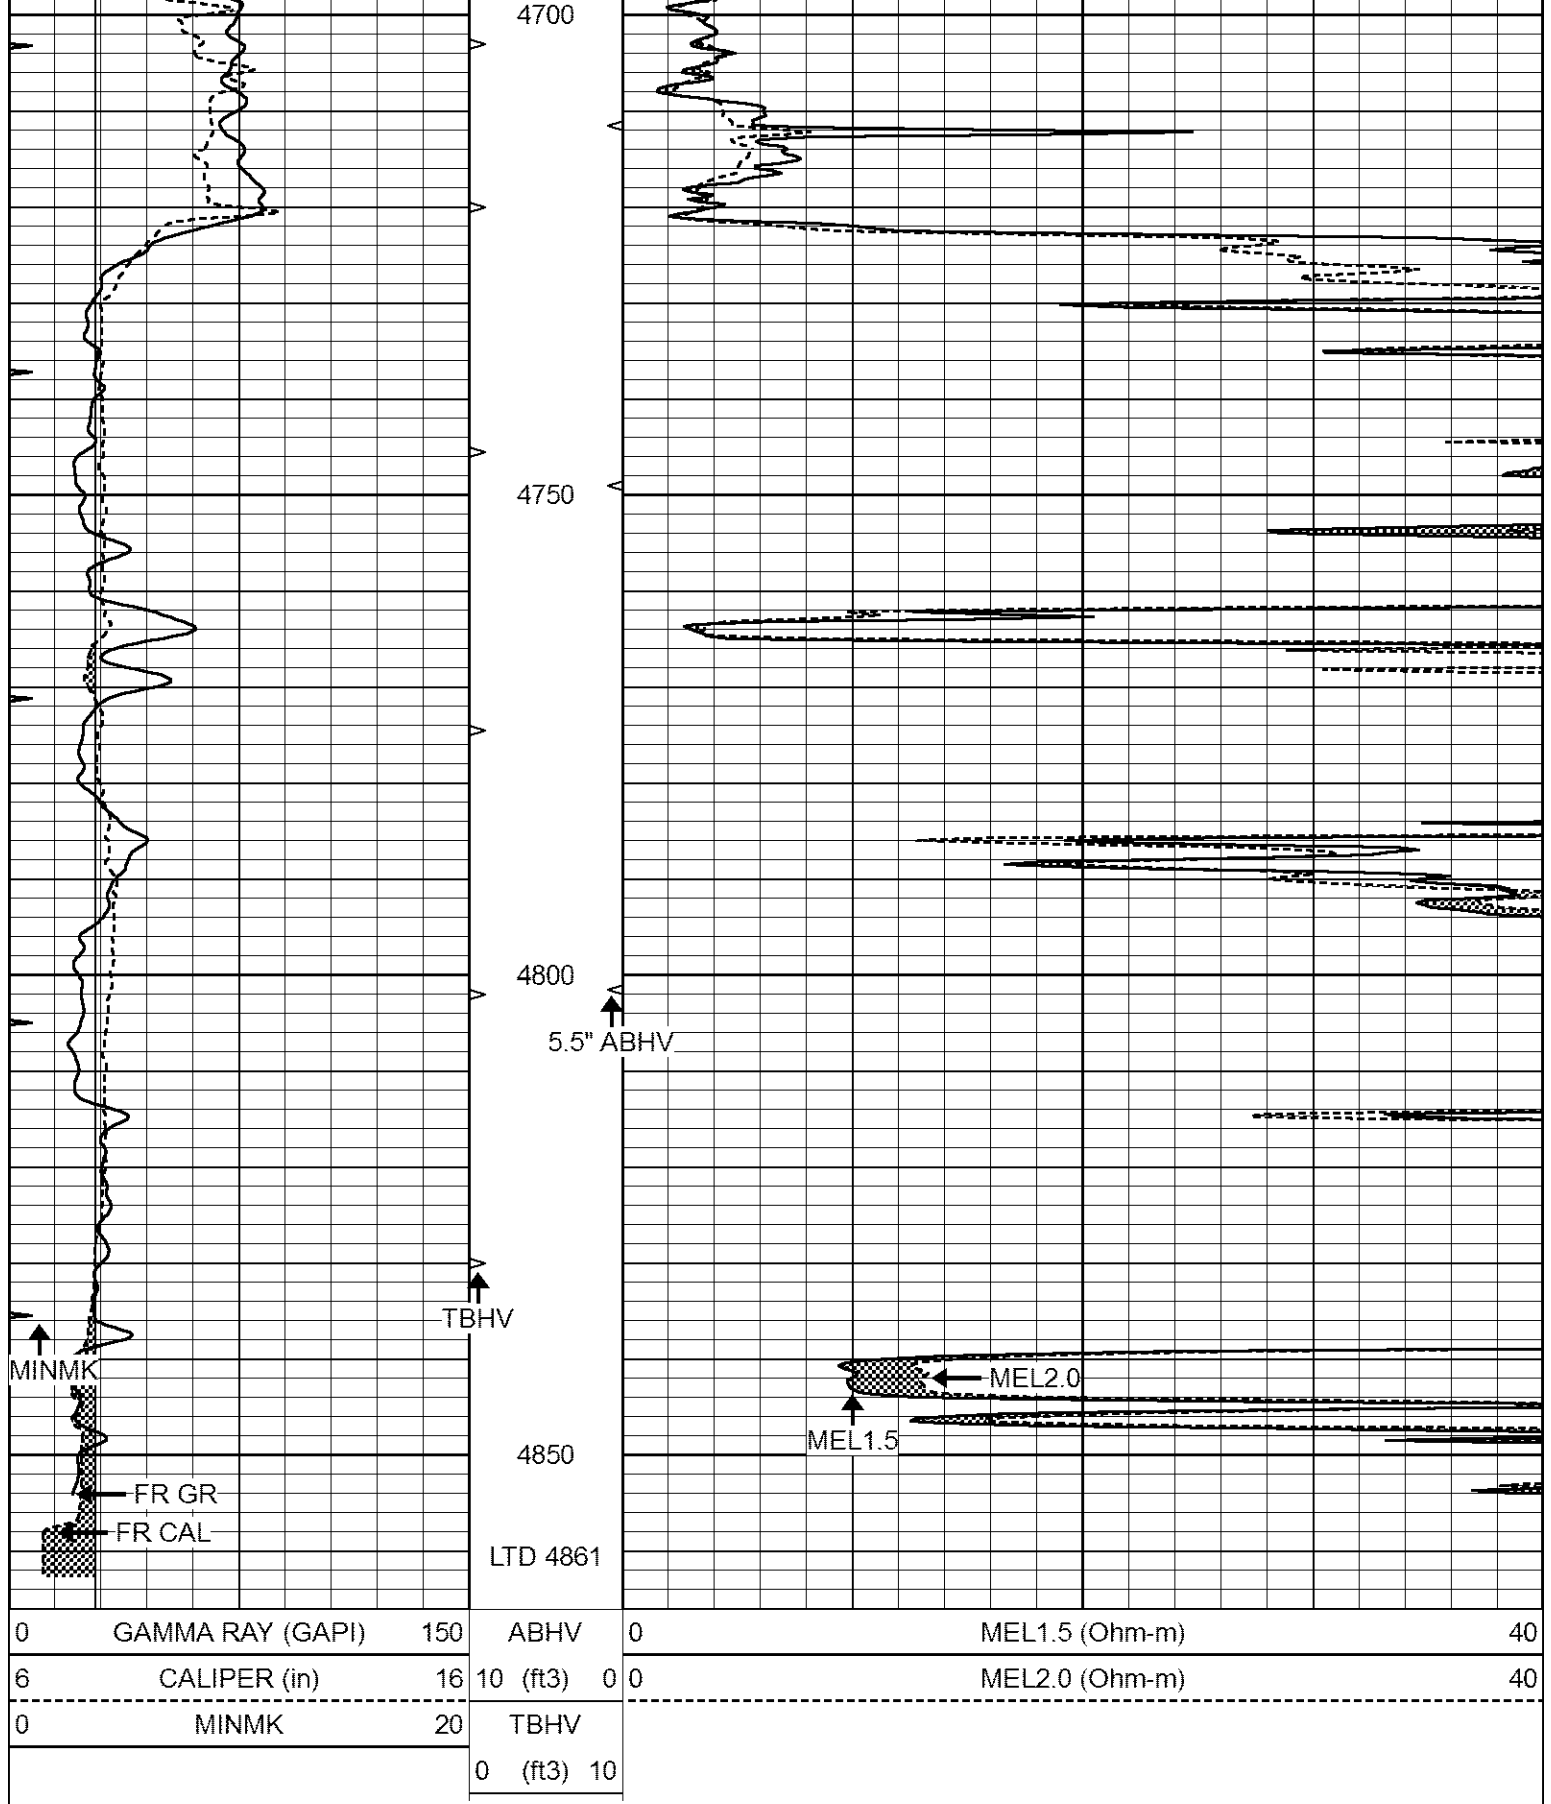

REPEAT SECTION

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

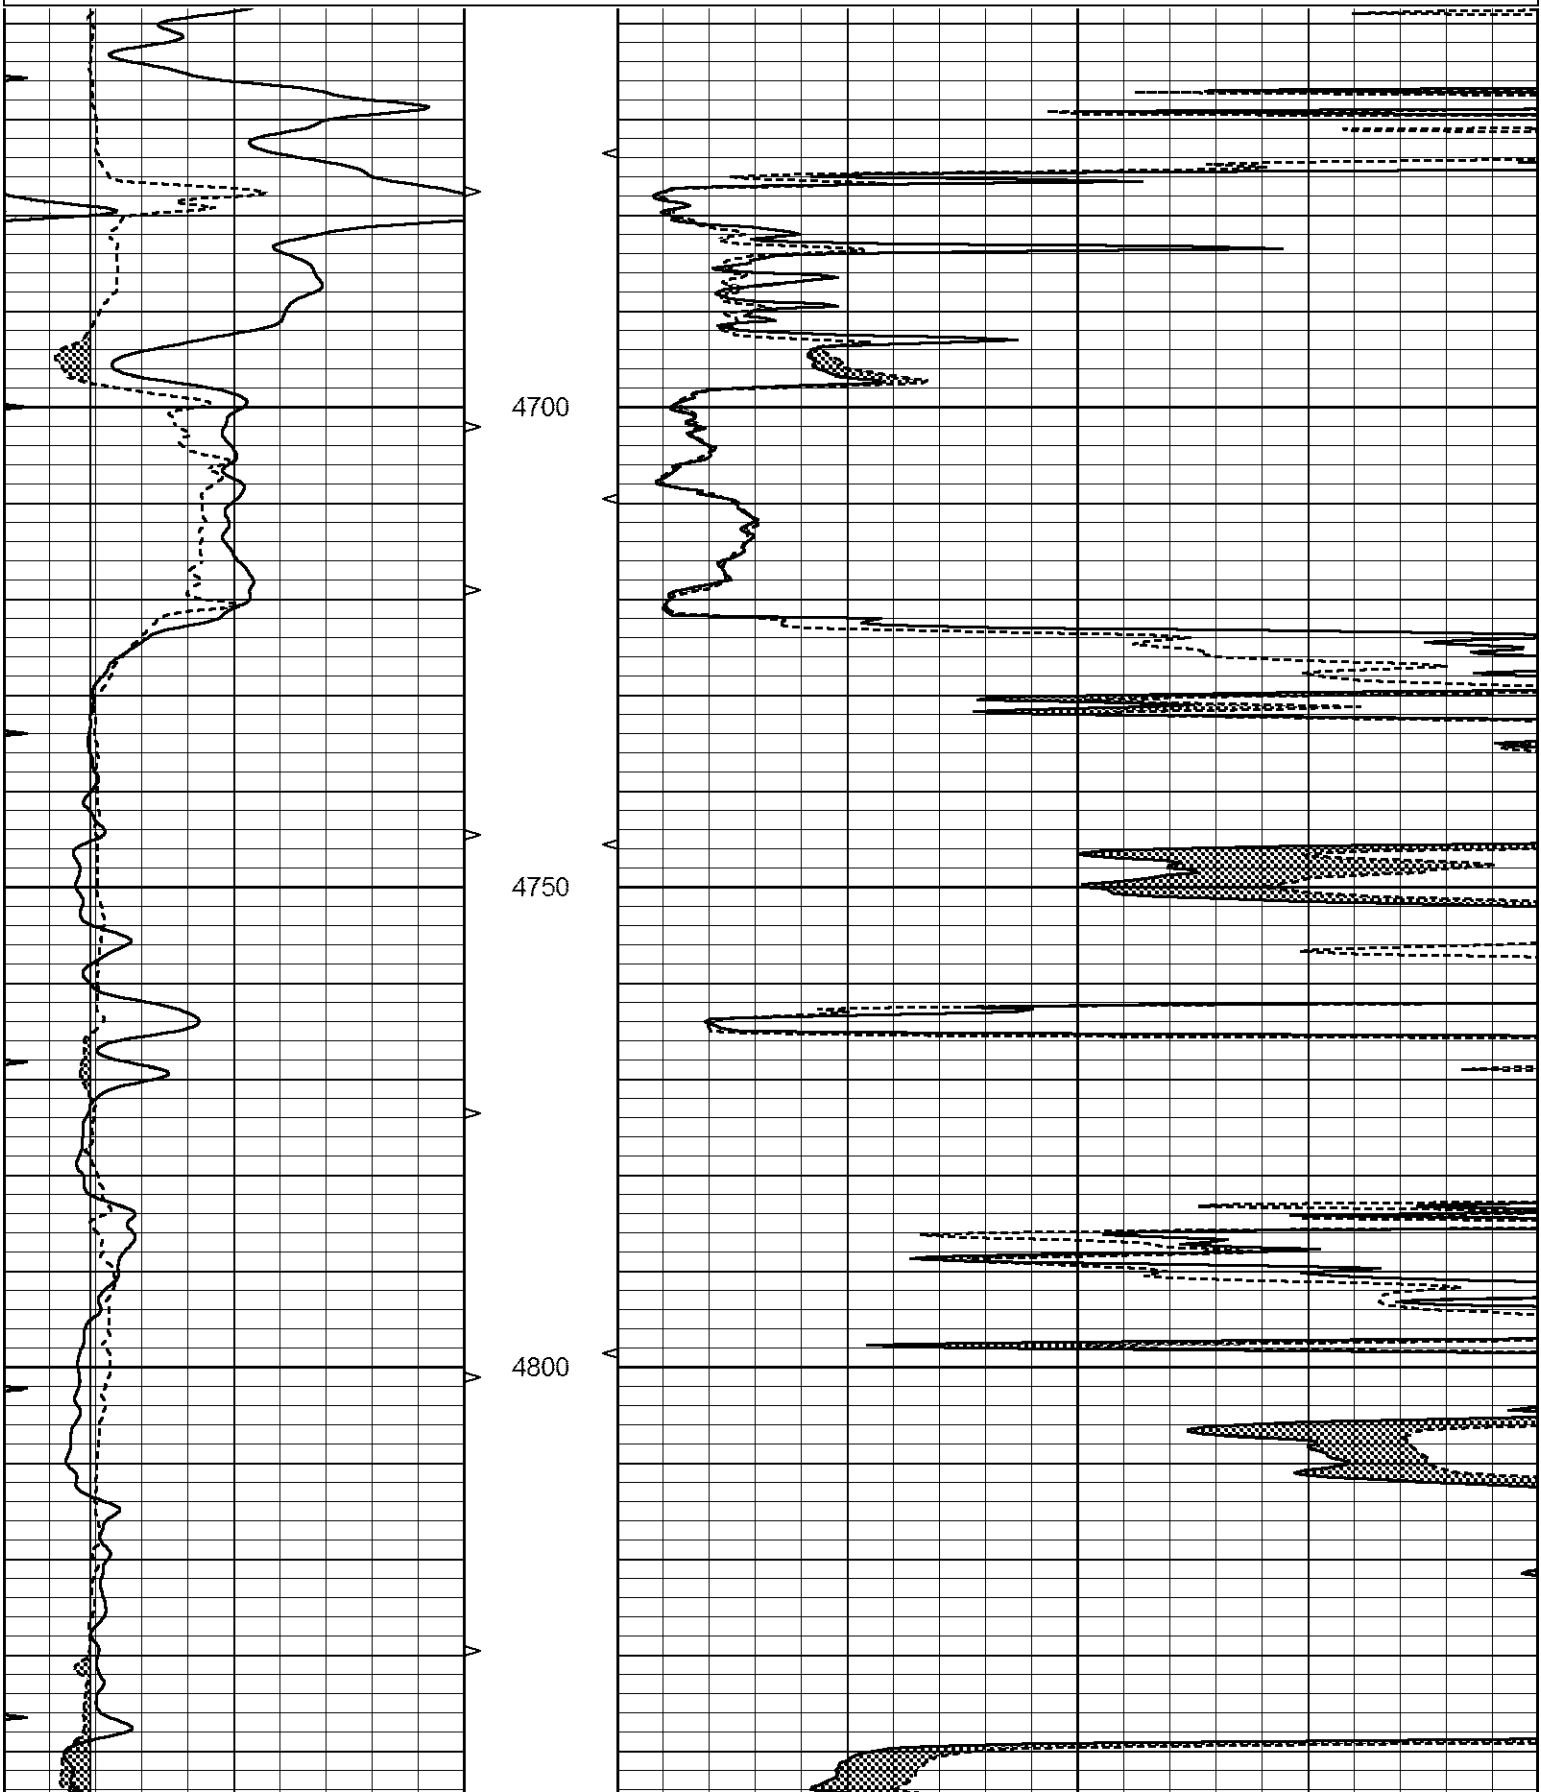

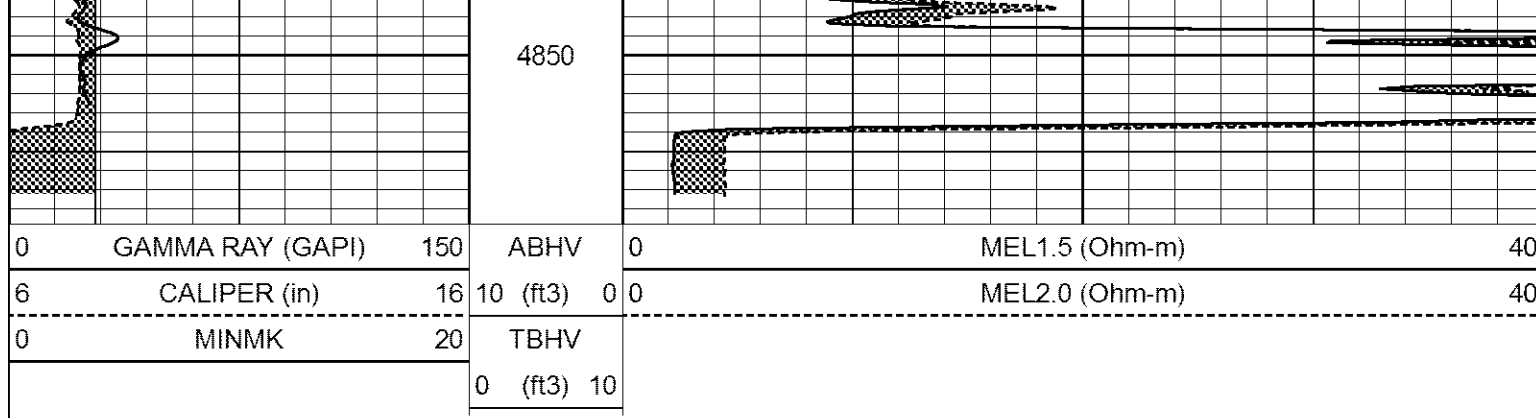

Calibration Report			
Database File	7235ddn.db		
Dataset Pathname	pass5R		
Dataset Creation	Mon Oct 17 16:07:13 2022		

MICRO_USR Calibration Report

Serial Number:	070911
Tool Model:	ProbeL
Performed:	Sun Oct 16 04:04:35 2022

Caliper Calibration:	Gain=4.500	Offset=0.100
References	Low Cal	High Cal
Readings	8.000	14.000
	1.451	3.049

1.5" Calibration:	Gain=55.000	Offset=-1.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.004	0.843

2" Calibration:	Gain=50.000	Offset=0.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.021	0.810

Microlog Calibration Report

Serial-Model:	070911-ProbeL
Performed:	Sat May 14 04:48:25 2022

	Readings				References			Results	
	Zero	Cal			Zero	Cal		m	b
Normal	0.0002	0.4836	V		0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V		0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V		0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Sat Jul 02 05:55:58 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity:

0.2600

GAPI/cps