

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-055-21119-00-01
Spot: SWNWSW Sec/Twnshp/Rge: 19-21S-34W
1665 feet from S Section Line, 350 feet from W Section Line
Lease Name: BRETZ A Well #: 1 OWWO
County: FINNEY Total Vertical Depth: 3250 feet

Operator License No.: 33168
Op Name: WOOLSEY OPERATING COMPANY, LL
Address: 125 N. MARKET, SUITE 1000
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		2750		
PROD	4.5	3191	0	WITH 875 SX CMT
SURF	8.625	299		WITH 250 SX CMT

\$ 105.63

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 03/20/2007 9:00 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: ROBERT MOOREHEAD Company: WOOLSEY OPERATING Phone: (316) 267-4379

Proposed Plugging Method: PUMP 300# HULLS & 40 SX CMT AND GEL TO 1100'. CIRCULATE CMT FROM 1100' - 0'.

Plugging Proposal Received By: RICHARD LACEY Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 03/20/2007 11:30 AM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 45 SX CMT & 300# HULLS. PUMP 100 SX CMT DOWN 4 1/2" CASING TO SURFACE. PRESSURED TO 500#. HELD AT 400#. PUMP 5 SX CMT DOWN 4 1/2" X 8 5/8" ANNULUS. PRESSURED TO 700# & HELD.

Perfs:


Top	Bot	Thru	Comments
2756	2759		
2637	2650		

INVOICED
DATE 4-10-07
INV. NO. 2007061572

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

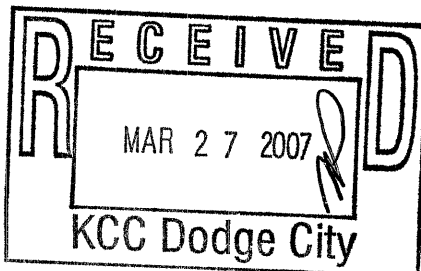

Signed Ken Jehlik
(TECHNICIAN)

RECEIVED Form CP-2/3
KANSAS CORPORATION COMMISSION

APR 04 2007

CONSERVATION DIVISION
WICHITA, KS