

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-055-00312-00-00
Spot: SE Sec/Twnshp/Rge: 9-22S-34W
1320 feet from S Section Line, 1320 feet from E Section Line
Lease Name: JOHNSON Well #: 1
County: FINNEY Total Vertical Depth: 2629 feet

Operator License No.: 33094
Op Name: CIMAREX ENERGY CO.
Address: 15 EAST 5TH STREET - STE 1000
TULSA, OK 74103

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		1100		WITH 2 SX CMT
CIBP		2467		
CIBP		2586		
PROD	5.5	2613	0	WITH 300 SX CMT
SURF	8.625	291		WITH 100 SX CMT

\$85.44

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 03/20/2007 3:00 PM
Plug Co. License No.: 7407 Plug Co. Name: EAGLE WELL SERVICE
Proposal Rcvd. from: KENT PENDERGRAFT Company: CIMAREX ENERGY Phone: (918) 585-1100

Proposed Plugging Method: PER KCC INSTRUCTIONS. THERE IS A POSSIBLE CASING LEAK AROUND 500'. (1) CIBP W/2 SX CMT @1950 (2) SX CMT @ 1100' (3) TEST CSG TO 750# (4) PERF 4 HOLES @ 1050' (5) 180 SX 60/40 POZ 6 % GEL DOWN 5 1/2" W 100 HULLS AFTER 90 SX (6) IF NO CIRCULTION, 150 SX 60/40 POZ 6% GEL DOWN 5 1/2" X 8 5/8" PER KEN JEHLIK 11/06/06.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 03/22/2007 1:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

1ST PLUG SET CIBP @ 1100' & 2 SX CMT. TESTED CASING. PUMPED 24 BBLS @ 300#. 2ND PLUG TESTED CASING. FOUND HOLES FROM 885'-1072'. PUMPED 60 SX CMT & 100# HULLS OUT CASING AT 885'. TAGGED TOC @ 994'. 3RD PLUG TUBING @ 990' PUMPED 60 SX CMT. 4TH PLUG PULLED TUBING TO 390'. CIRCULATE CMT TO SURFACE WITH 50 SX CMT. 5TH PLUG HOOK UP TO 8 5/8" X 5 1/2" ANNULUS. PUMP 116 SX CMT @ 500#. SHUT IN ON VACUUM. 6TH PLUG TOP OFF 5 1/2" WITH 13 SX CMT.

Perfs:

Top	Bot	Thru	Comments
2609	2611		
2578	2582		
2562	2568		
2530	2534		

INVOICED
DATE 4-12-07
INV. NO. 2007061581

RECEIVED
KANSAS CORPORATION COMMISSION


APR 09 2007

Remarks: USED CLASS A CMT BY EAGLE WELL SERVICE.

Plugged through: TBG

CONSERVATION DIVISION
WICHITA, KS

District: 01

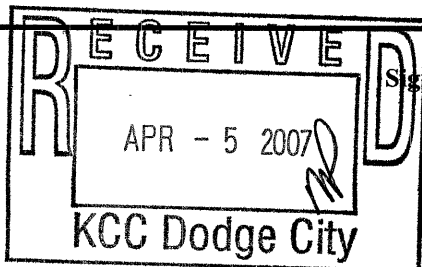

Signed

Ken Jehlik

(TECHNICIAN)

Form SP 2/3
[Signature]