



MICRO LOG

Company	R L INVESTMENT, LLC.	
Well	KOSTER "H" #2-32	
Field	KOSTER	
County	SHERIDAN	State KANSAS
Location:	API # : 15-179-21487-0000 2005' FNL & 1816' FEL NW - SE - SW - NE	
Permanent Datum	GROUND LEVEL	Elevation 2850
Log Measured From	KELLY BUSHING 7' A.G.L.	
Drilling Measured From	KELLY BUSHING	
SEC 32 TWP 8S RGE 29W		Other Services CDL/CNL DIL
Date	8/8/22	Elevation K.B. 2857 D.F. 2855 G.L. 2850
Run Number	TWO	
Depth Driller	4235	
Depth Logger	4236	
Bottom Logged Interval	4234	
Top Log Interval	3600	
Casing Driller	8 5/8" @ 263'	
Casing Logger	263	
Bit Size	7 7/8"	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 1,100 PPM
Density / Viscosity	9.3/50	
pH / Fluid Loss	8.0/10.5	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	1.30 @ 60F	
Rmf @ Meas. Temp	.975 @ 60F	
Rmc @ Meas. Temp	1.56 @ 60F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.661 @ 118F	
Time Circulation Stopped	3.5 HOURS	
Time Logger on Bottom	1:30 P.M.	
Maximum Recorded Temperature	118F	
Equipment Number	922339	
Location	HAYS, KANSAS	
Recorded By	JEFF LUEBBERS	
Witnessed By	RICHARD BELL	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-179-21487-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
SEGUIN, KS., 2S. ON "RD. 80W" TO "RD. 40S", 1E., 1/2N., W. INTO




MAIN SECTION

Database File	6349ddn.db
Dataset Pathname	pass6.3
Presentation Format	micro
Dataset Creation	Mon Aug 08 14:30:47 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

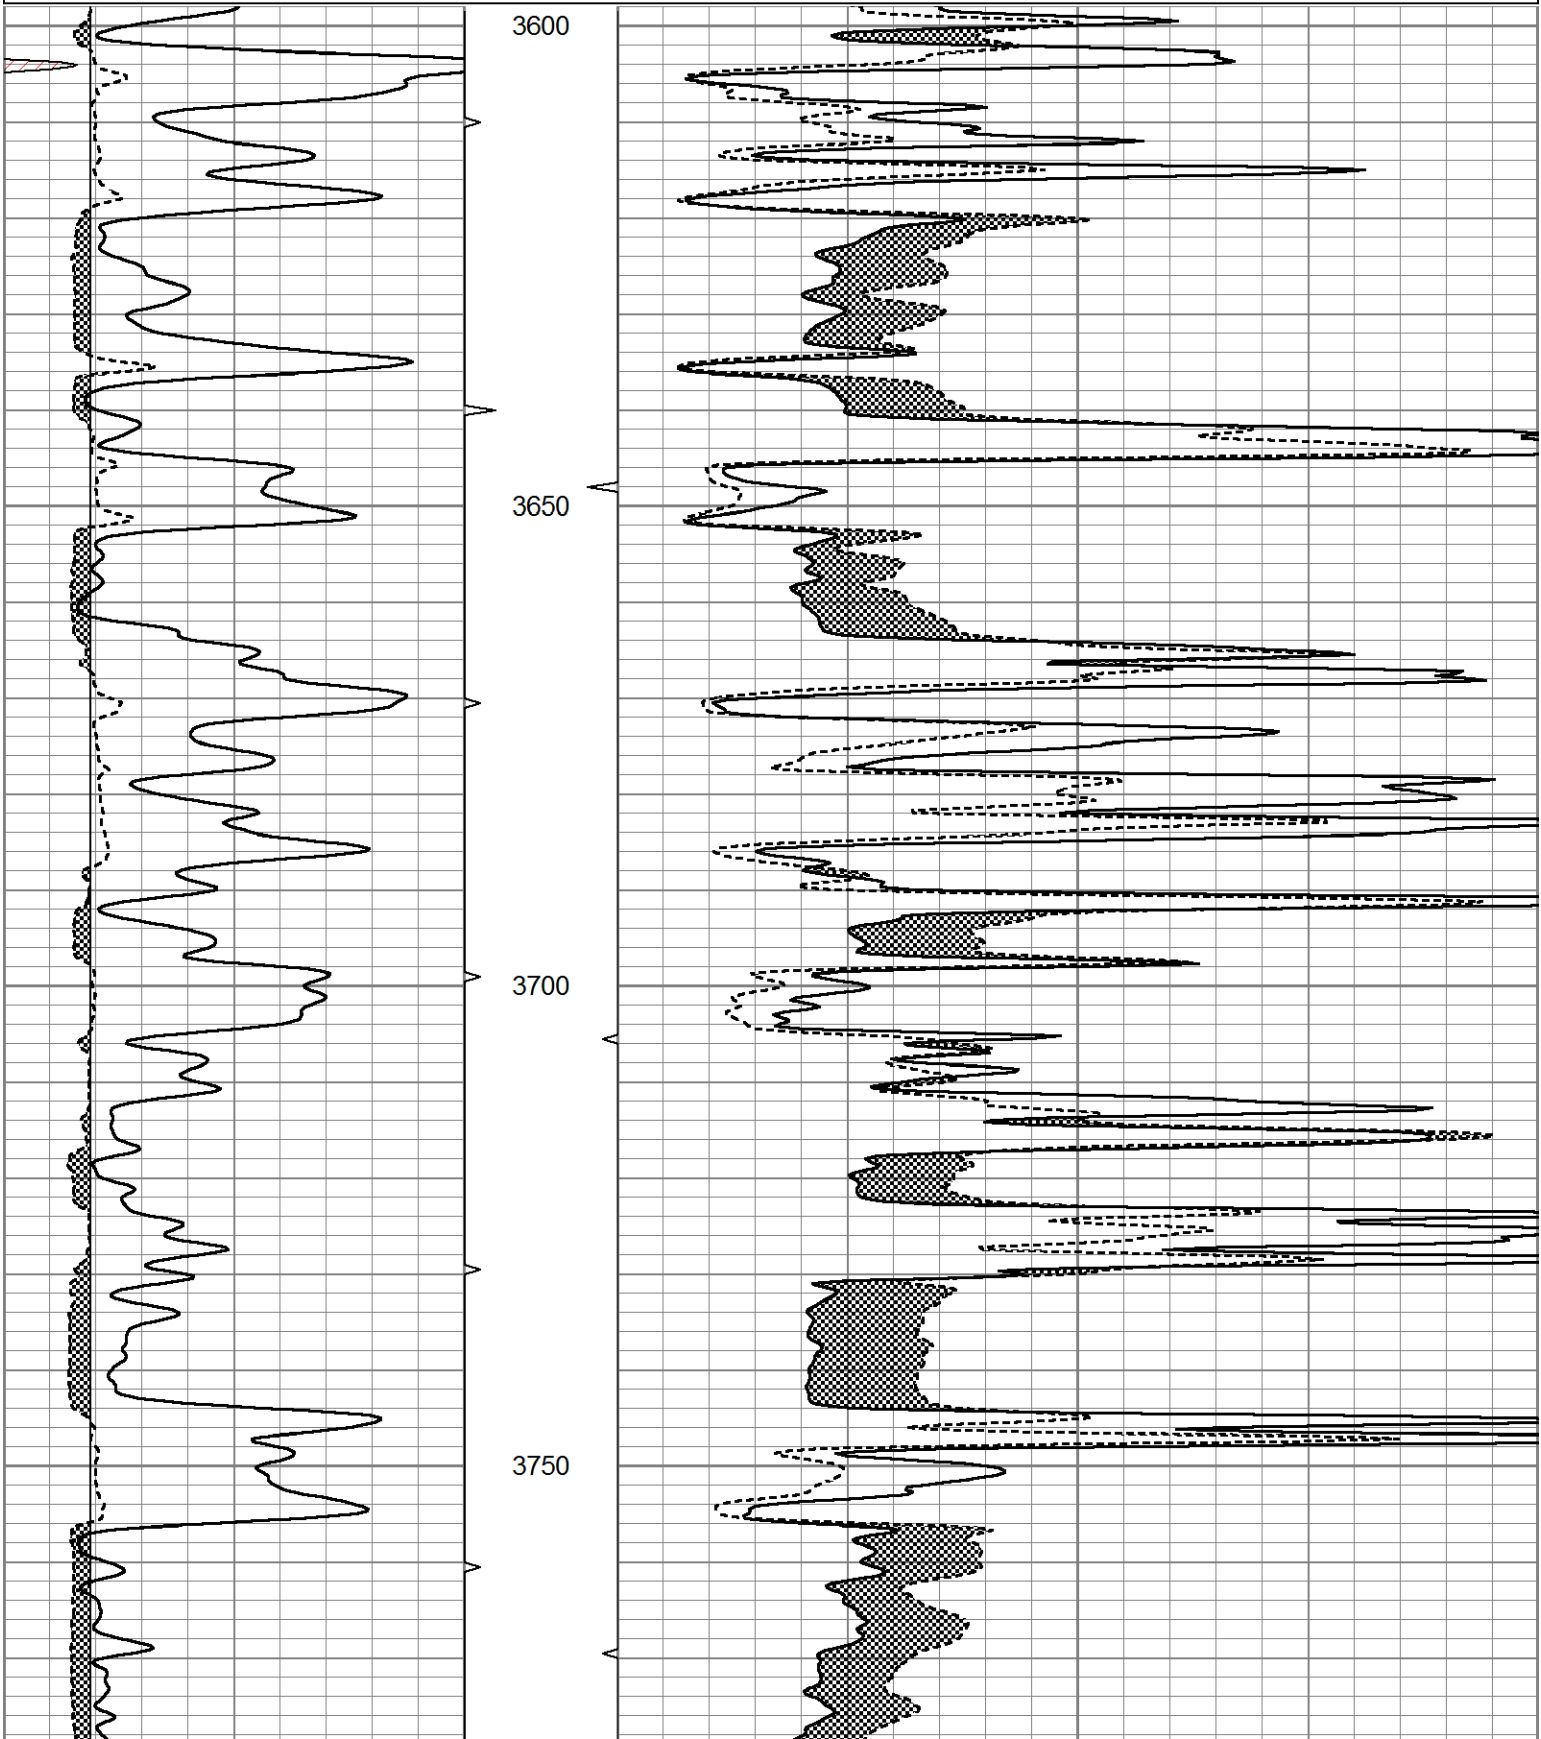

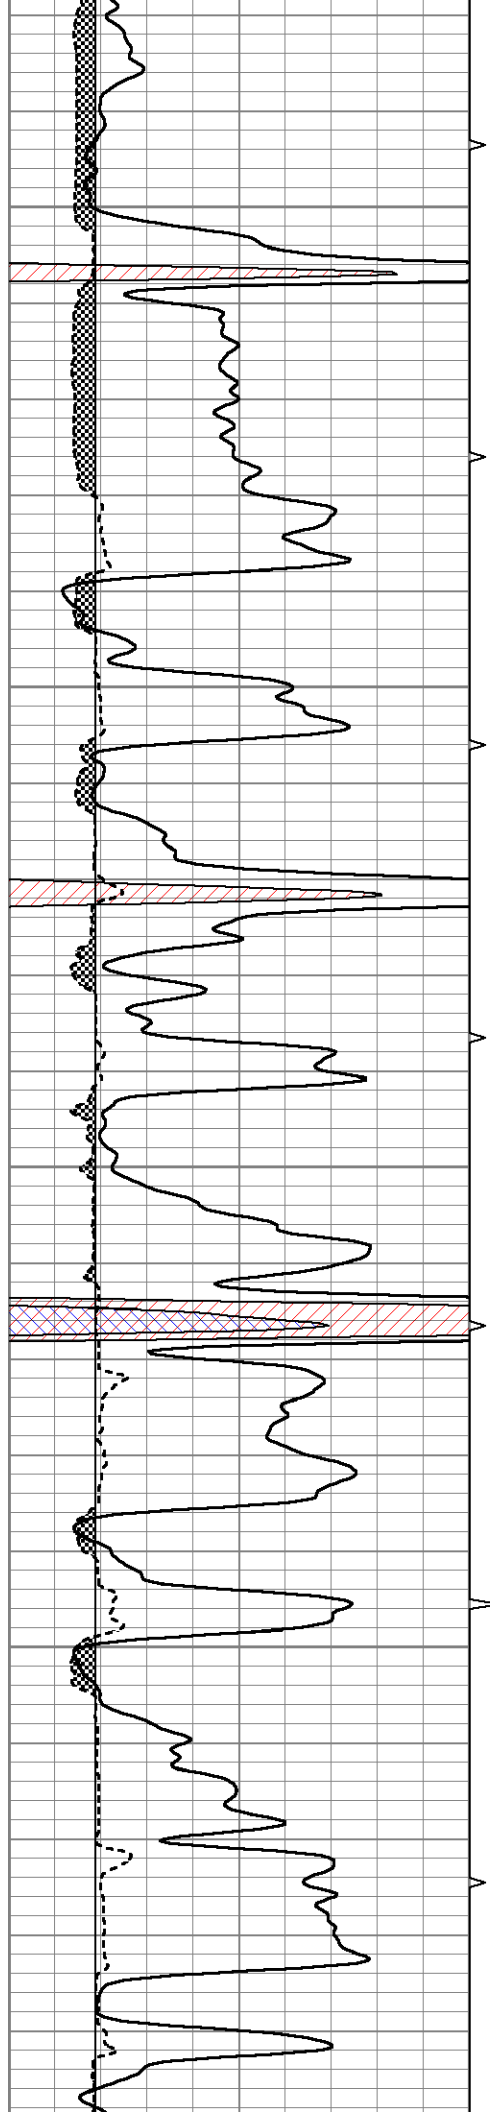



3800

3850

3900

3950

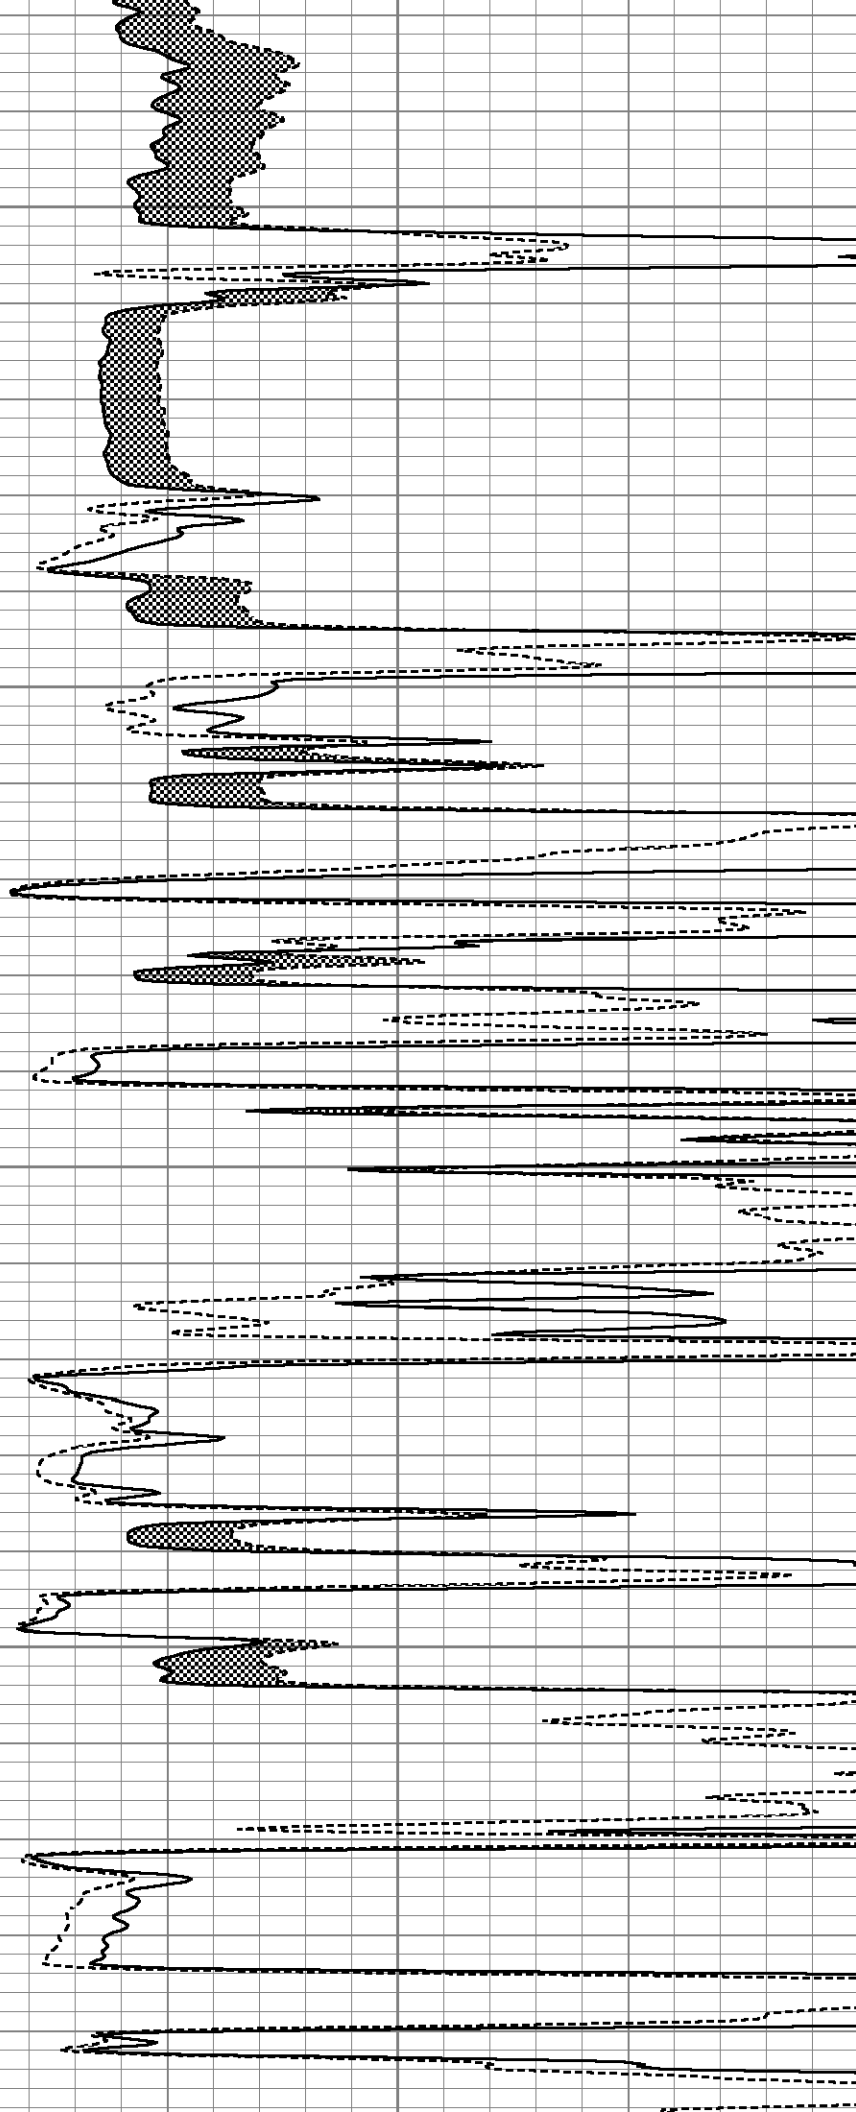

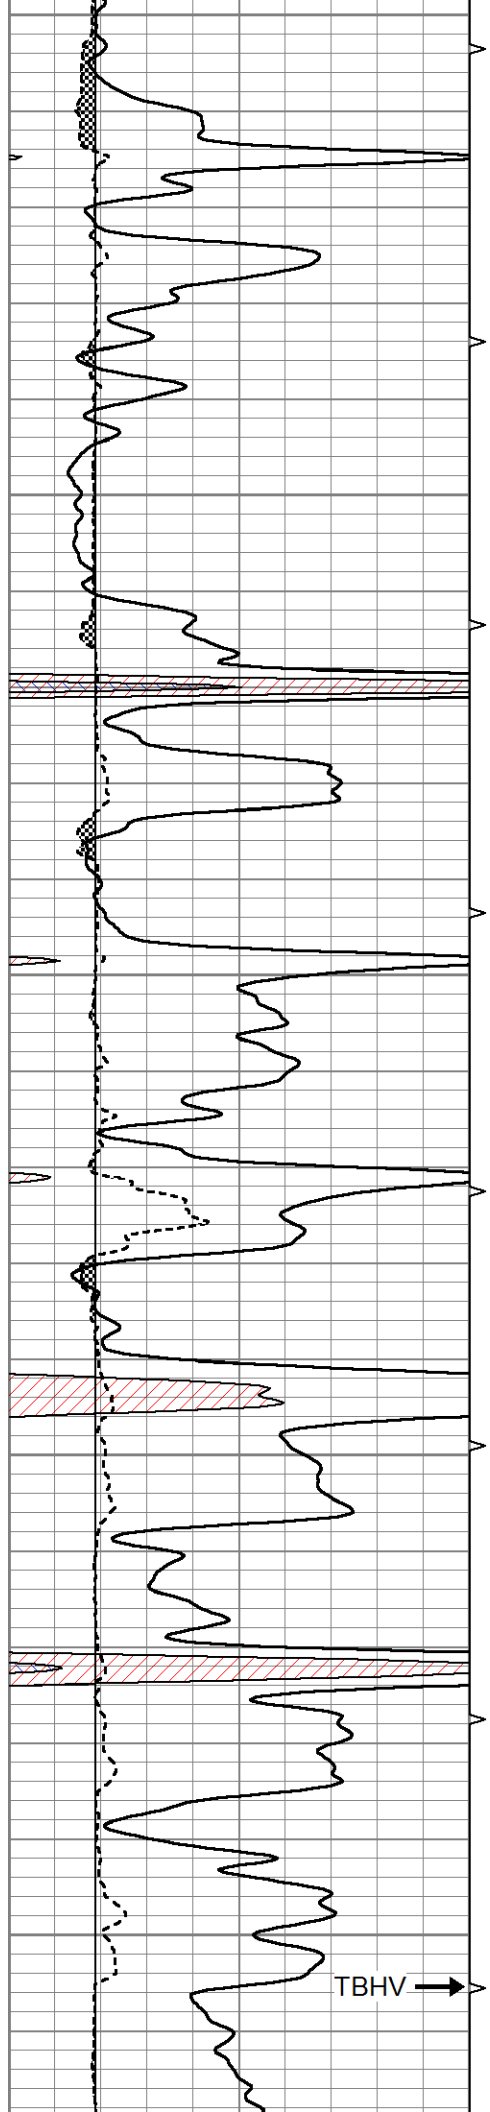

4000

4050


4100


4150

4200

TBHV →

5.5" ABHV ↑

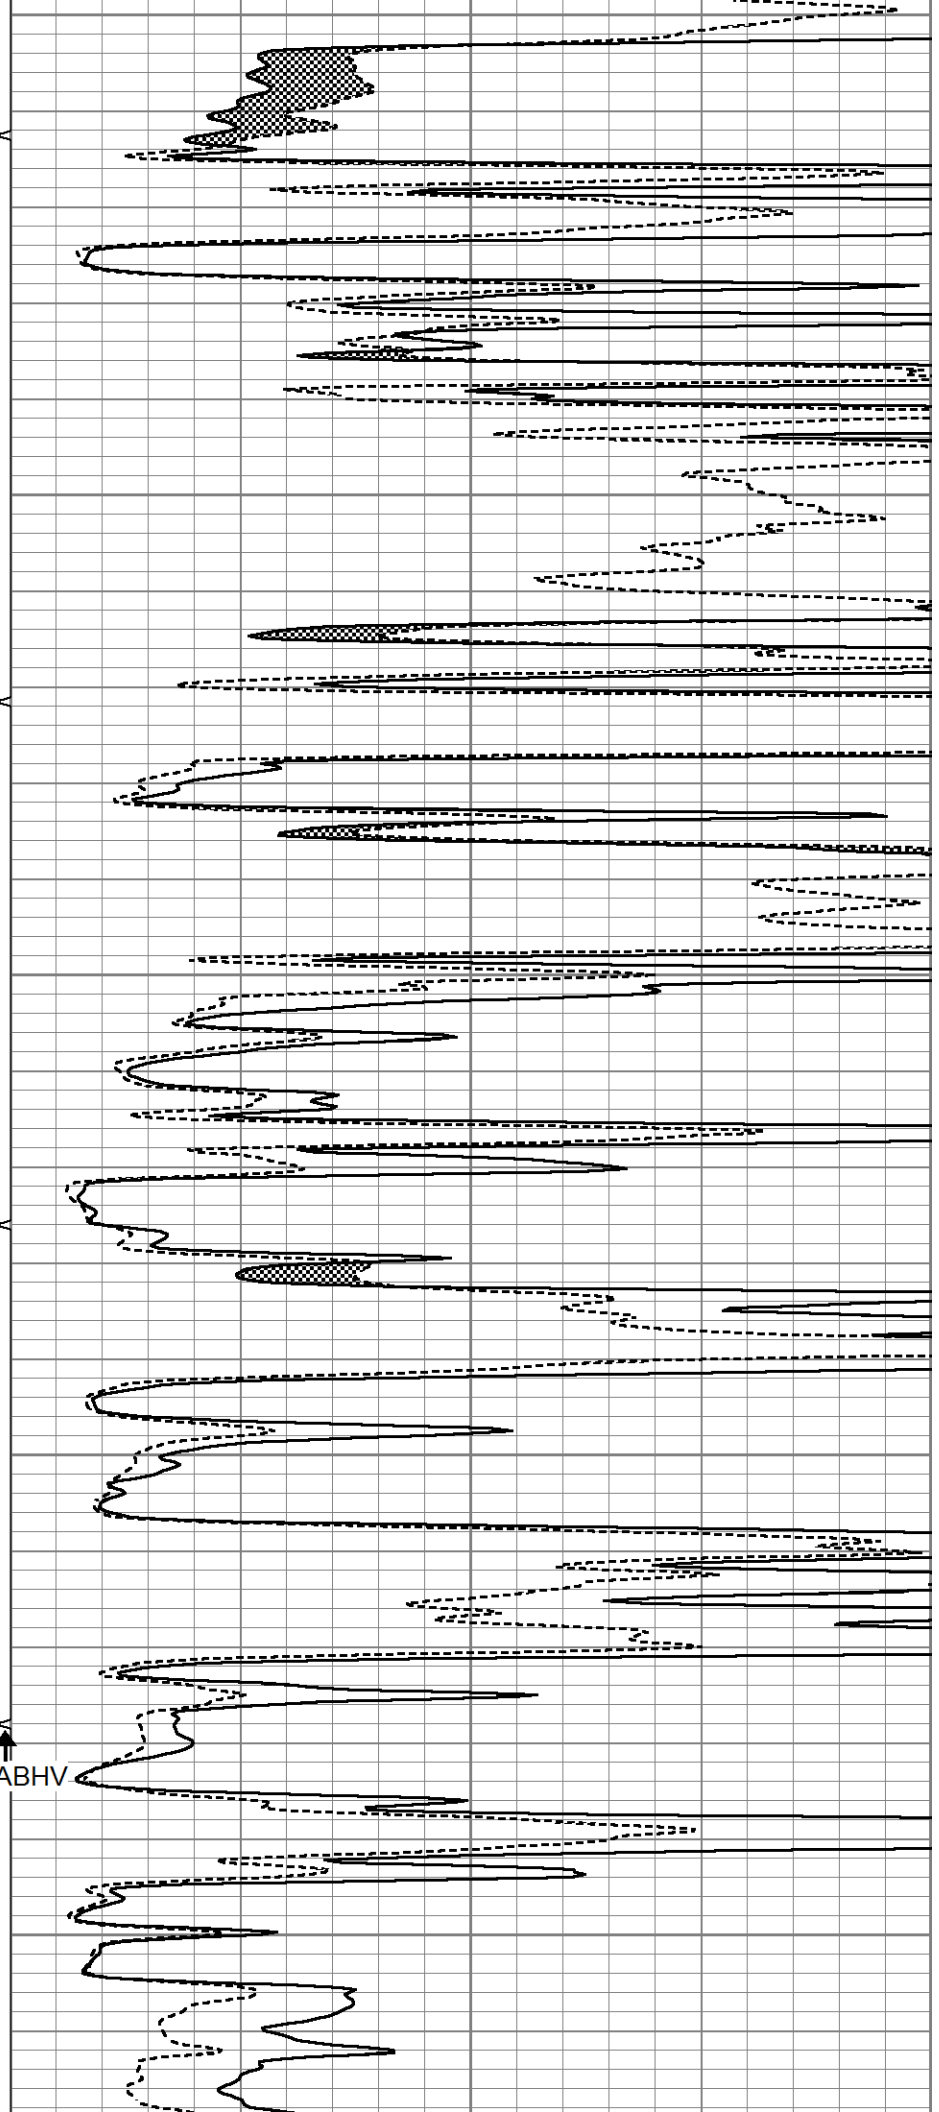


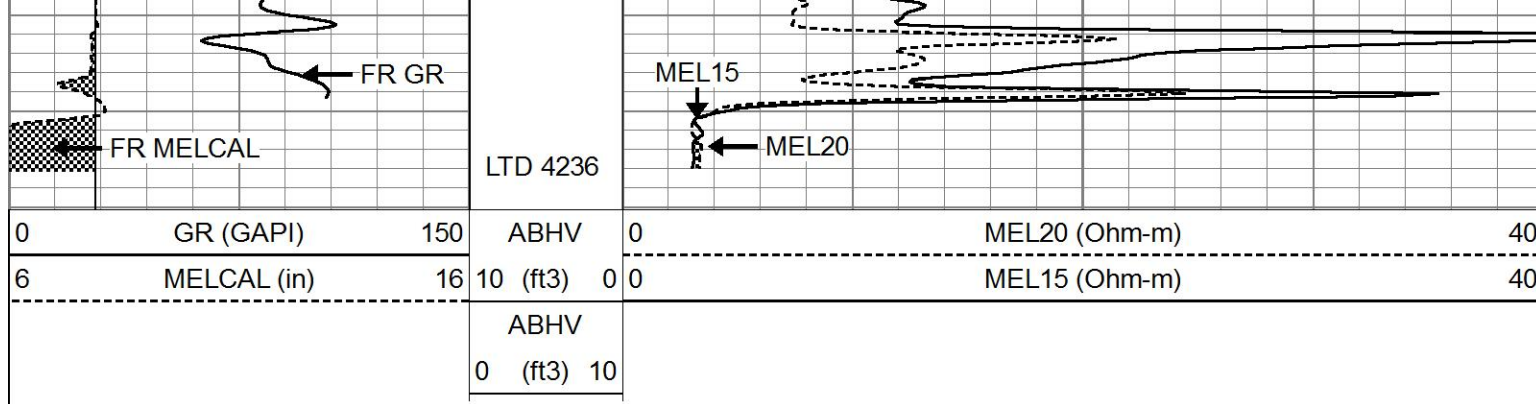


REPEAT SECTION

Database File 6349ddn.db
 Dataset Pathname pass5.2
 Presentation Format micro
 Dataset Creation Mon Aug 08 14:34:11 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

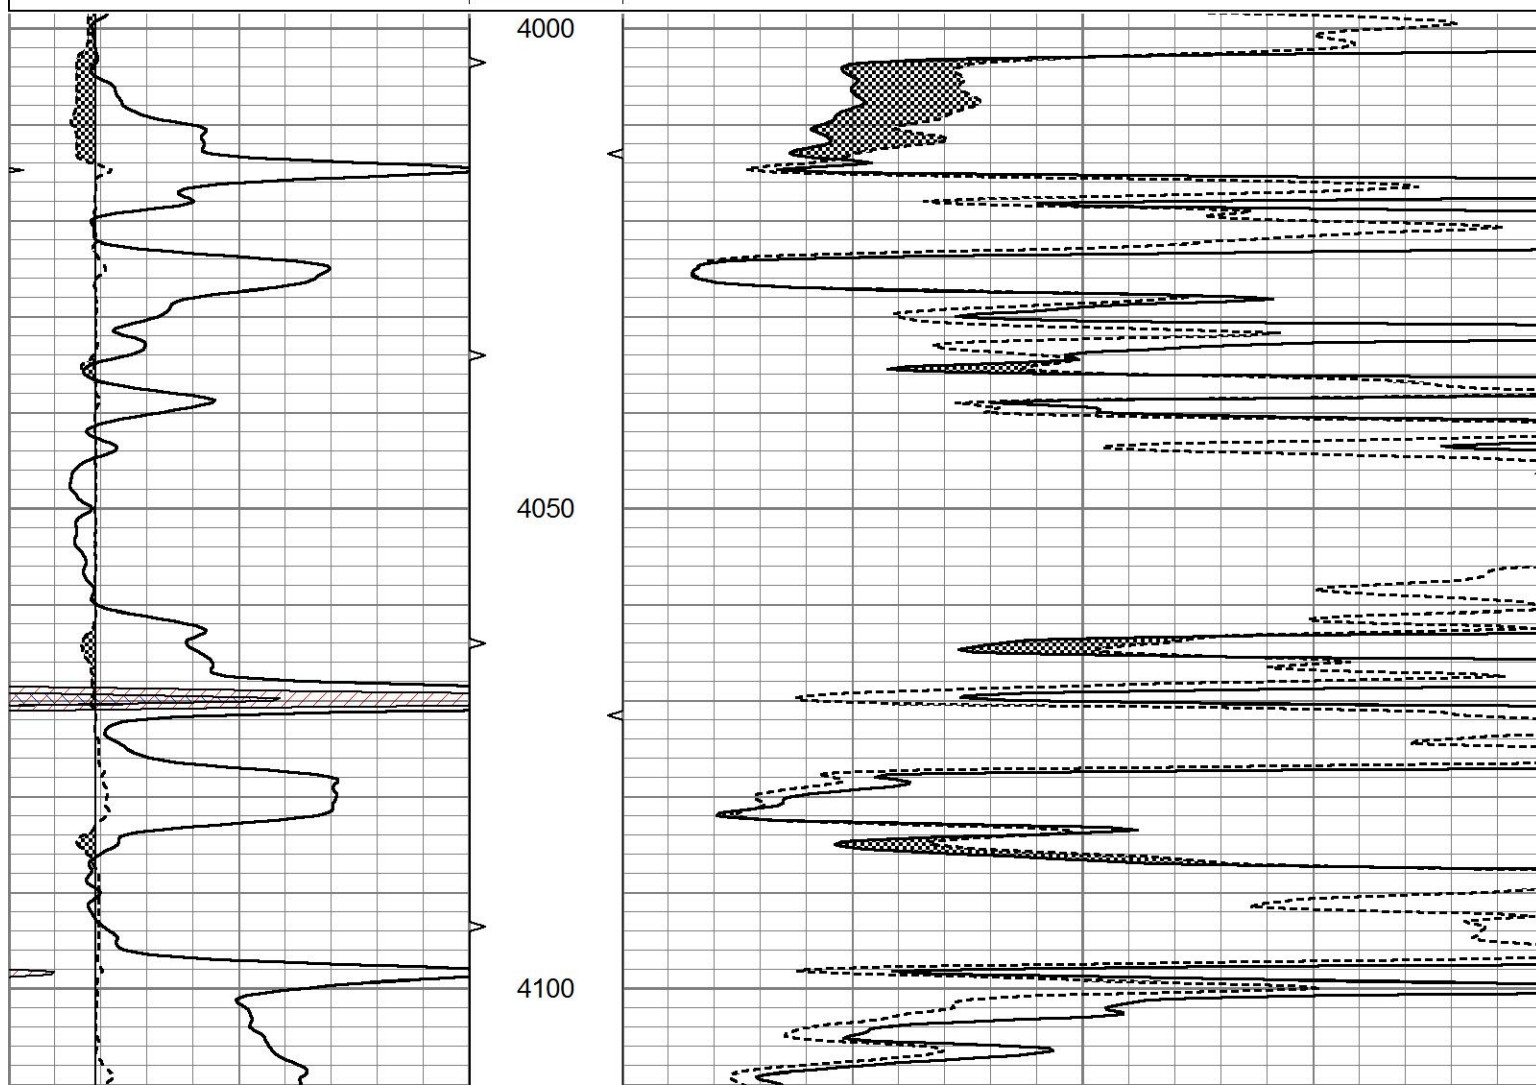

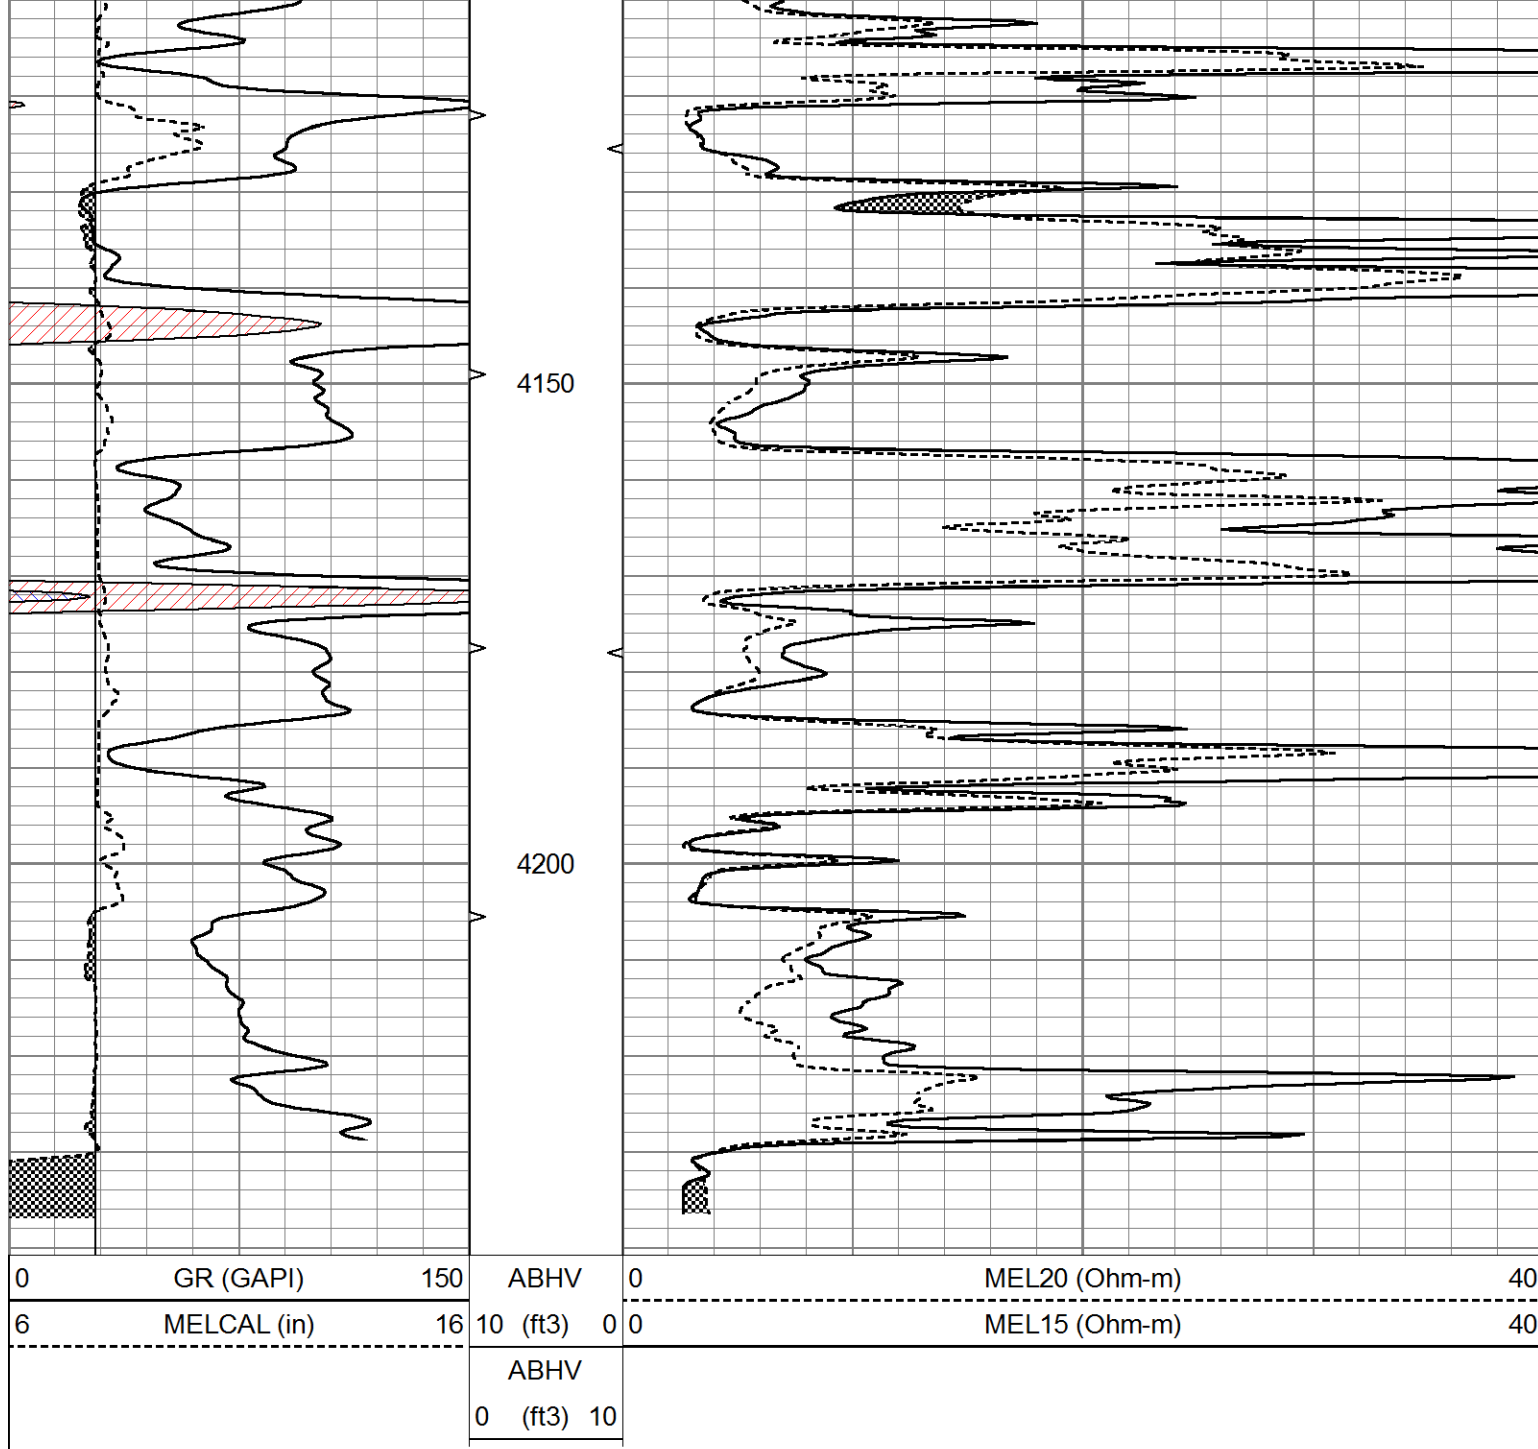

Calibration Report			
Database File	6349ddn.db		
Dataset Pathname	pass6.3		
Dataset Creation	Mon Aug 08 14:30:47 2022		
MICRO Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeN		
Performed:	Mon Aug 08 14:16:59 2022		
Caliper Calibration:	Gain=4.571	Offset=0.914	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	1.550	3.300	
1.5" Calibration:	Gain=38.000	Offset=-0.300	

References	Low Cal	High Cal
Readings	0.000	20.000
	0.000	1.216
2" Calibration:	Gain=50.000	Offset=-0.500
	Low Cal	High Cal
References	0.000	20.000
Readings	0.002	1.053
Gamma Ray Calibration Report		
Serial Number:	070558	
Tool Model:	OPEN_GR	
Performed:	Mon Aug 08 13:52:35 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3200	GAPI/cps