



MICRO LOG

Company JASPAR CO. INC.		Company JASPAR CO. INC.	
Well ASHMORE #1		Well ASHMORE #1	
Field UNNAMED		Field UNNAMED	
County ROOKS		County ROOKS	
State KANSAS		State KANSAS	
Location: API #: 15-163-24468-0000		Other Services CDL/CNL DIL/SON	
Permanent Datum Log Measured From Drilling Measured From		SEC 11 TWP 6S RGE 20W GROUND LEVEL Elevation 2176 KELLY BUSHING 7' A.G.L. KELLY BUSHING	
Date 11/19/22		Elevation K.B. 2183 D.F. 2181 G.L. 2176	
Run Number	TWO		
Depth Driller	3645		
Depth Logger	3638		
Bottom Logged Interval	3622		
Top Log Interval	3100		
Casing Driller	8 5/8" @ 221'		
Casing Logger	221		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES: 3,000 PPM	
Density / Viscosity	9.1/50		
pH / Fluid Loss	10.0/7.6		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	2.20 @ 49F		
Rmf @ Meas. Temp	1.65 @ 49F		
Rmc @ Meas. Temp	2.64 @ 49F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.954 @ 113F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	6.45 P.M.		
Maximum Recorded Temperature	113F		
Equipment Number	8916		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	CAMERON BRIN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
STOCKTON, KS., 9N. ON HWY 183 TO (ROOKS/PHILLIPS COUNTY LINE) 13W. ON "RD. A" TO "RD. 5", 1 1/2S., E. INTO




MAIN SECTION

Database File	6724ddn.db
Dataset Pathname	pass8.3
Presentation Format	_micro
Dataset Creation	Sat Nov 19 18:55:11 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

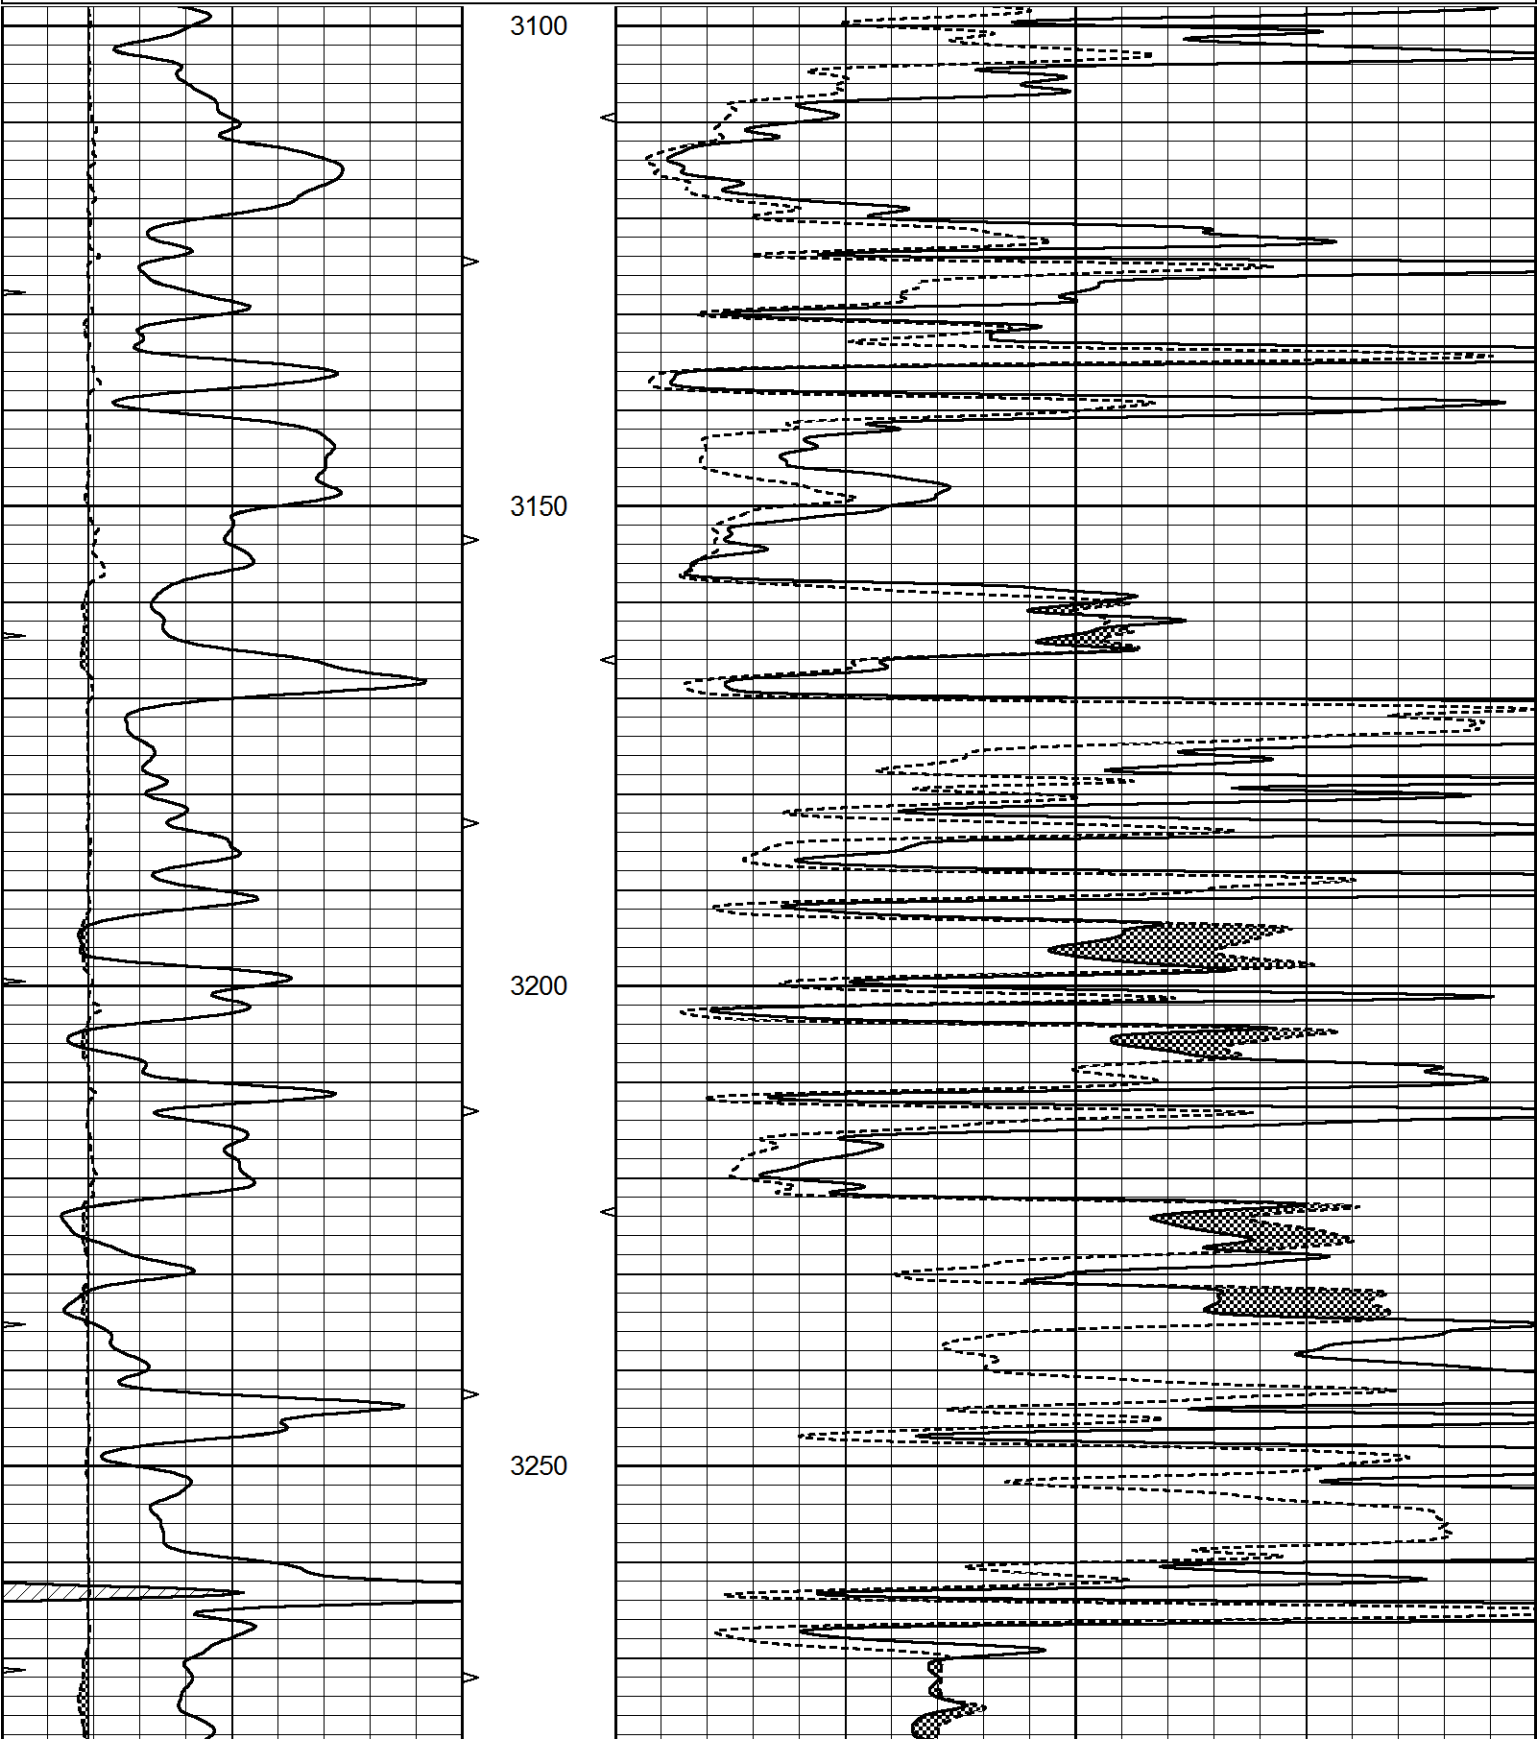

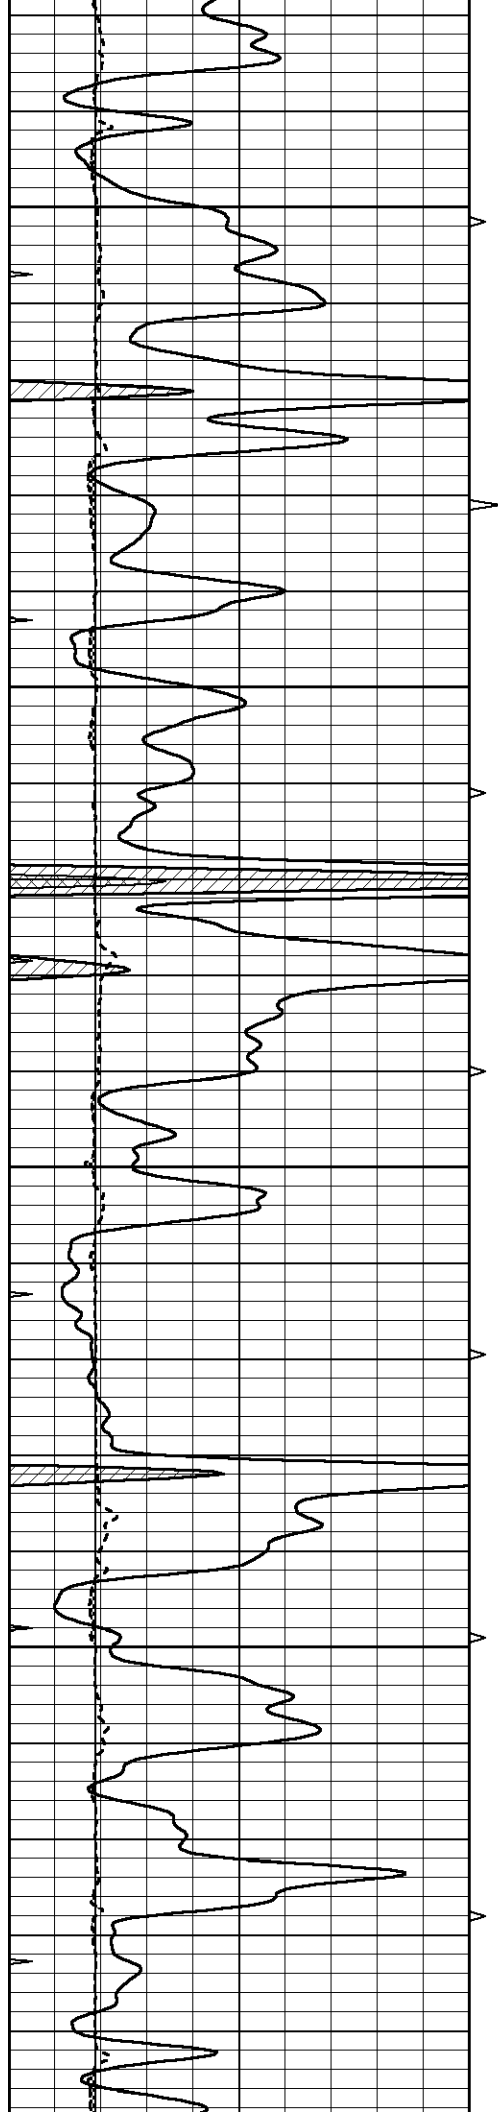



3300

3350

3400

3450

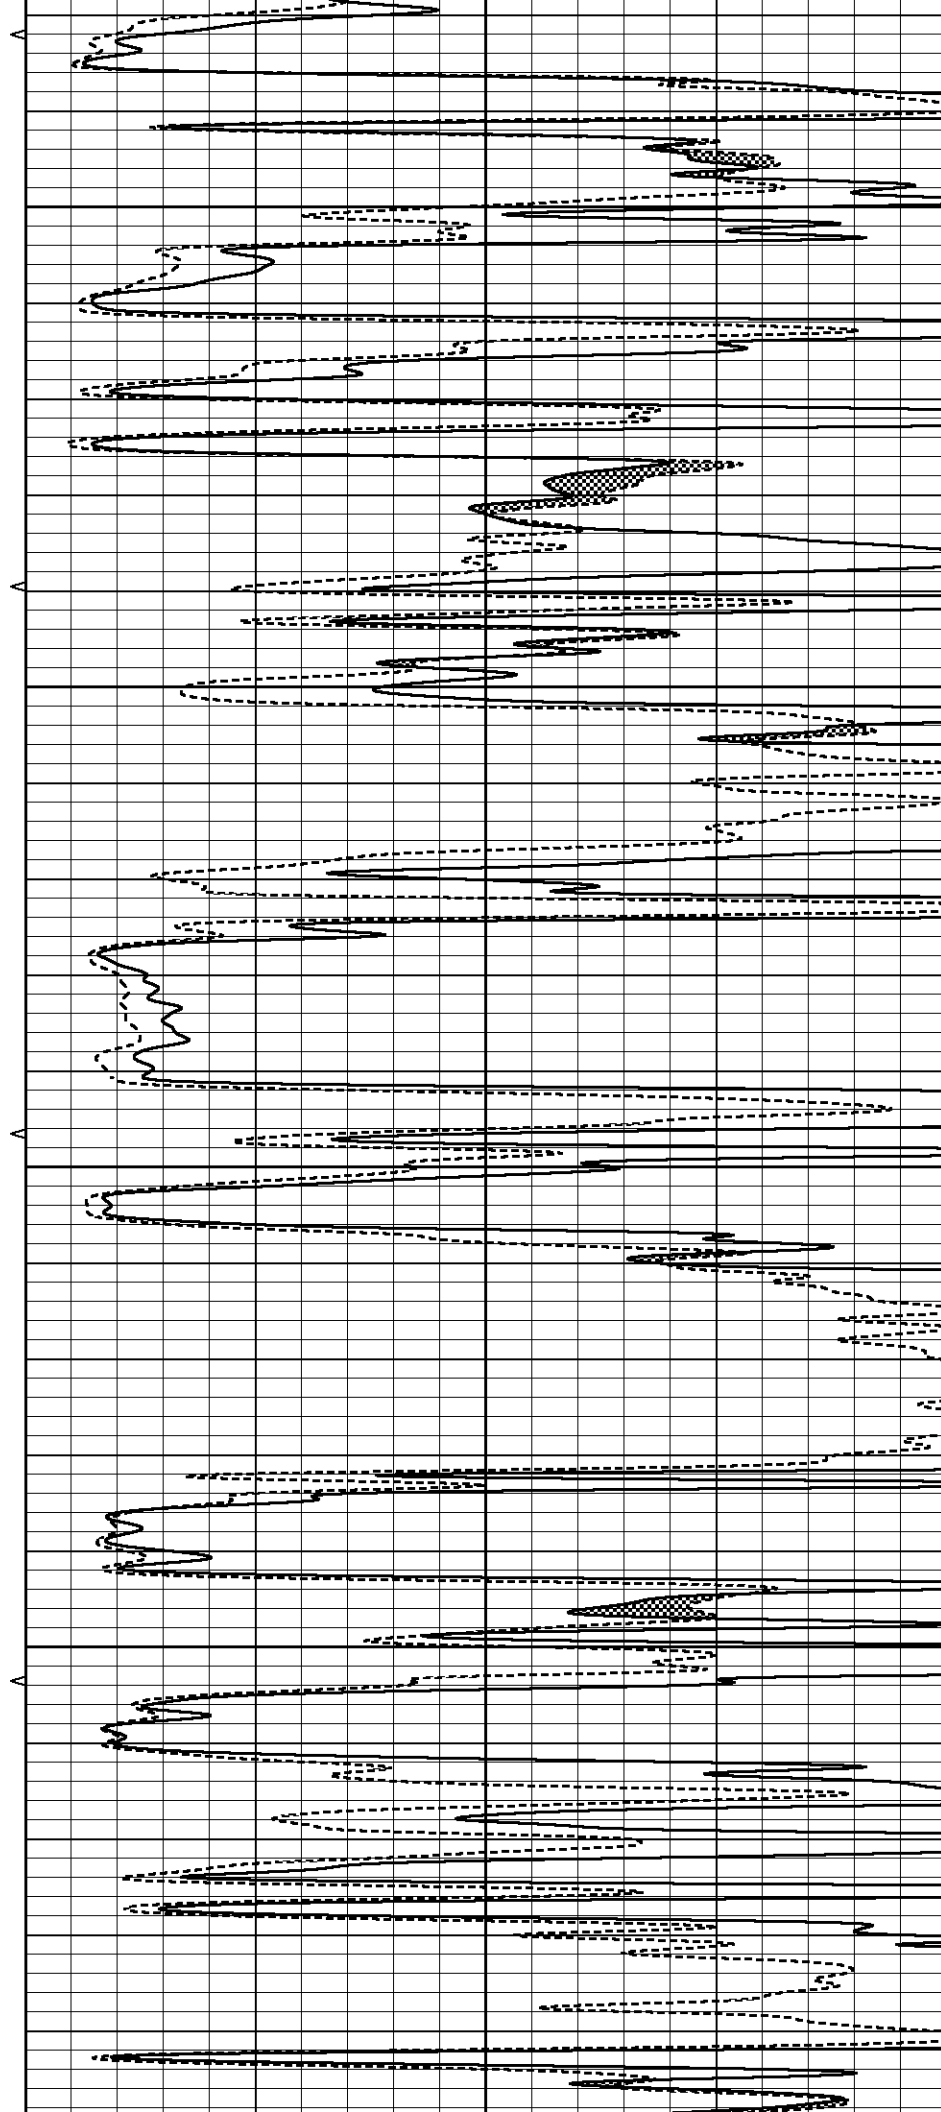

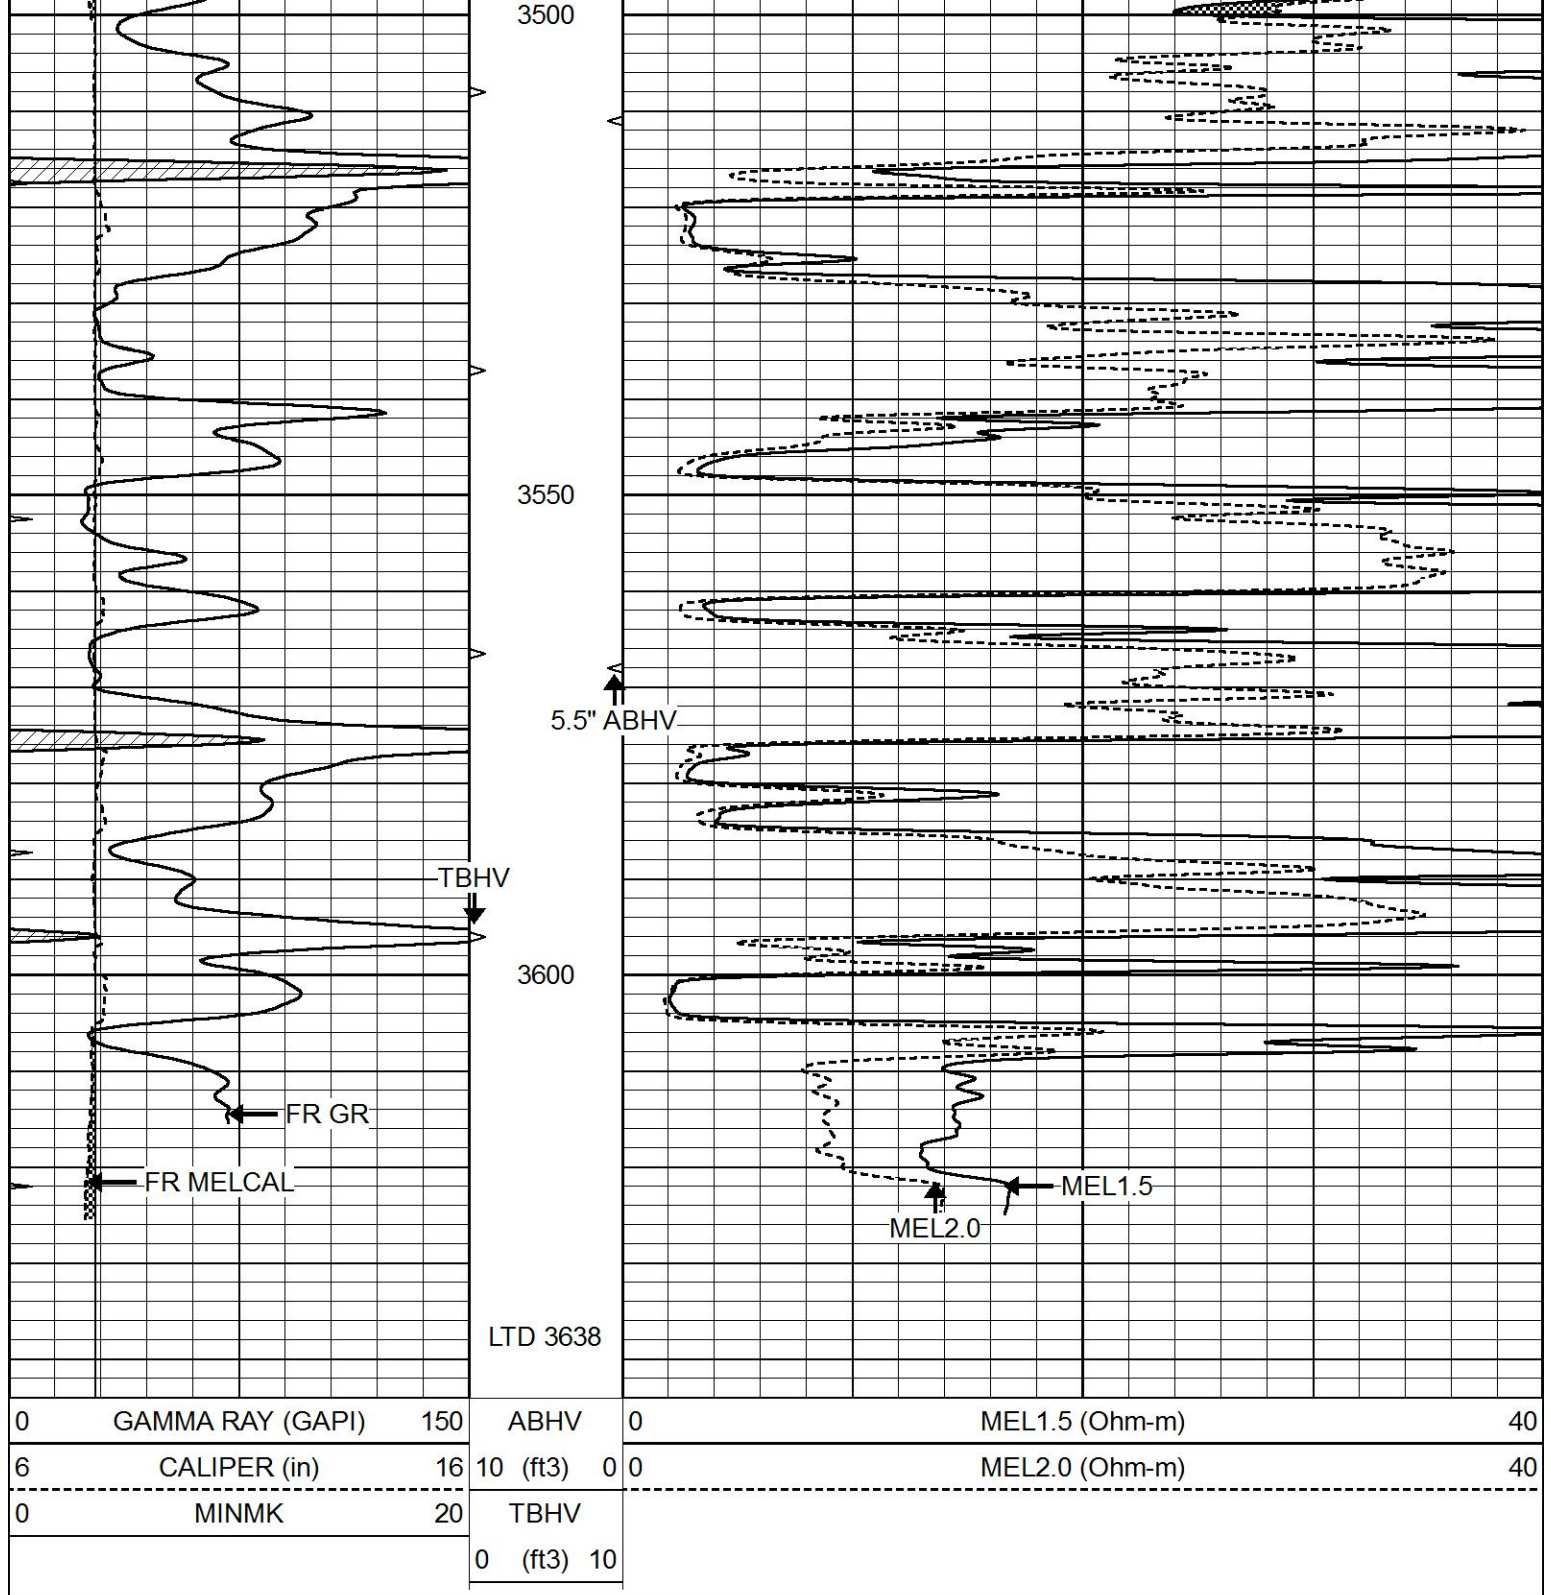

REPEAT SECTION

Database File 6724ddn.db
 Dataset Pathname pass7.3
 Presentation Format _micro
 Dataset Creation Sat Nov 19 18:58:02 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40

0 MINMK 20		TBHV	
		0 (ft3) 10	
0 GAMMA RAY (GAPI) 150 6 CALIPER (in) 16 0 MINMK 20		ABHV 0 MEL1.5 (Ohm-m) 40 MEL2.0 (Ohm-m) 40	

0	MIN/MAX	20	FDIV
		0	(ft3) 10

Calibration Report			
Database File	6724ddn.db		
Dataset Pathname	pass8.3		
Dataset Creation	Sat Nov 19 18:55:11 2022		
MICRO Calibration Report			
Serial Number:	MICRO6		
Tool Model:	PROBE		
Performed:	Sat Nov 19 18:30:36 2022		
Caliper Calibration:	Gain=-2.735	Offset=18.612	
	Low Cal	High Cal	
References	8.000	16.000	
Readings	3.880	0.955	
1.5" Calibration:	Gain=40.000	Offset=-1.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.002	0.624	
2" Calibration:	Gain=60.000	Offset=-2.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.006	0.468	
Gamma Ray Calibration Report			
Serial Number:	GR5		
Tool Model:	OPEN		
Performed:	Thu Nov 17 19:32:29 2022		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.5800	GAPI/cps	