

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-30274-00-00 ⁰¹ ^{KCC} ^{apb} ³⁻²¹⁻⁰⁷ ^{apb}
Spot: SWNE Sec/Twnshp/Rge: 12-17S-21W
1980 feet from N Section Line, 1980 feet from E Section Line
Lease Name: STARRET B Well #: 1
County: NESS Total Vertical Depth: 4119 feet

Operator License No.: 5123
Op Name: PICKRELL DRILLING COMPANY, INC.
Address: 100 SOUTH MAIN - SUITE 505
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
DVT		1430		WITH 400 SX CMT
PROD	5.5	4111	0	WITH 150 SX CMT
SURF	8.621	400		WITH 200 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 12/02/2005 10:10 AM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Rcvd. from: ED MONDERO Company: PICKRELL DRILLING Phone: (620) 793-2315

Proposed Plugging Method: RUN 2-3/8' TUBING OPEN ENDED TO 1720'. SPOT CMT PLUGS AS DIRECTED BY KCC REPRESENTATIVE. TIE INTO 8-5/8' X 5-1/2' ANNULUS AND PUMP CMT TO PRESSURE UP TO 500#. SI

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/02/2005 12:00 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

SQUEEZED AT 1730' WITH 200 SX CMT. DRILLING OUT GOT OUT OF CASING, STOPPED DRILLING. RAN TUBING TO 1600' & PUMPED 155 SX CMT & 200# HULLS. CMT CIRCULATED TO SURFACE. PULLED TUBING & TOPPED OFF WITH 20 SX CMT. TIED ONTO BACKSIDE AND PUMPED 1/4 BBL. PRESSURED TO 500#.

Perfs:


Top	Bot	Thru	Comments
4052	4055		

RECEIVED
DEC 14 2005
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES.

Plugged through: TBG

District: 01

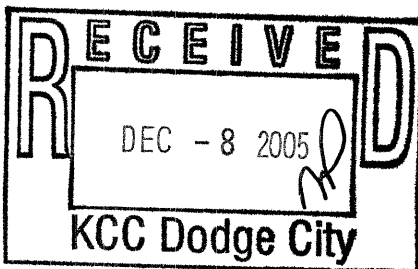

Signed

Michael Maier
(TECHNICIAN)

INVOICED
DATE 12-14-05
NO. 2006060865

Form CP 2/3