

Company JOHN O. FARMER, INC.
Well PRELLWITZ B #1
Field UNNAMED
County LYON
State KANSAS

Company JOHN O. FARMER, INC.
Well PRELLWITZ B #1
Field UNNAMED
County LYON State KANSAS

Location: 560' FSL & 2815' FWL
API #: 15-111-20560-0000
Other Services
Permanent Datum GROUND LEVEL Elevation 1333'
Log Measured From KELLY BUSHING 12' A.G.L.
Drilling Measured From KELLY BUSHING
Elevation
K.B. 1345'
D.F. 1344'
G.L. 1333'

Date OCT. 10, 2022

Run Number ONE
Depth Driller 3103'
Bottom Logged Interval 3047'
Top Log Interval 3046'
Open Hole Size 1700'
Type Fluid WATER
Density / Viscosity ///
Max. Recorded Temp. 114F
Estimated Cement Top 1825'
Time Well Ready ///
Time Logger on Bottom ///
Equipment Number PT-09
Location HAYS
Recorded By BOB KLAUS
Witnessed By VAL DREHER

Borehole Record		Tubing Record					
Run Number	Bit	From	To	Size	Weight	From	To
ONE	12.25"	0	262'	23#	0		262'
TWO	7.875"	262'	3103'				

Casing Record
Surface String 8 5/8" Size Wgt/Ft 23# Top Bottom 262'
Prot. String
Production String 5 1/2" Size Wgt/Ft 15.5# Top Bottom 3101'
Liner

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


THANK YOU FOR USING
PERF-TECH WIRELINE SERVICES, INC.
785-628-3969

DIRECTIONS: ALLEN, Ks.
1 WEST to K Rd, 1/2 SOUTH,
1/2 EAST, NORTH into

Database File: oct102209.db
 Dataset Pathname: pass3
 Presentation Format: 3x5
 Dataset Creation: Mon Oct 10 10:20:56 2022 by Log Std Casedhole 06040
 Charted by: Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150	0	3' AMPLITUDE (mV)	100	200	5' Variable Density	1100
			475	3' TRAVEL TIME (usec)	235			
			9	Collar Locator	-1			

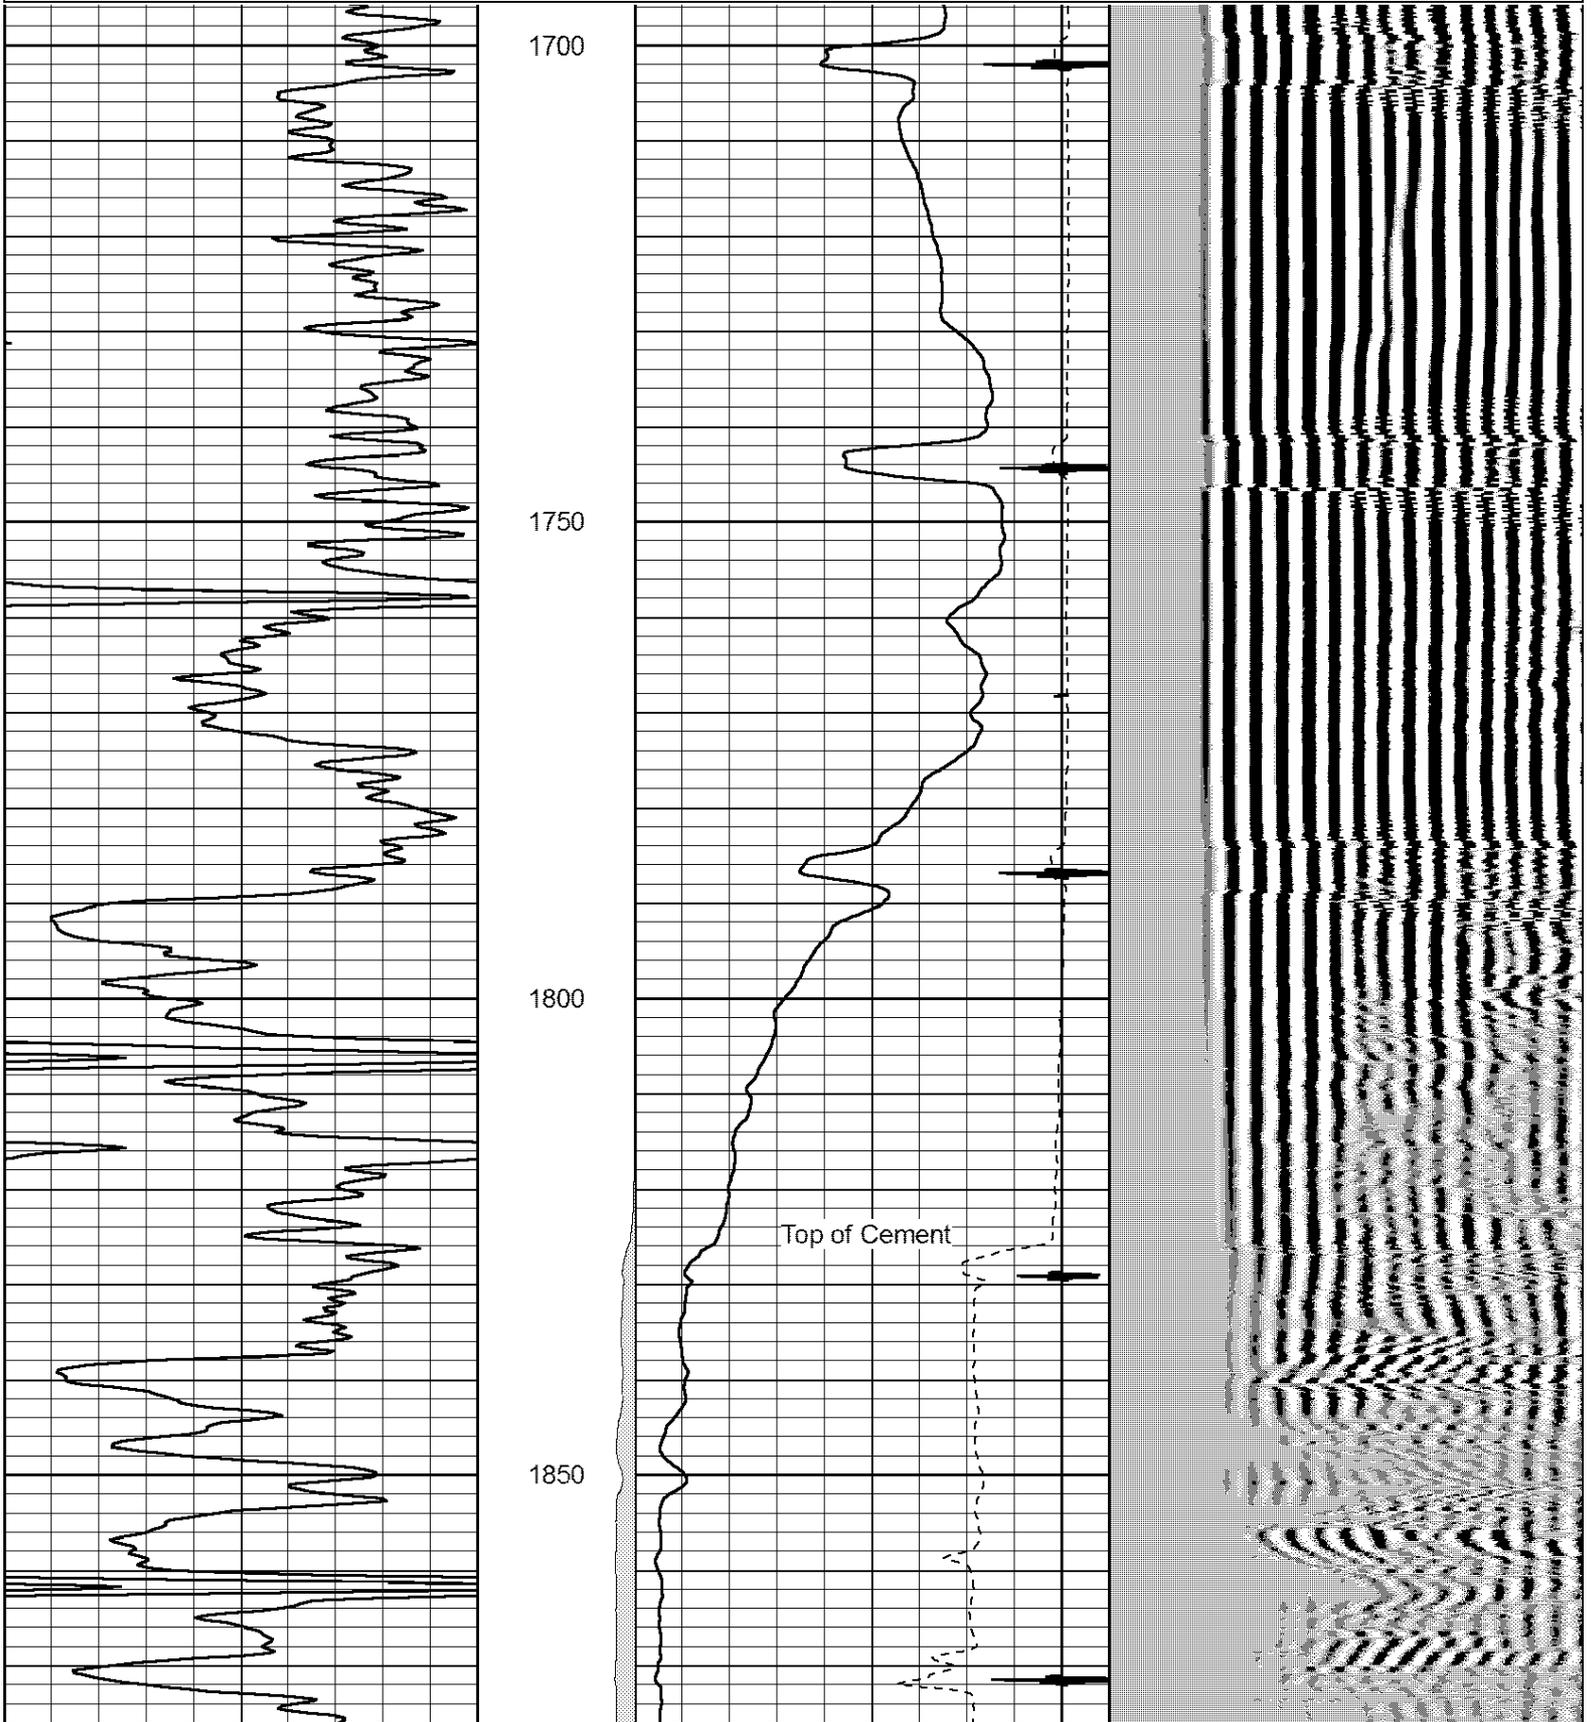


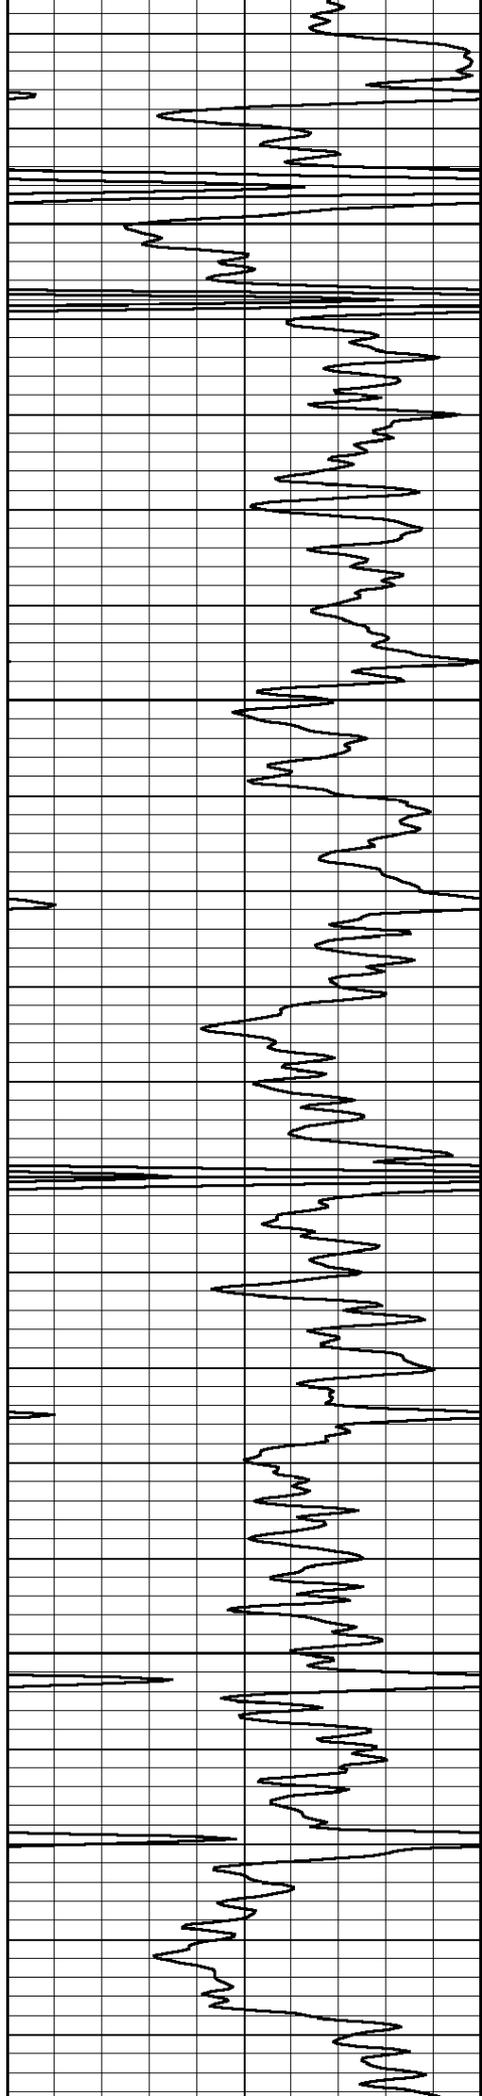





1900


1950

2000

2050

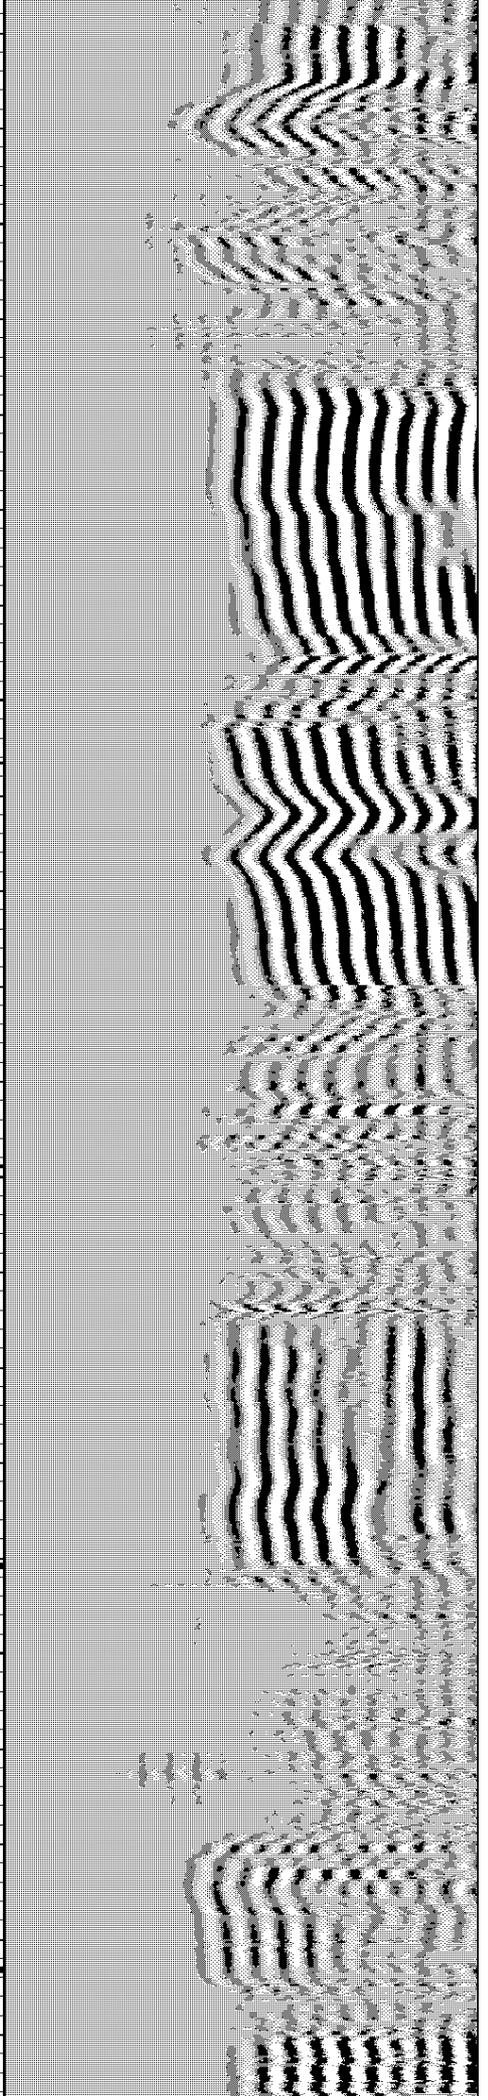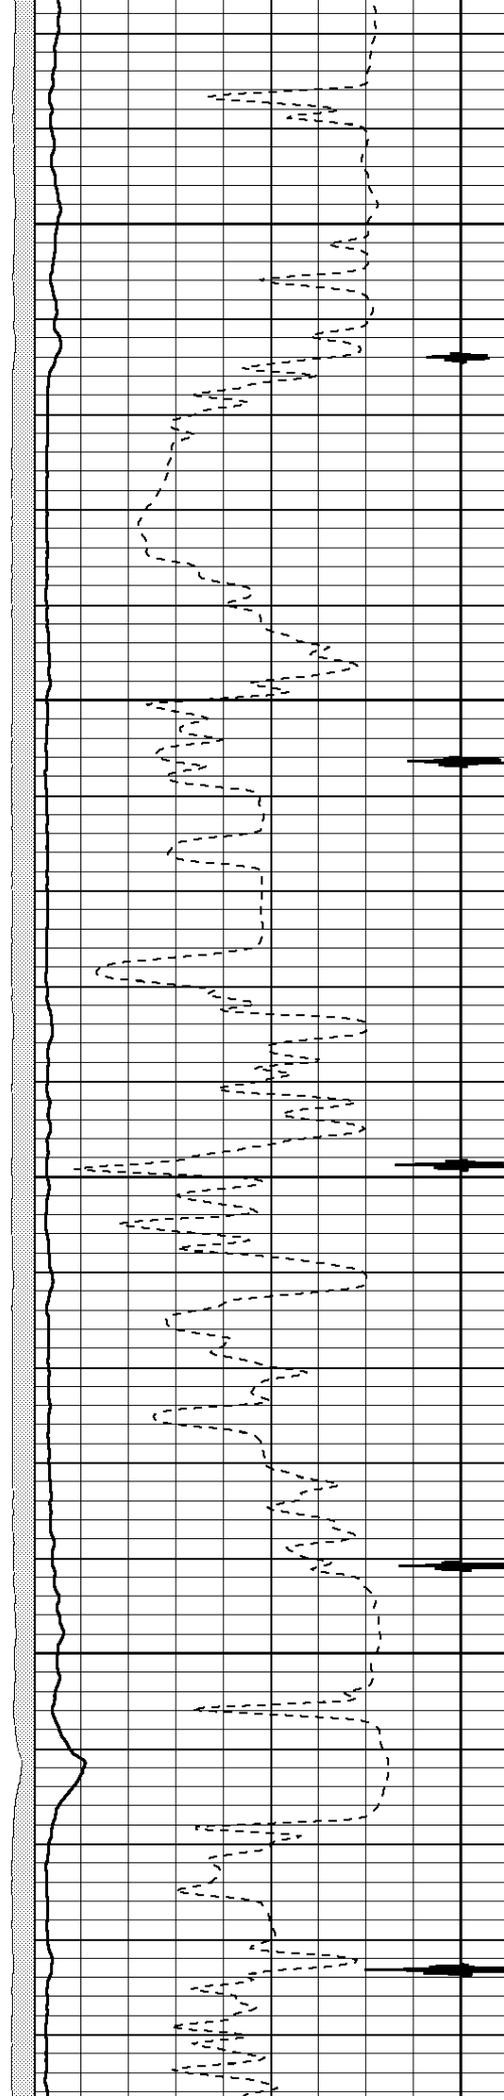

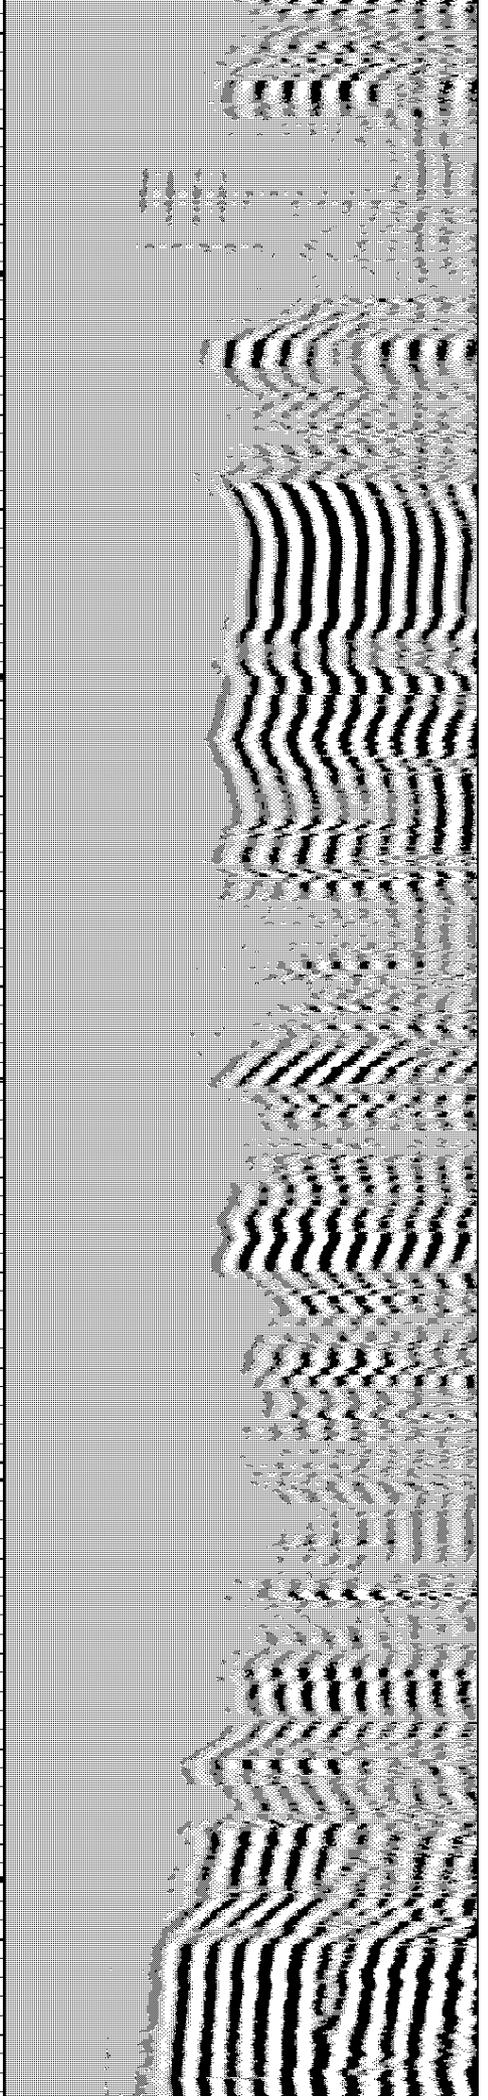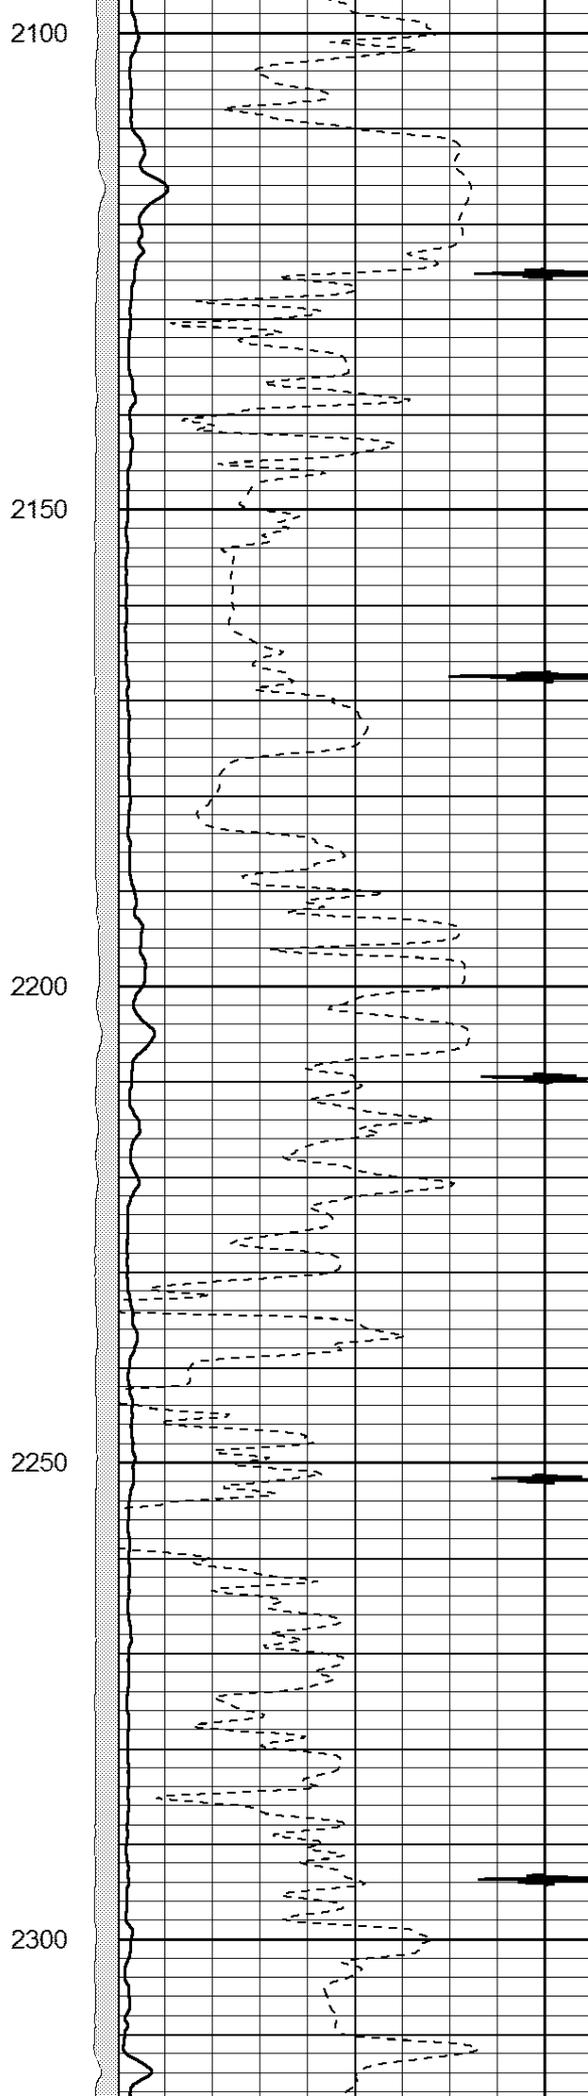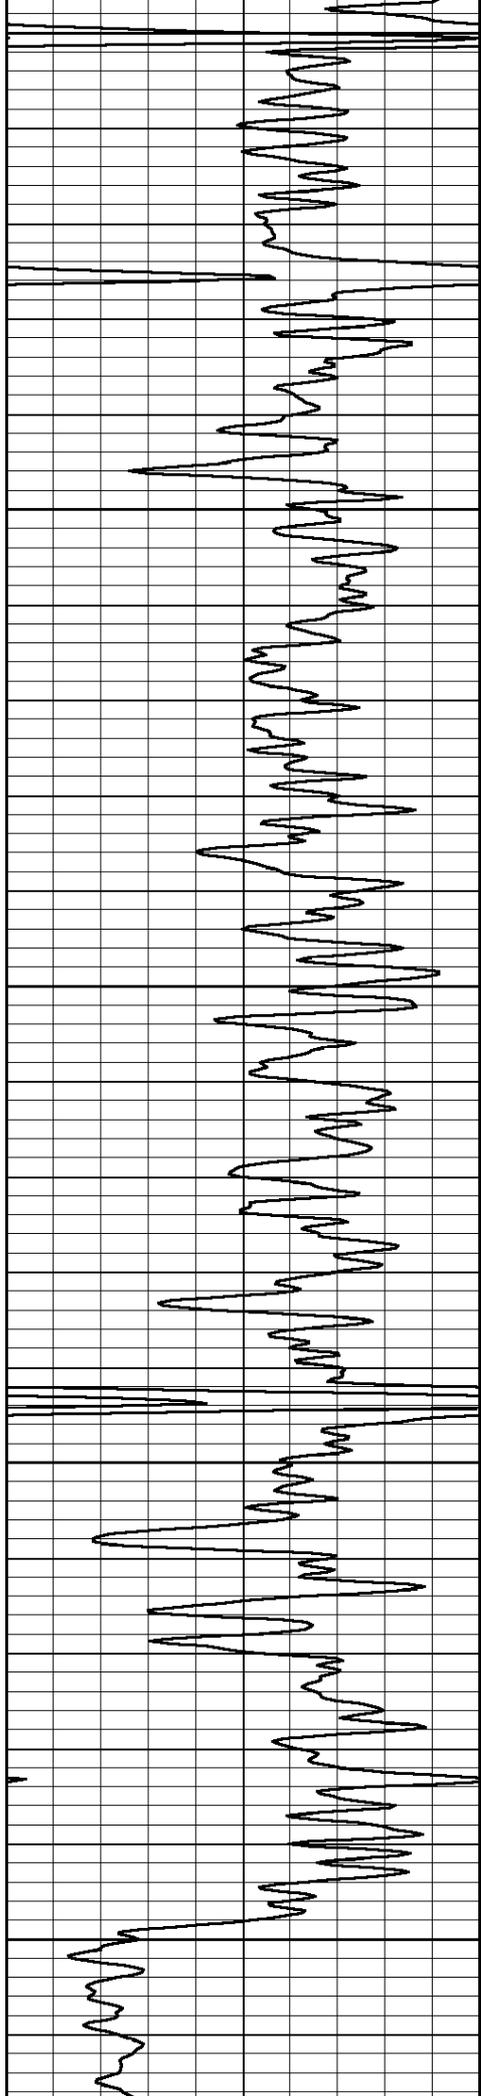


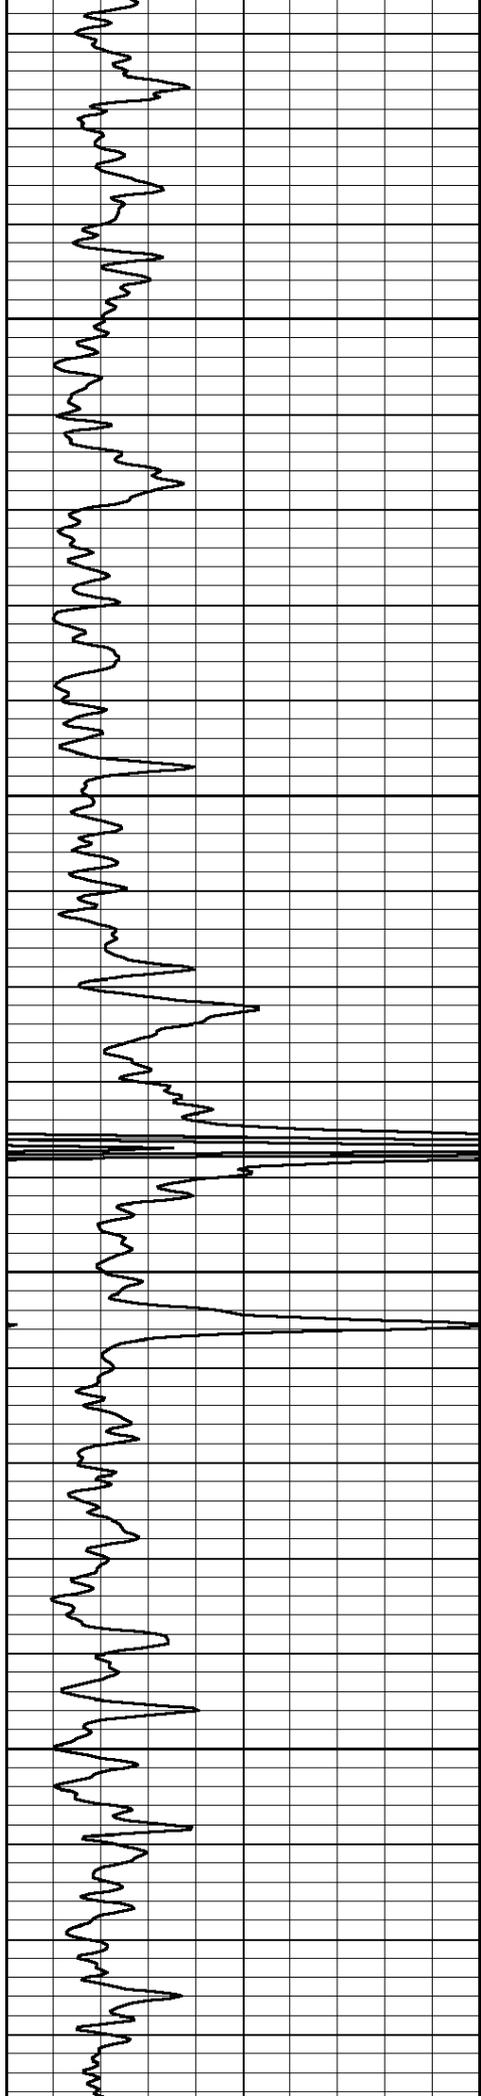





2350


2400

2450

2500

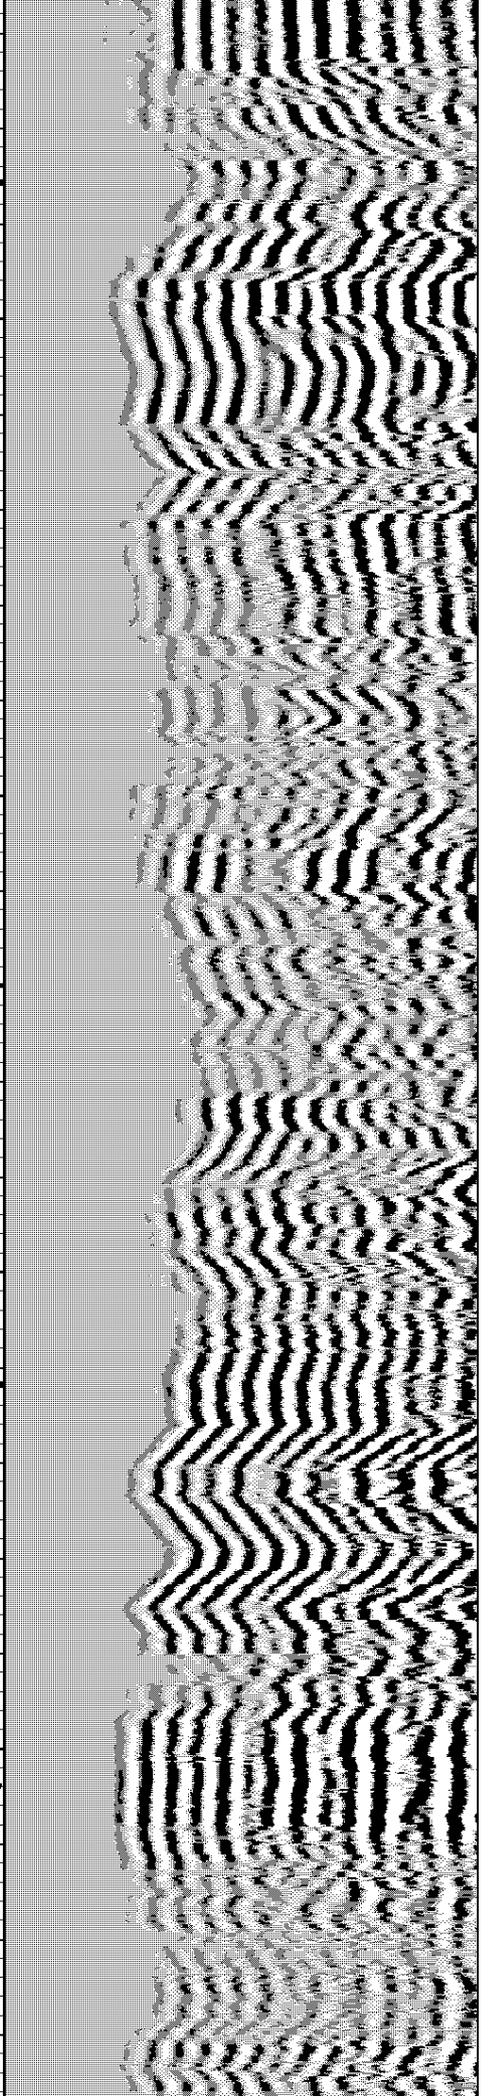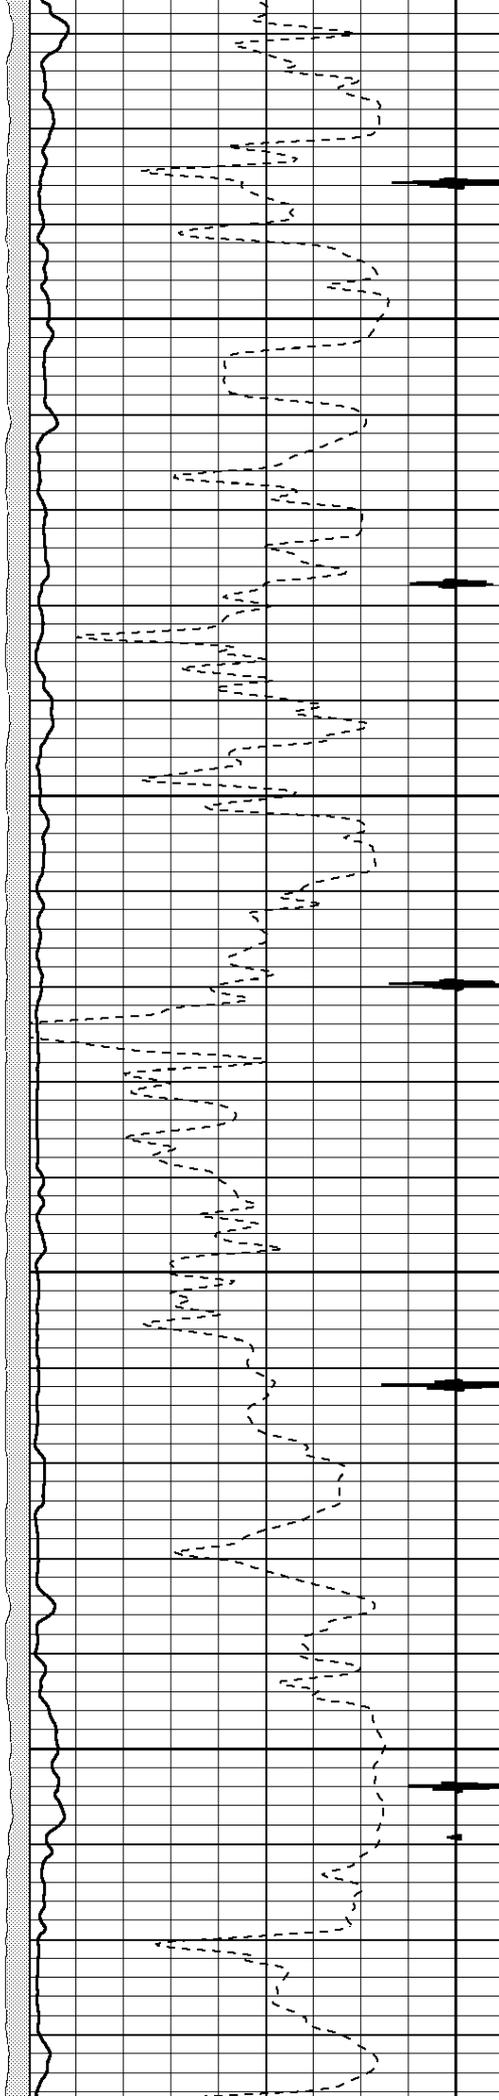

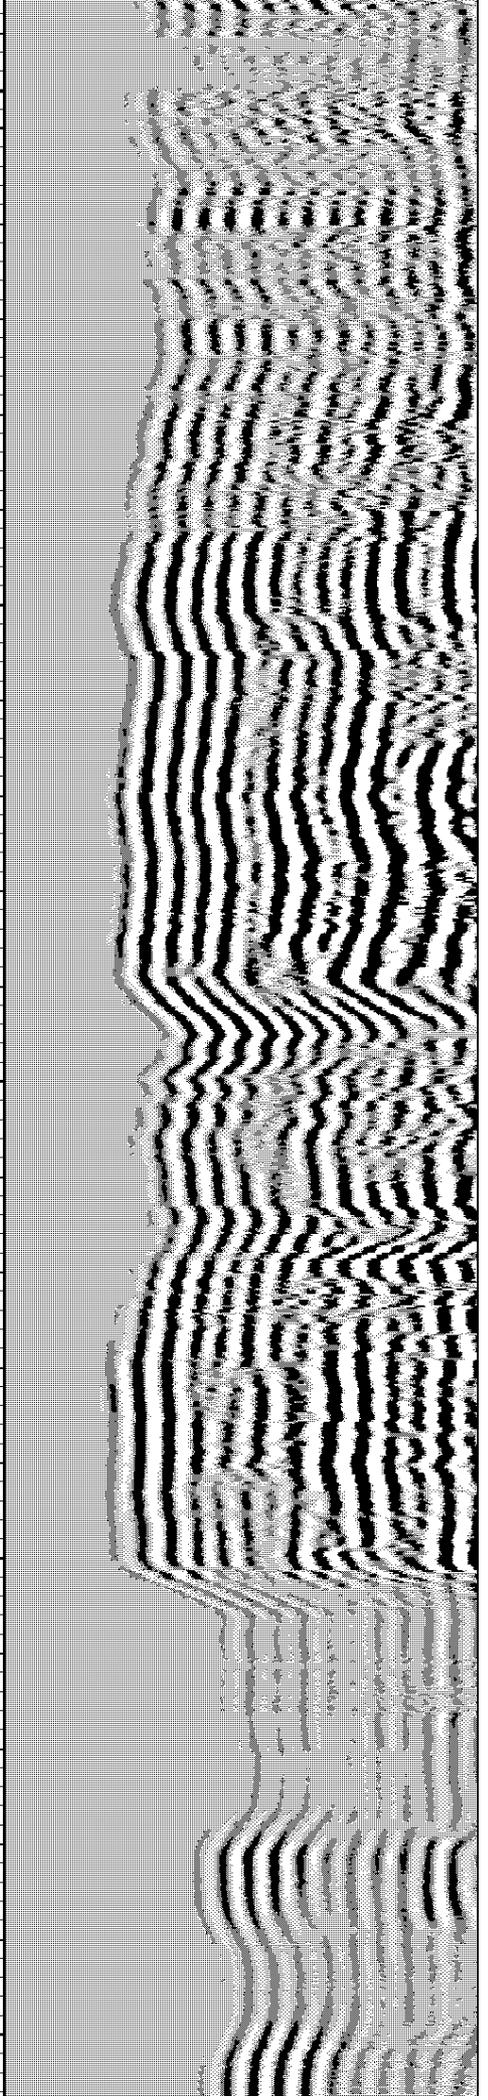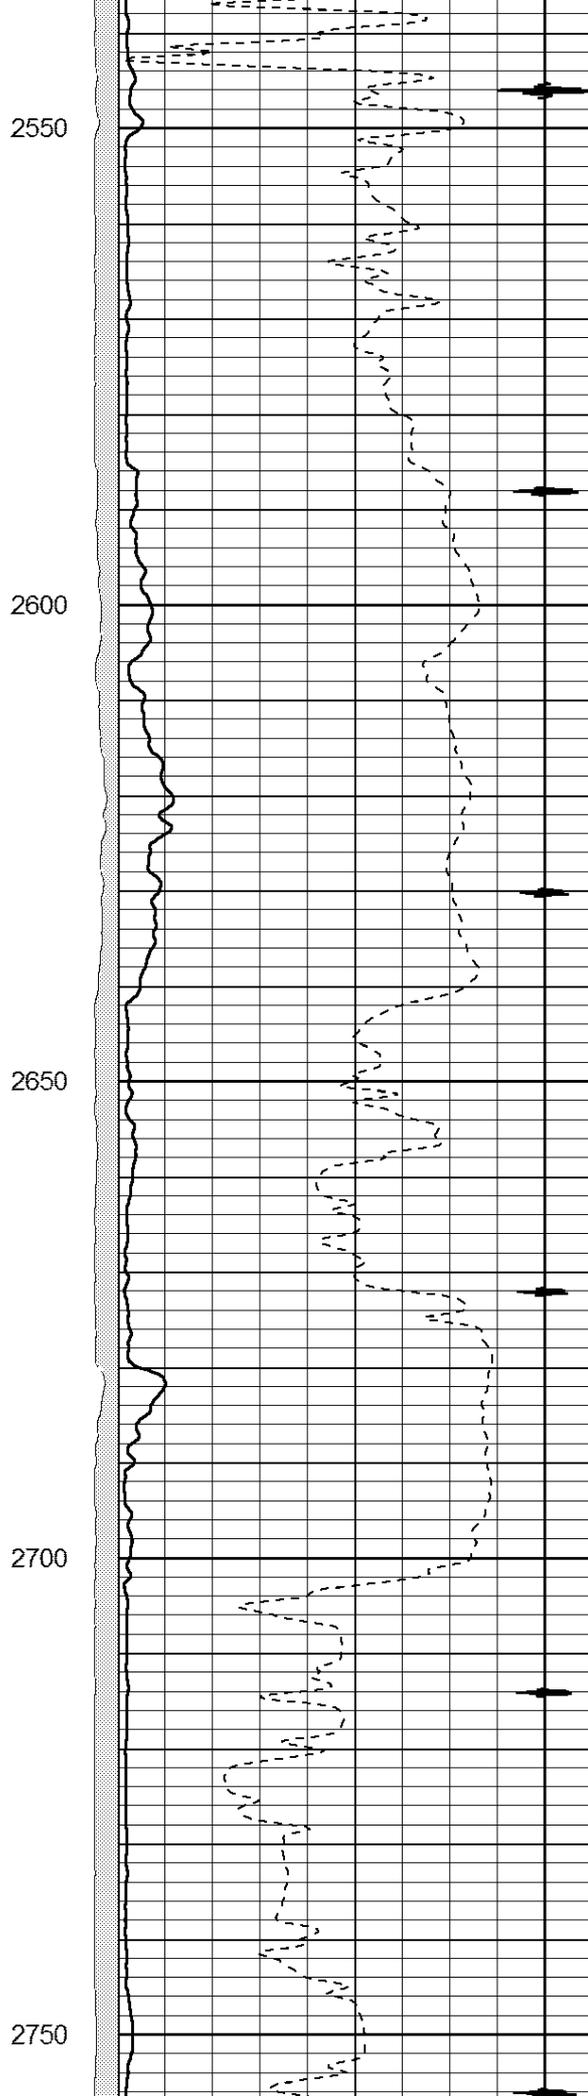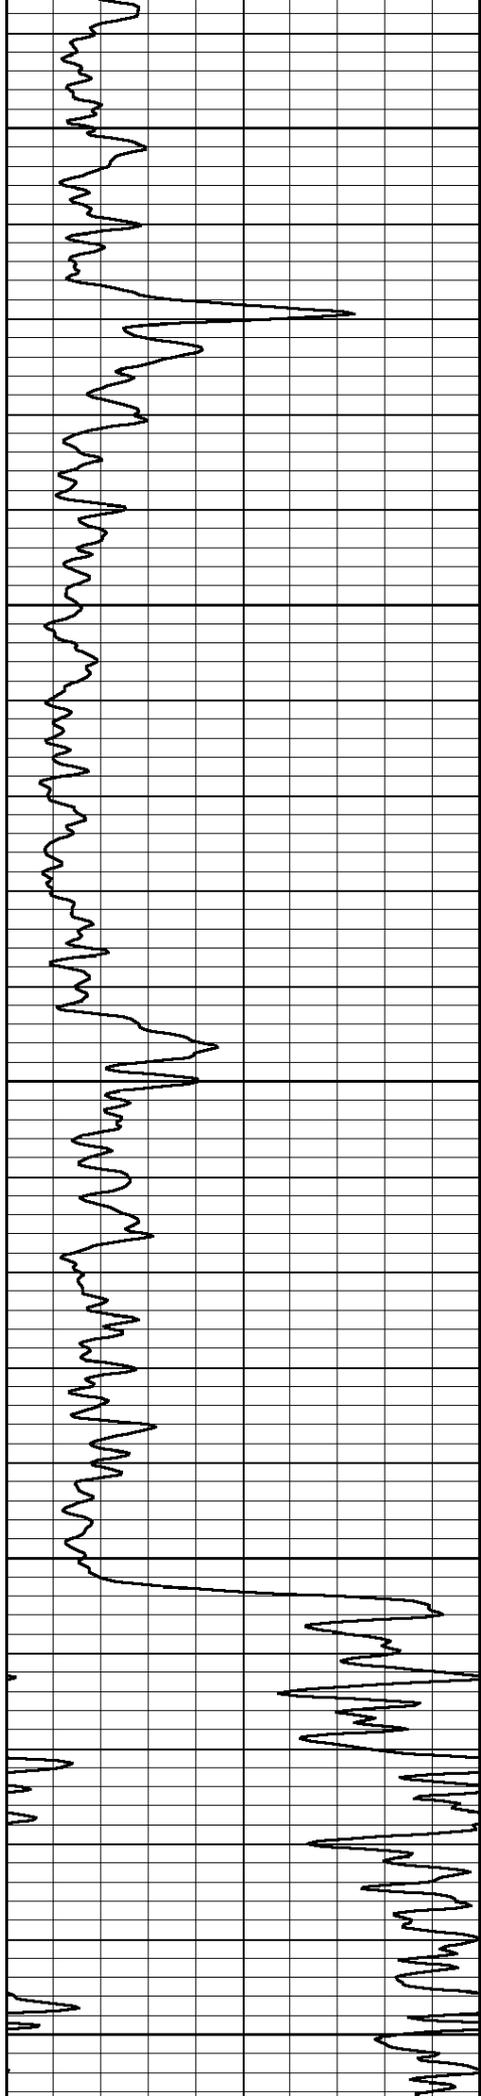

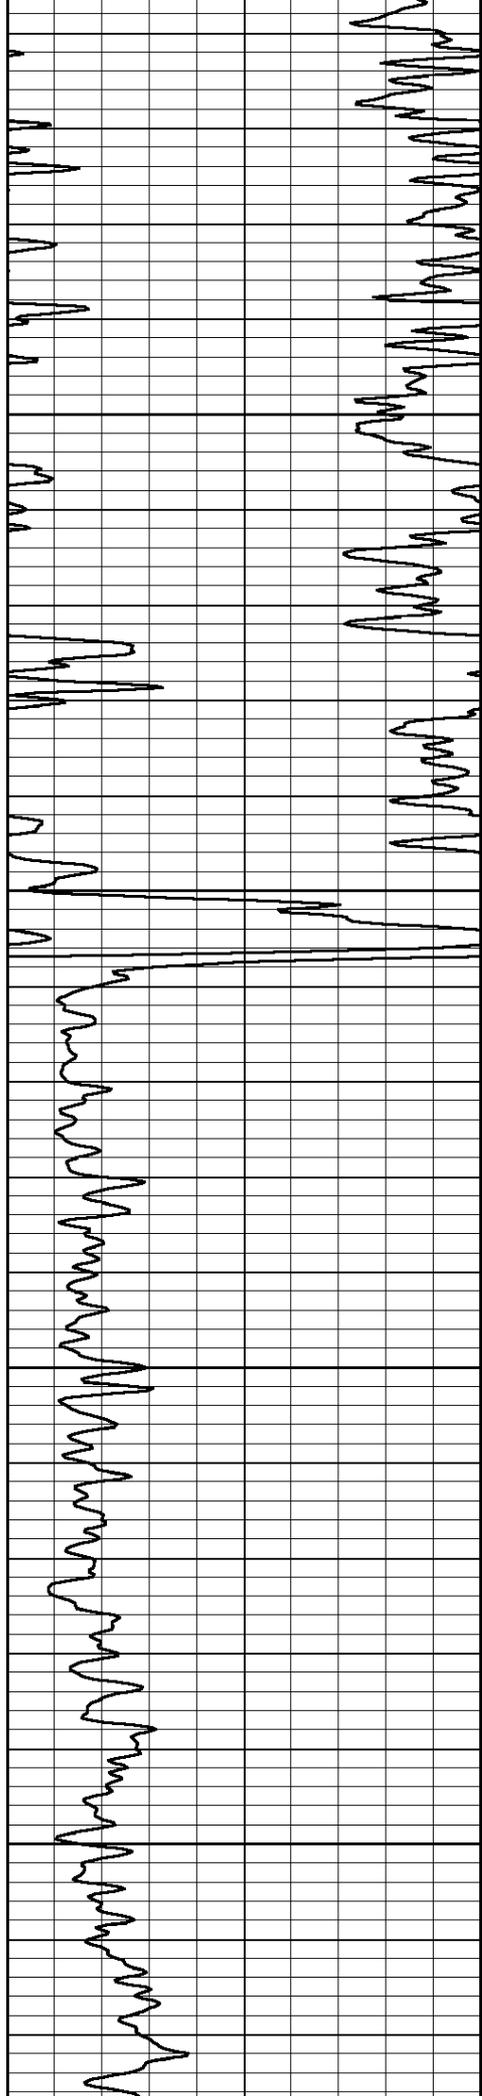



2800


2850

2900

2950

Casing Collar →

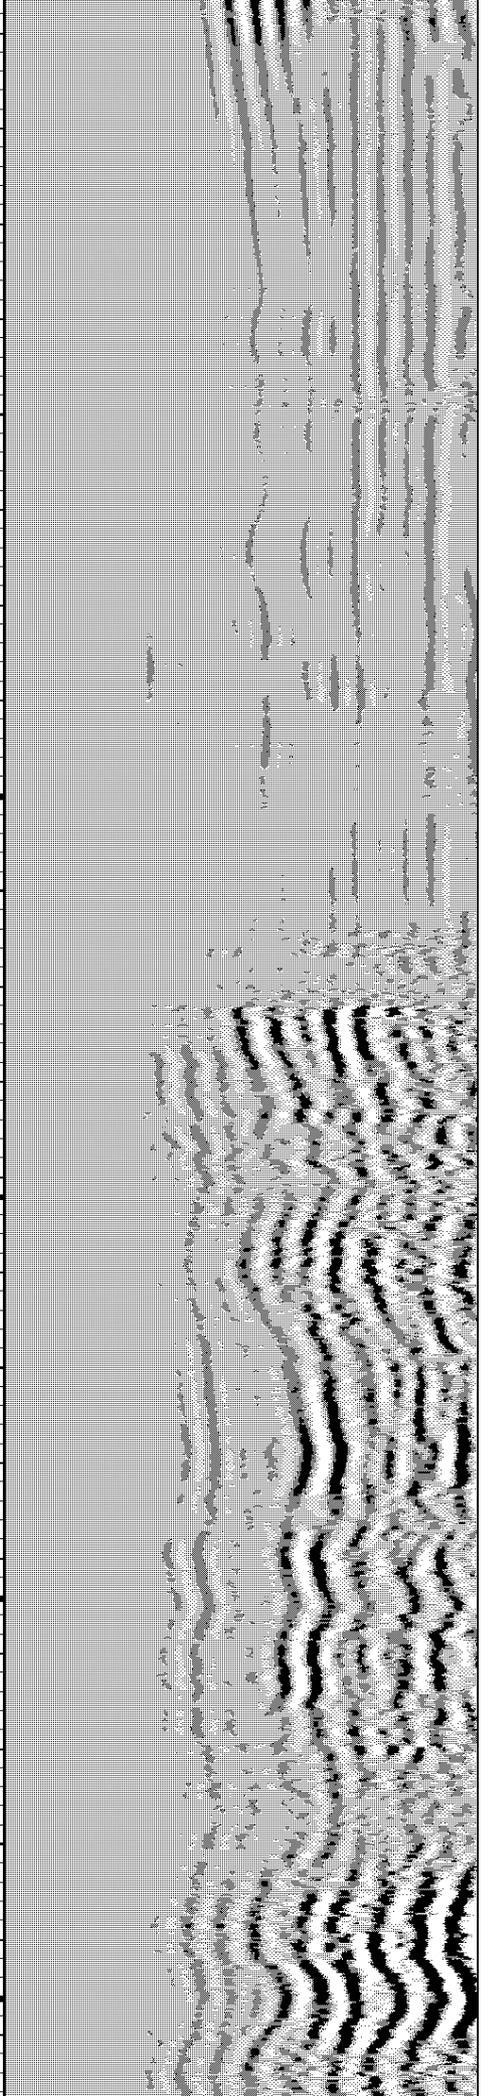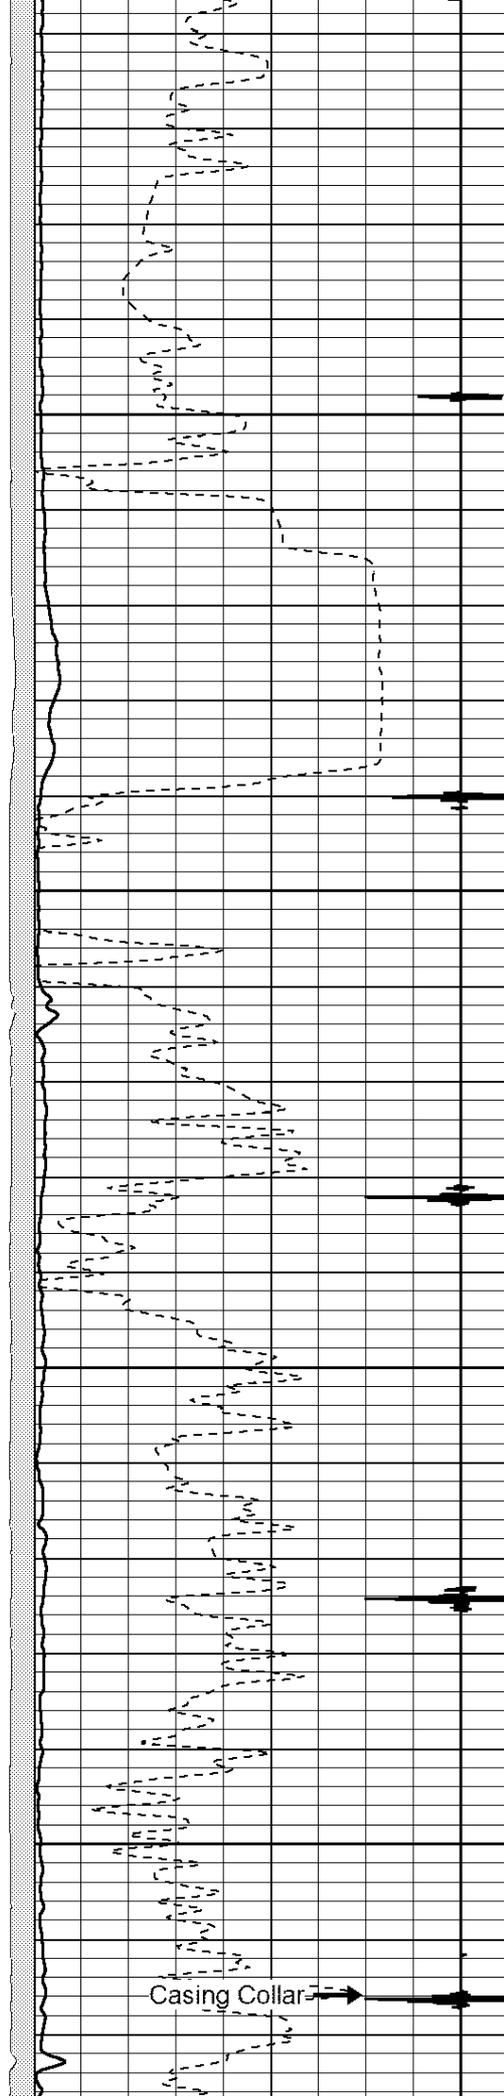

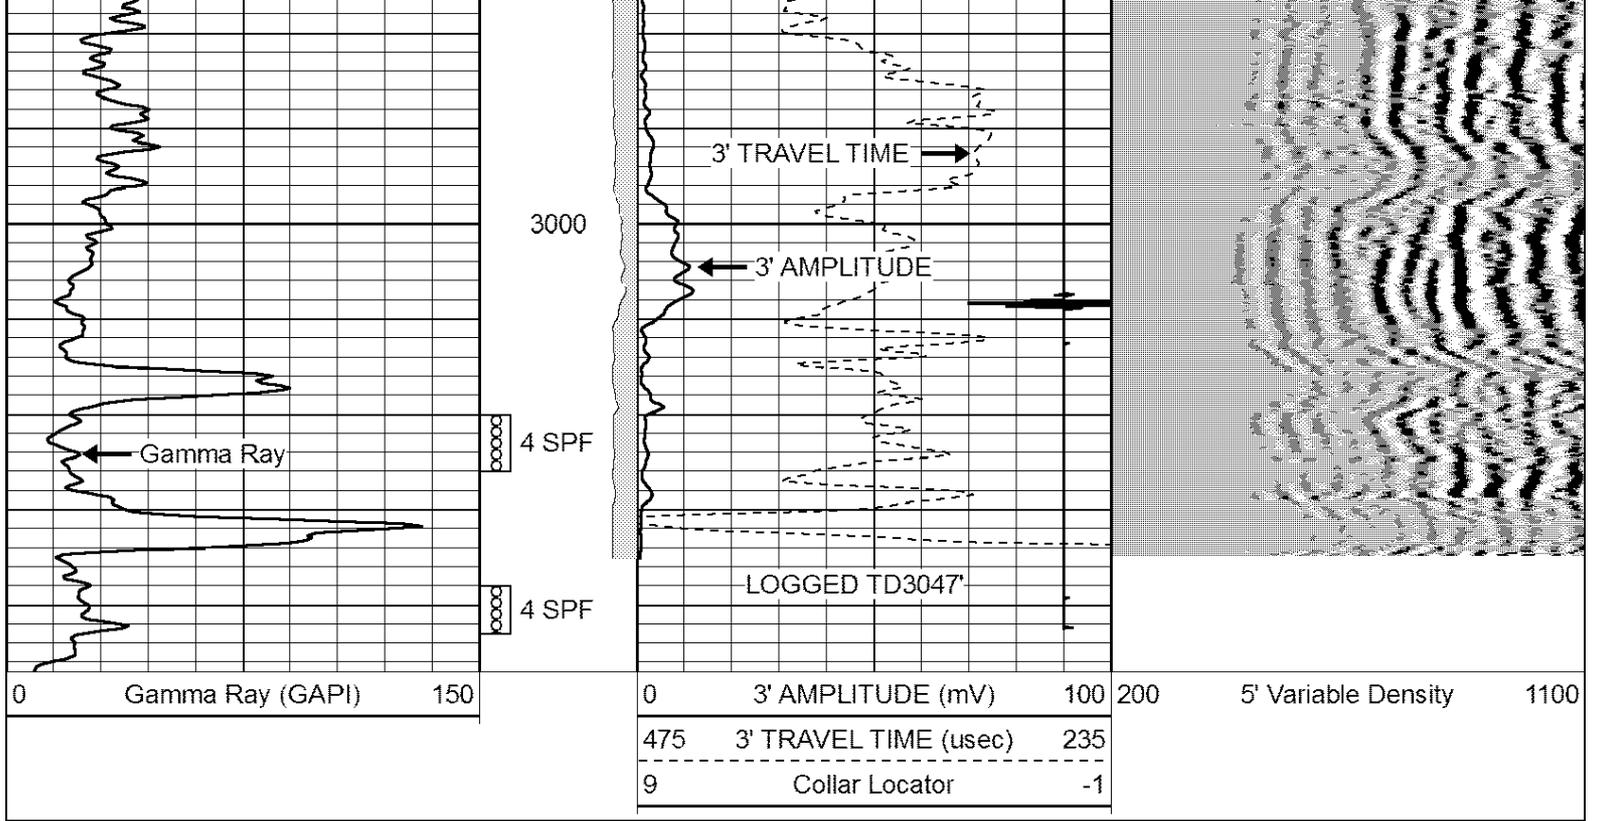

Perf-Tech
Wireline Services, Inc.

REPEAT SECTION

Database File: oct102209.db
 Dataset Pathname: pass2
 Presentation Format: 3x5
 Dataset Creation: Mon Oct 10 10:14:27 2022 by Log Std Casedhole 06040
 Charted by: Depth in Feet scaled 1:240

