



DUAL INDUCTION LOG

Company SHAKESPEARE OIL COMPANY, INC.

Well WELLS #2-27

Field UNNAMED

County WICHITA State KANSAS

Location: API #: 15-203-20394-0000

1540 FSL & 1360 FWL
SW - SW - NE - SW

SEC 27 TWP 16S RGE 35W

Permanent Datum GROUND LEVEL Elevation 3197
Log Measured From KELLY BUSHING 9' A.G.L
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL
PE/MEL

Elevation
K.B. 3206
D.F. 3204
G.L. 3197

Date	11/19/24
Run Number	ONE
Depth Driller	4897
Depth Logger	4898
Bottom Logged Interval	4896
Top Log Interval	00
Casing Driller	8.625 @ 237
Casing Logger	237
Bit Size	7.875
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.4/67
pH / Fluid Loss	9.0/10.4
Source of Sample	FLOWLINE
Rm @ Meas. Temp	.700 @ 60F
Rmf @ Meas. Temp	.525 @ 60F
Rmc @ Meas. Temp	.840 @ 60F
Source of Rmf / Rmc	MEASUREMENT
Rm @ BHT	.339 @ 124F
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	4:15 A.M.
Maximum Recorded Temperature	124F
Equipment Number	3802
Location	HAYS, KANSAS
Recorded By	COLE ROBBEN
Witnessed By	KENT MATSON

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:

FROM PENCE, KANSAS GO 6 MILES WEST ON ROAD 270, SOUTH ON ROAD 22 FOR 1 1/2 MILES TO FARM ON EAST SIDE, TURN EAST ONTO THE NORTH DRIVE (NORTH OF GRAIN BIN), SOUTHEAST INTO






MAIN SECTION



Database File 9072pe.db
 Dataset Pathname pass3M
 Presentation Format _dil2
 Dataset Creation Tue Nov 19 07:22:57 2024
 Charted by Depth in Feet scaled 1:600



0 Gamma Ray (GAPI) 150
 -100 SP (mV) 100


1000 CILD (mmho/m) 0
 0 RLL3 (Ohm-m) 50
 0 Deep Induction (Ohm-m) 50
 50 RILD X10 (Ohm-m) 500
 50 RLL3 X10 (Ohm-m) 500


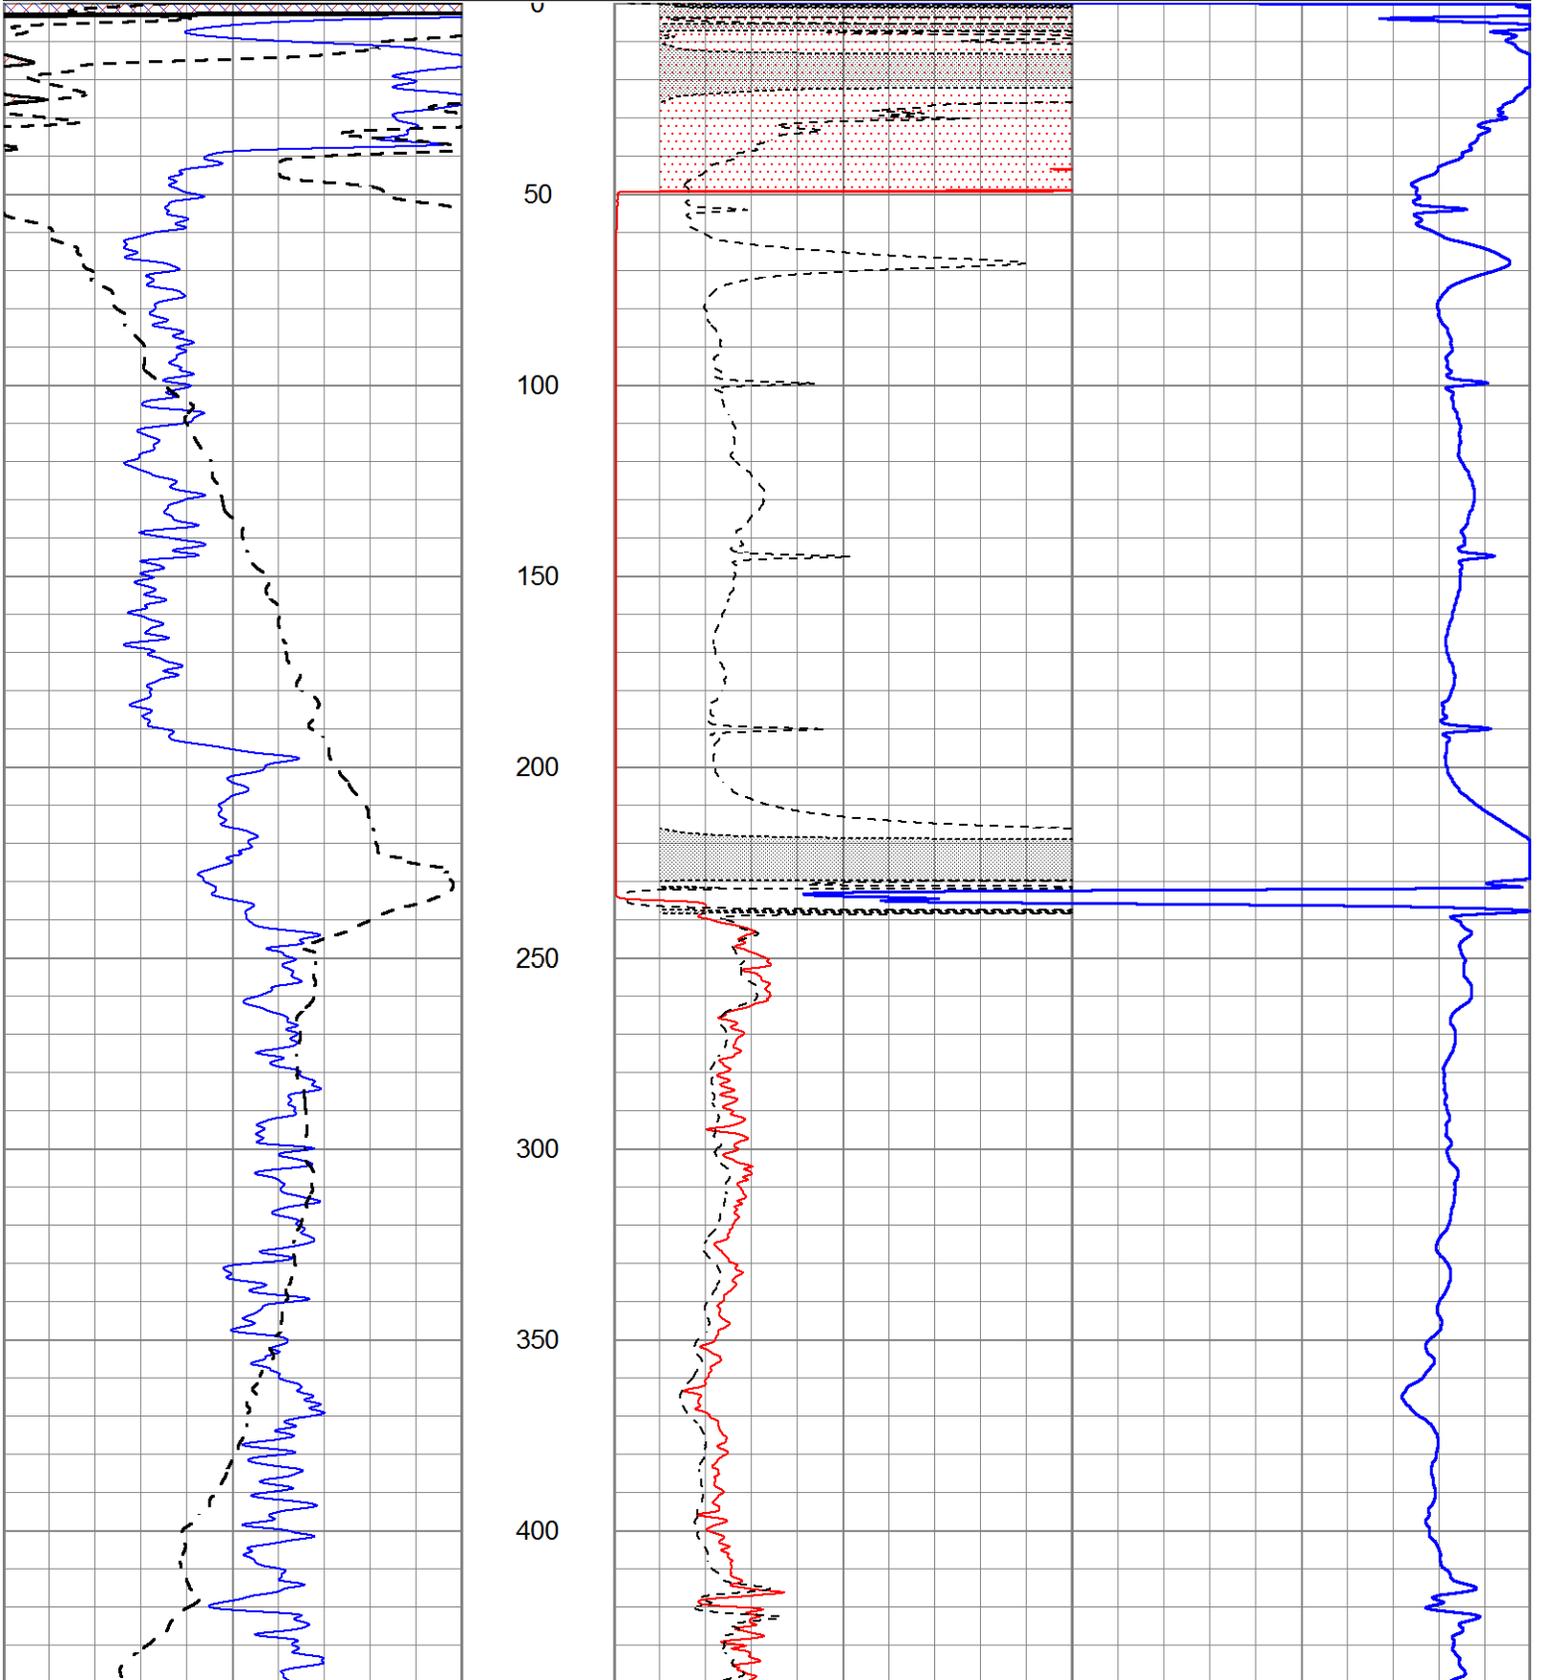


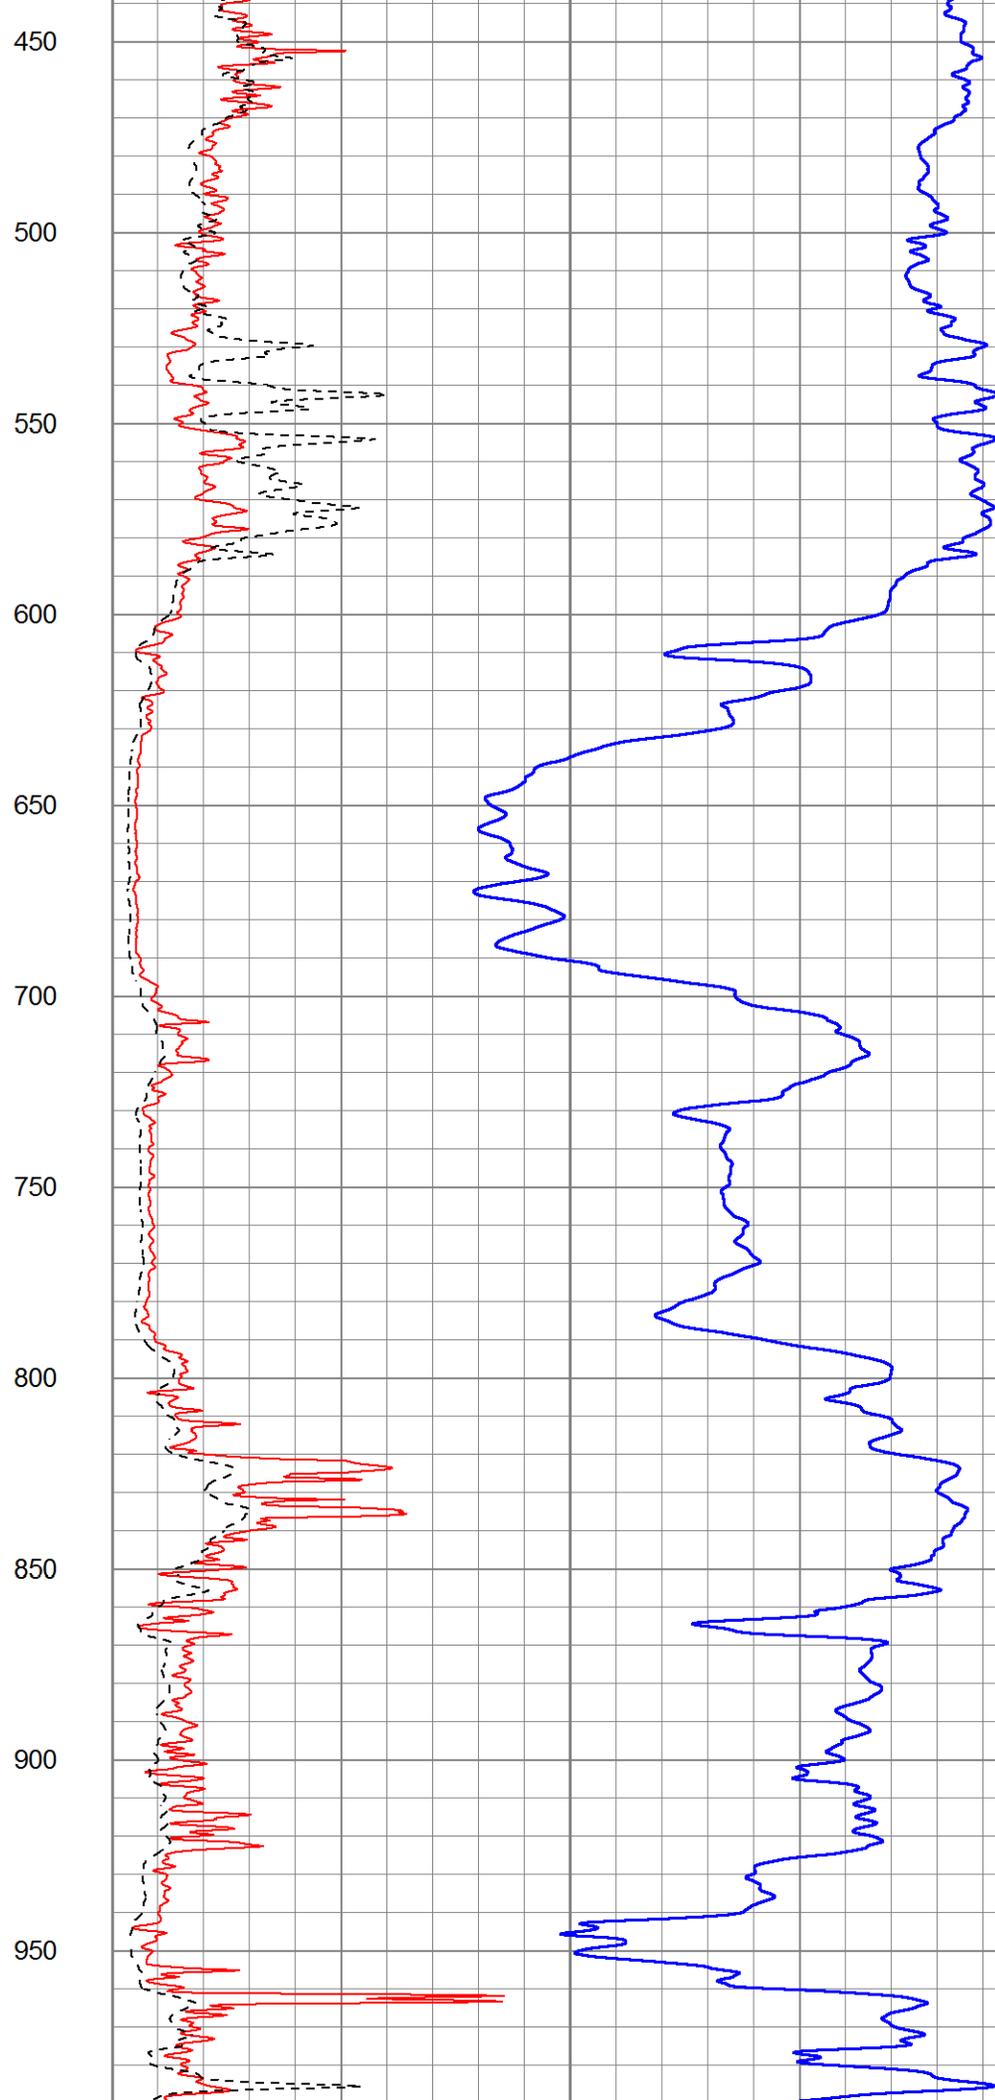
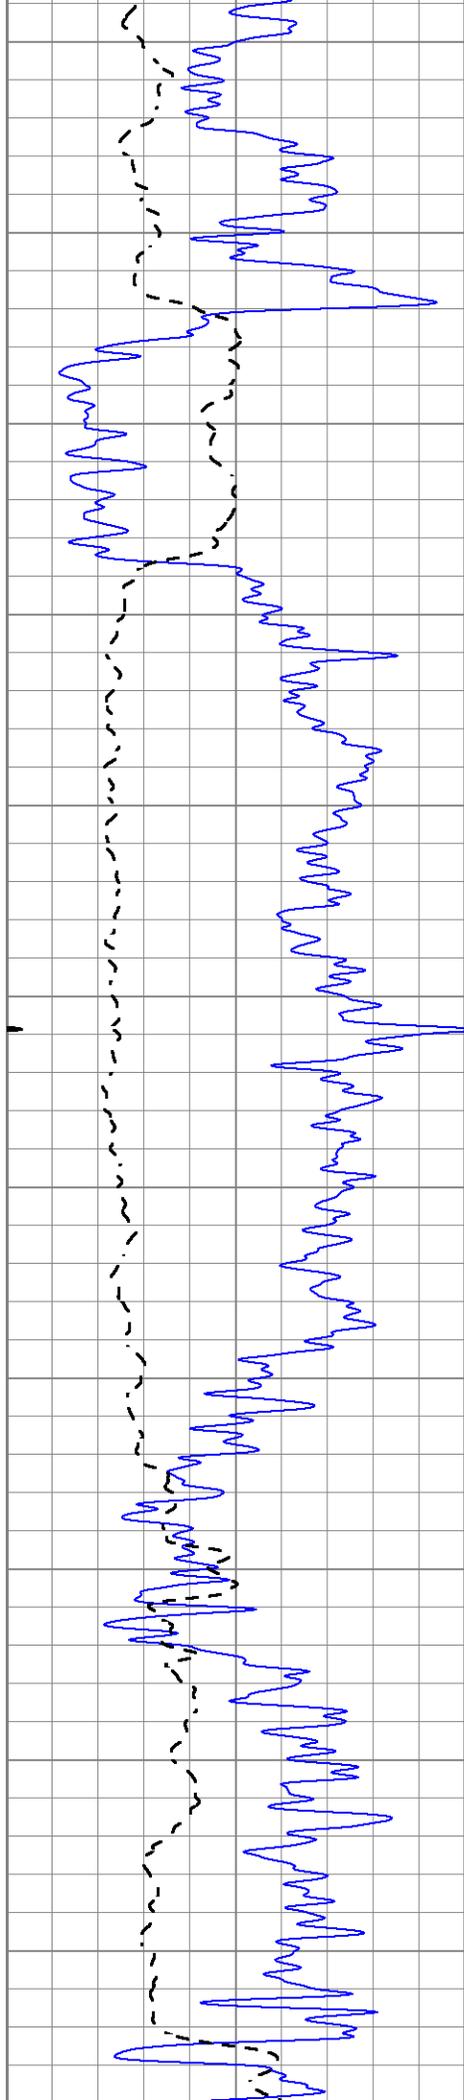



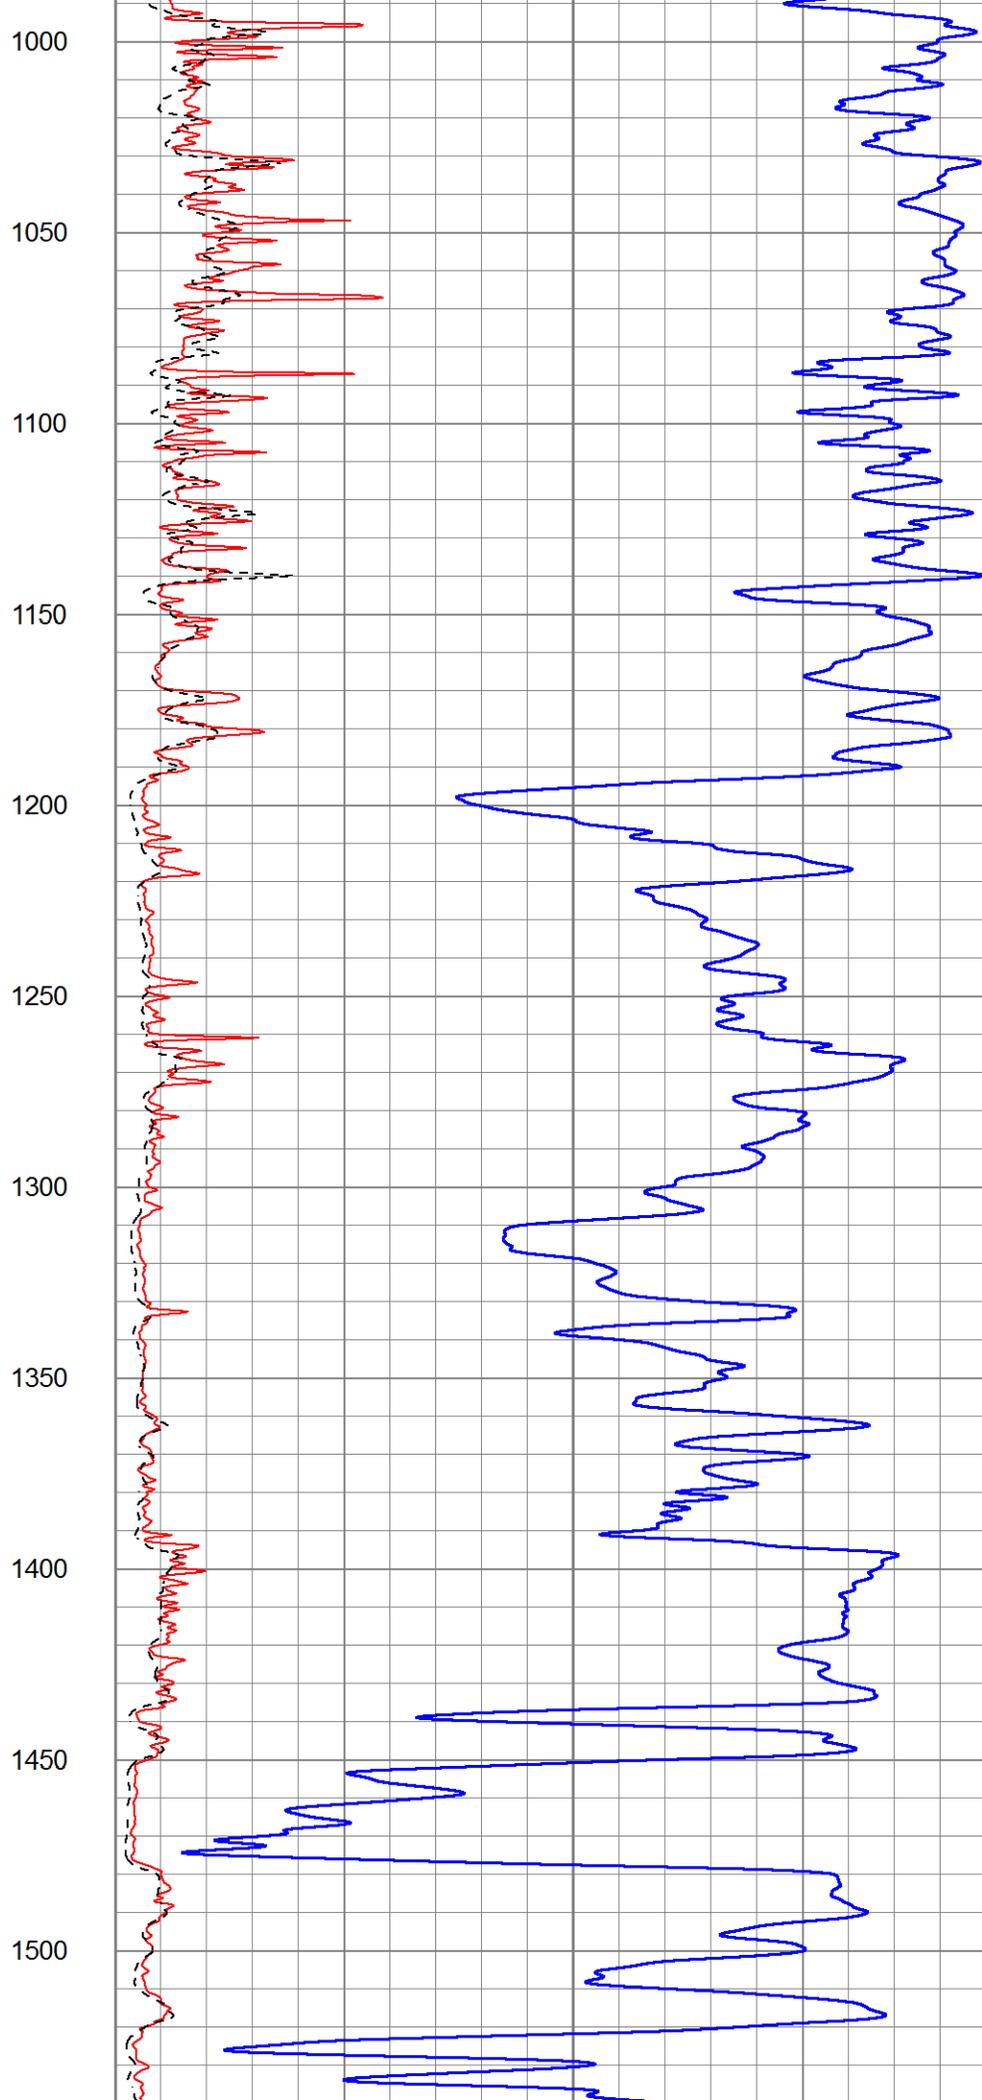
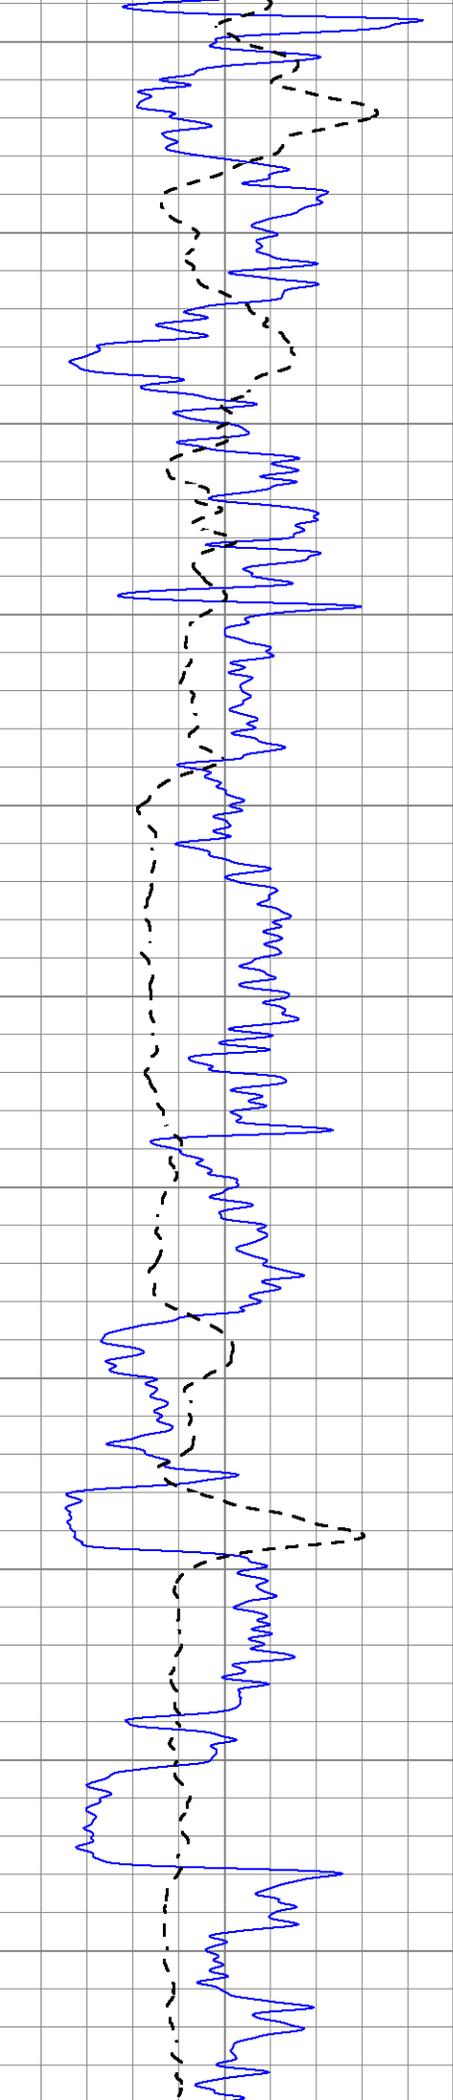


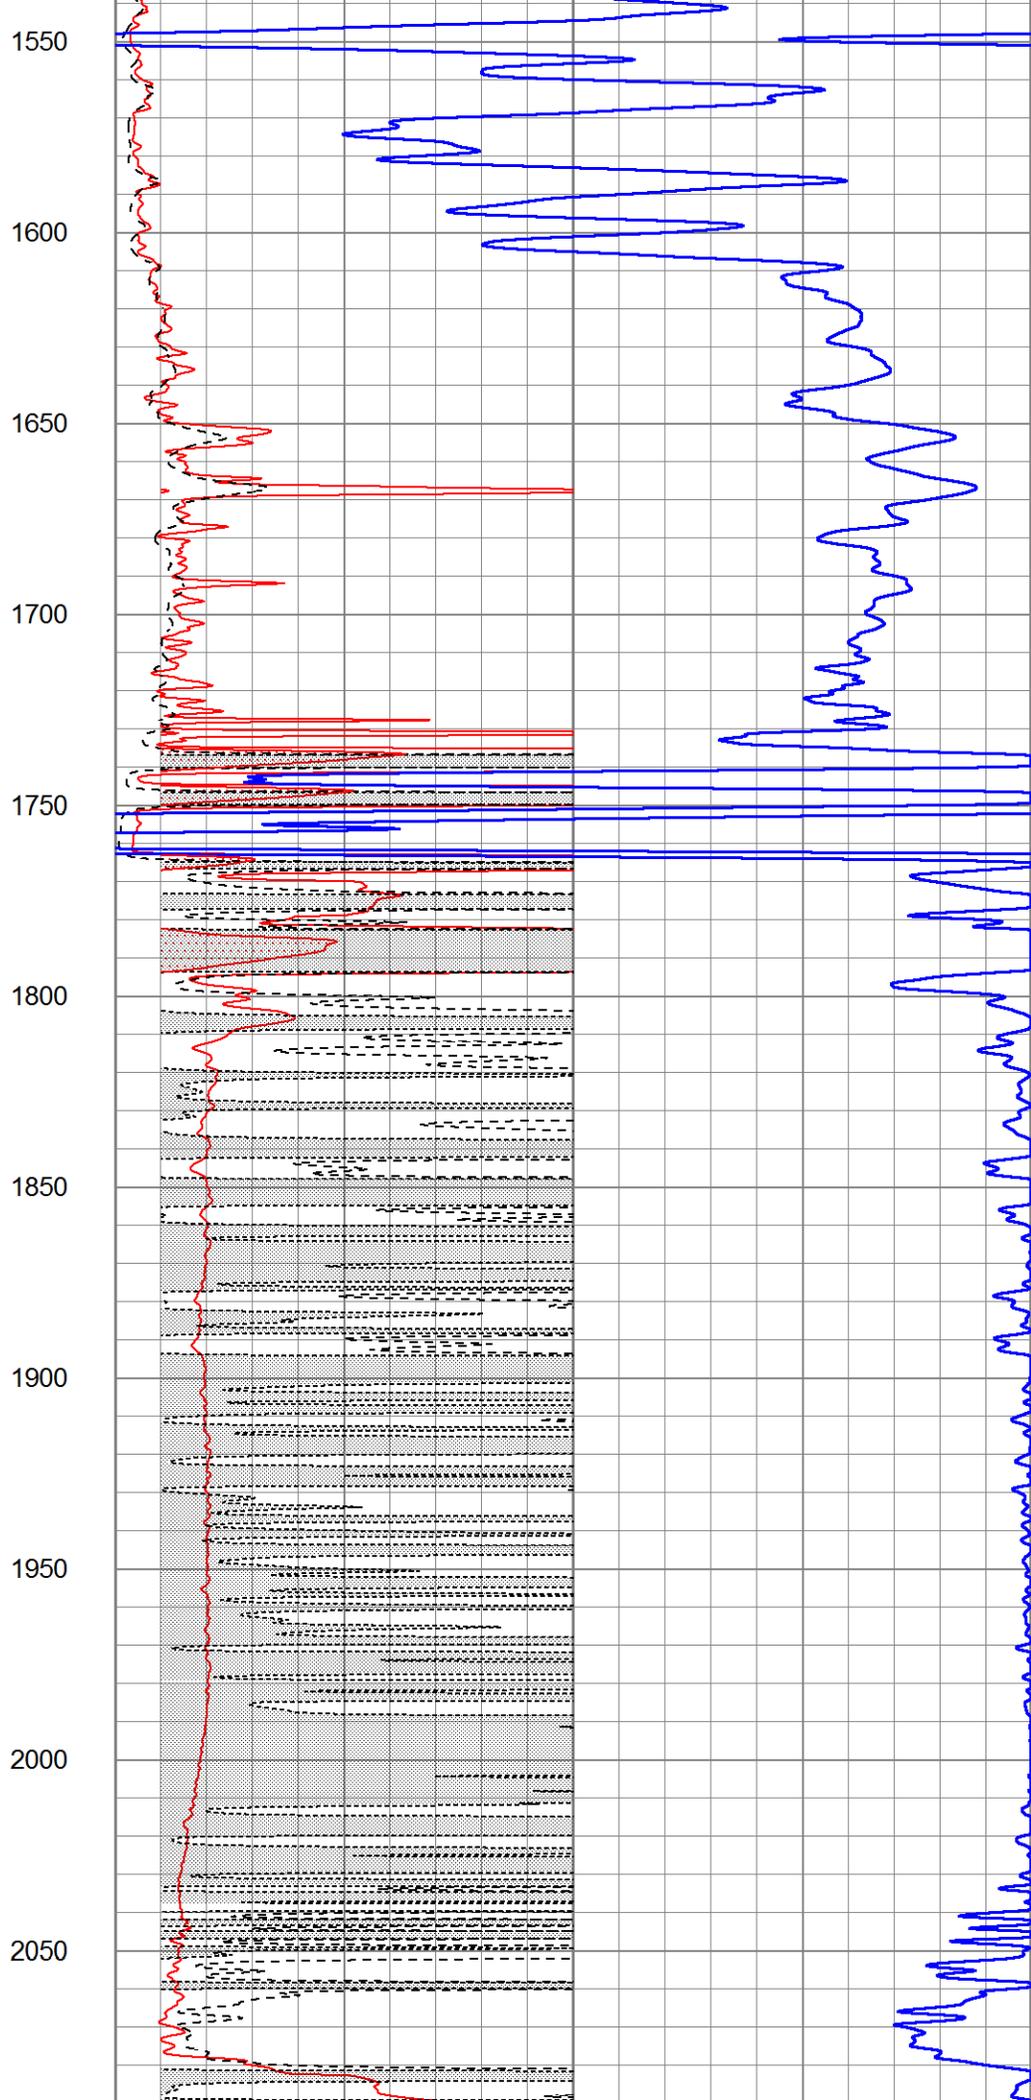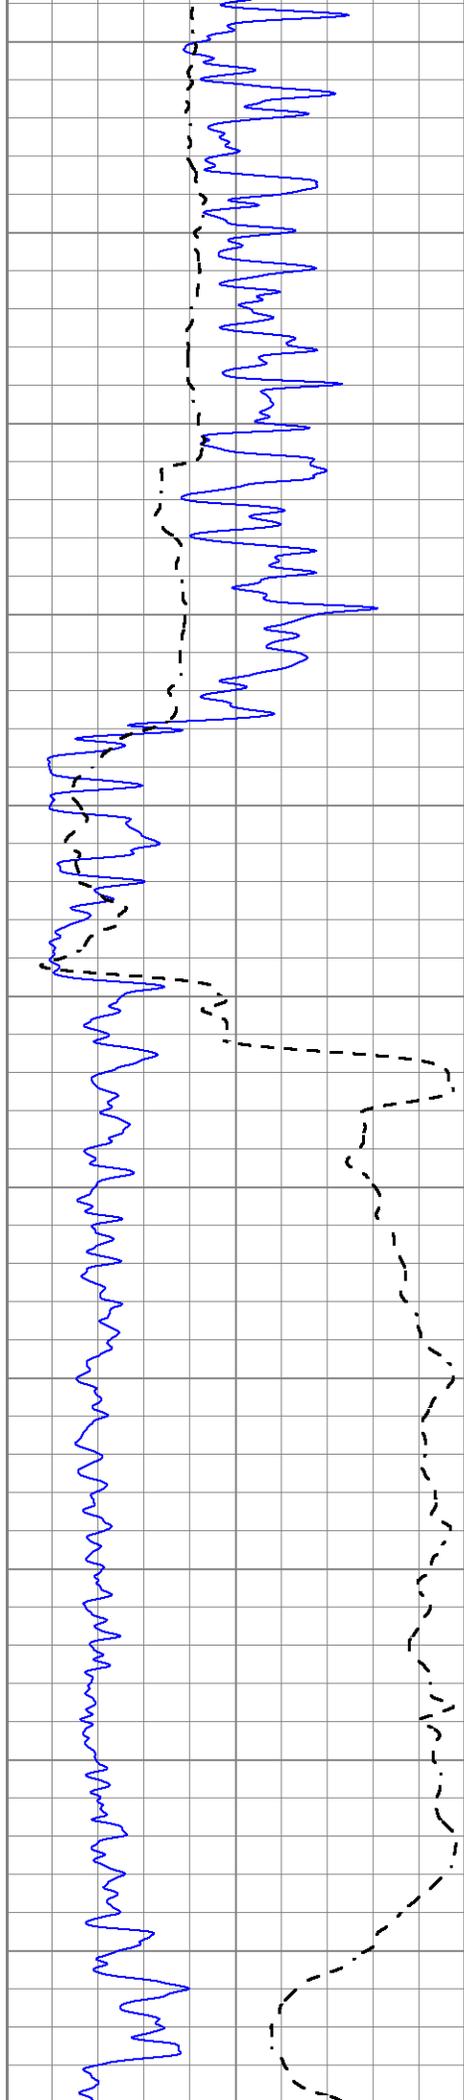


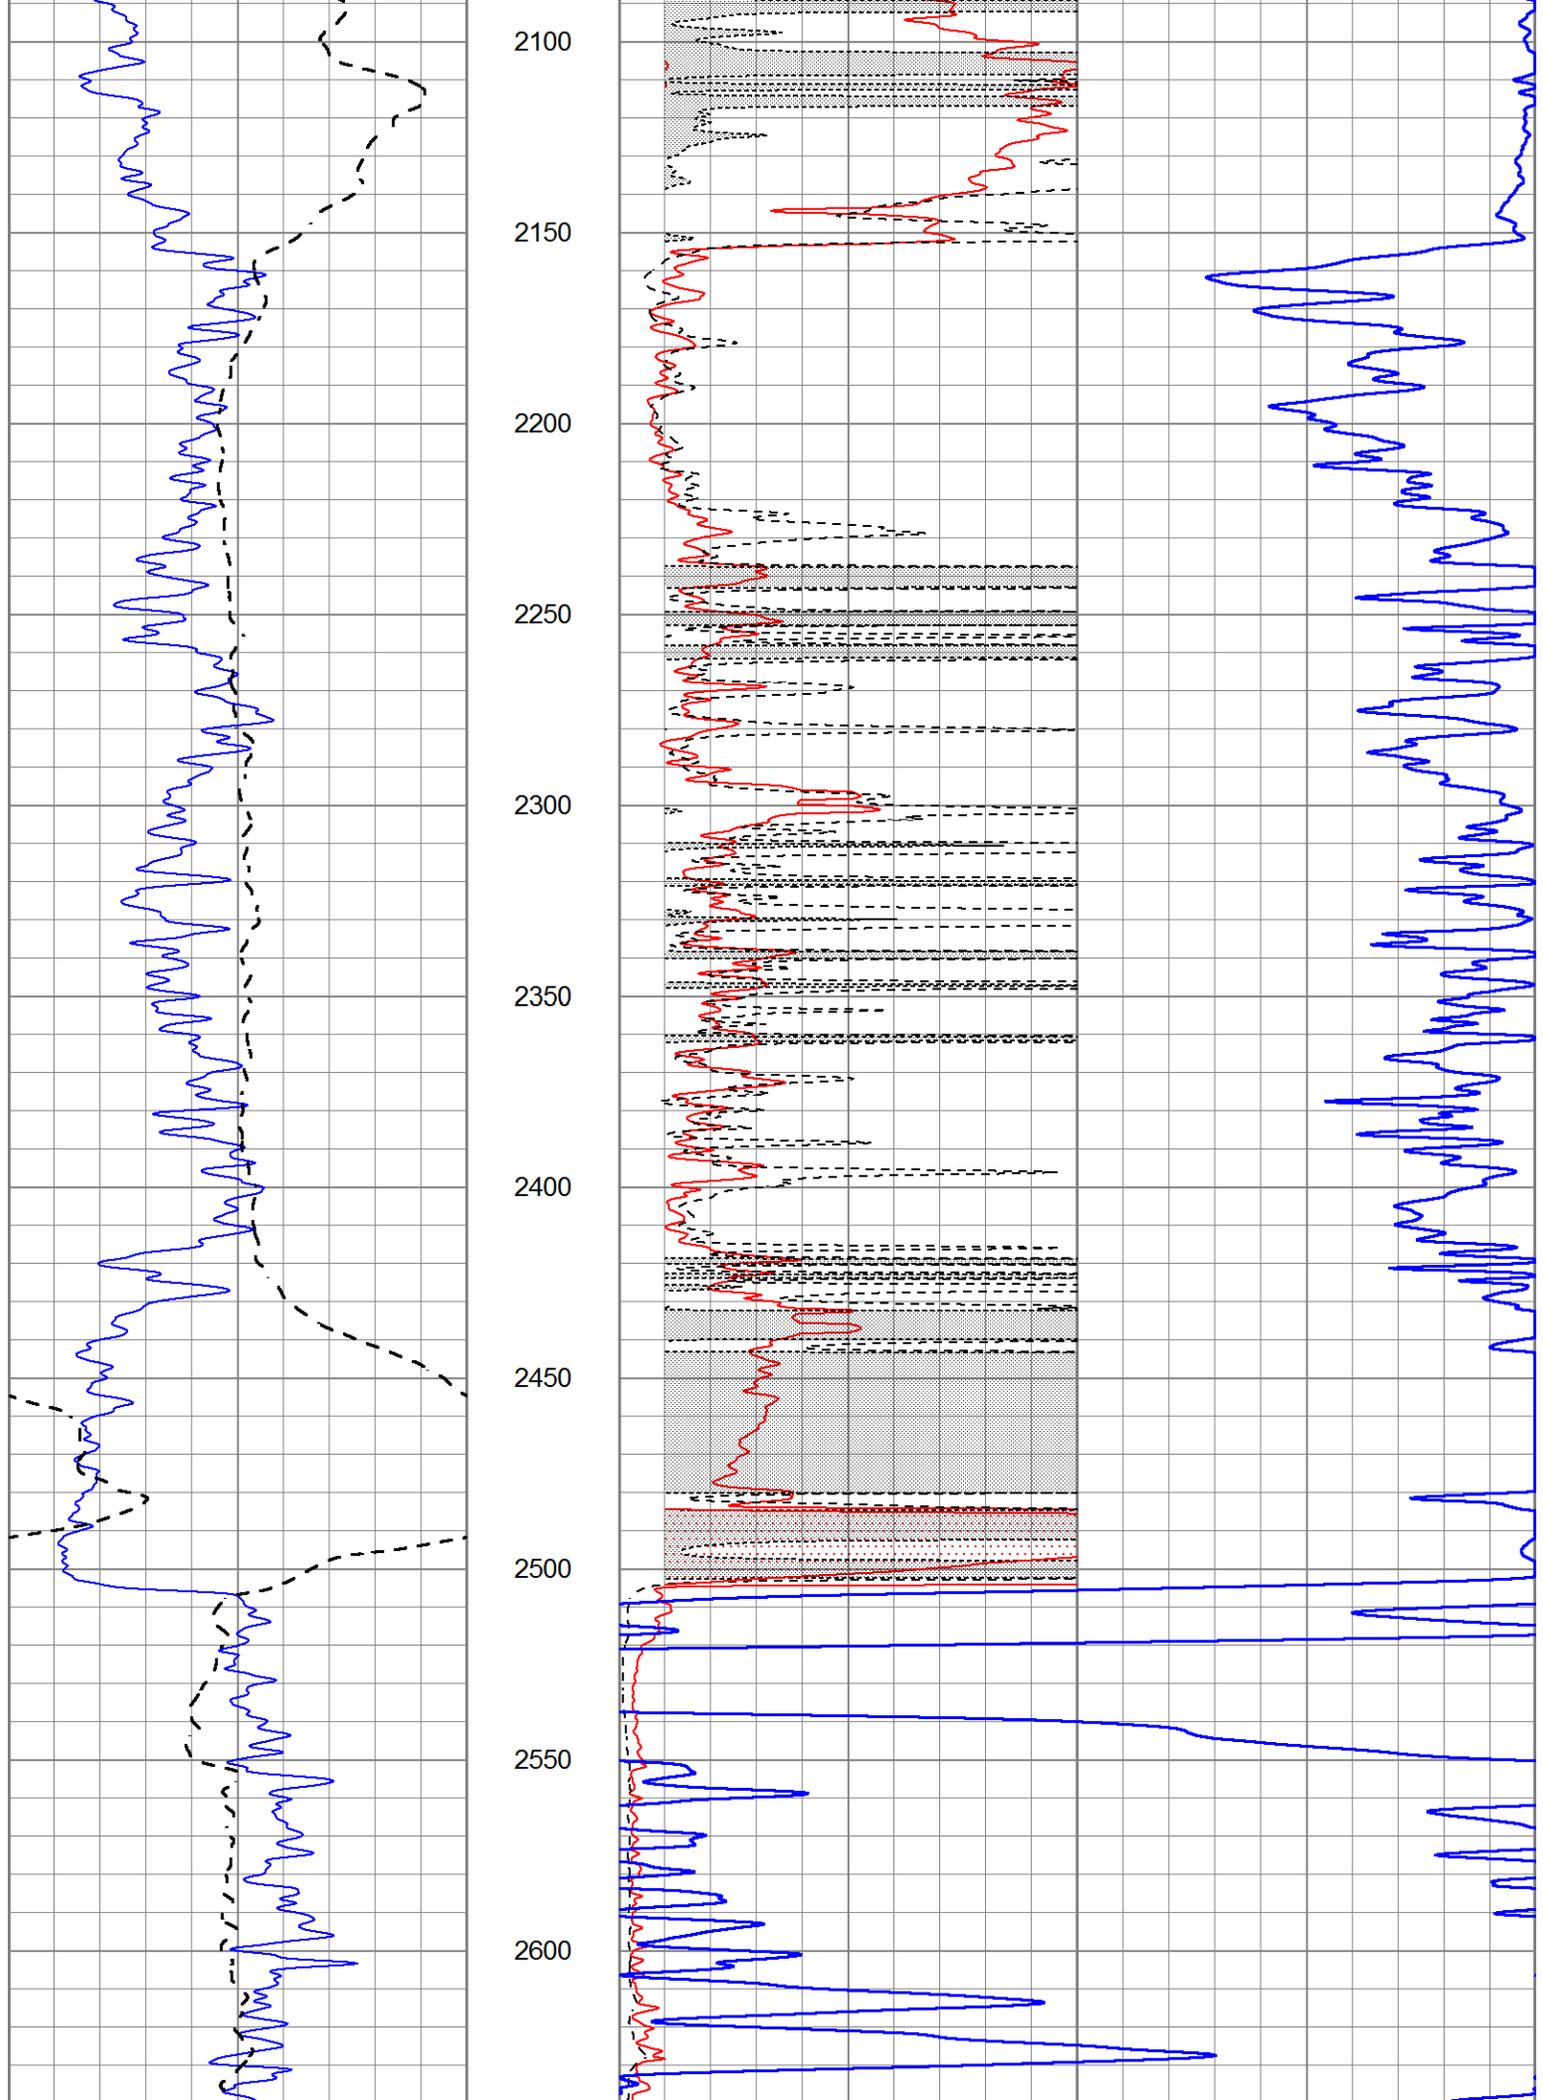


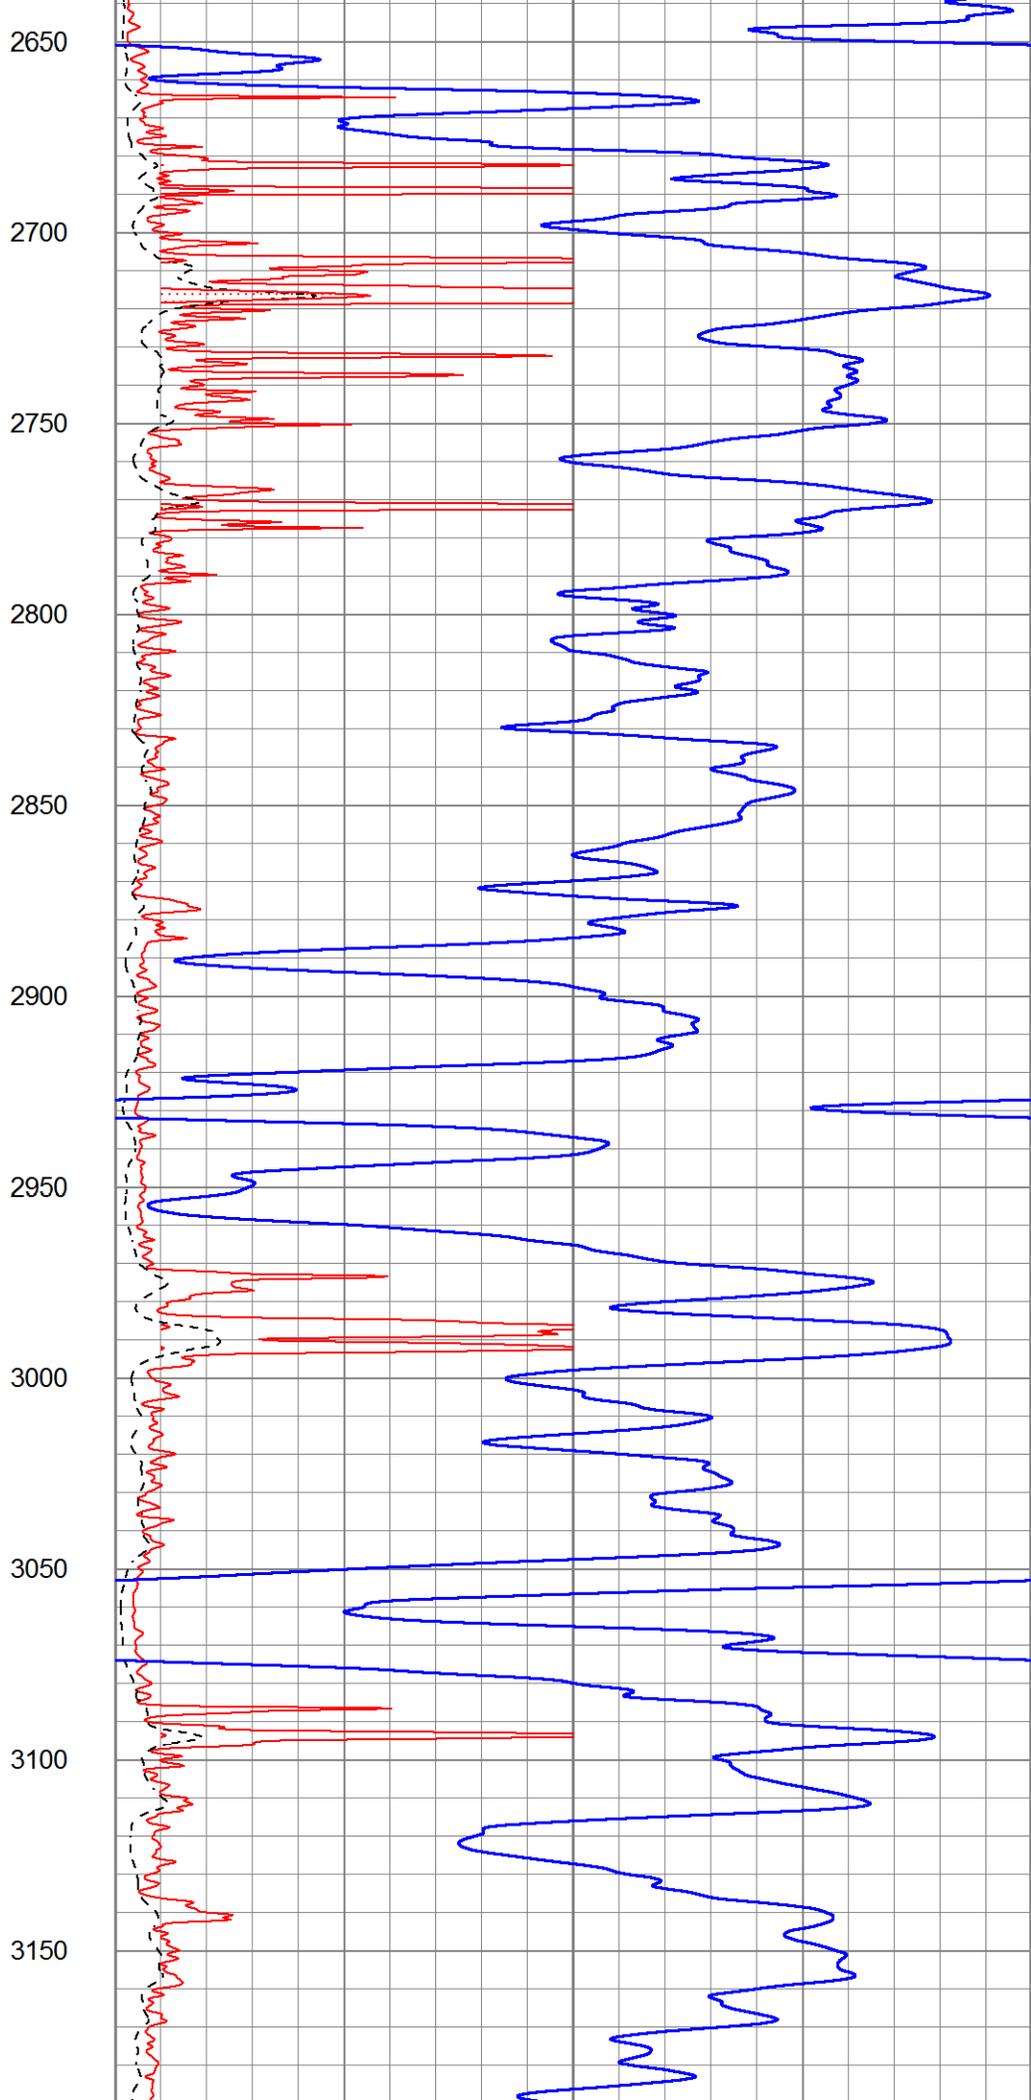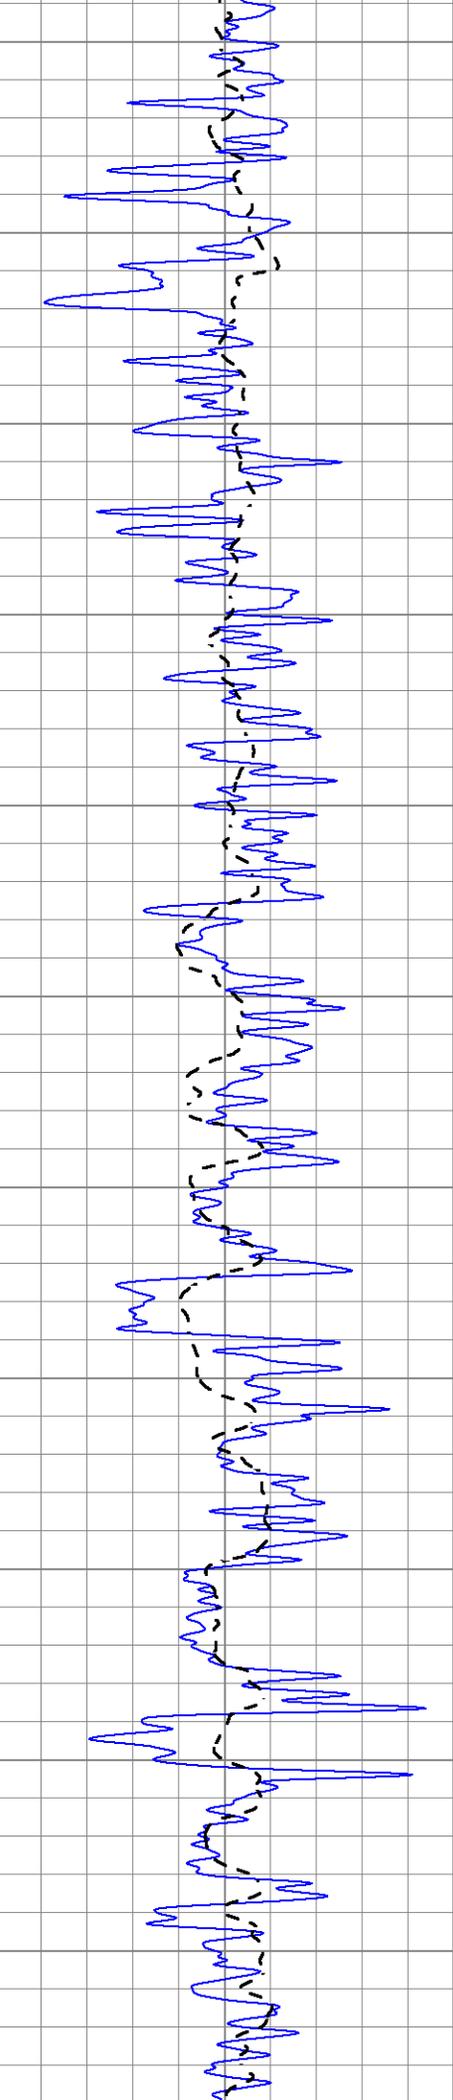

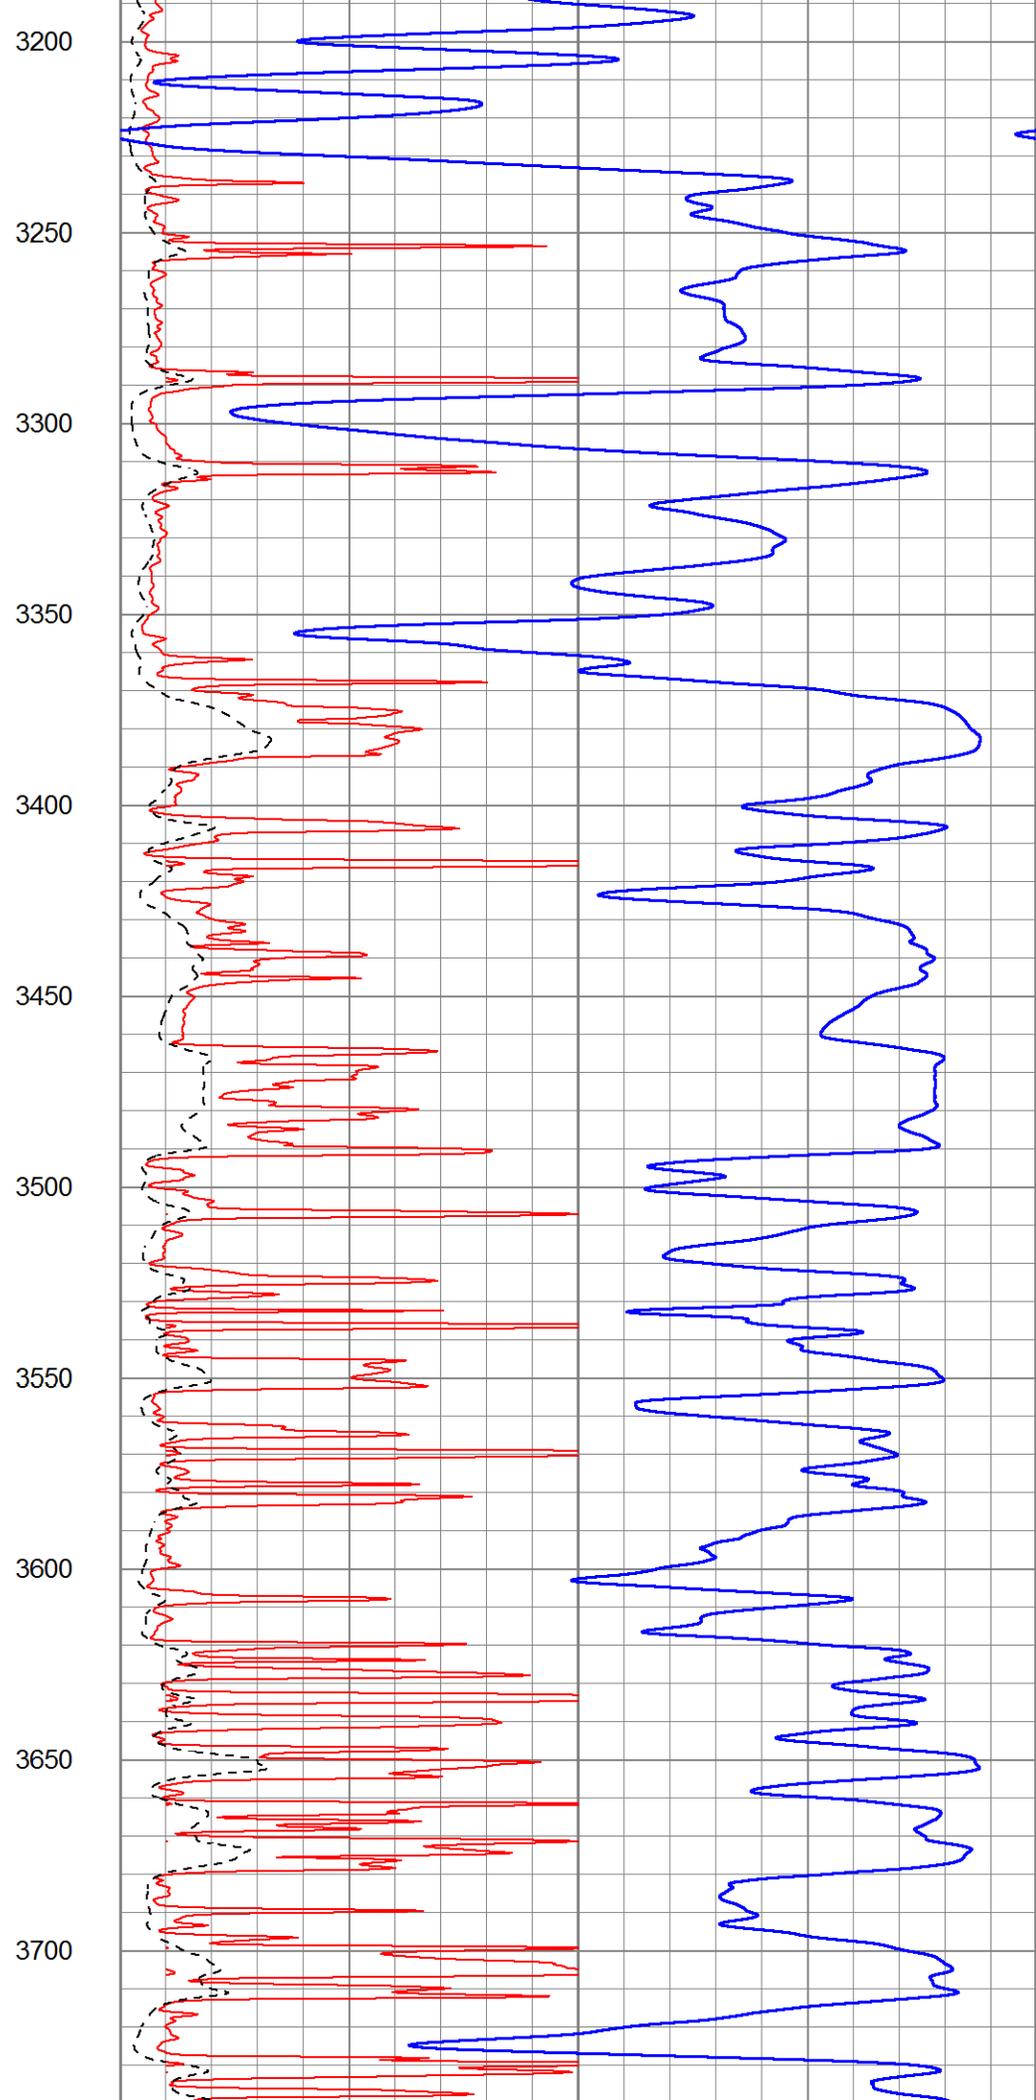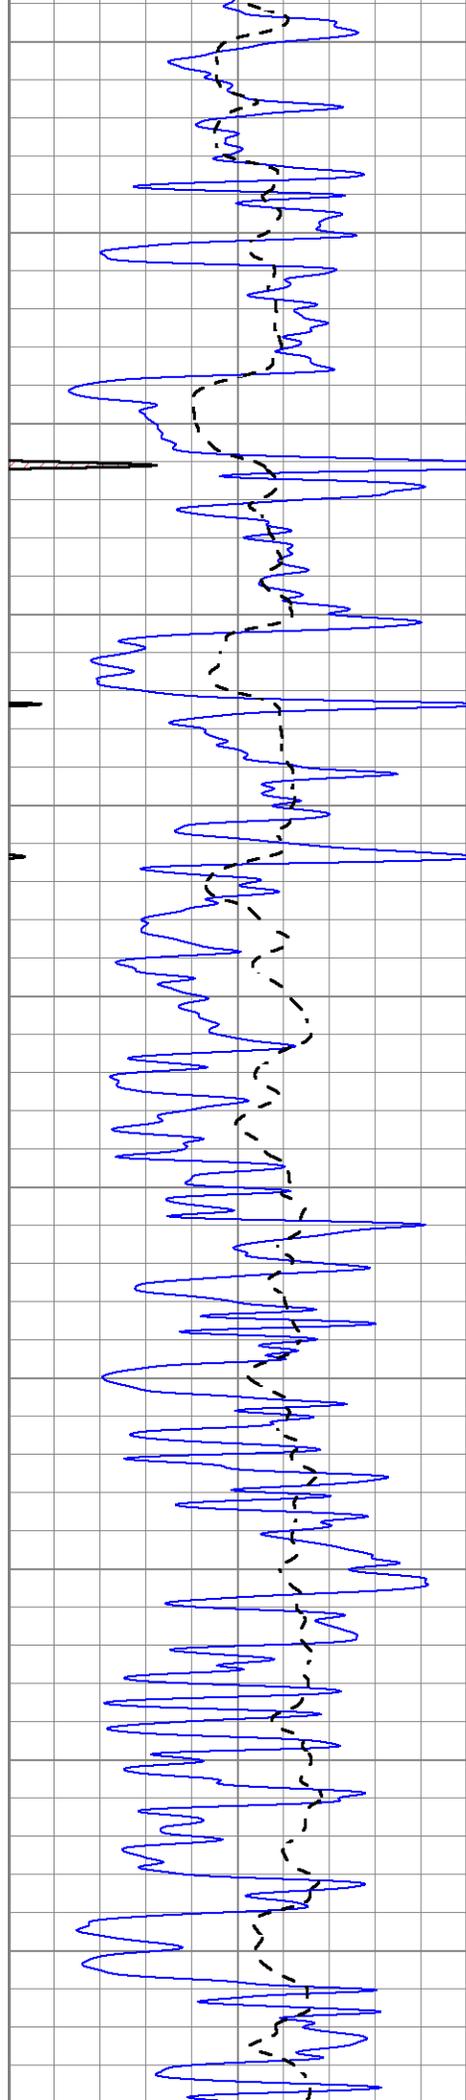

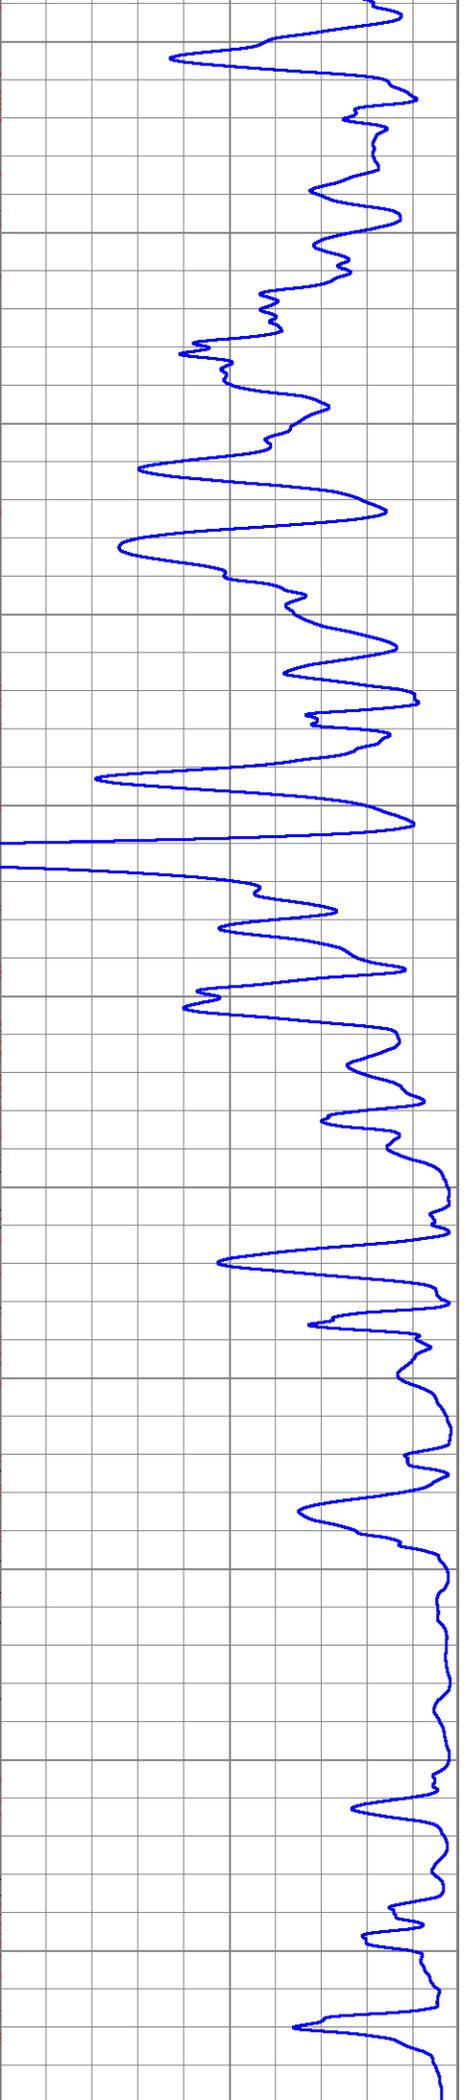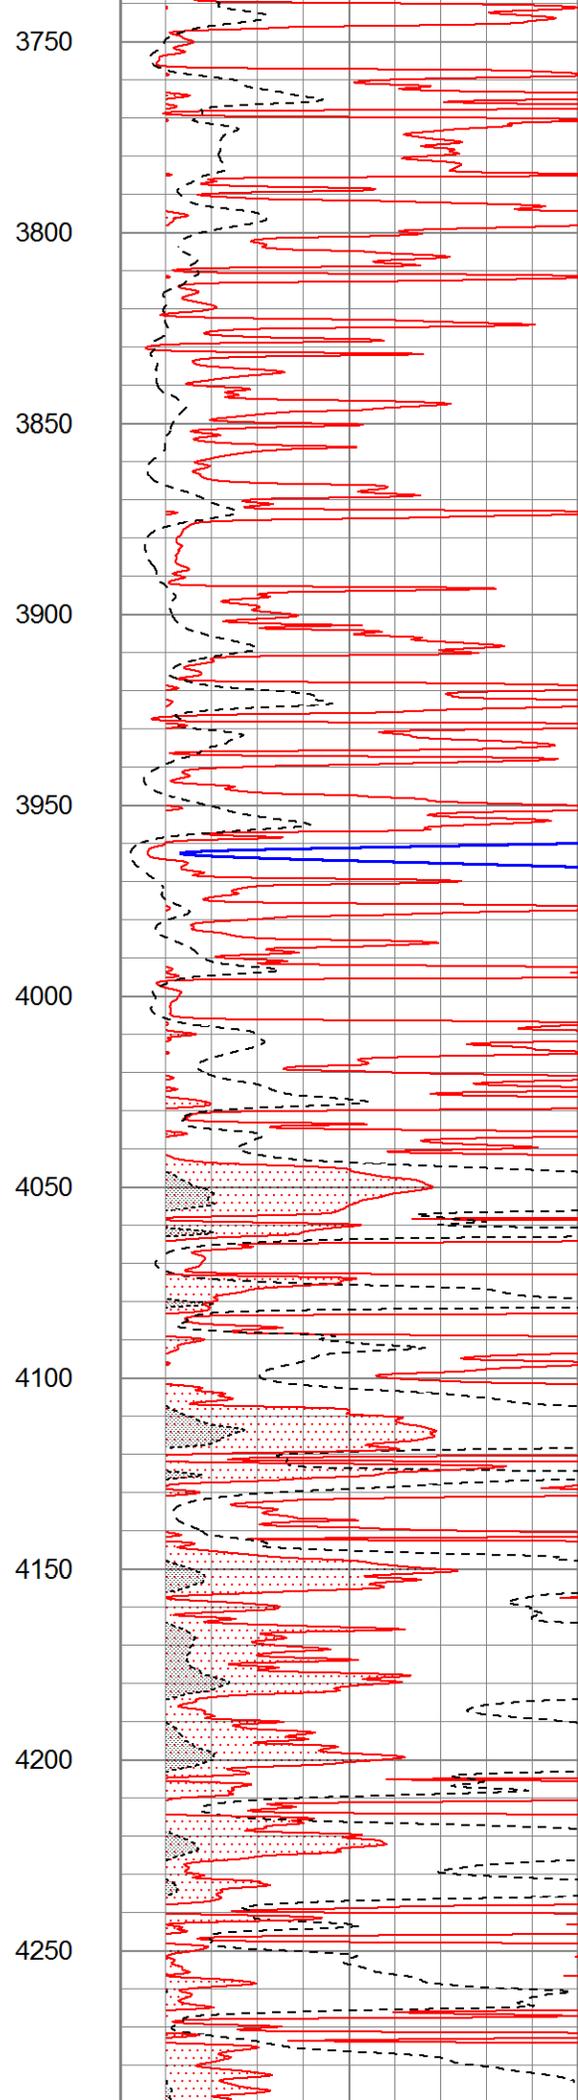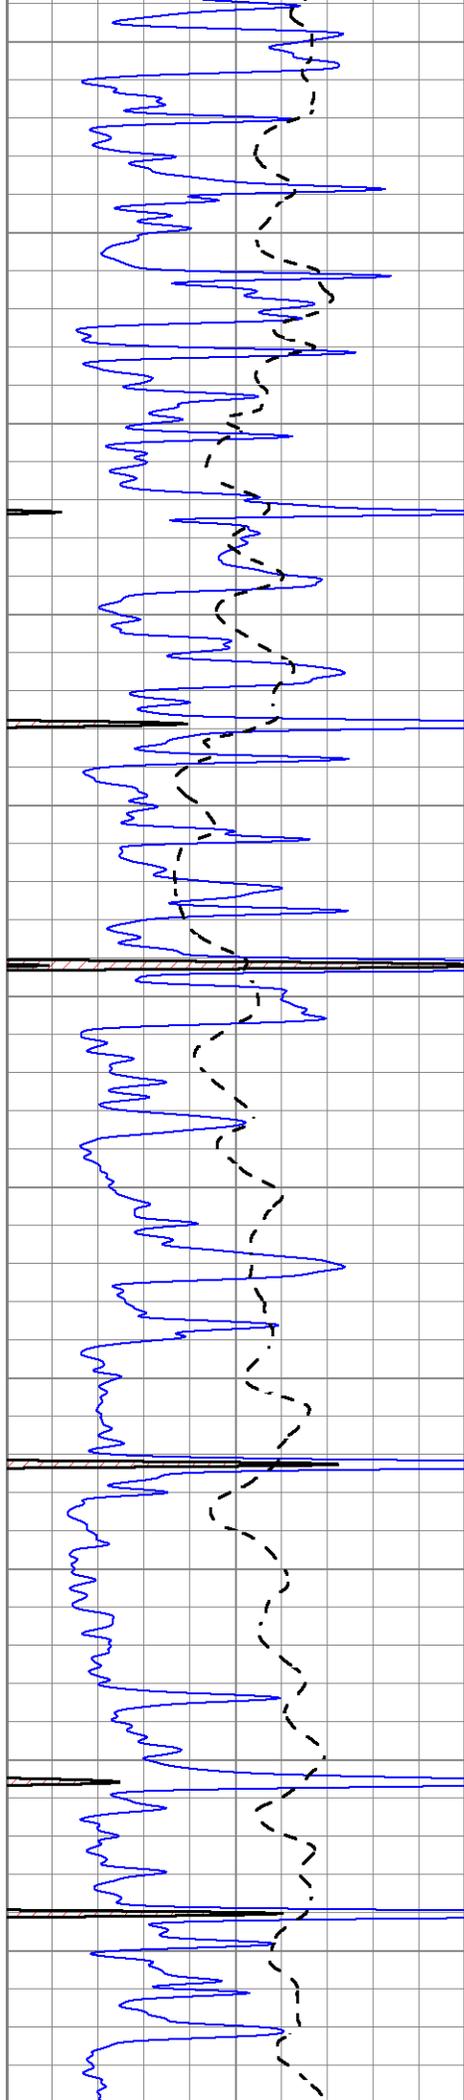

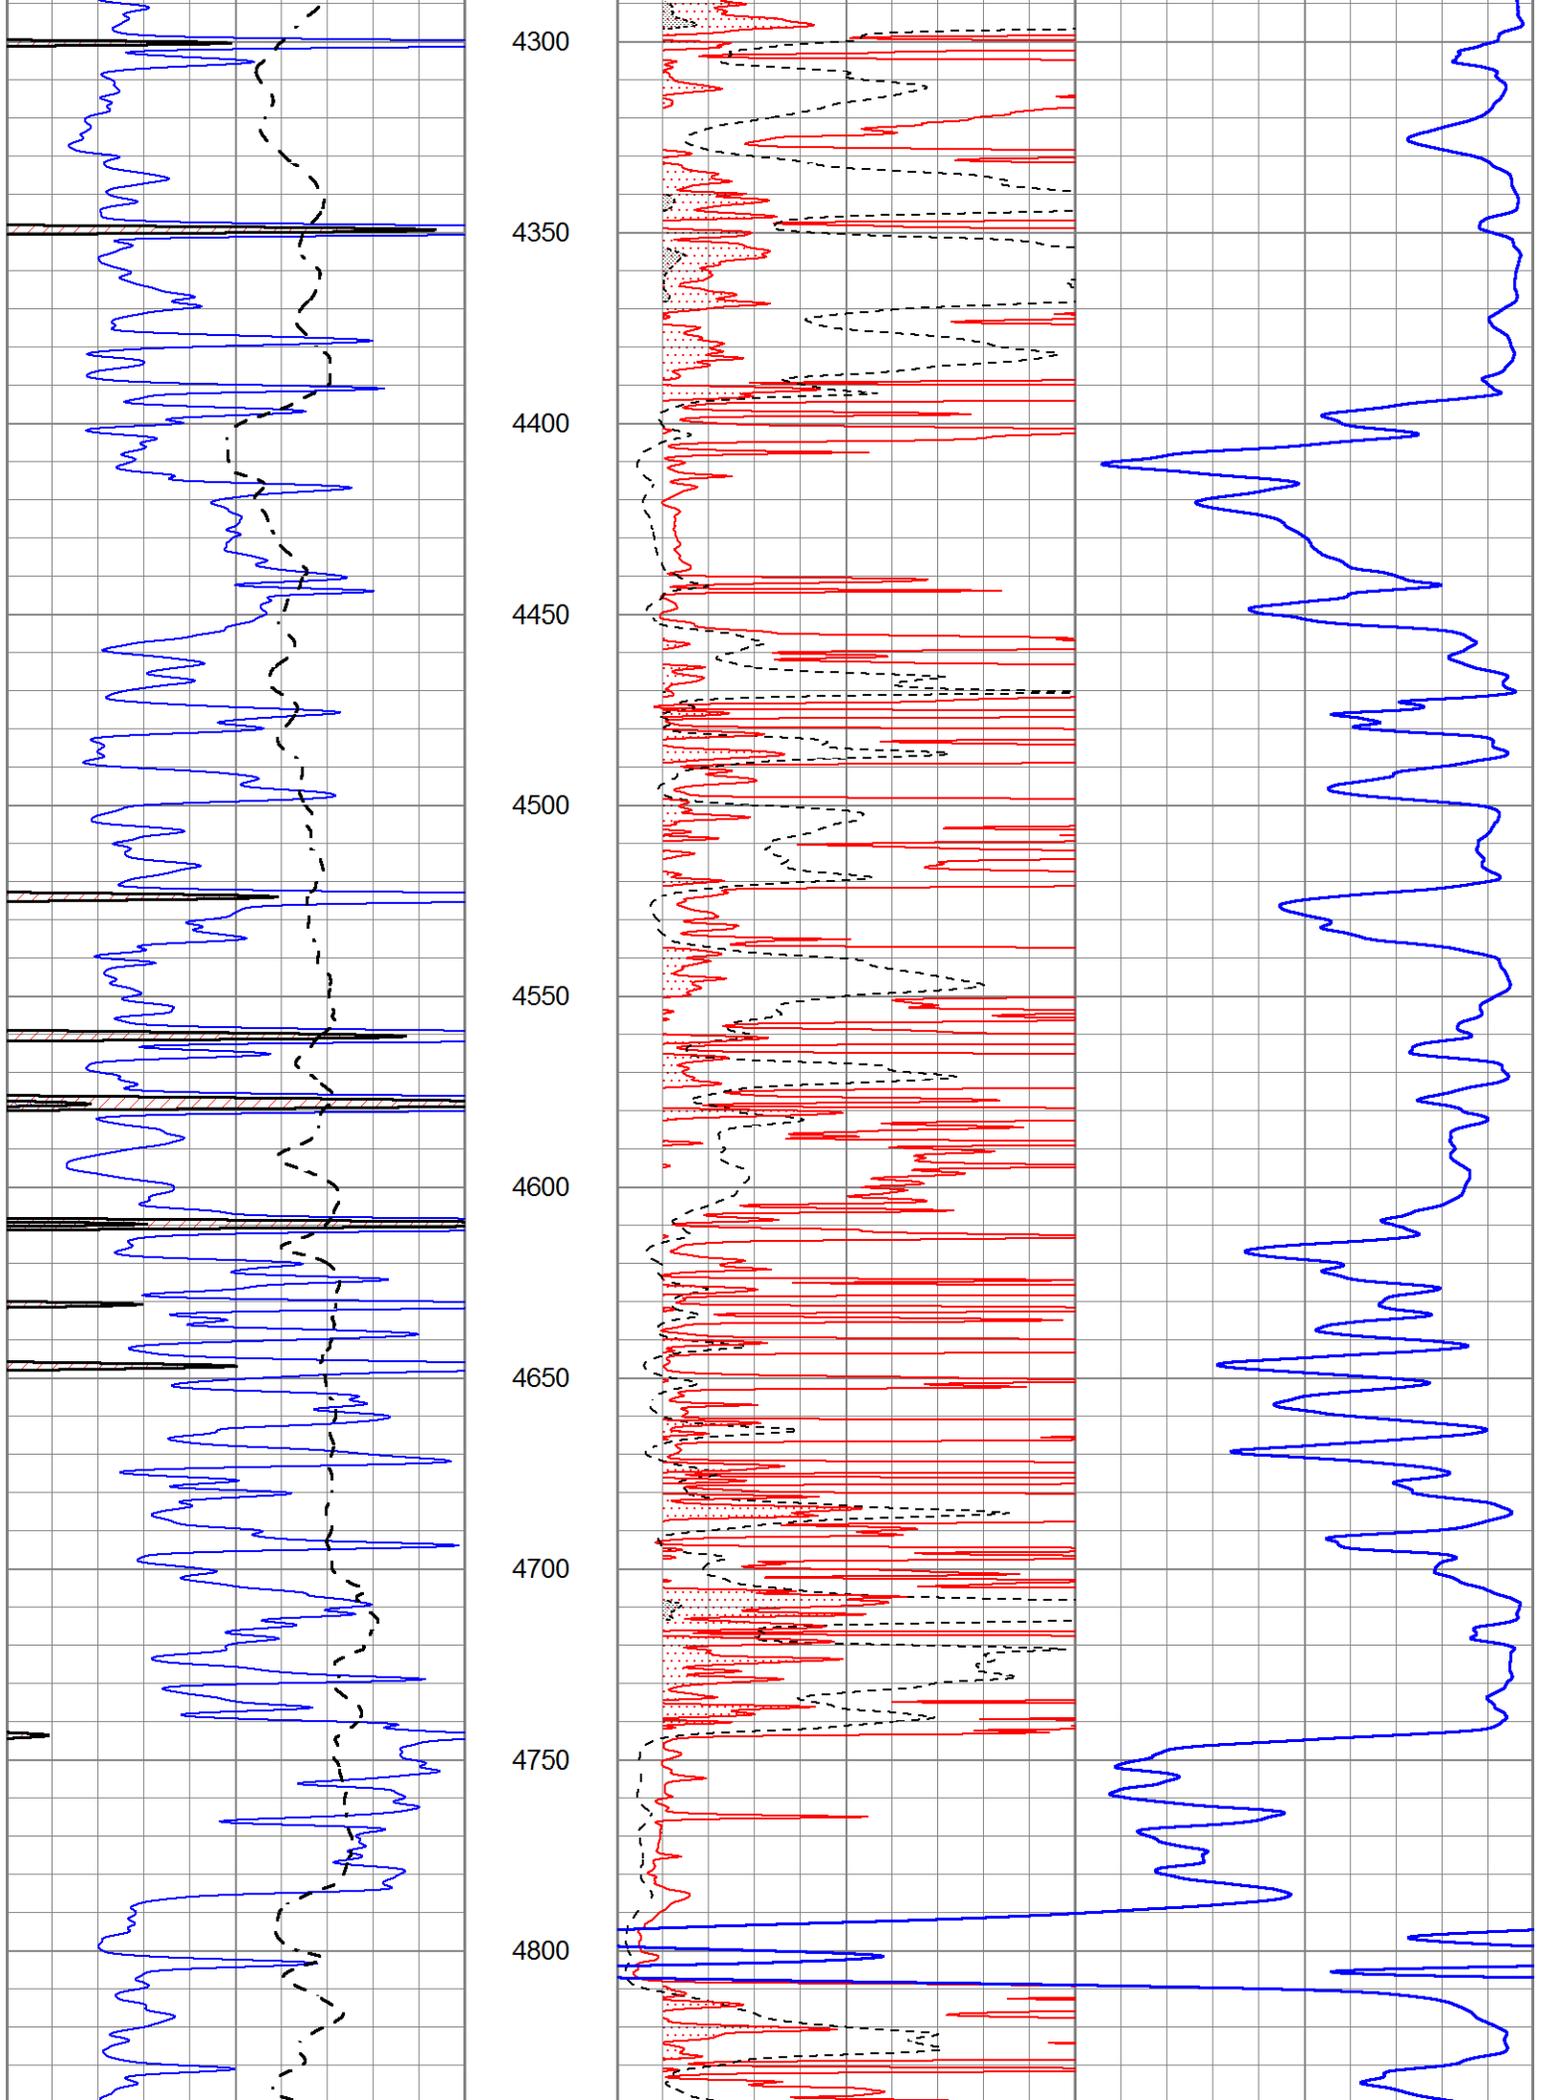


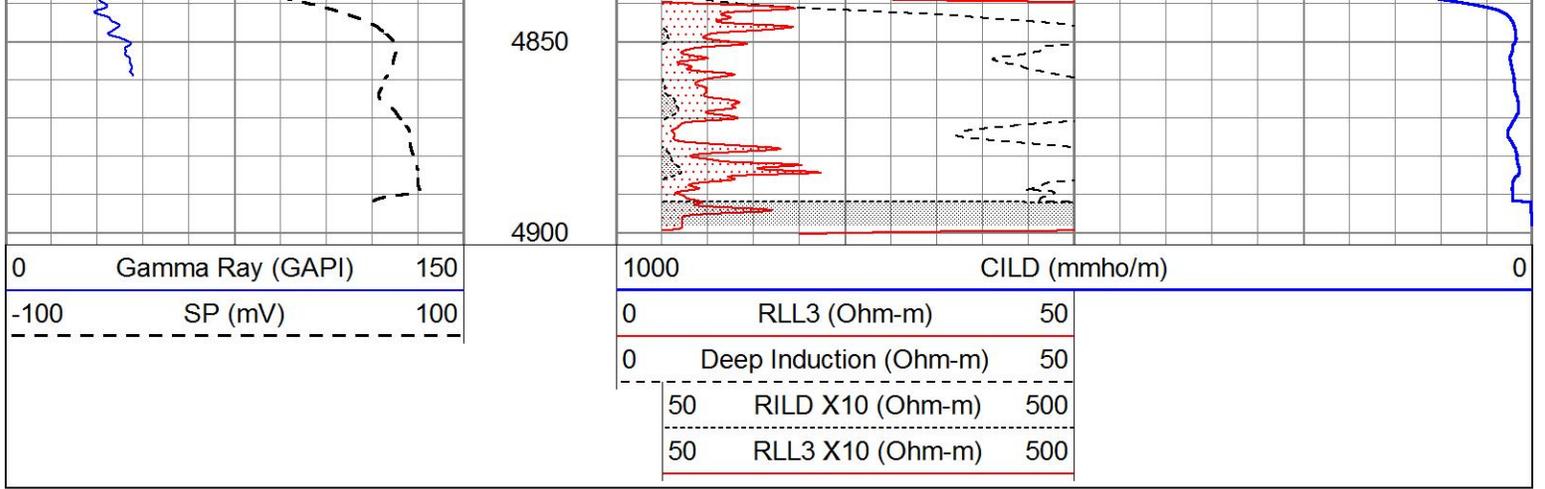

ANHYDRITE

Database File 9072pe.db
 Dataset Pathname pass3A
 Presentation Format _dil
 Dataset Creation Tue Nov 19 05:43:49 2024
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	MEDIUM INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	DEEP INDUCTION (Ohm-m)	2000

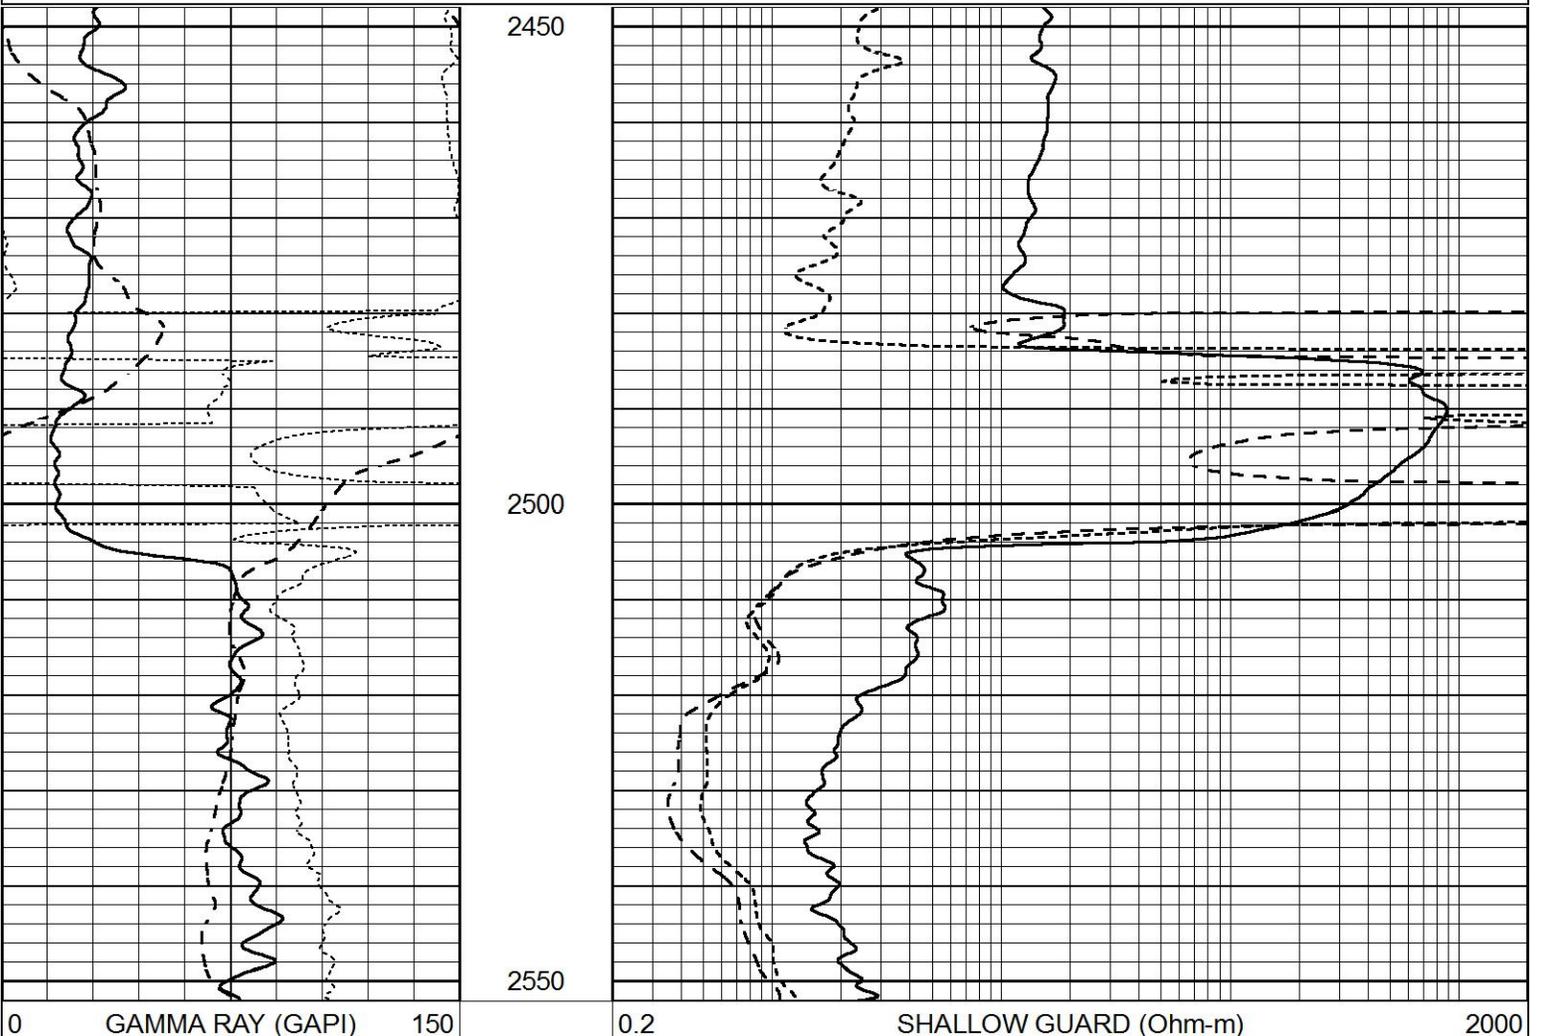

-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000





MAIN SECTION

Database File 9072pe.db
 Dataset Pathname pass3M
 Presentation Format _dil
 Dataset Creation Tue Nov 19 07:22:57 2024
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

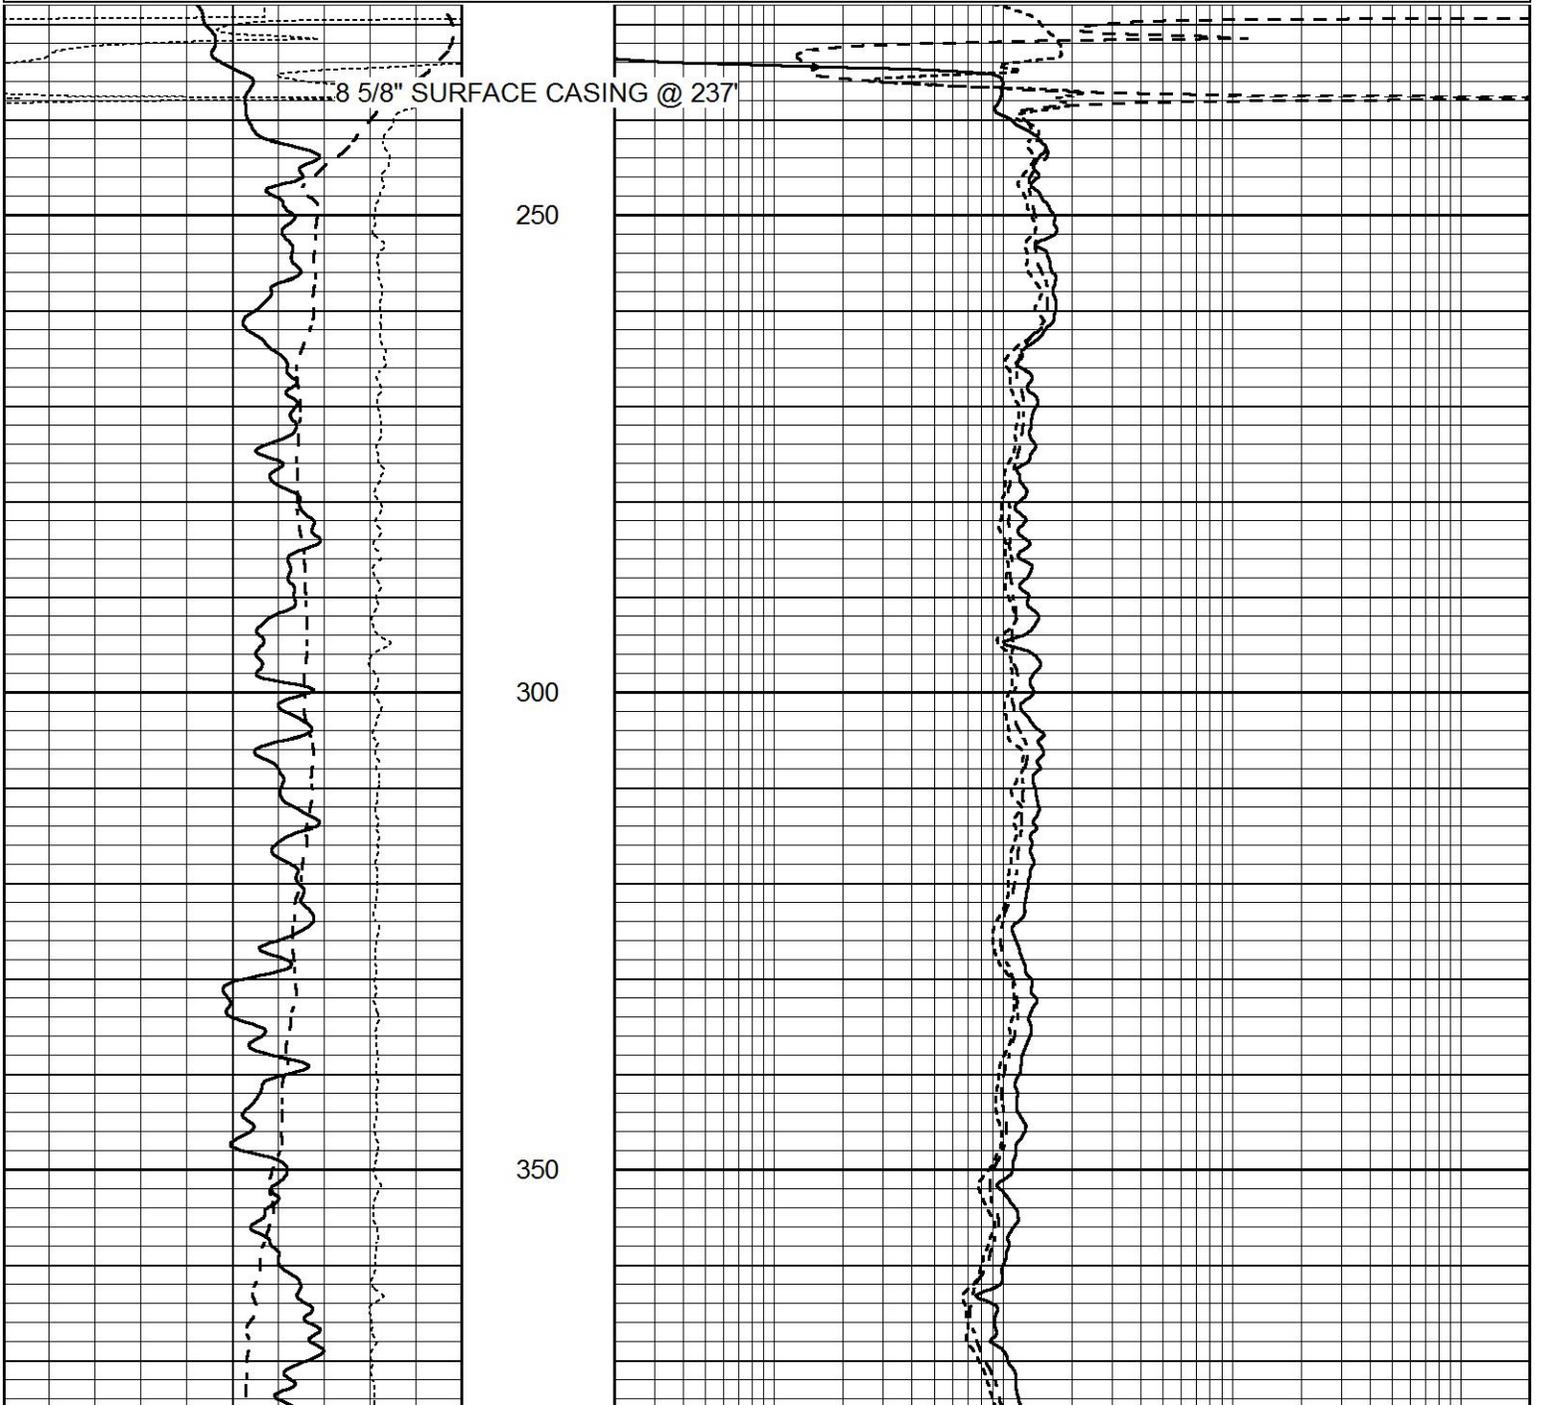

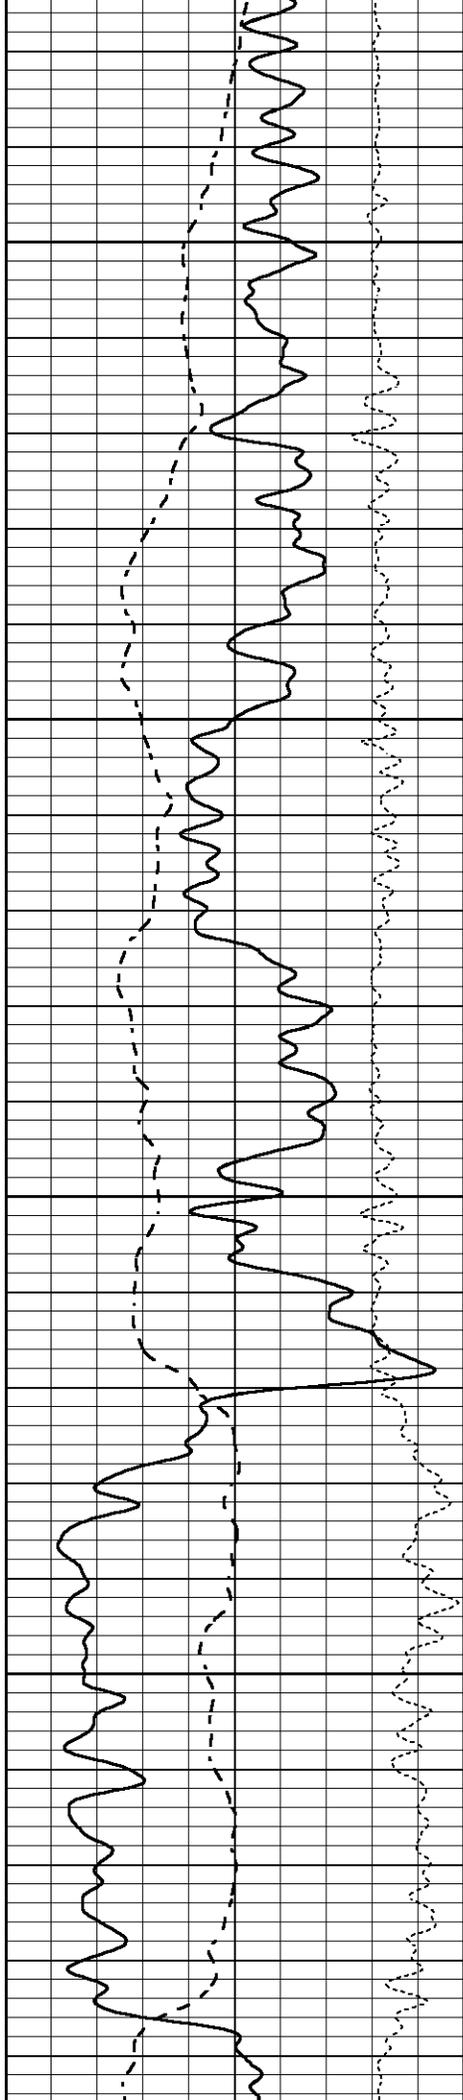



400

450

500

550

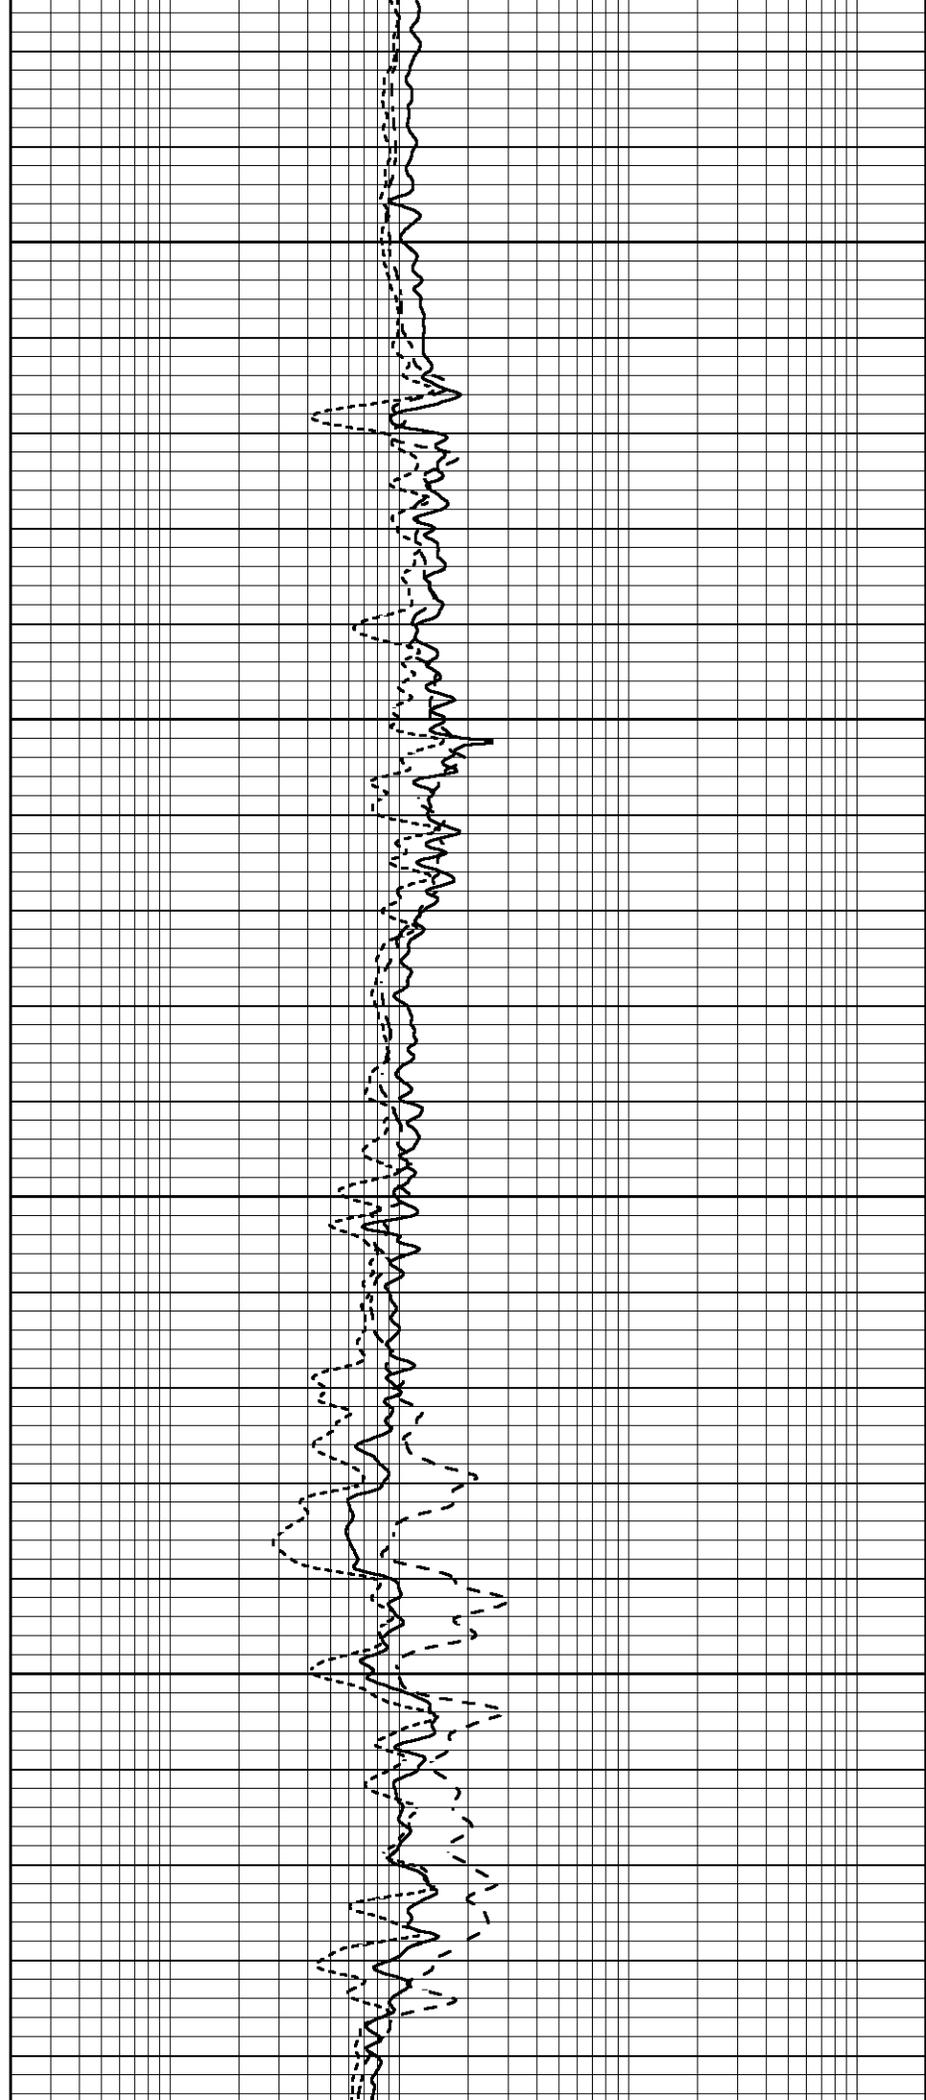

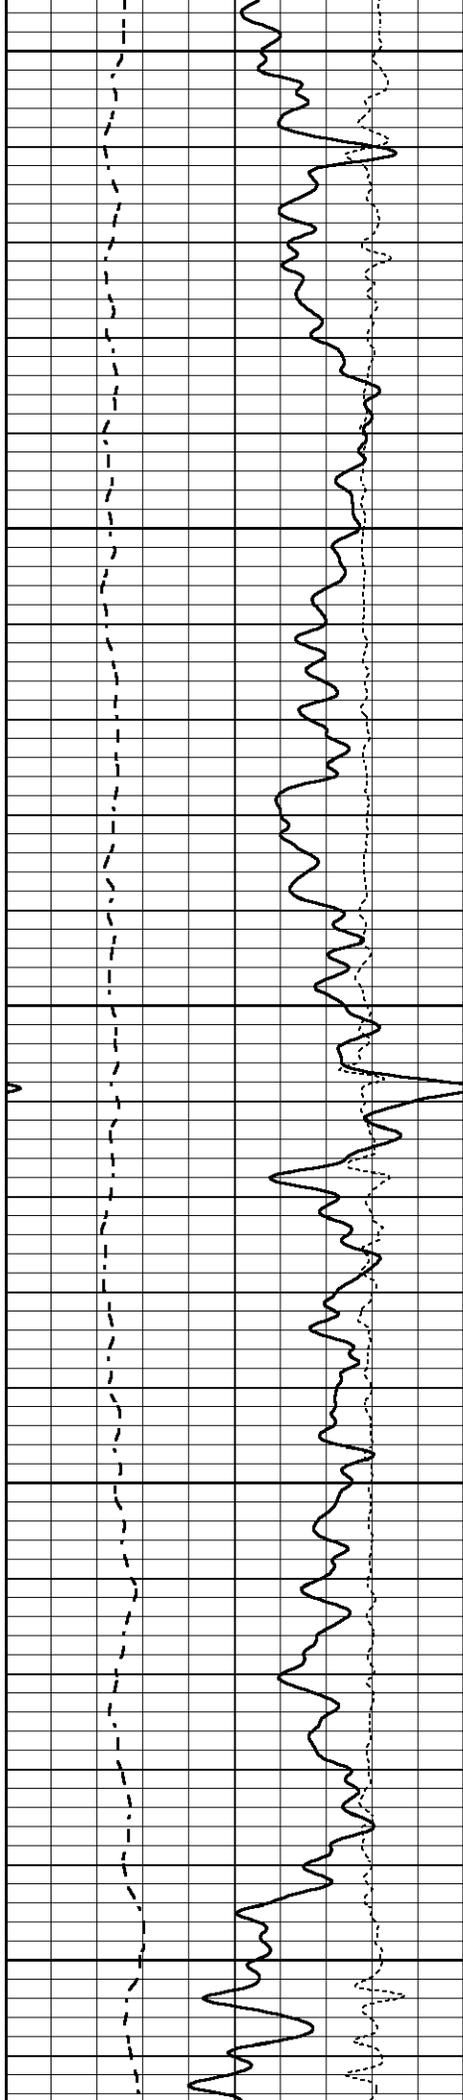


600


650

700

750

800

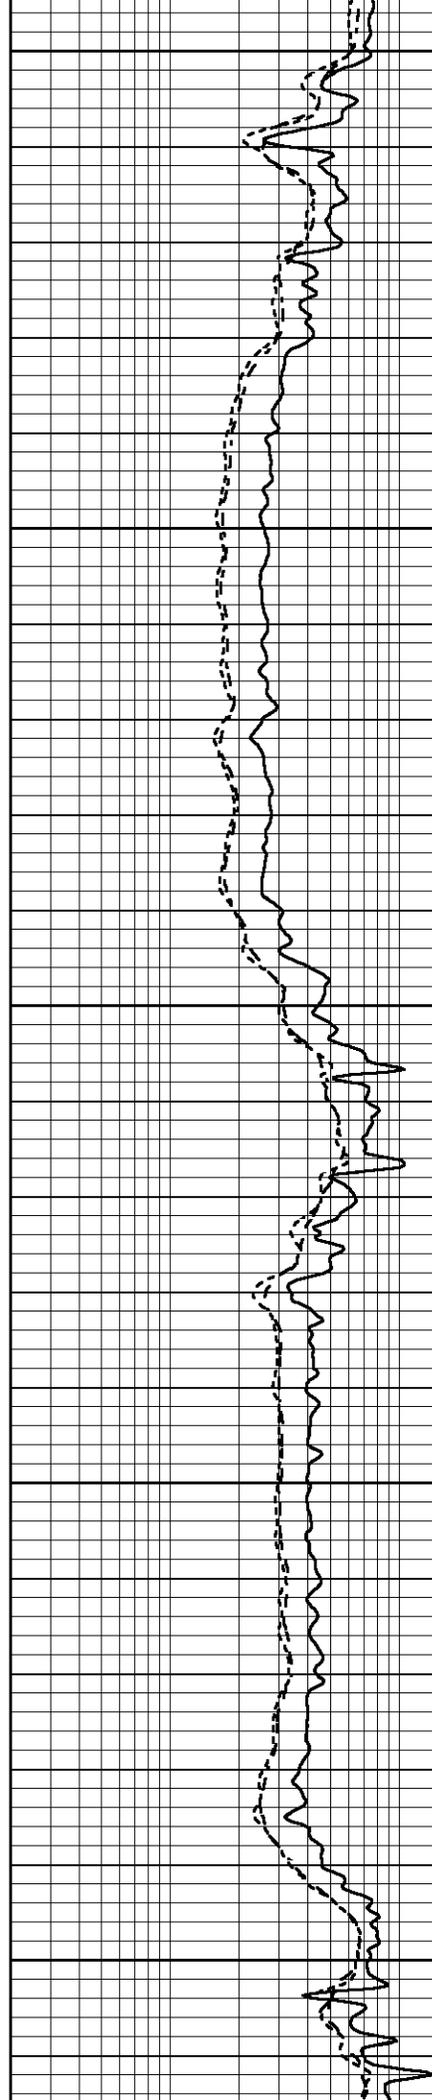

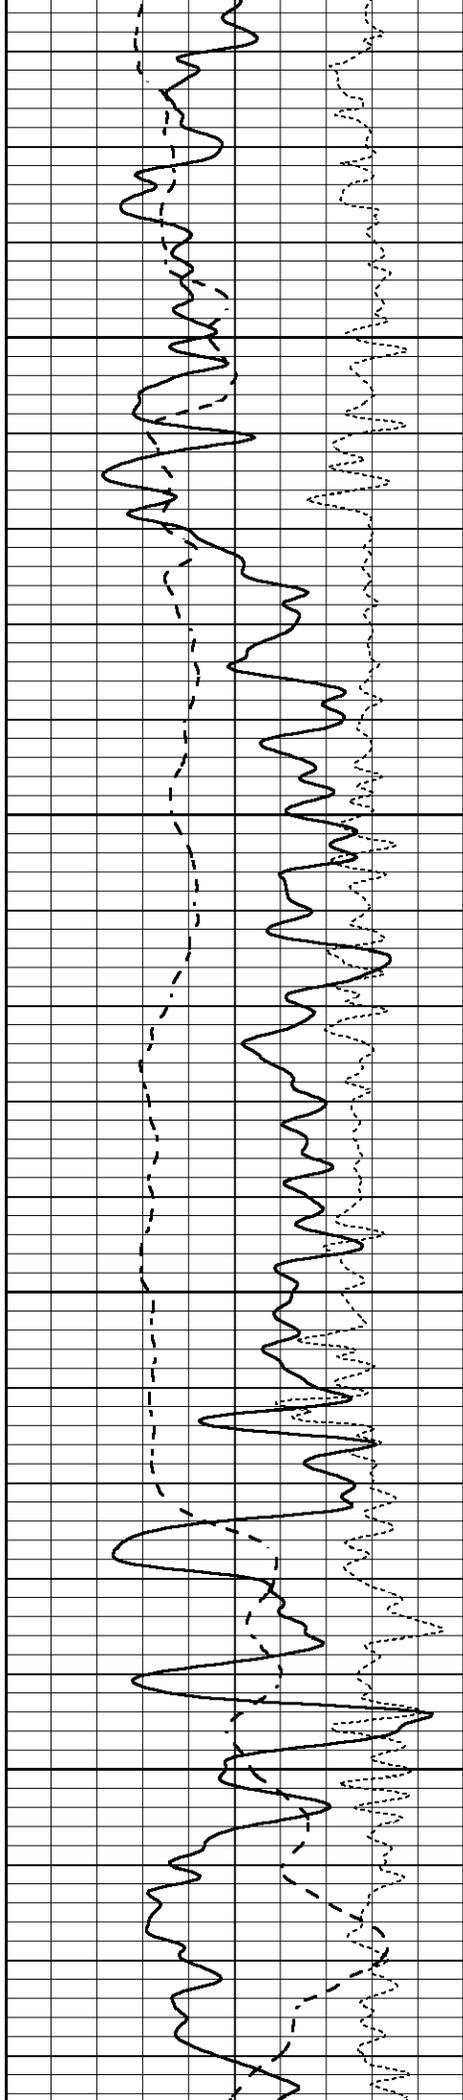



850

900

950

1000

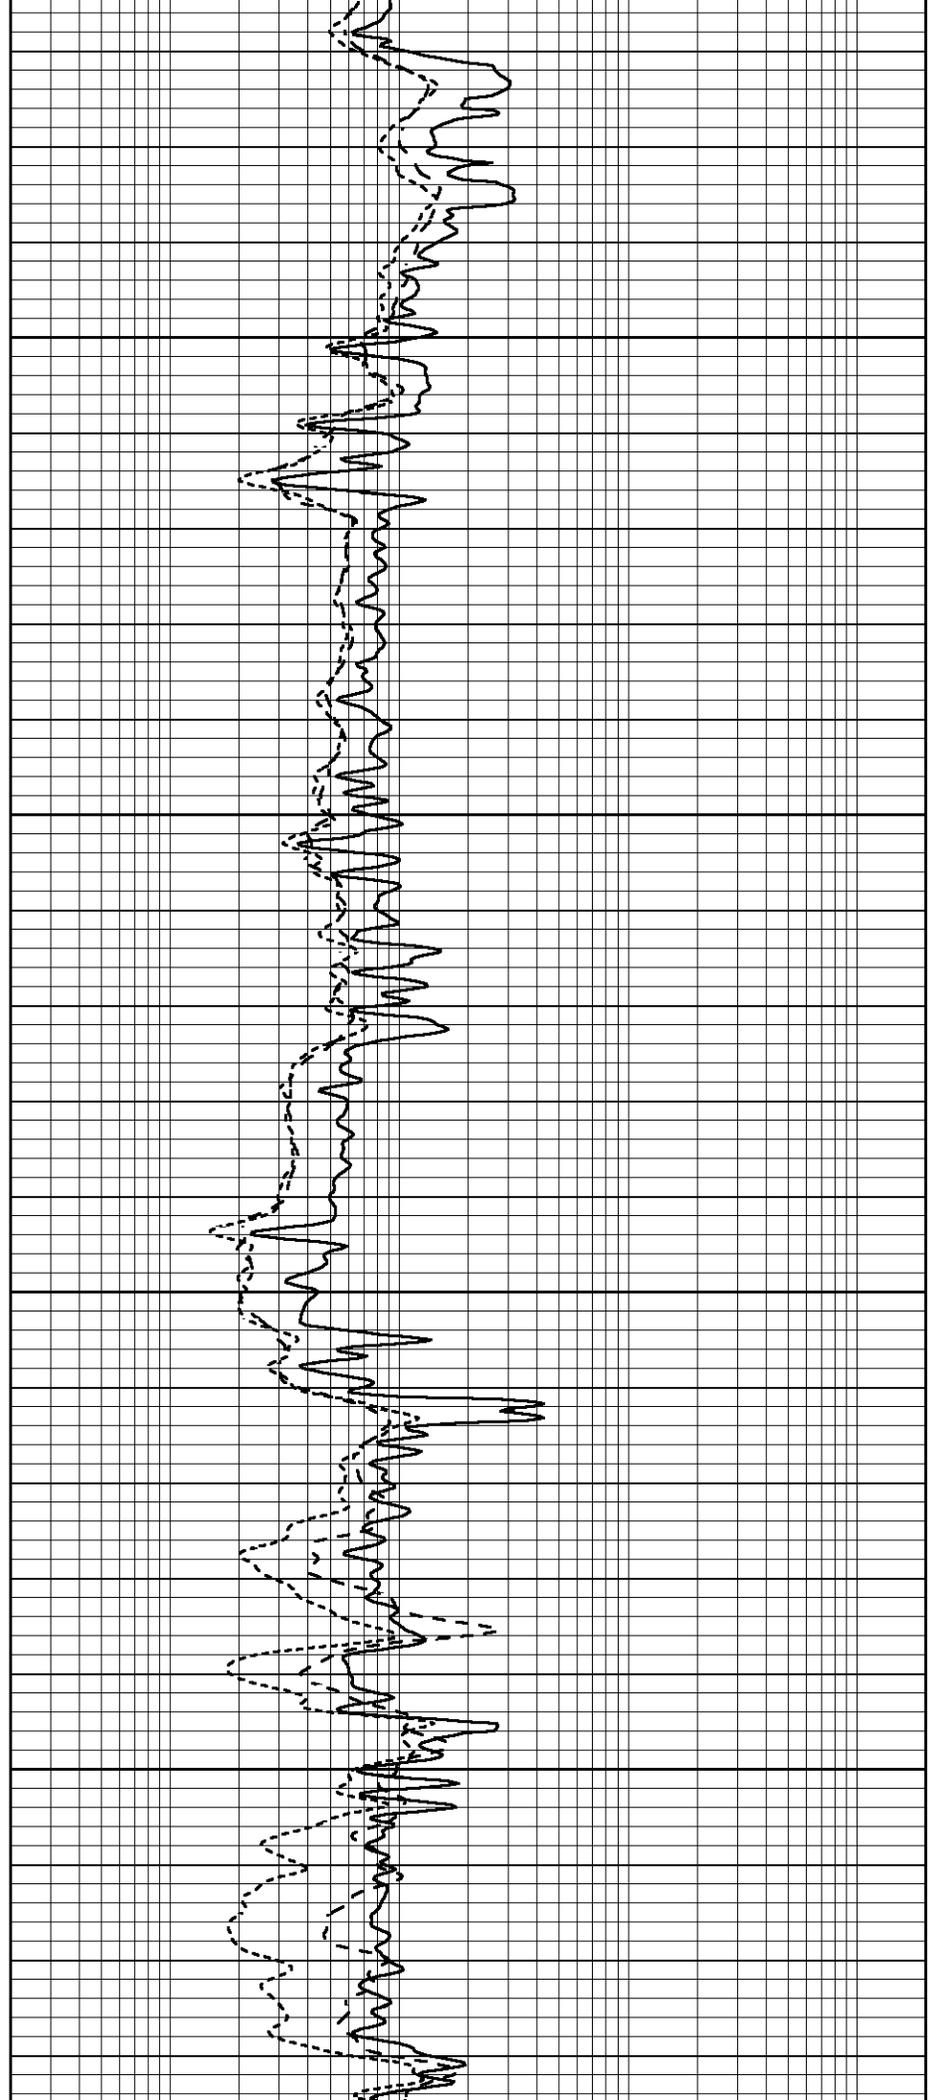

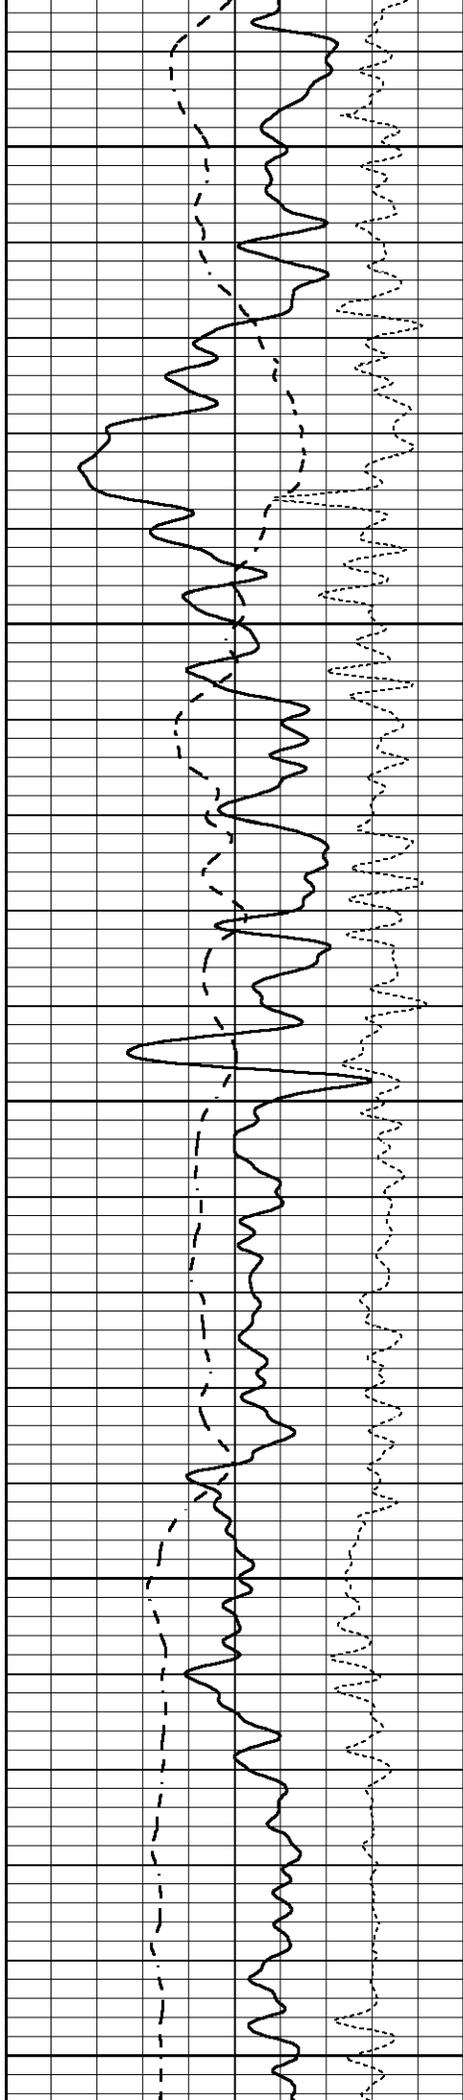


1050


1100

1150

1200

1250

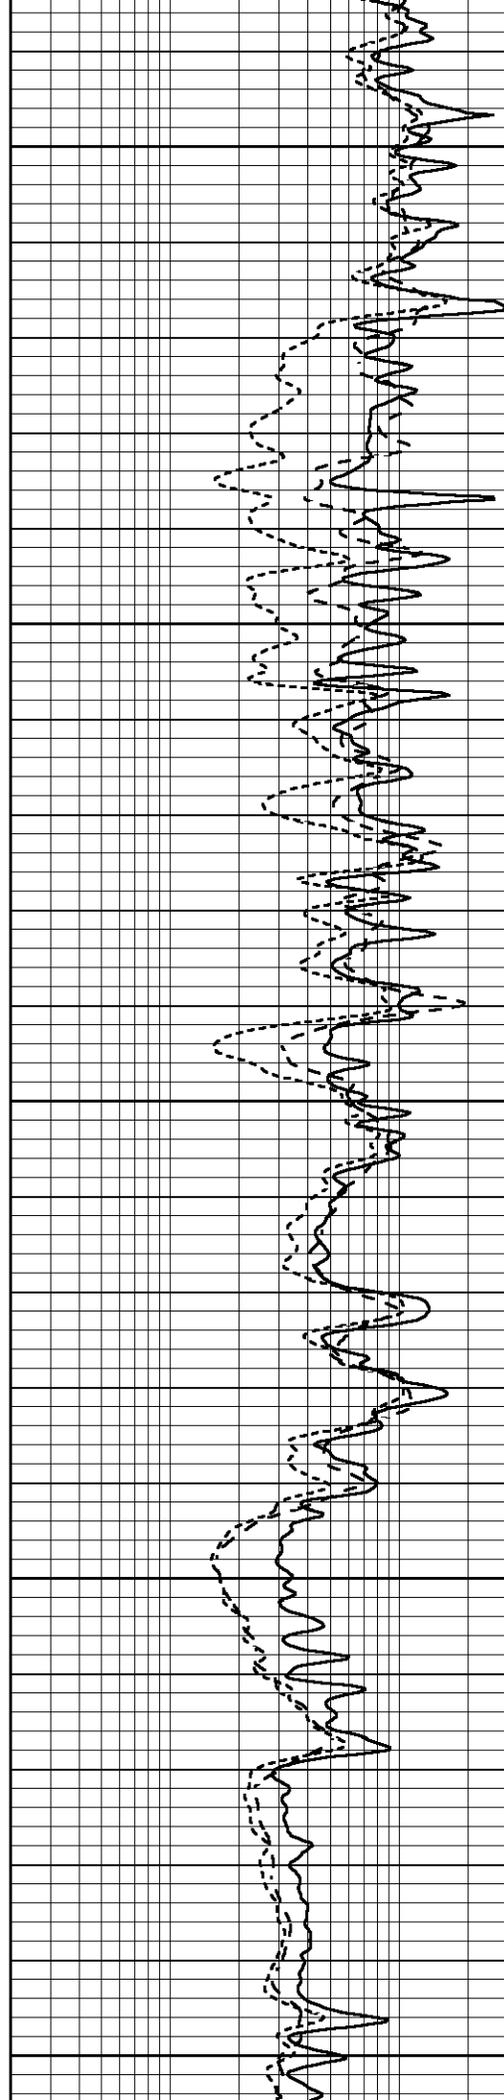

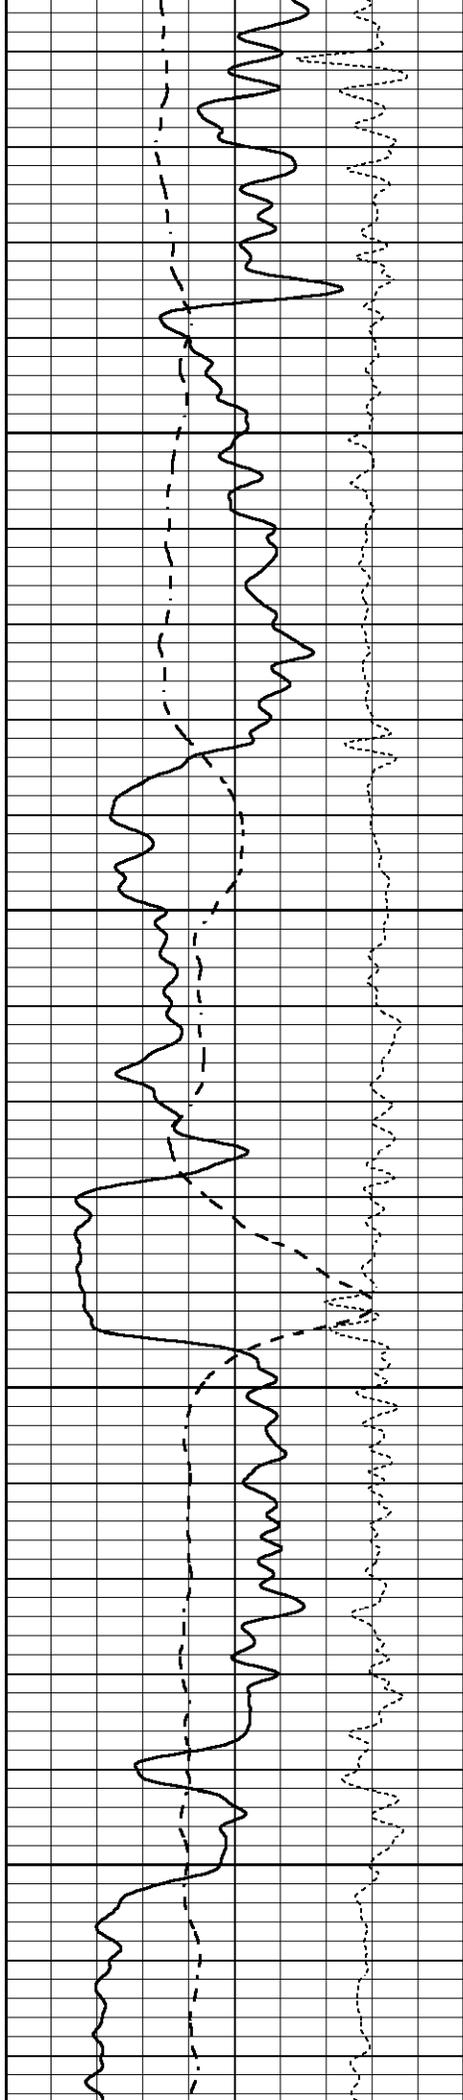



1300

1350

1400

1450

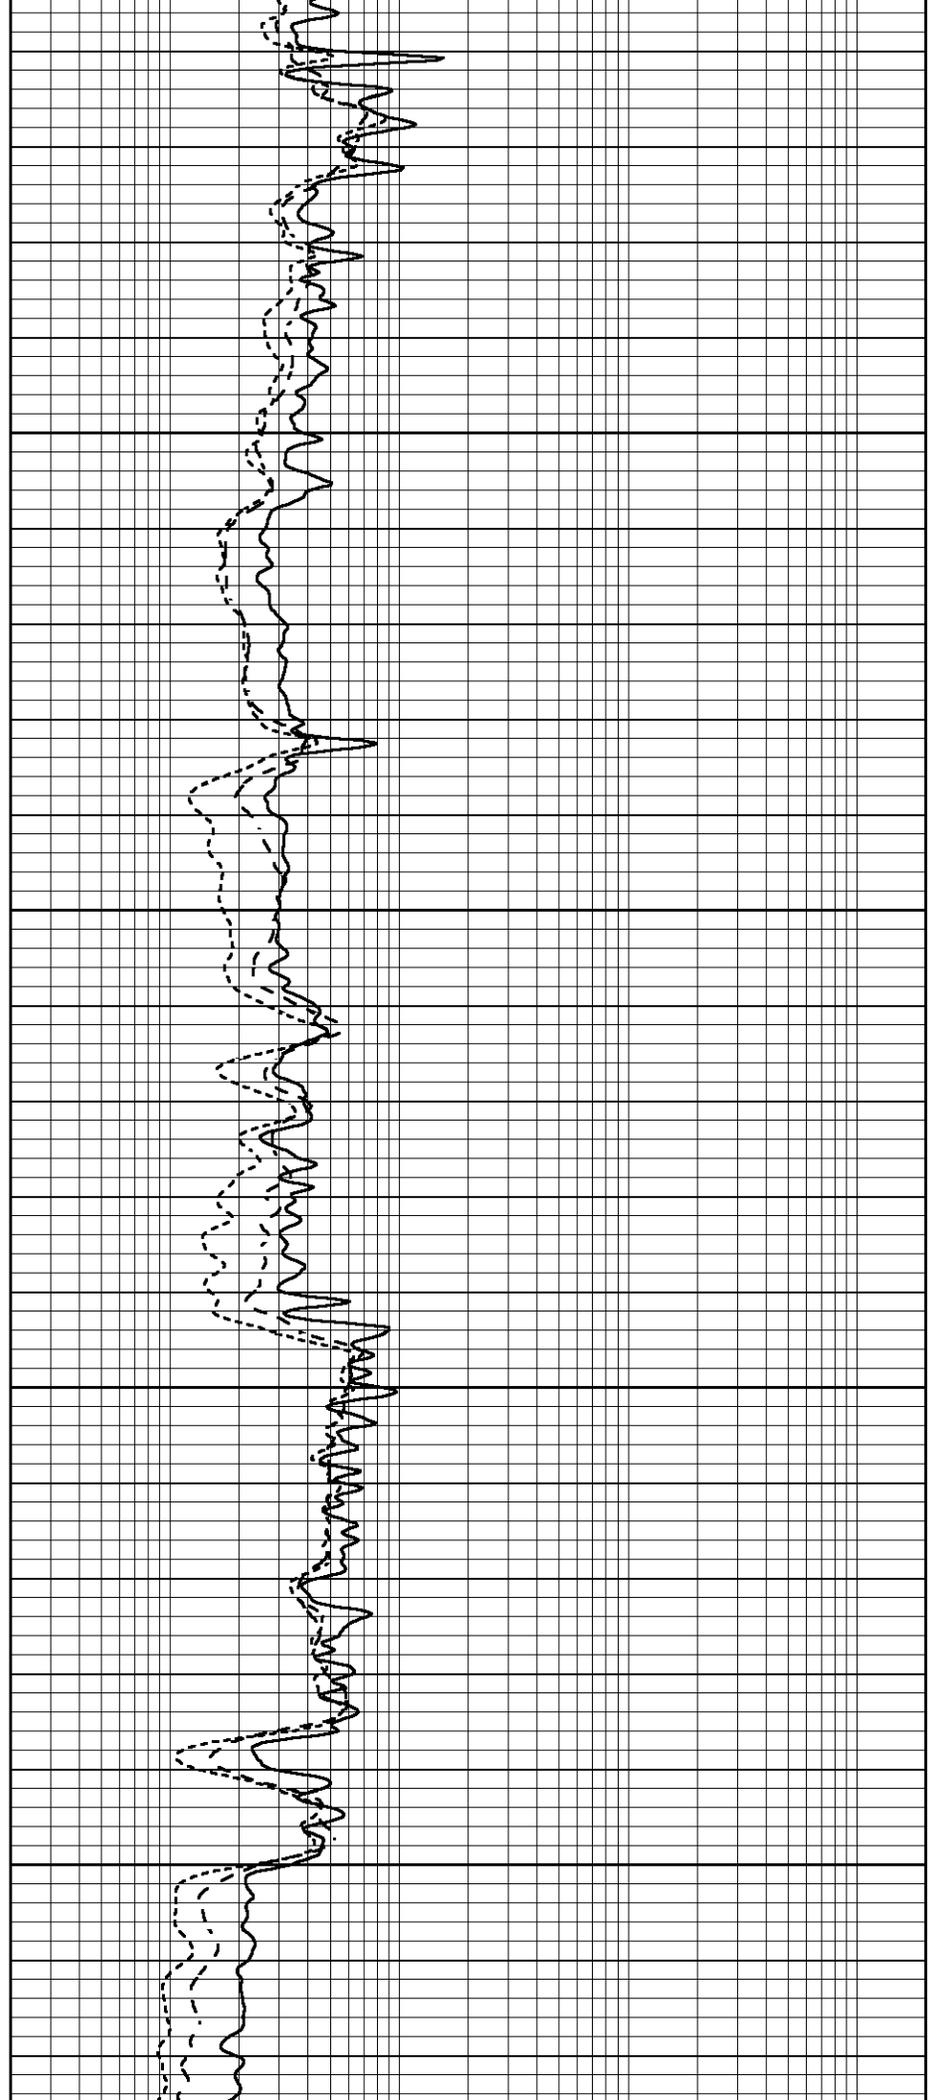

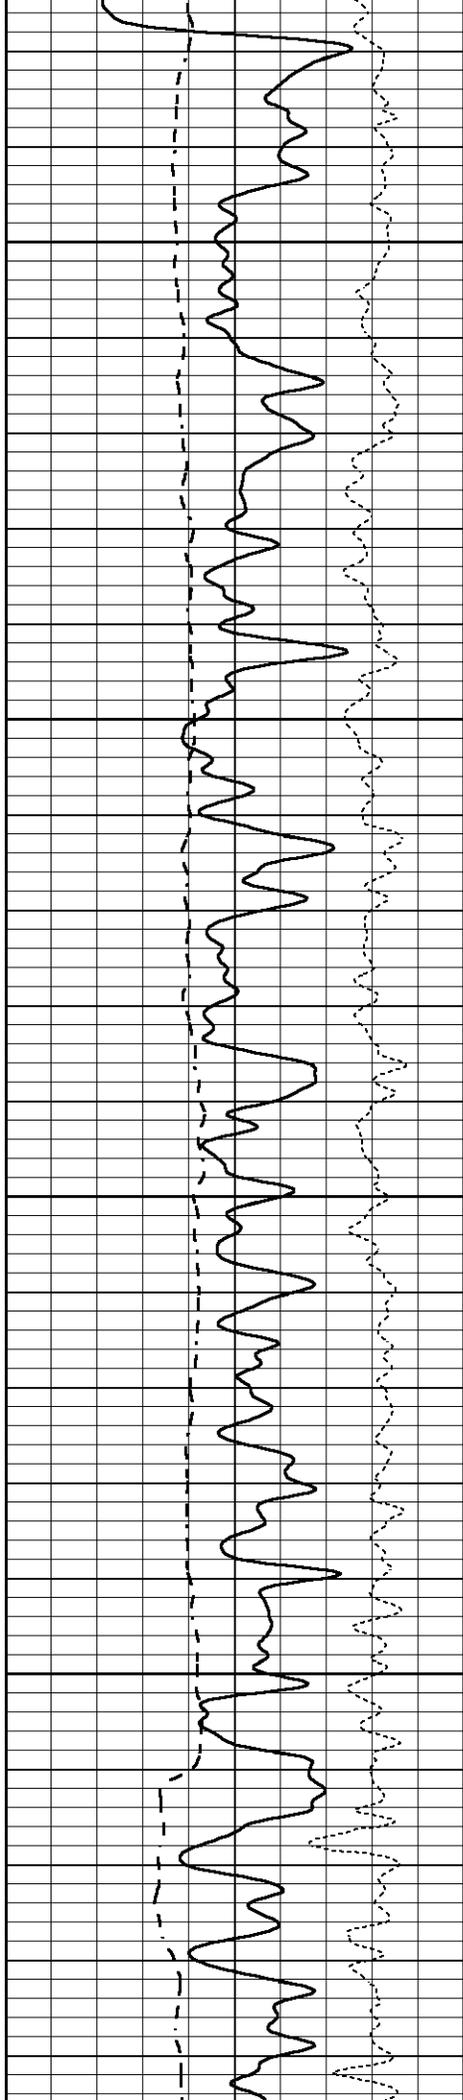



1500

1550

1600

1650

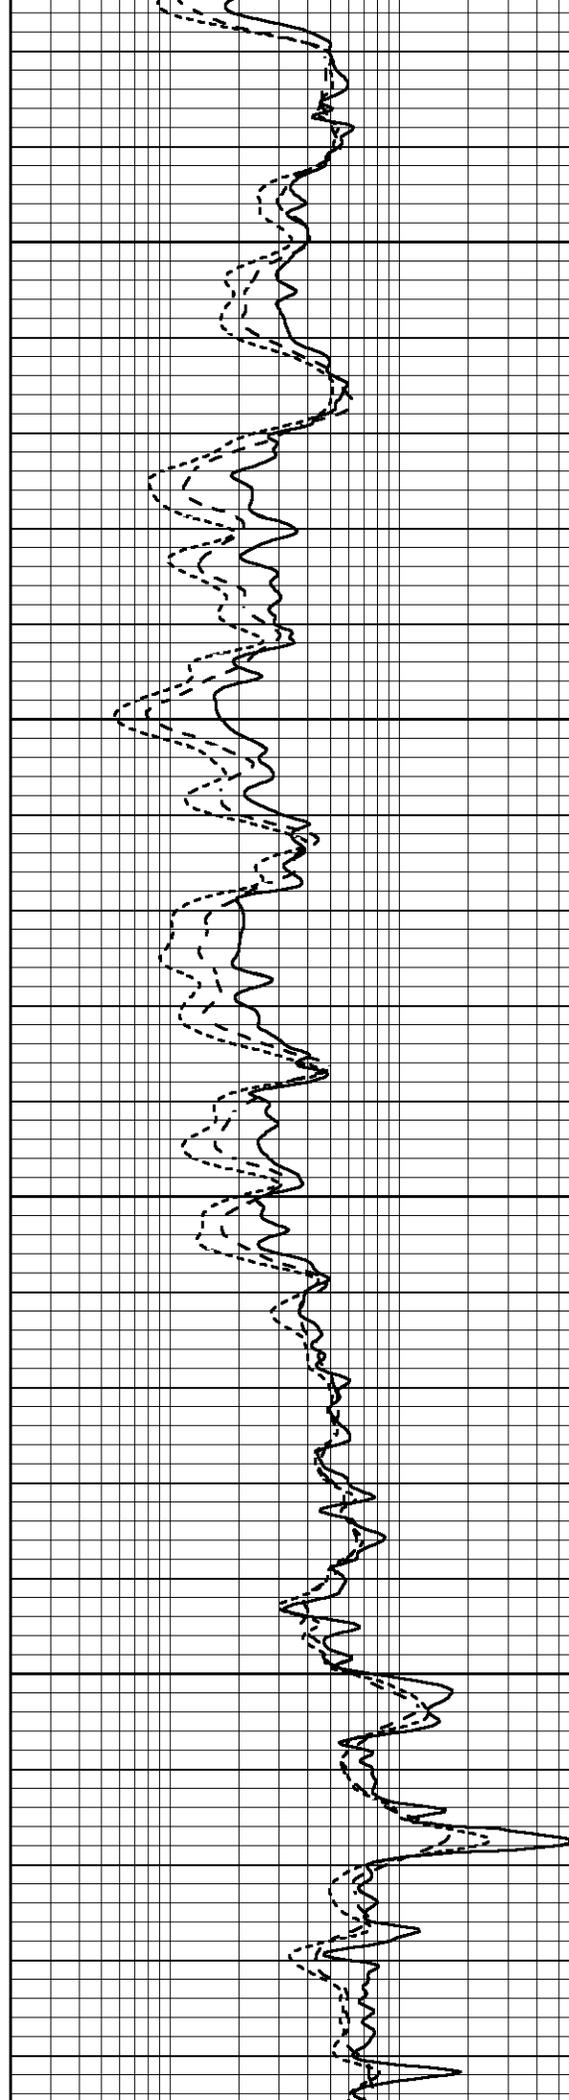

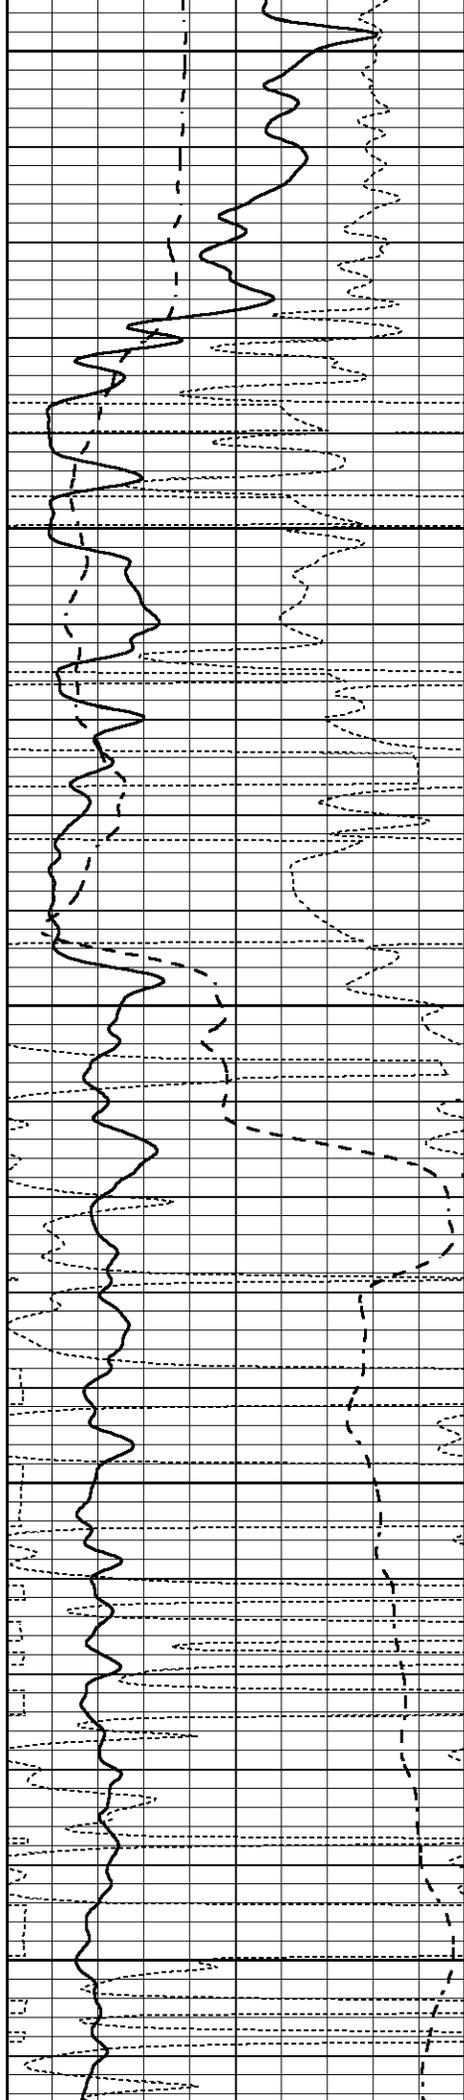


1700


1750

1800

1850

1900

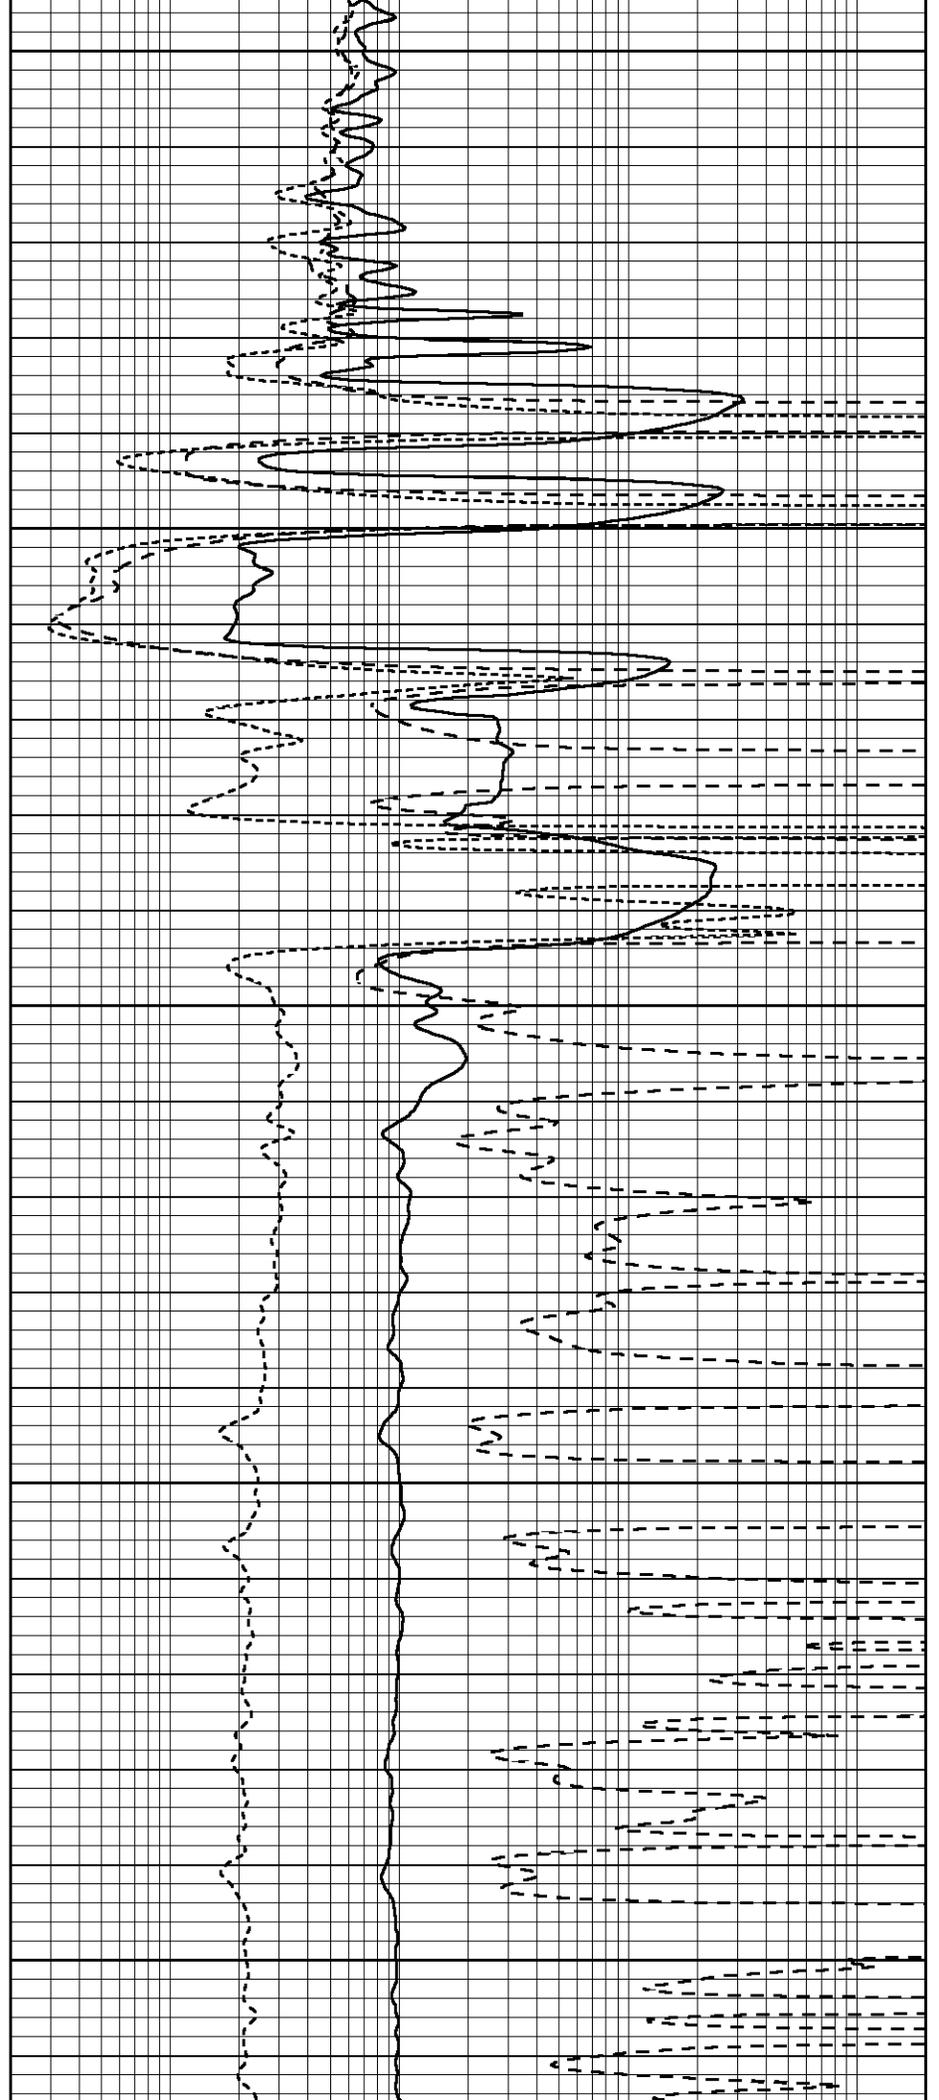

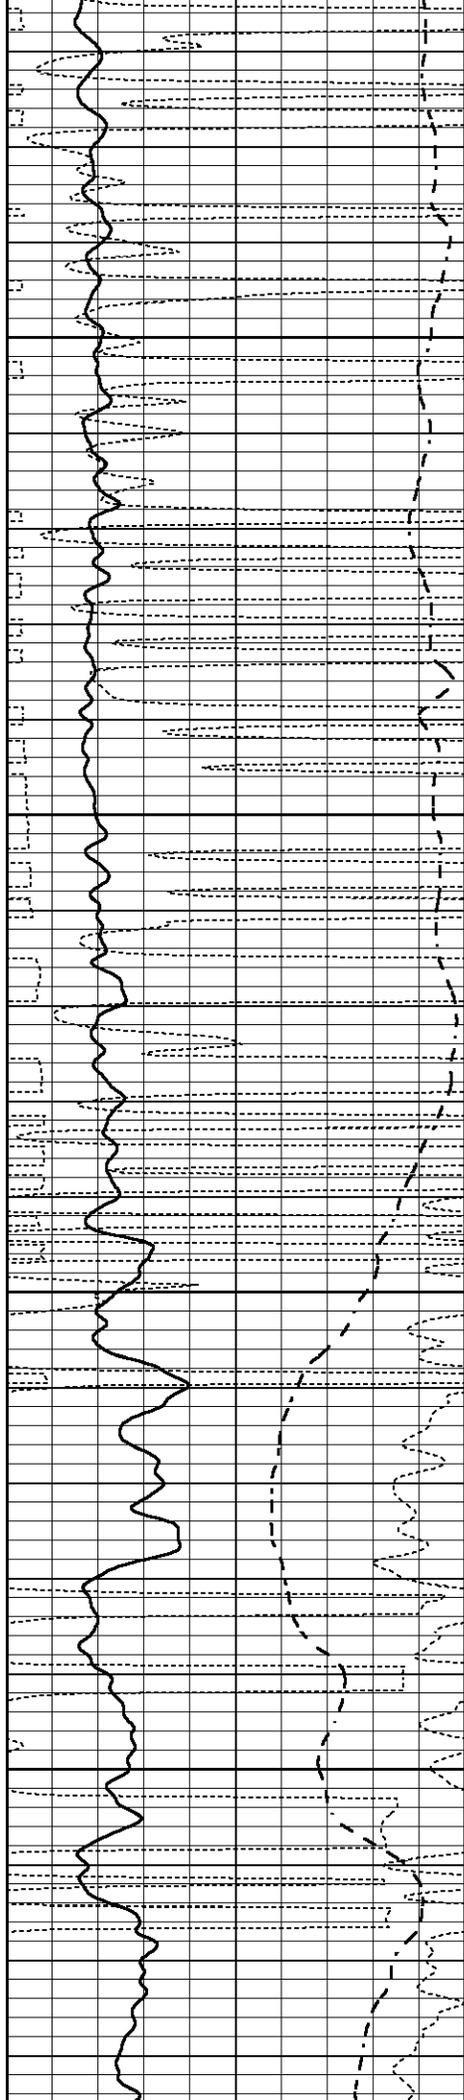



1950

2000

2050

2100

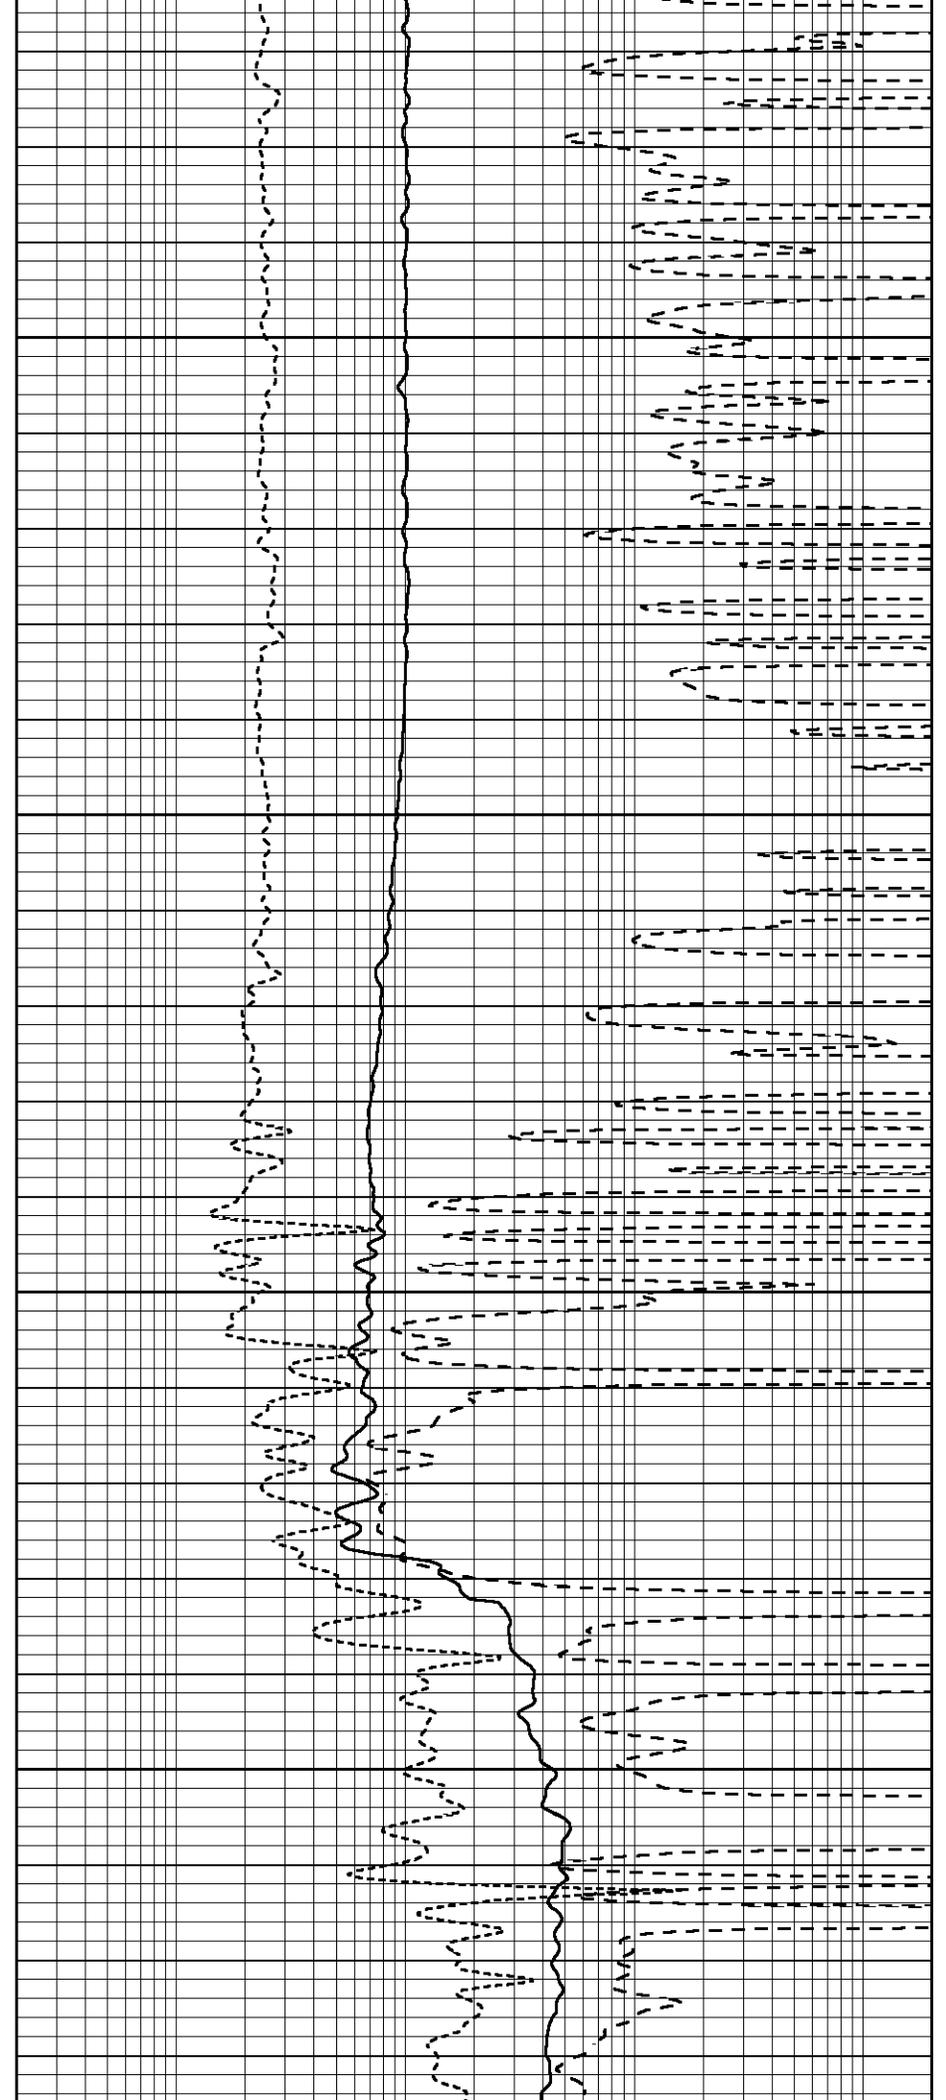

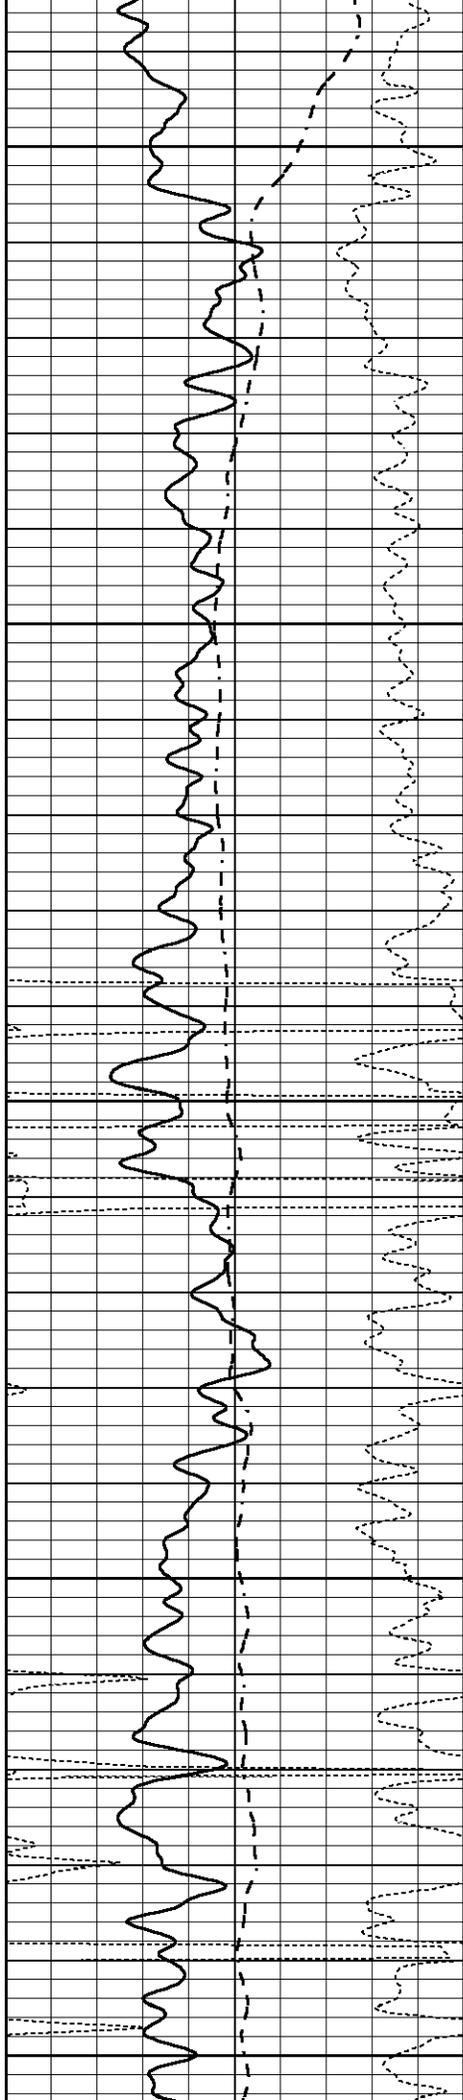


2150


2200

2250

2300

2350

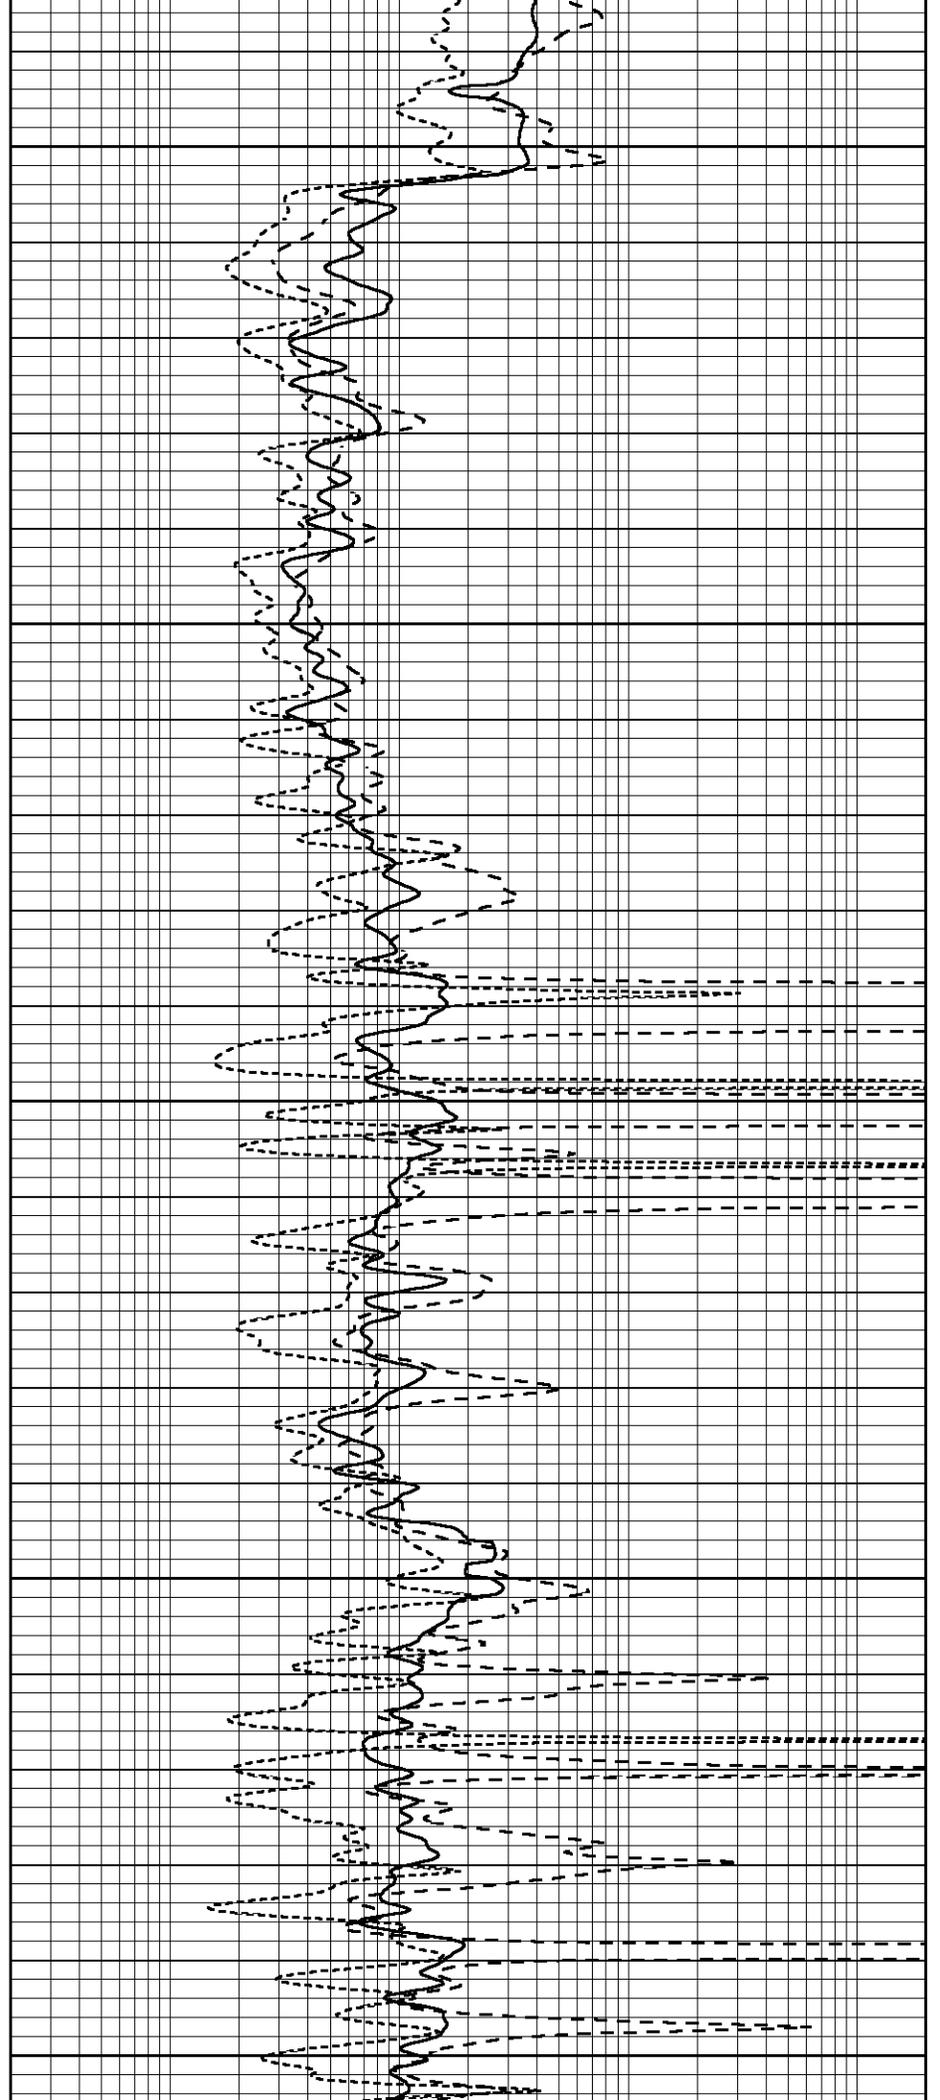

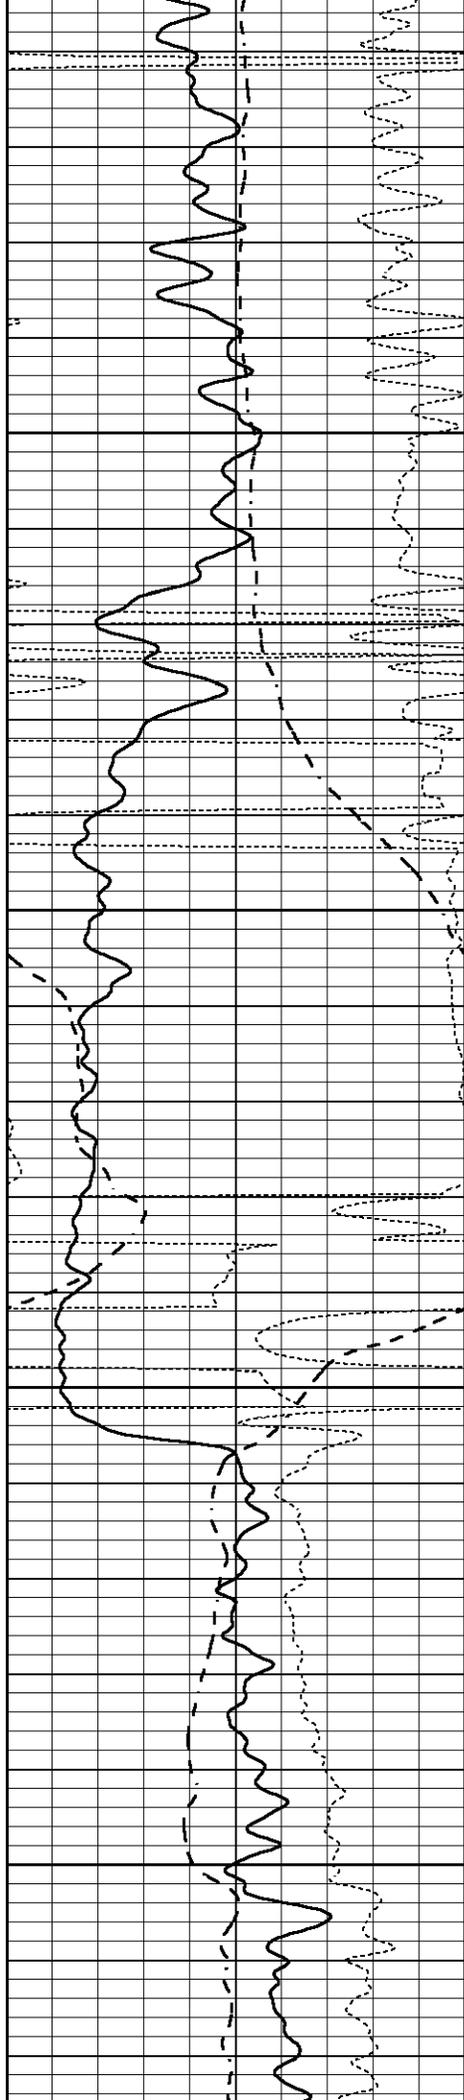


2400

2450

2500

2550

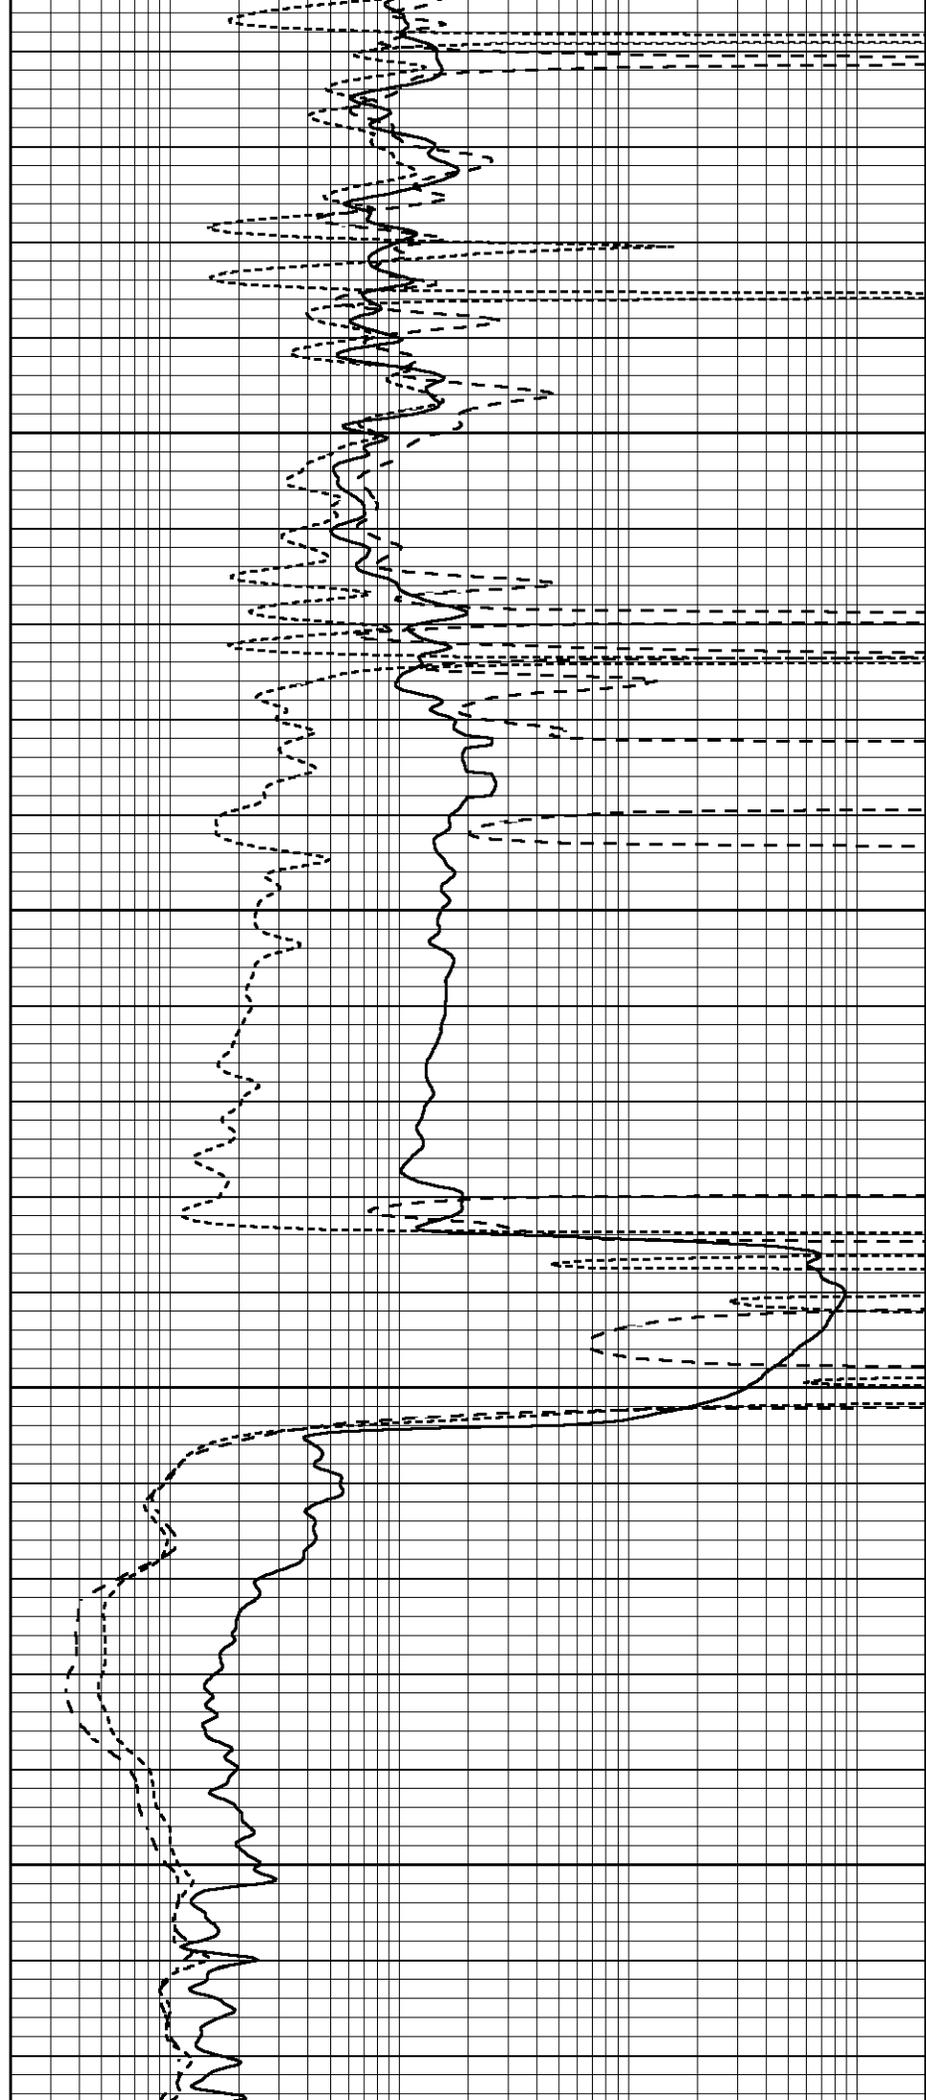





2600

2650

2700

2750

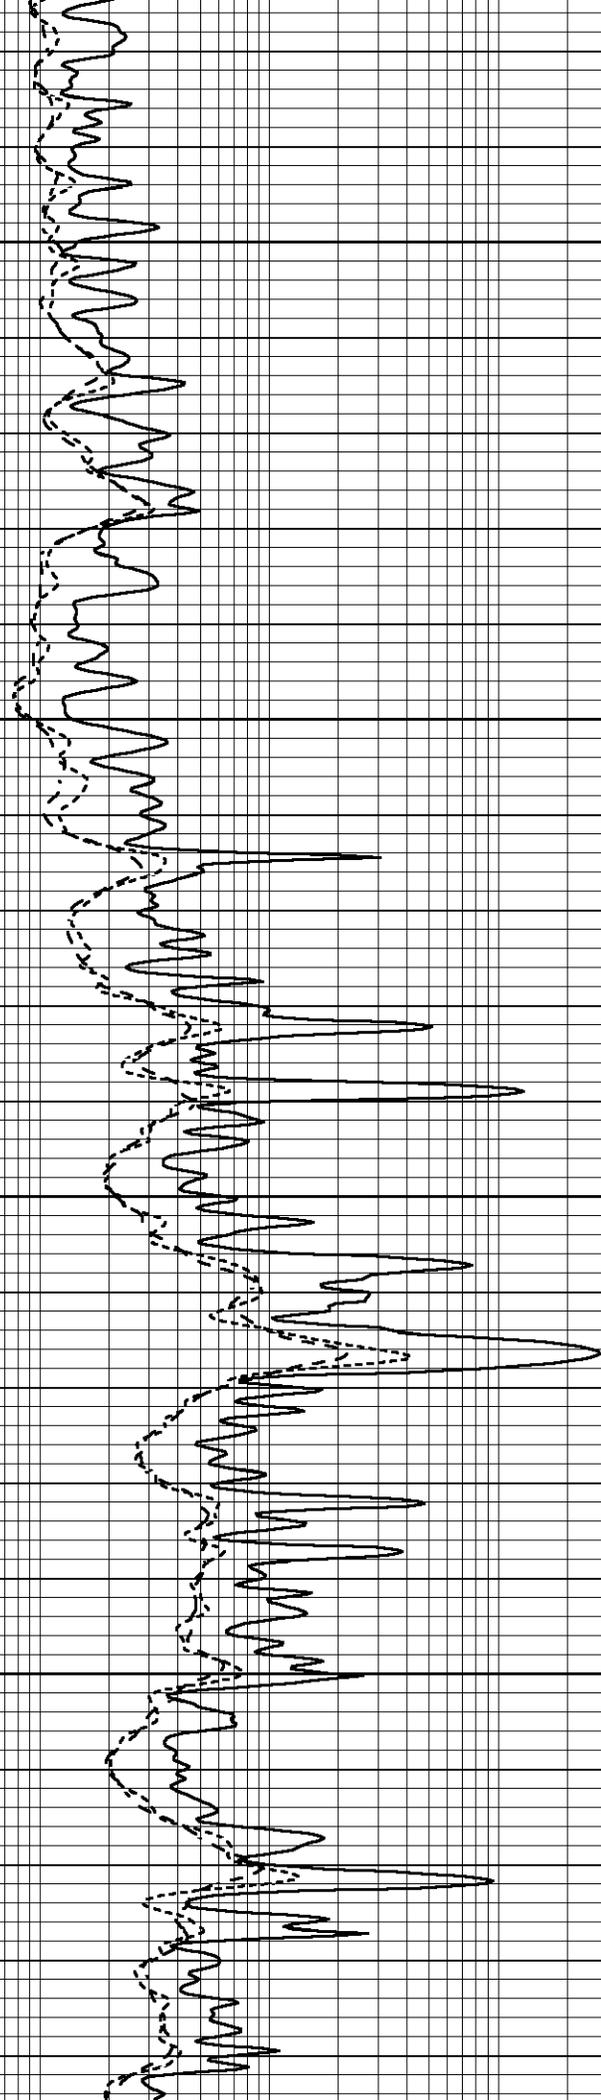

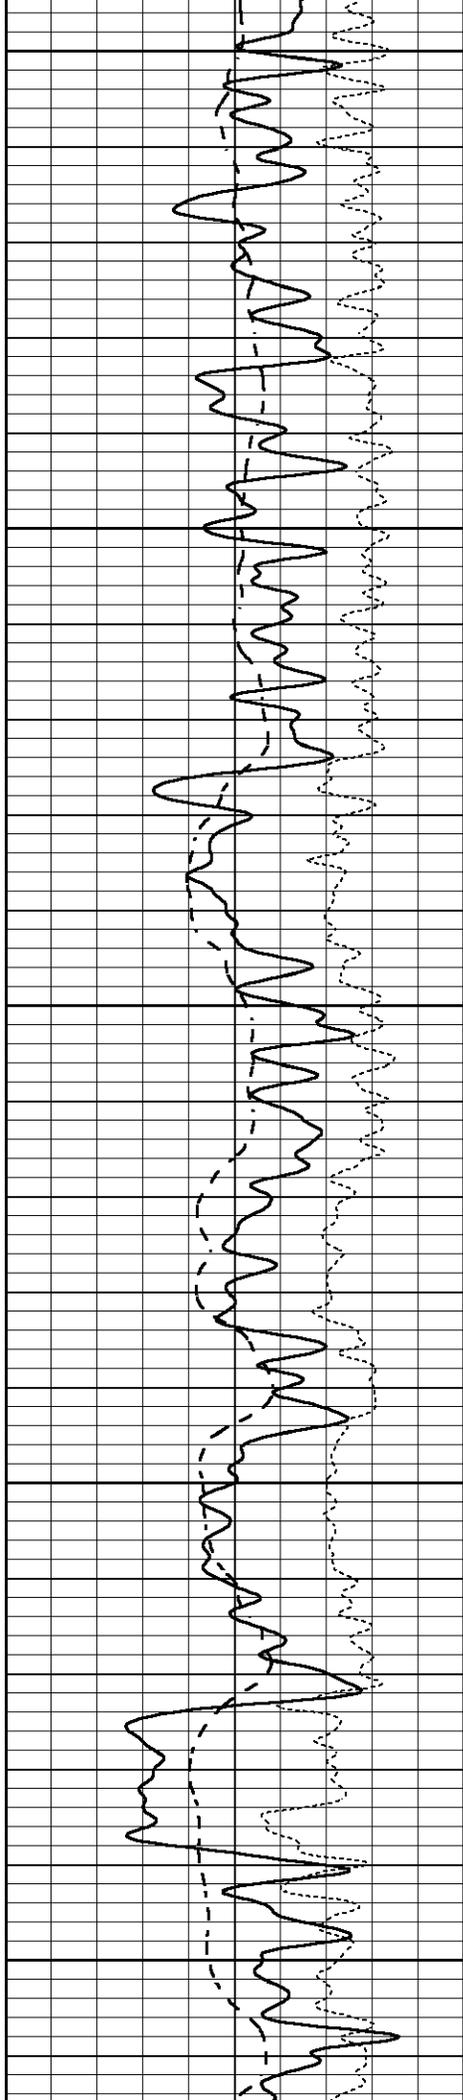


2800



2850


2900

2950

3000

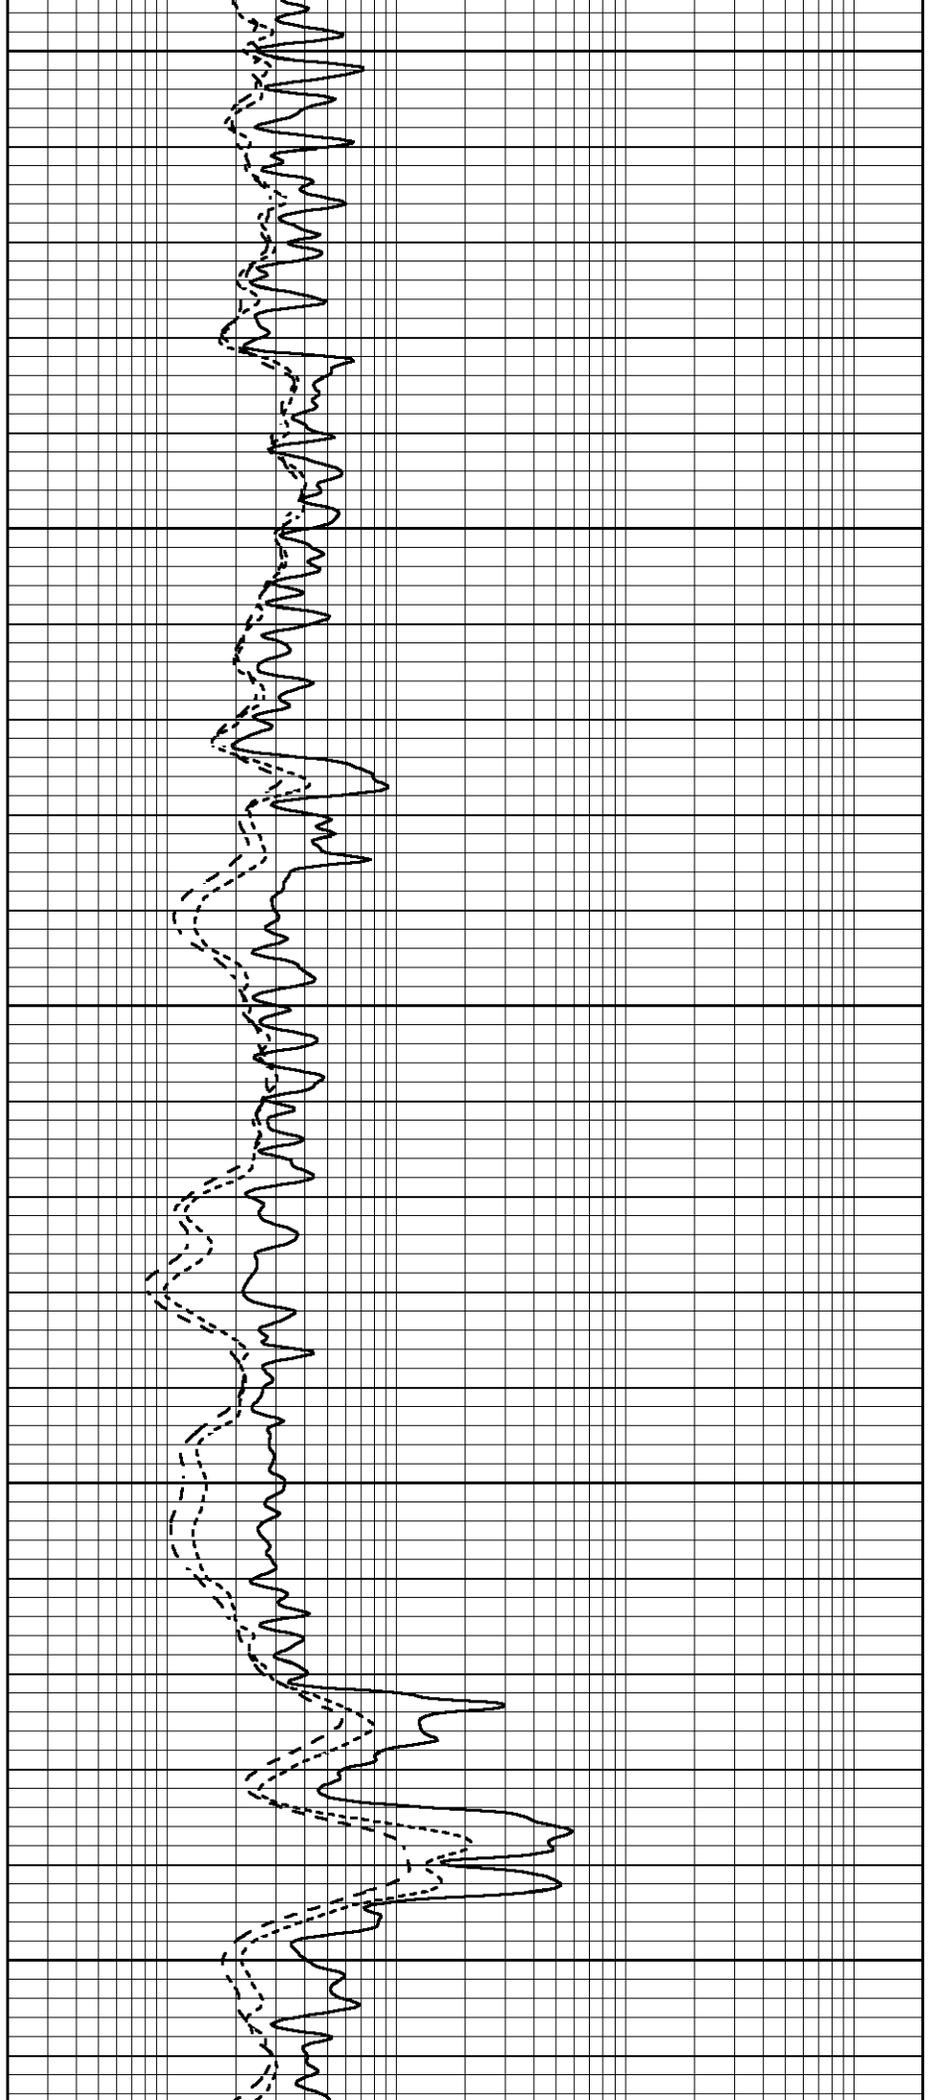

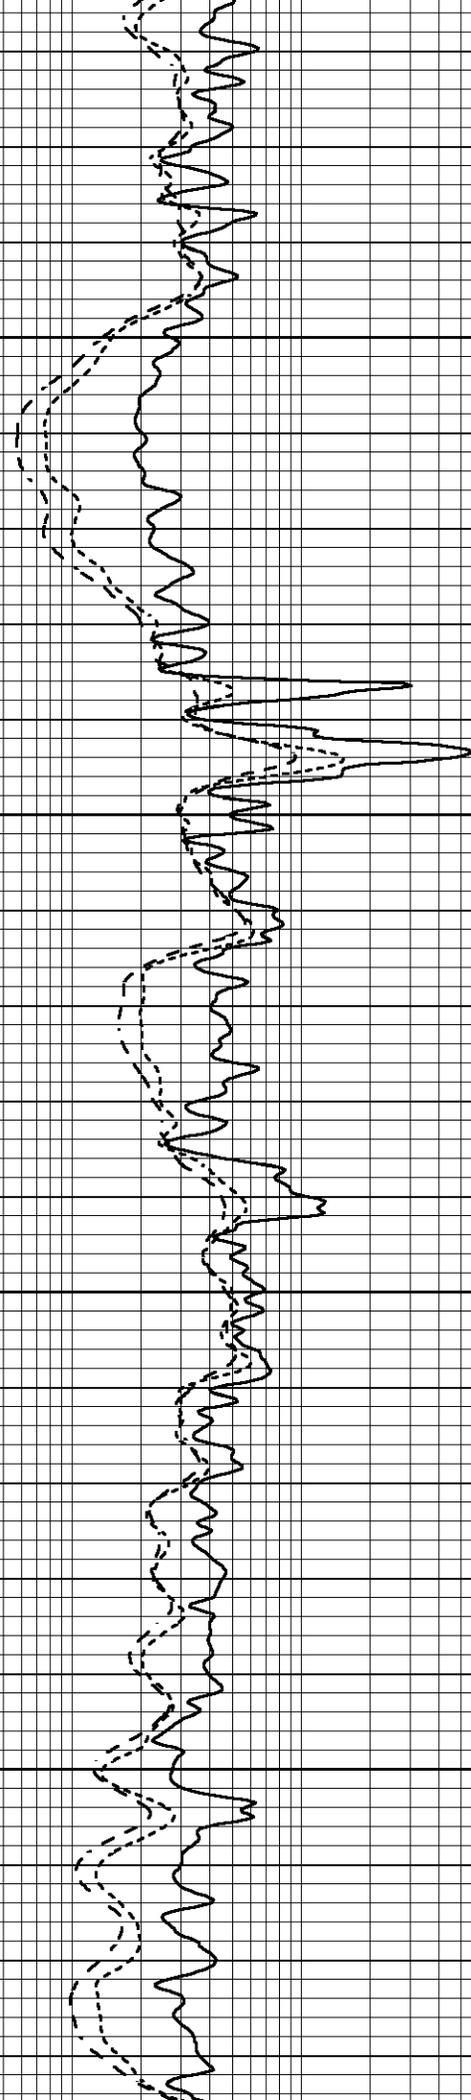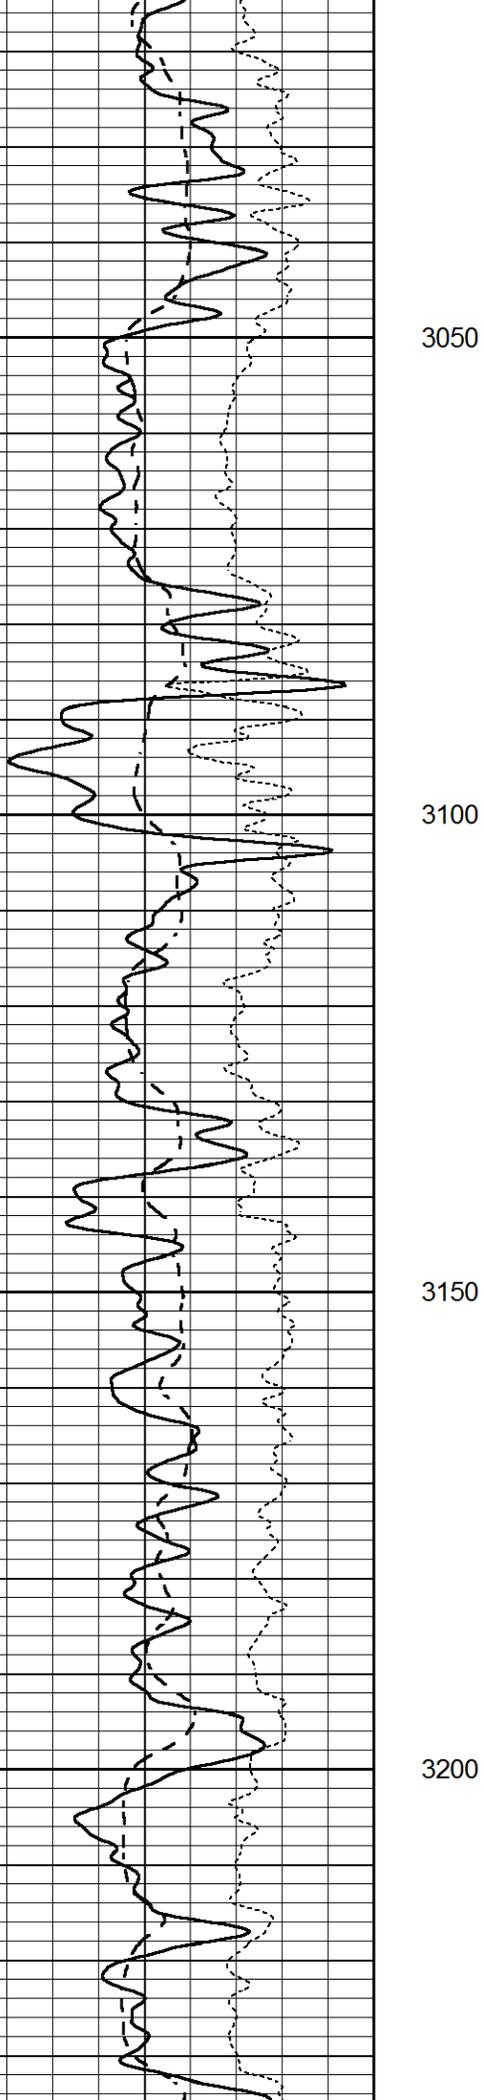

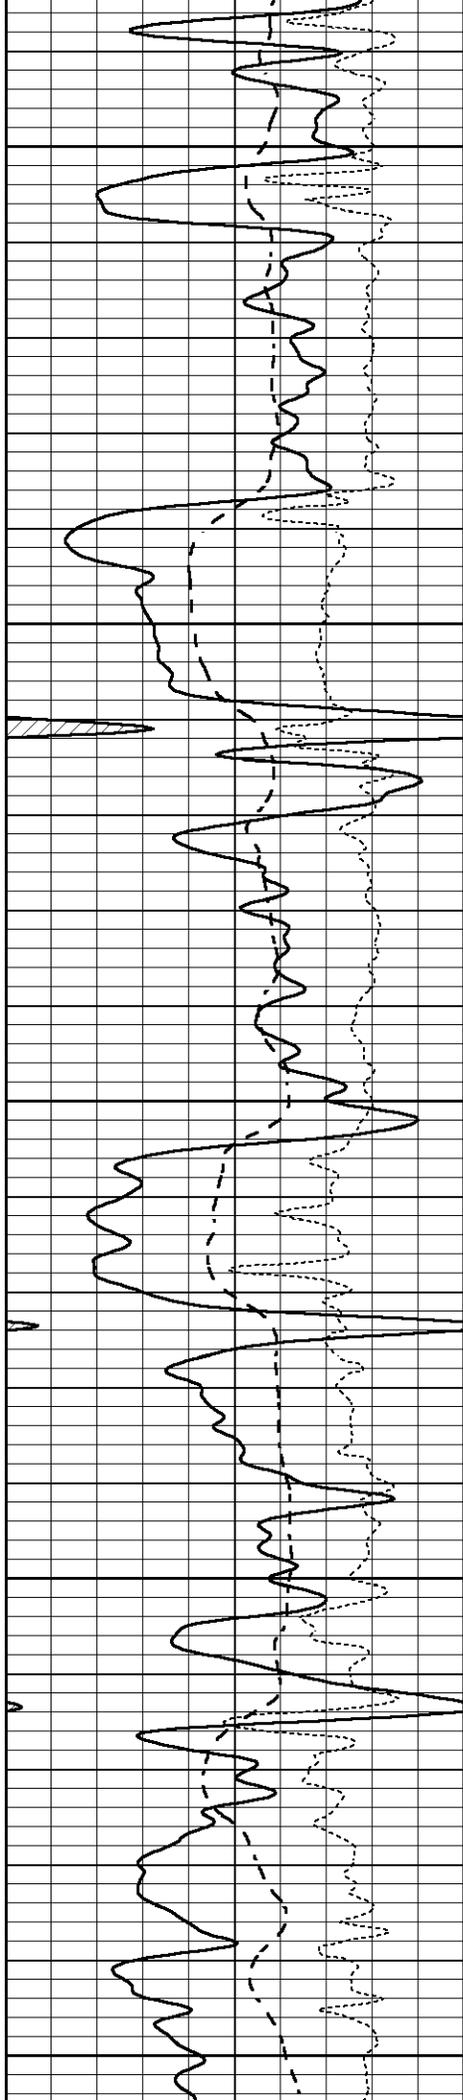


3250


3300

3350

3400

3450

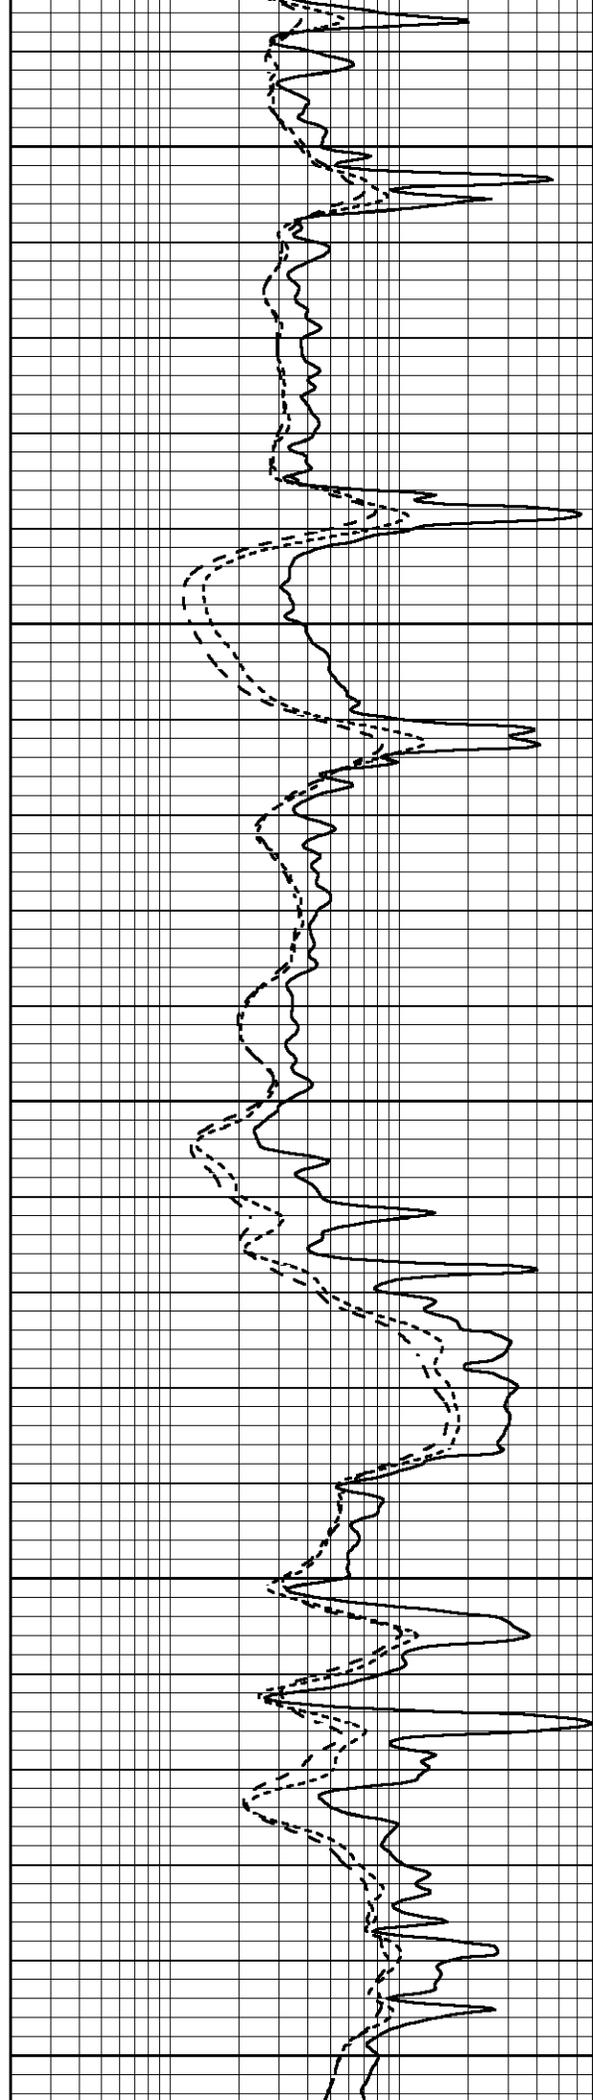

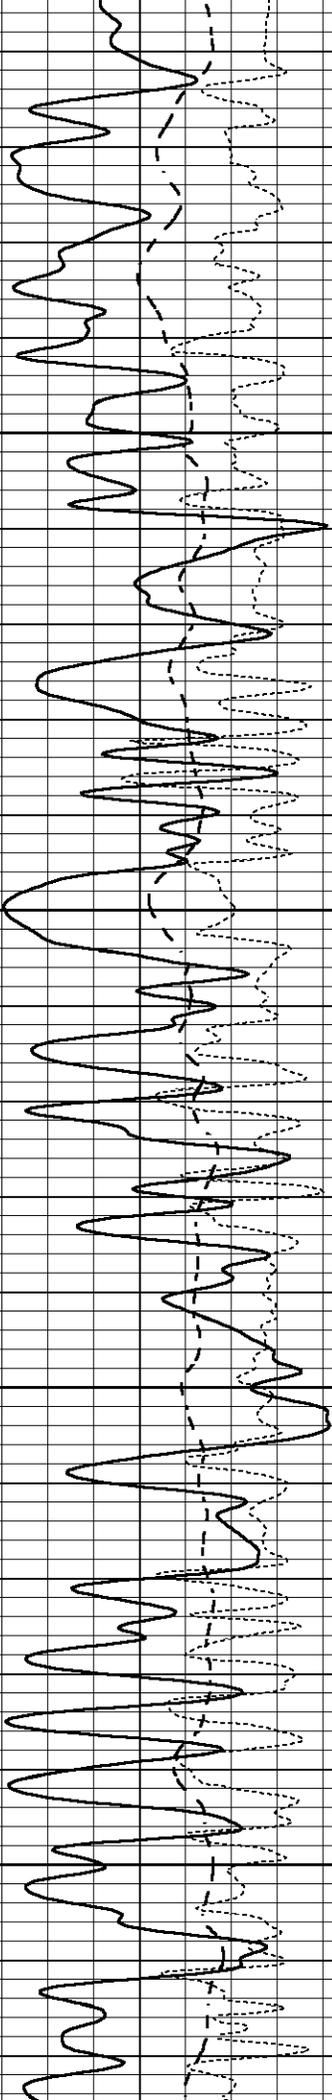



3500

3550

3600

3650

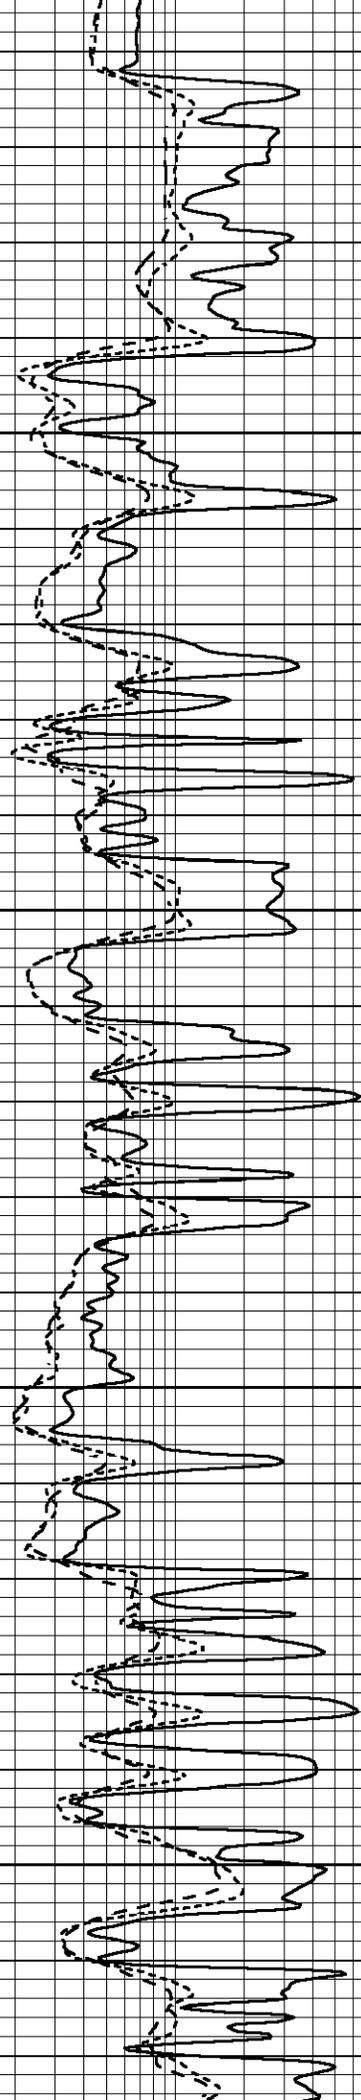

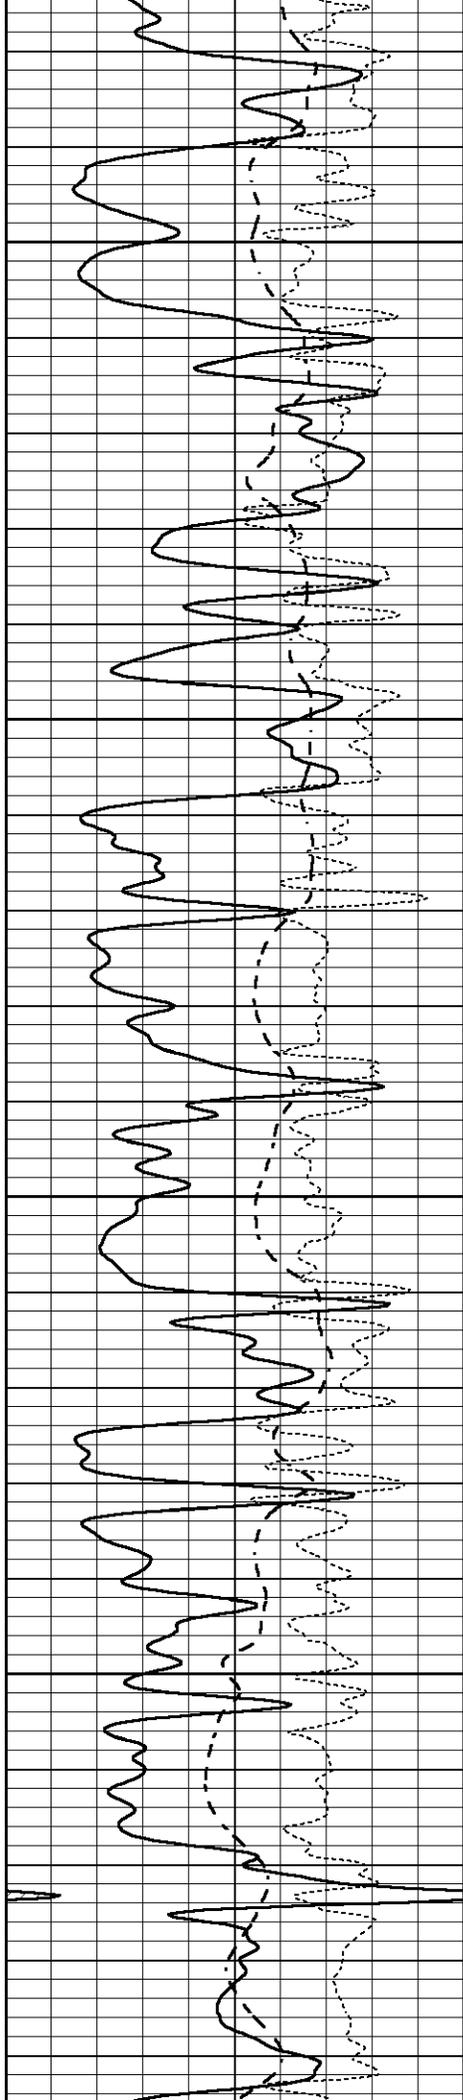



3700

3750

3800

3850

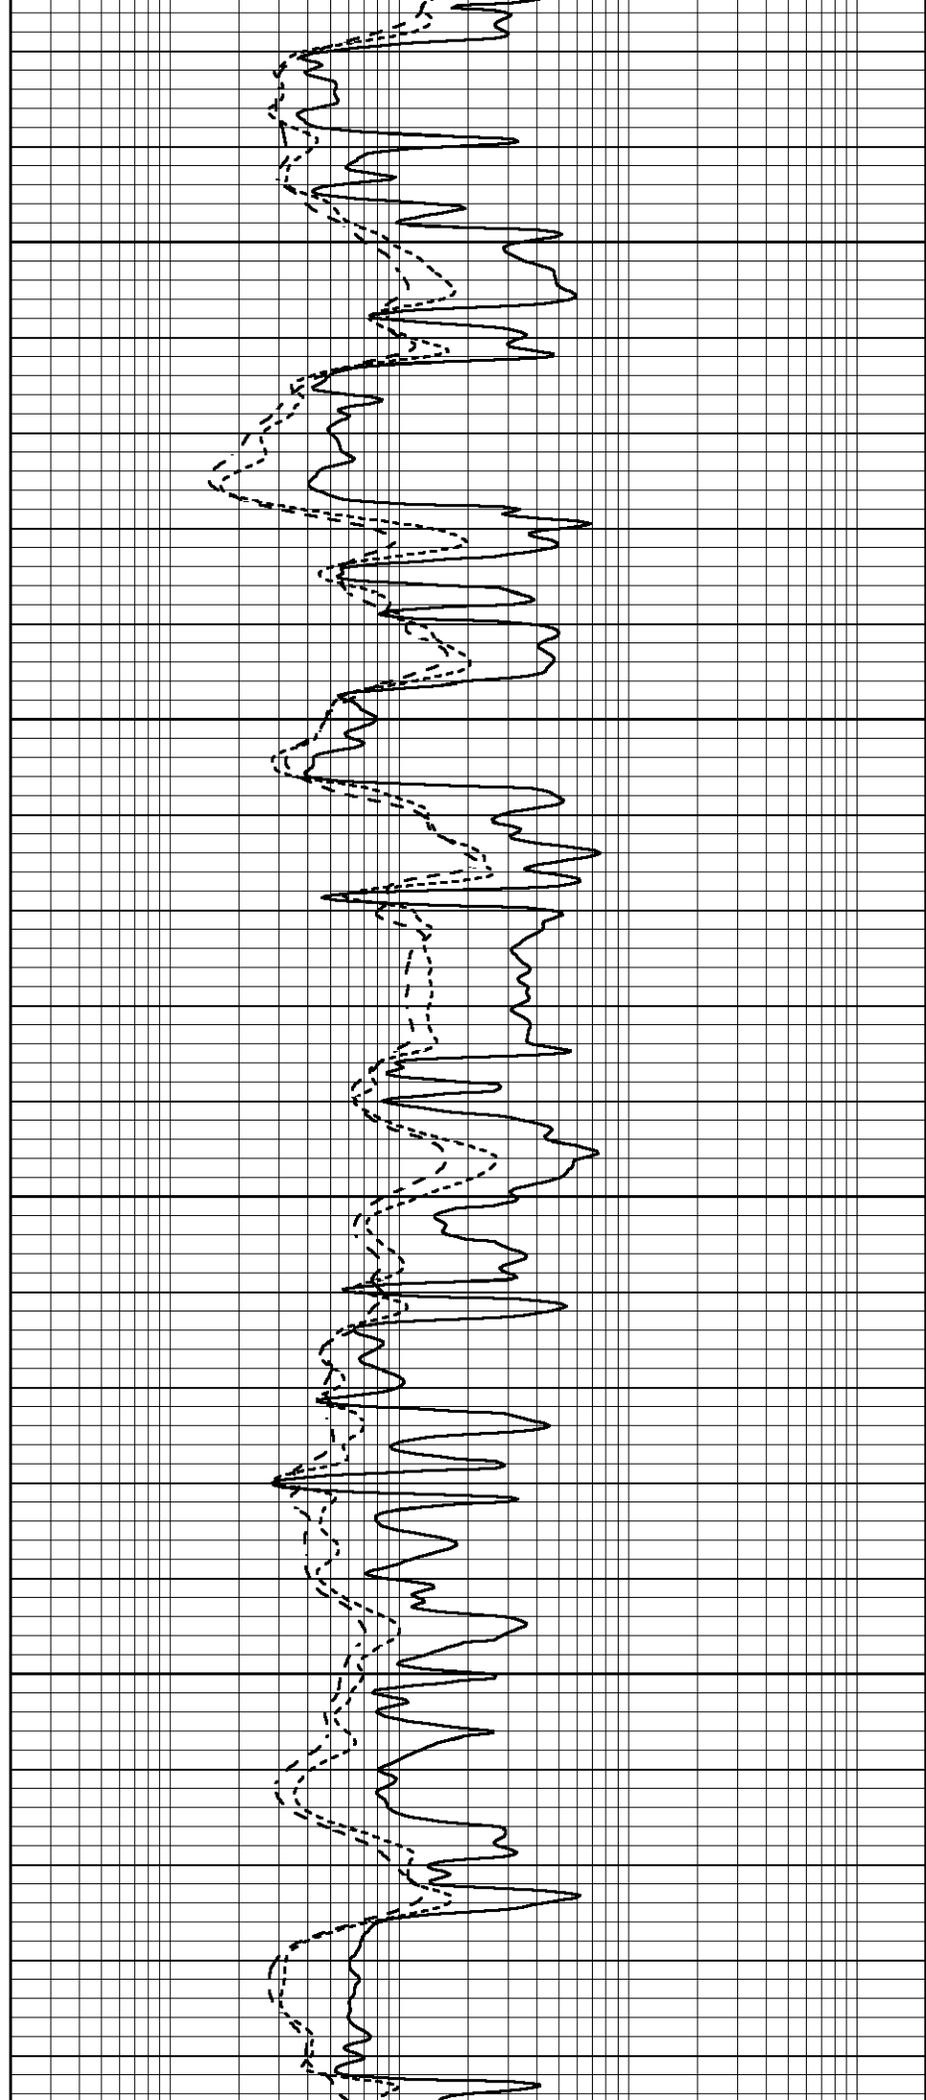

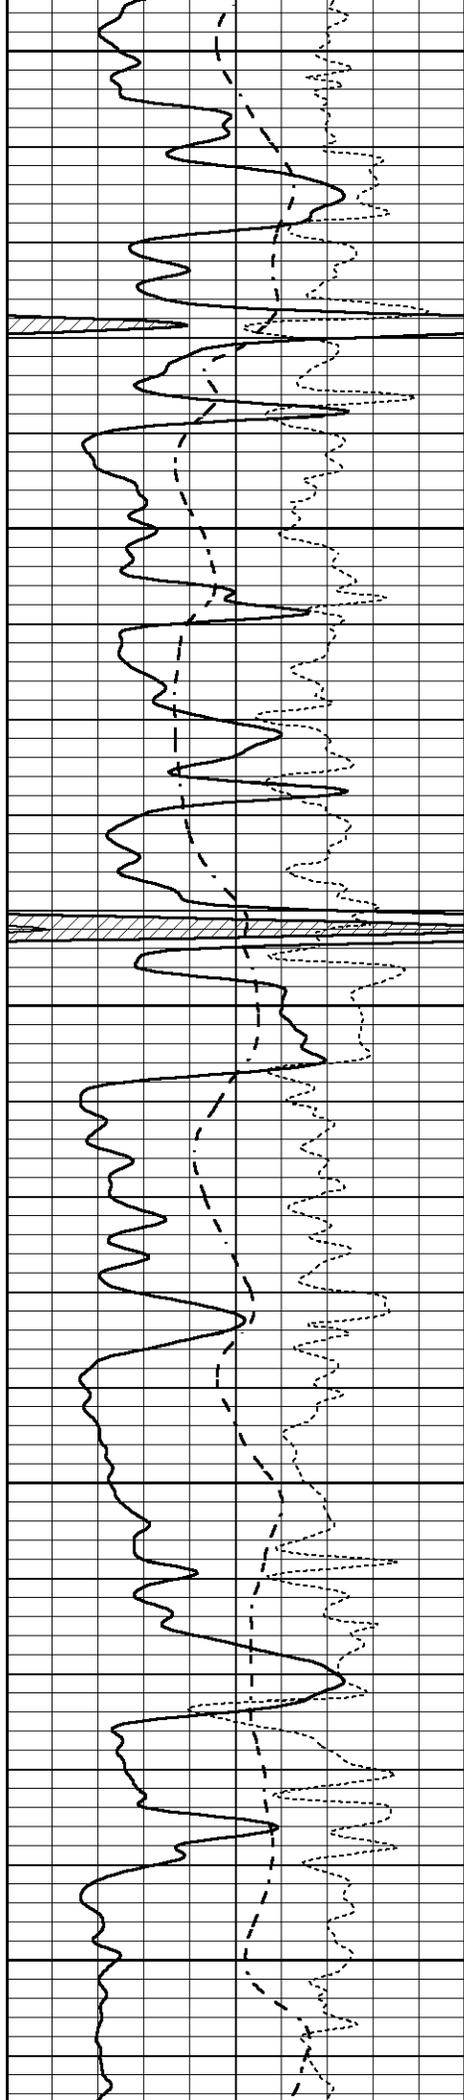


3900


3950

4000

4050

4100

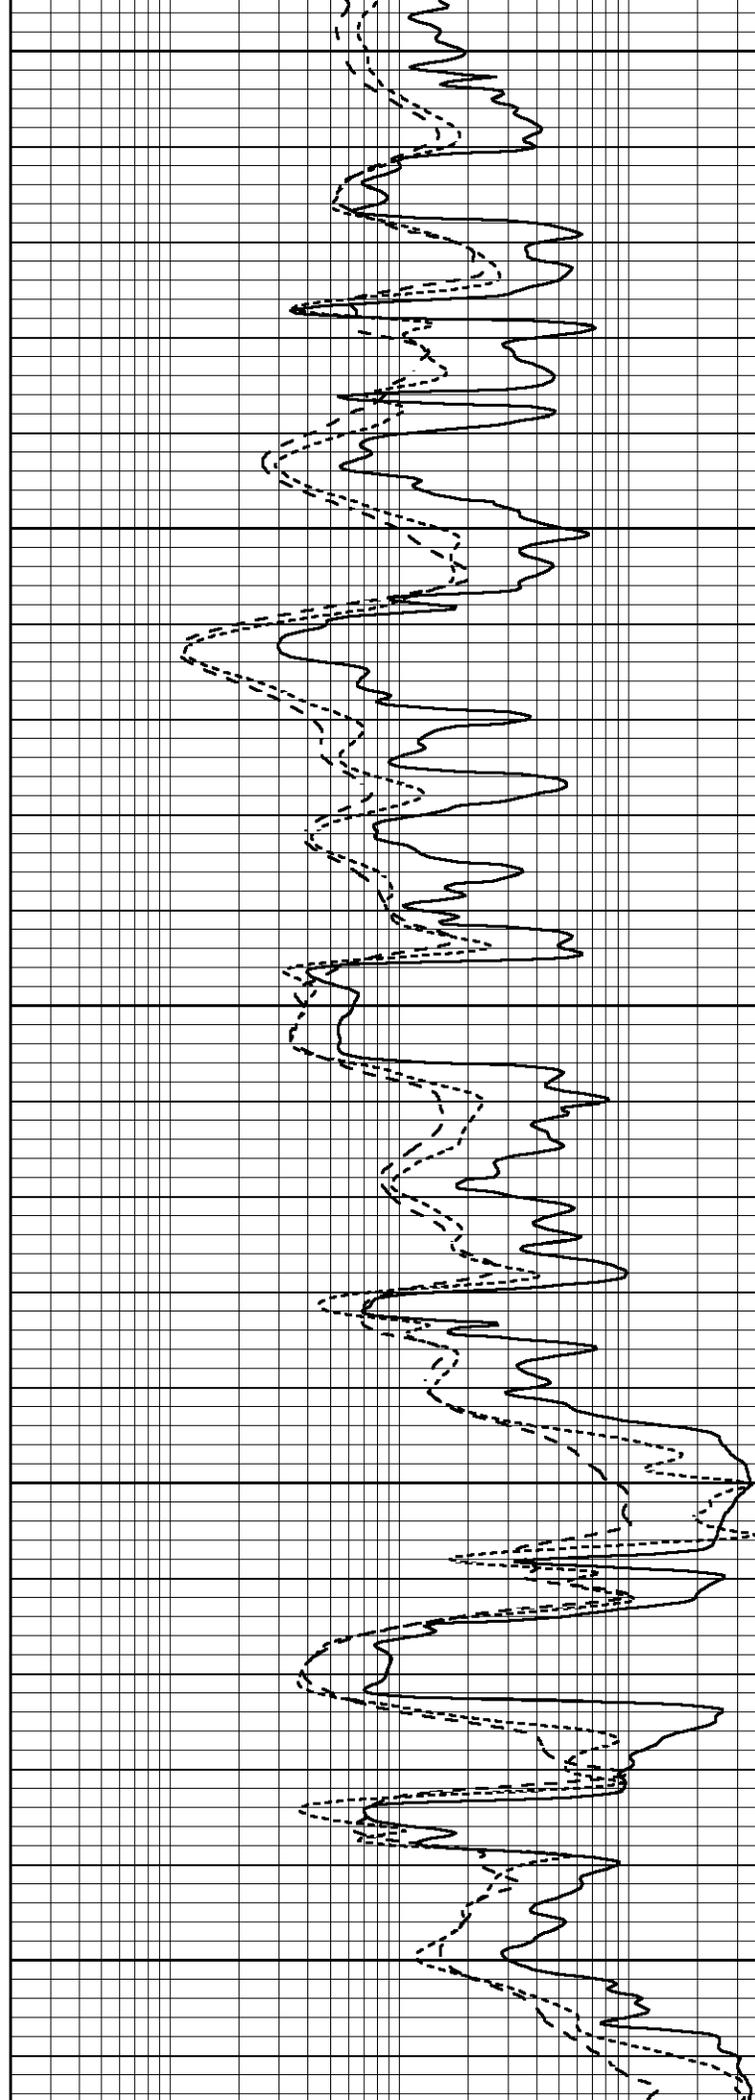

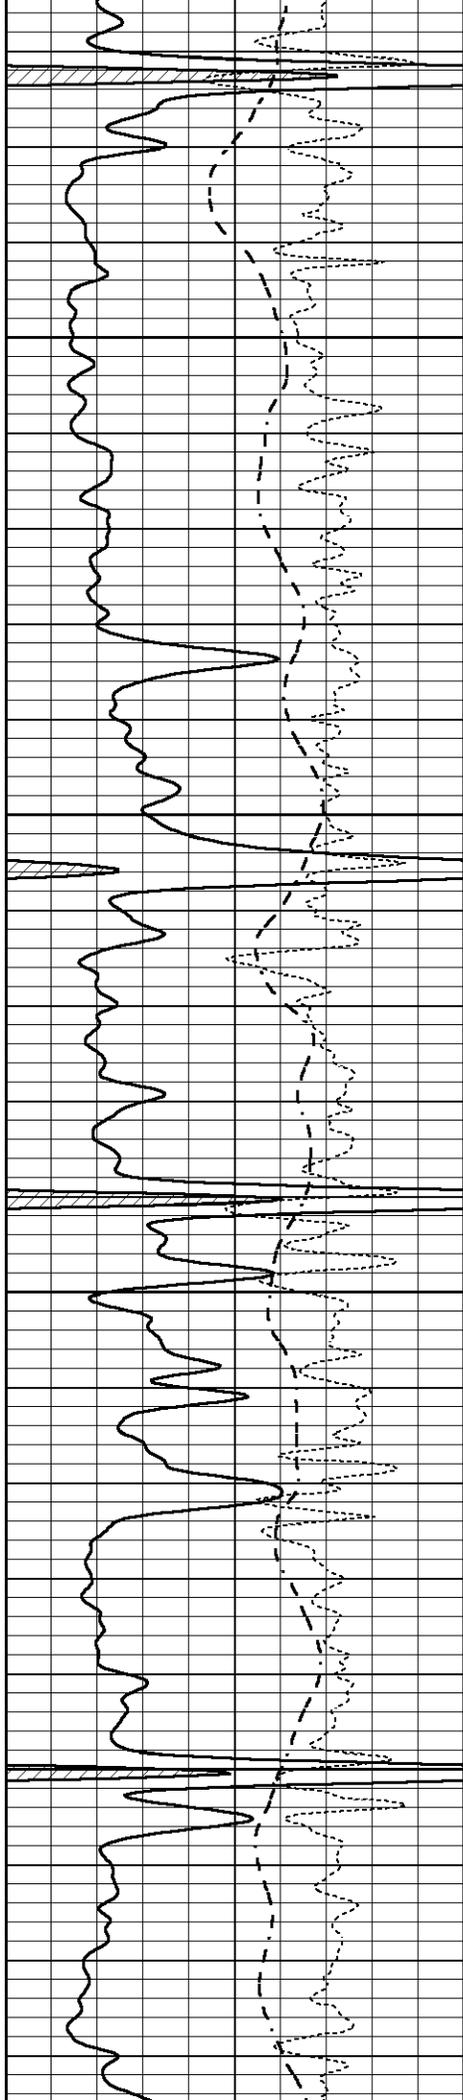



4150

4200

4250

4300

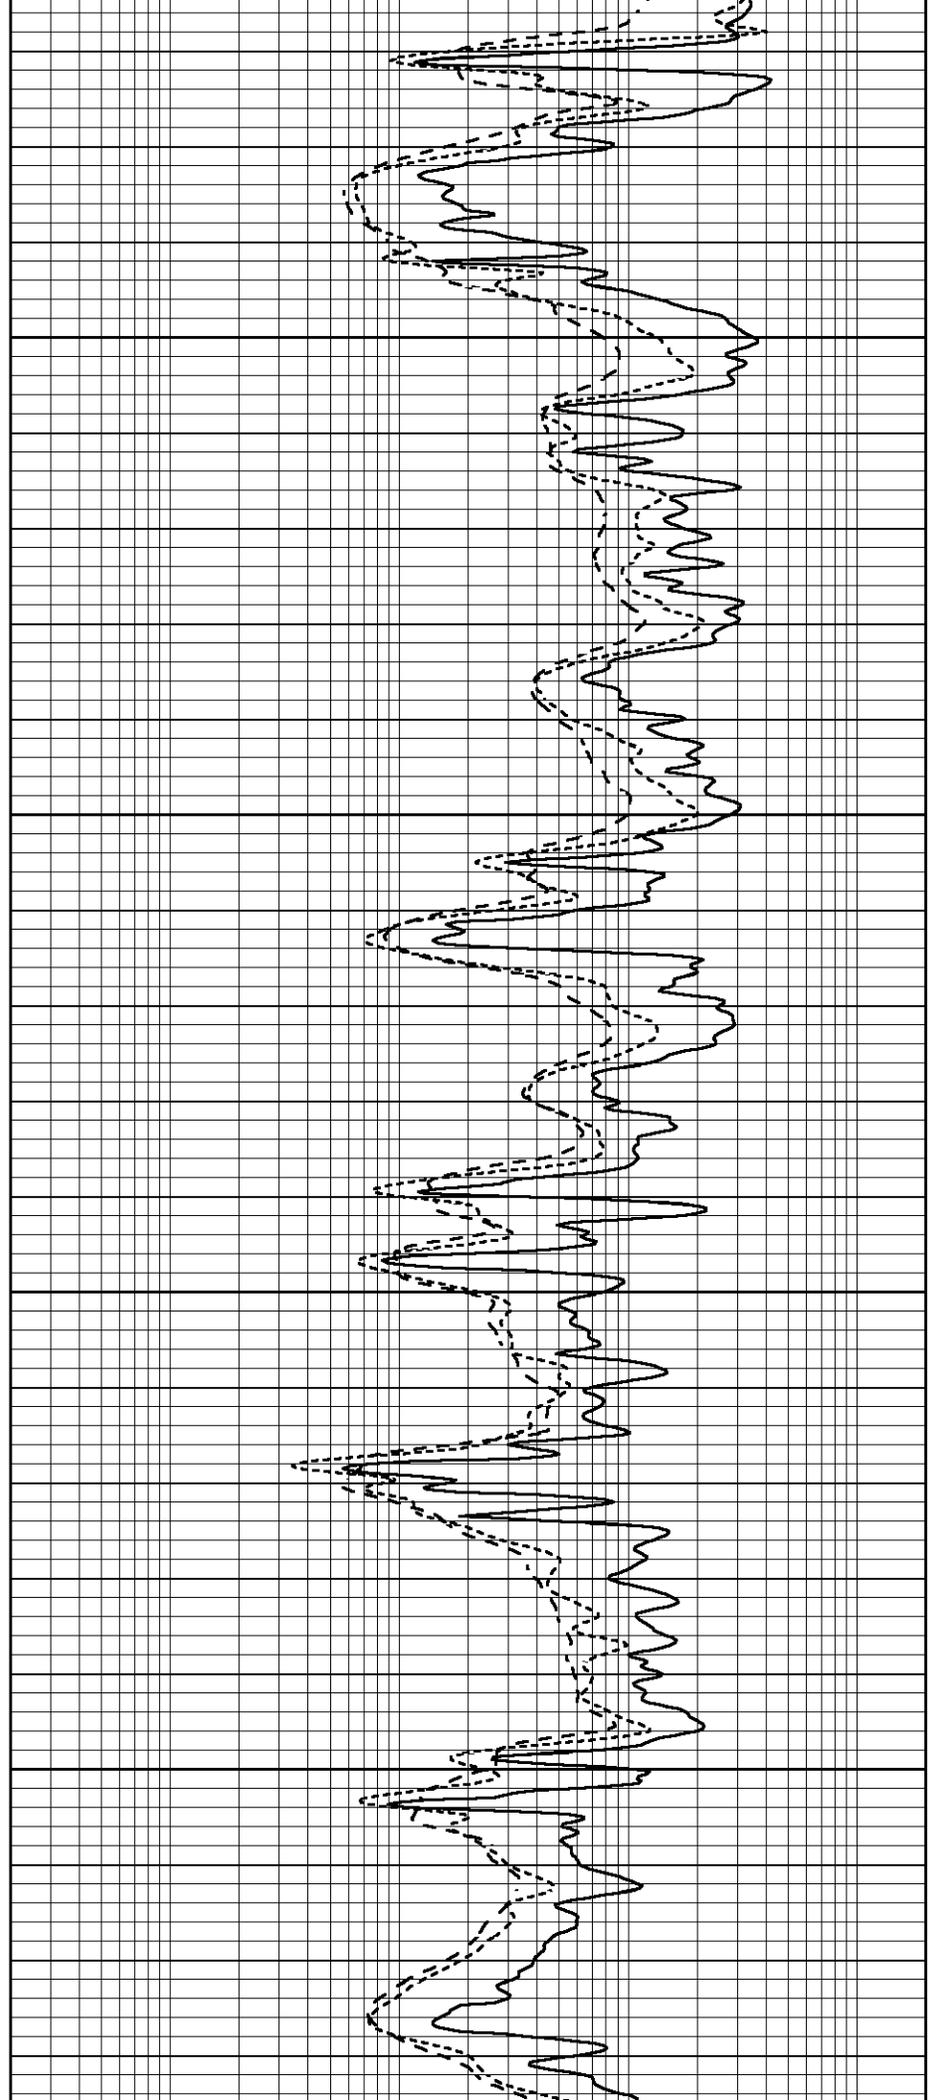

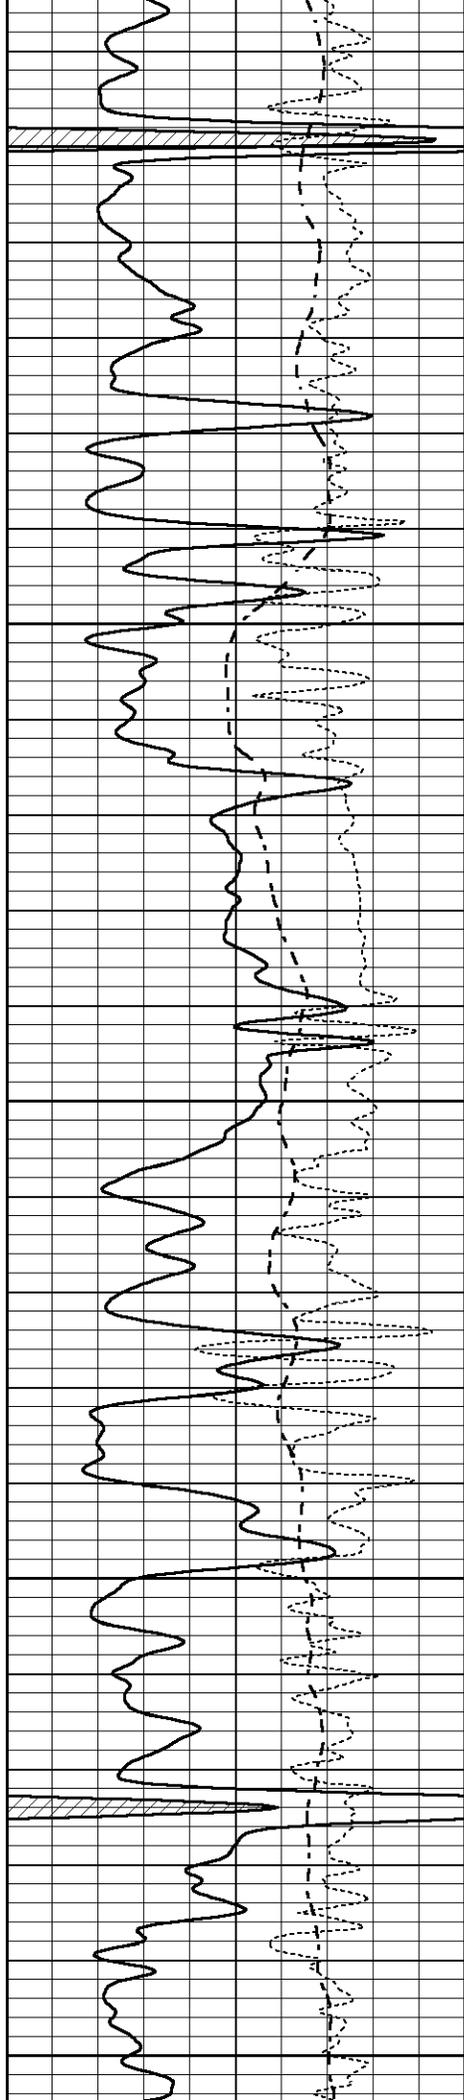


4350


4400

4450

4500

4550

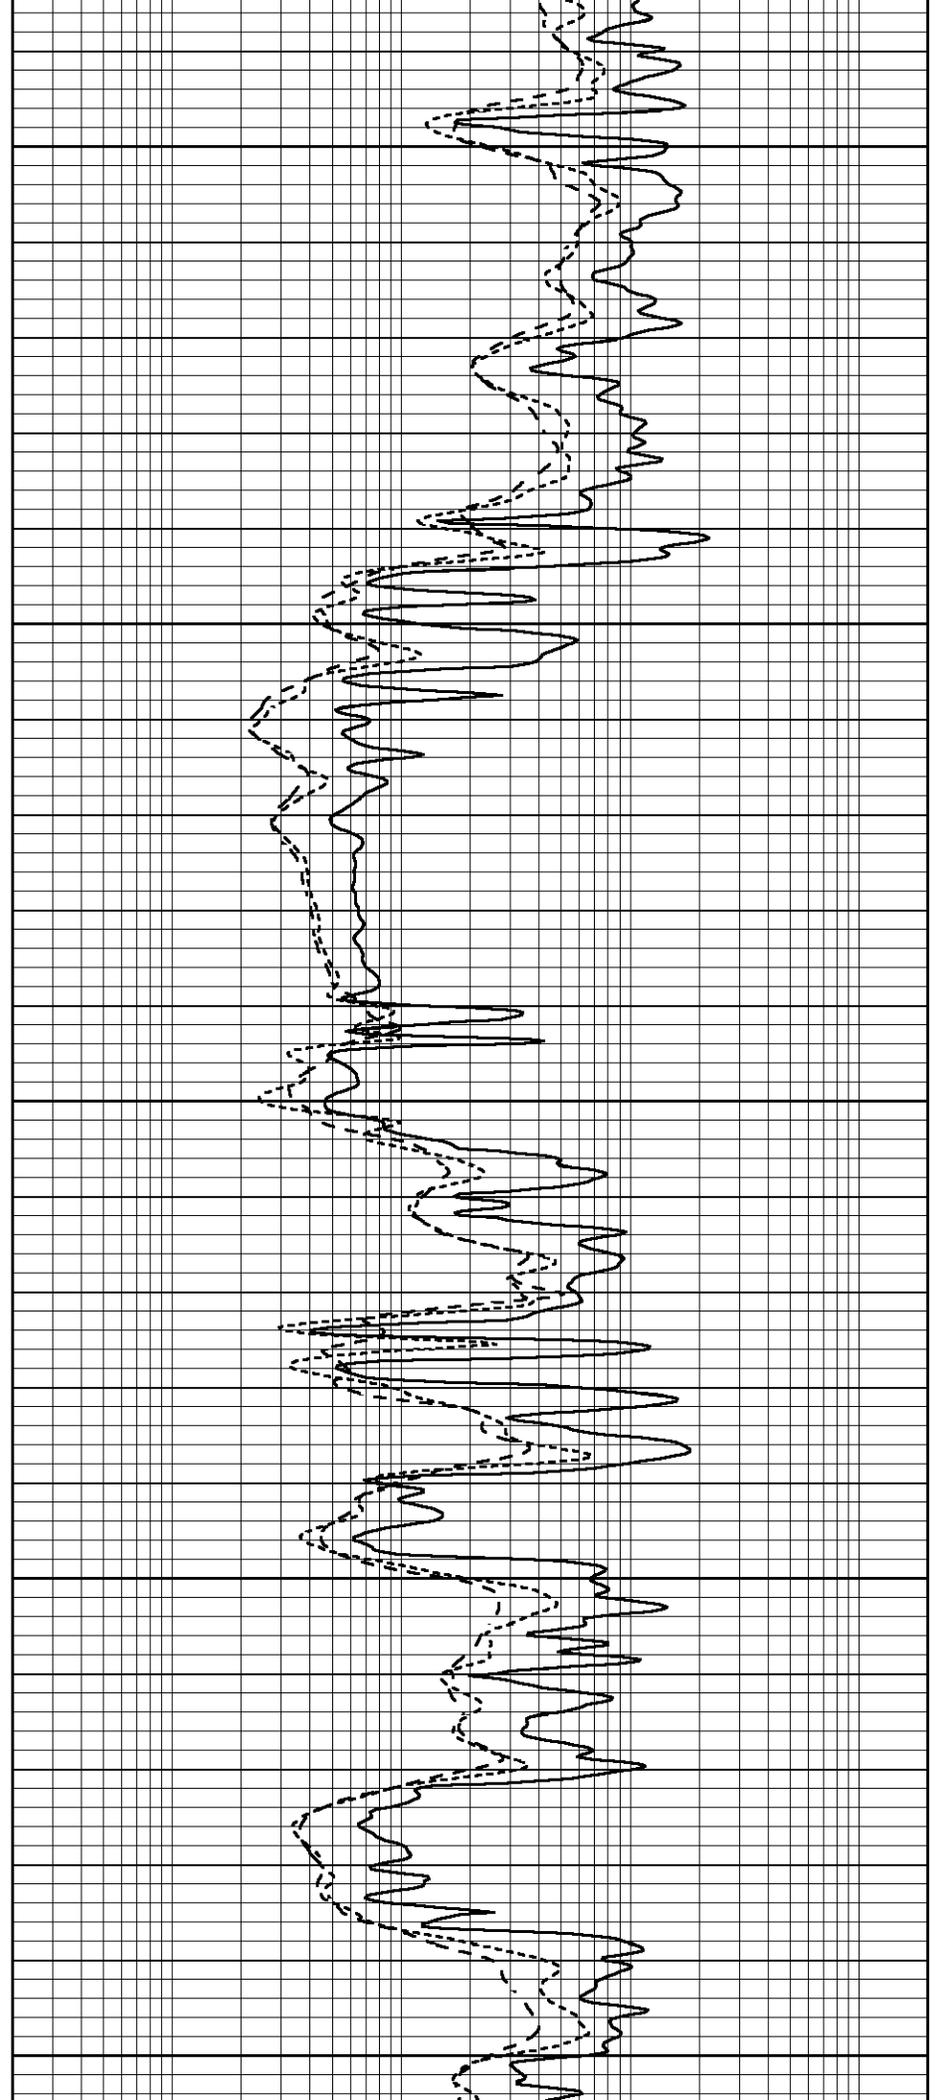

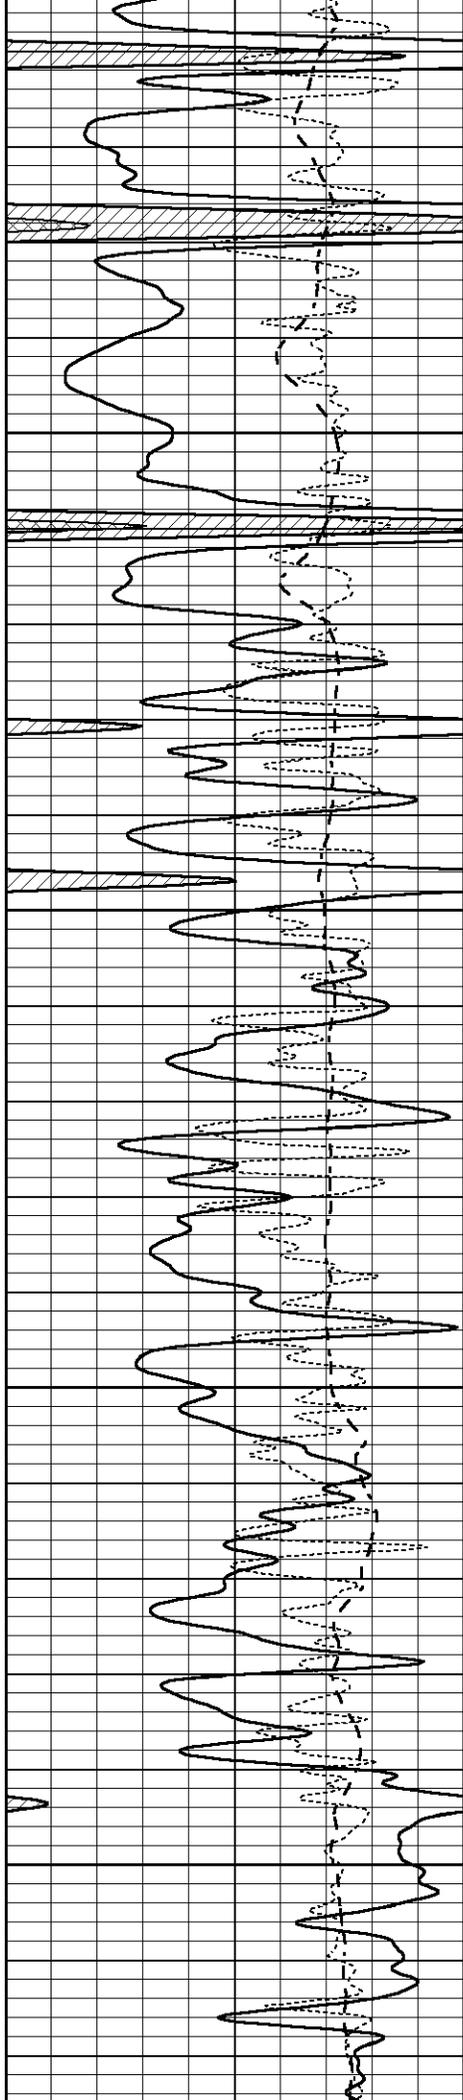



4600

4650

4700

4750

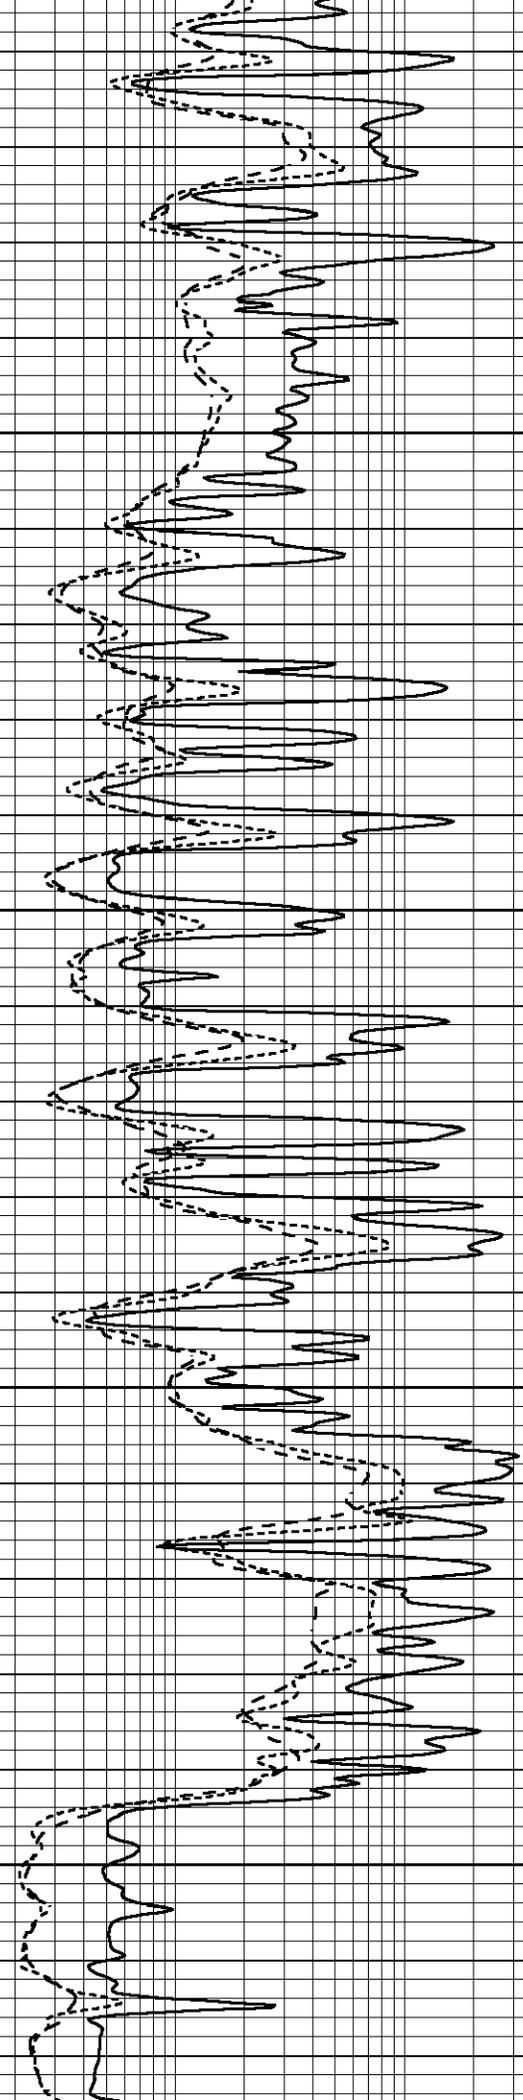

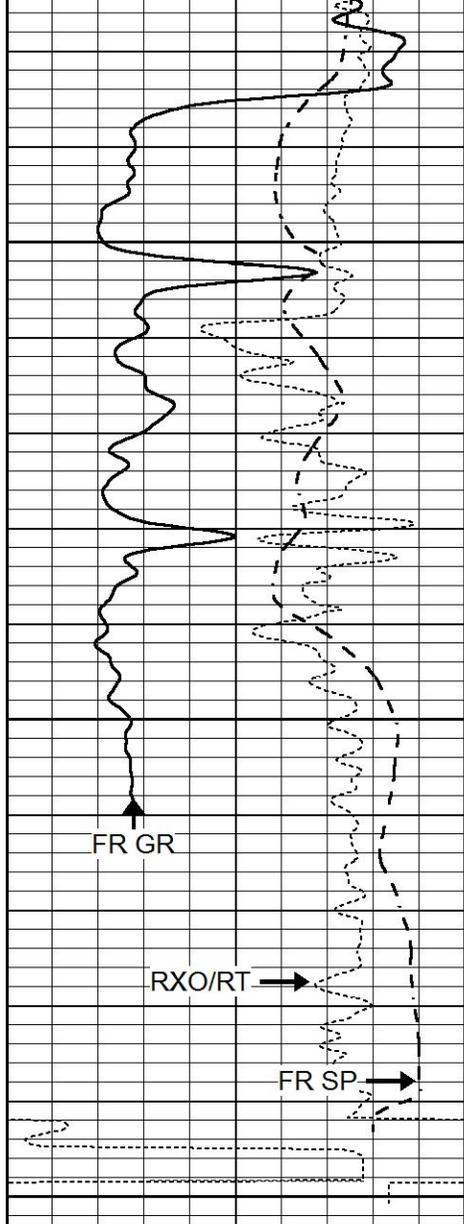


4800

4850

LTD 4898
4900

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

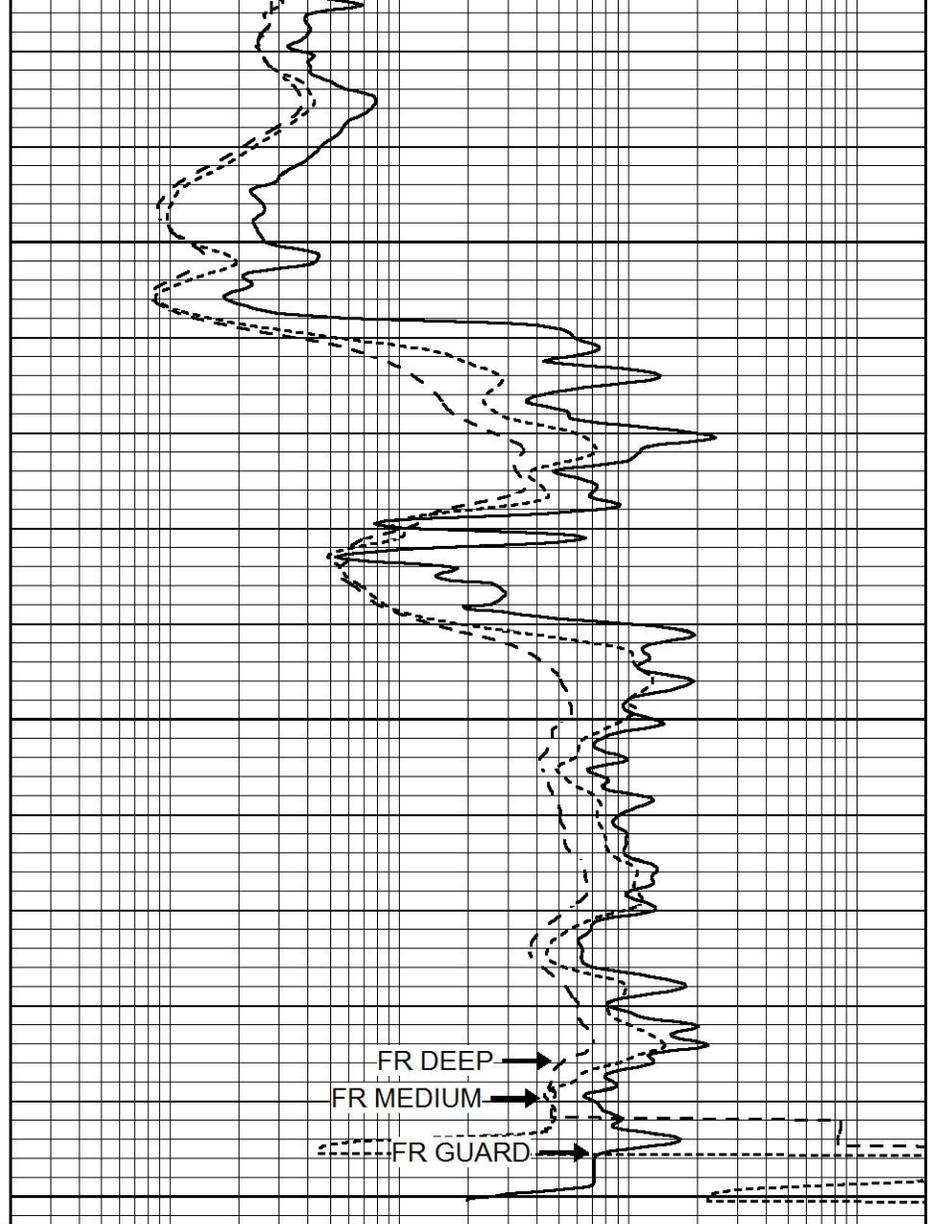

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000




REPEAT SECTION

Database File 9072pe.db
 Dataset Pathname pass2R
 Presentation Format _dil
 Dataset Creation Tue Nov 19 05:15:17 2024
 Charted by Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

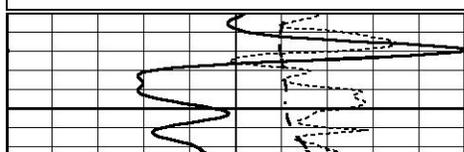

4700



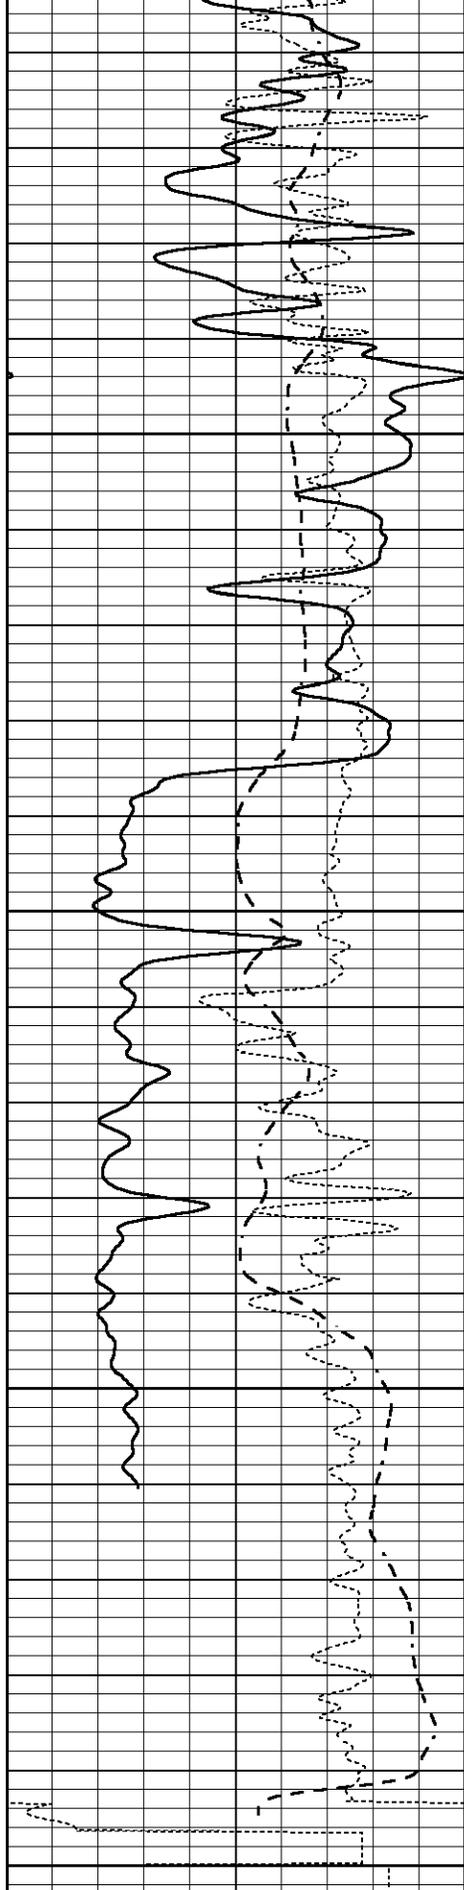


4750

4800

4850

4900

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

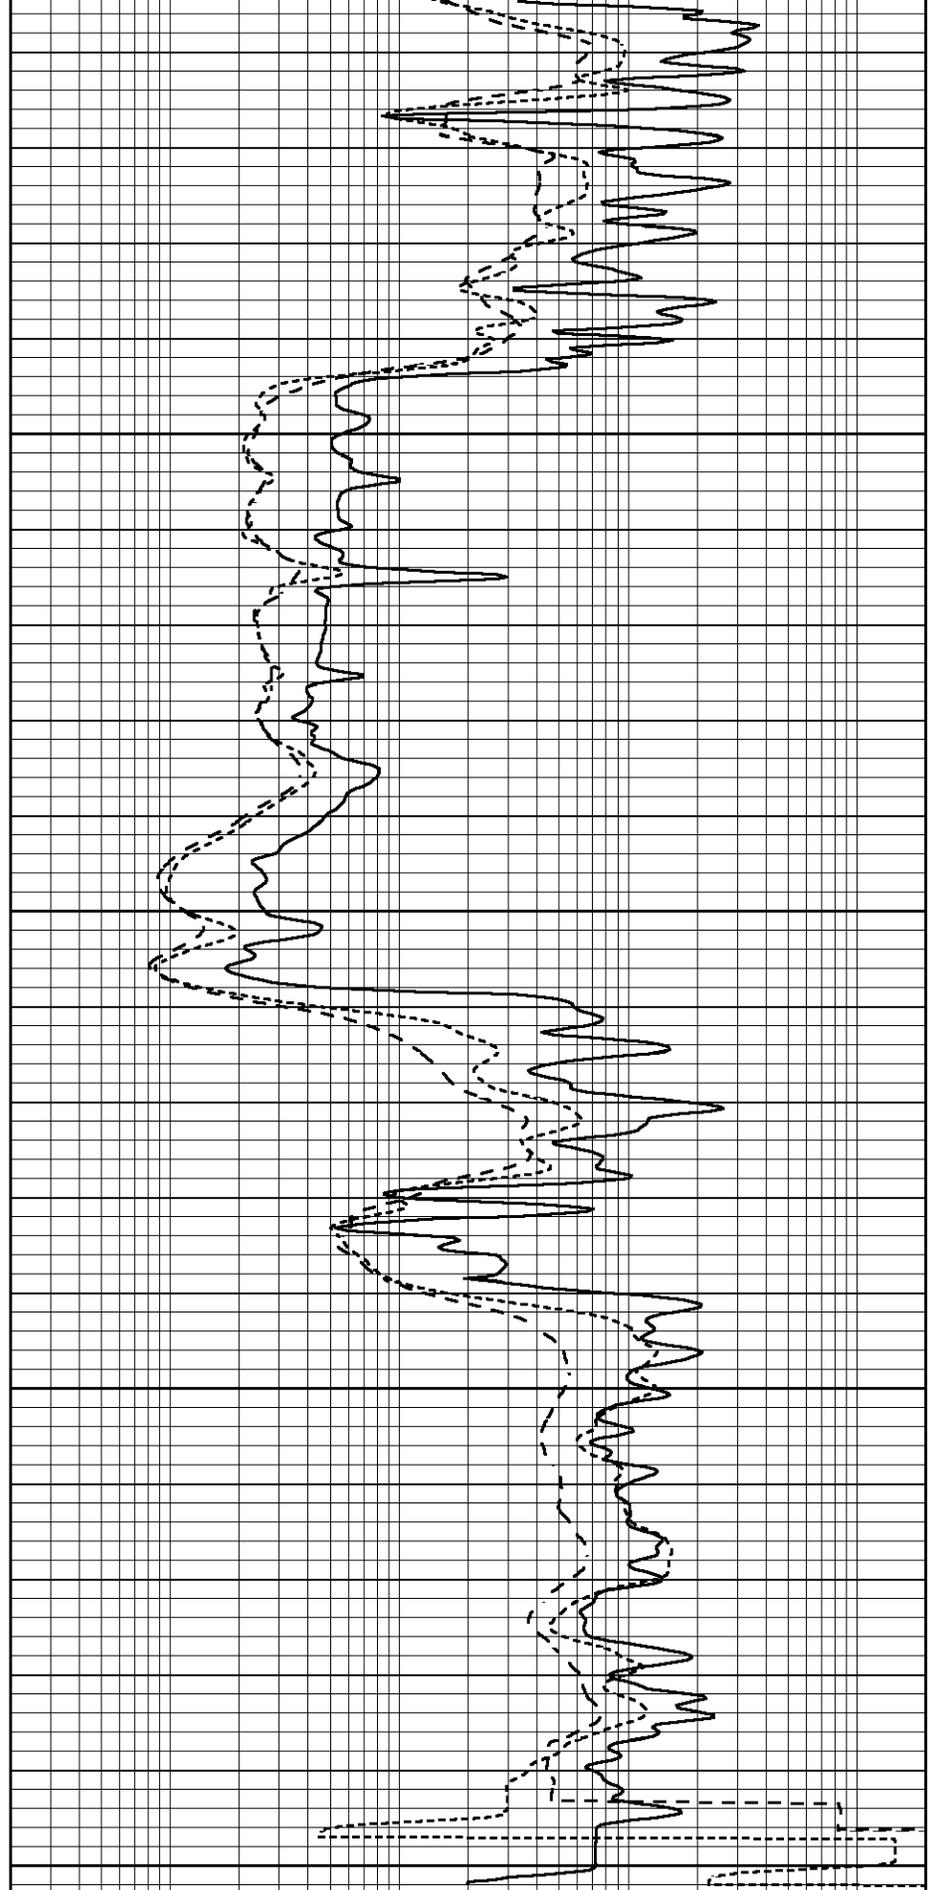

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

Calibration Report

Database File 9072pe.db
 Dataset Pathname pass3M
 Dataset Creation Tue Nov 19 07:22:57 2024

Dual Induction Calibration Report

Serial-Model: FW1410-56-Probe
 Surface Cal Performed: Tue Apr 30 11:10:17 2024
 Downhole Cal Performed: Tue Jul 25 12:15:37 2017
 After Survey Verification Performed: Tue Jul 25 12:15:38 2017

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.008	0.765	V	1.000	400.000	mmho/m	520.000	18.000
Medium	-0.056	0.761	V	1.000	464.000	mmho/m	540.000	204.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.005	0.624	V	0.000	400.000	mmho/m	645.611	-3.034
Medium	0.012	0.721	V	0.000	464.000	mmho/m	653.591	-7.532

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	-0.647	301.329	mmho/m	-0.780	336.378	mmho/m	1.117	-0.058
Medium	38.256	411.013	mmho/m	39.046	441.706	mmho/m	1.080	-2.280
LL3		7.471	V		2500.000	Ohm-m		
		0.001	V		20.000	Ohm-m		
		-7.085	V		4000.000	mmho-m		

After Survey Verification

Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	-0.647	301.329	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	38.256	411.013	mmho/m	1.000	0.000
LL3		0.000	Ohm-m		1500.000	Ohm-m		
		0.000	Ohm-m		20.000	Ohm-m		
		0.000	mmho-m		3745.000	mmho-m		

Litho Density Calibration Report

Serial: 003 Model: PRB

Master Calibration

Performed Mon May 22 11:42:40 2023

	Background	Magnesium	Aluminum	Aluminum+Fe	
Window 1	1512.3	7465.7	2749.0	2519.6	cps
Window 2	1398.8	6705.7	2507.3	2313.8	cps
Window 3	1289.2	5259.5	2124.1	2009.6	cps
Window 4	351.1	351.6	351.8	353.2	cps
Long Space	0.0	5306.9	1108.5	915.0	cps
Short Space	3.3	2239.9	1441.2	1212.0	cps
Rho		1.7100	2.5900	0.0000	g/cc
Pe		2.0000	2.7500	5.7900	
Rib Angle	: 44.3	Rib Slope	: 0.975	Density/Spine Ratio	: 0.541
Spine Angle	: 74.3	Spine Slope	: 3.551	Spine Intercept	: -18.8

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 080621PMC
 Tool Model: NABORS

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 46001
 Tool Model: Probe1
 Performed: Thu Apr 20 09:55:57 2023

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 1.0 cps

Sensitivity: 0.4300 GAPI/cps