



MICRO LOG

Company DIXON OPERATING COMPANY, LLC.
Well KOPPITZ #9
Field STRANATHAN
County BARBER State KANSAS

Location: API #: 15-007-24447-0000

1980' FNL & 1980' FEL
C - SW - NE

SEC 2 TWP 35S RGE 12W

Permanent Datum GROUND LEVEL Elevation 1380
Log Measured From KELLY BUSHING 13' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL/PE
DIL/SON/FF

Elevation

K.B. 1393
D.F. 1391
G.L. 1380

Date 11/8/22

Run Number TWO

Depth Driller 5430

Depth Logger 5425

Bottom Logged Interval 5409

Top Log Interval 3700

Casing Driller 8 5/8" @ 267'

Casing Logger 267

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.3/55

pH / Fluid Loss 10.0/8.8

Source of Sample FLOWLINE

Rm @ Meas. Temp .750 @ 75F

Rmf @ Meas. Temp .563 @ 75F

Rmc @ Meas. Temp .900 @ 75F

Source of Rmf / Rmc MEASURED

Rm @ BHT .436 @ 129F

Time Circulation Stopped 5 HOURS

Time Logger on Bottom 3:30 P.M.

Maximum Recorded Temperature 129F

Equipment Number 8916

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By TIM HELLMAN

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS:


HARTDNER, KS., 3 1/2 E. ON HWY 281 TO "CLAIRMONT RD.", 1N. TO CATTLE GUARD, W. INTO
AND VEER SOUTH





MAIN SECTION

Database File	6717pe.db
Dataset Pathname	pass7.2
Presentation Format	_micro
Dataset Creation	Tue Nov 08 17:10:27 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

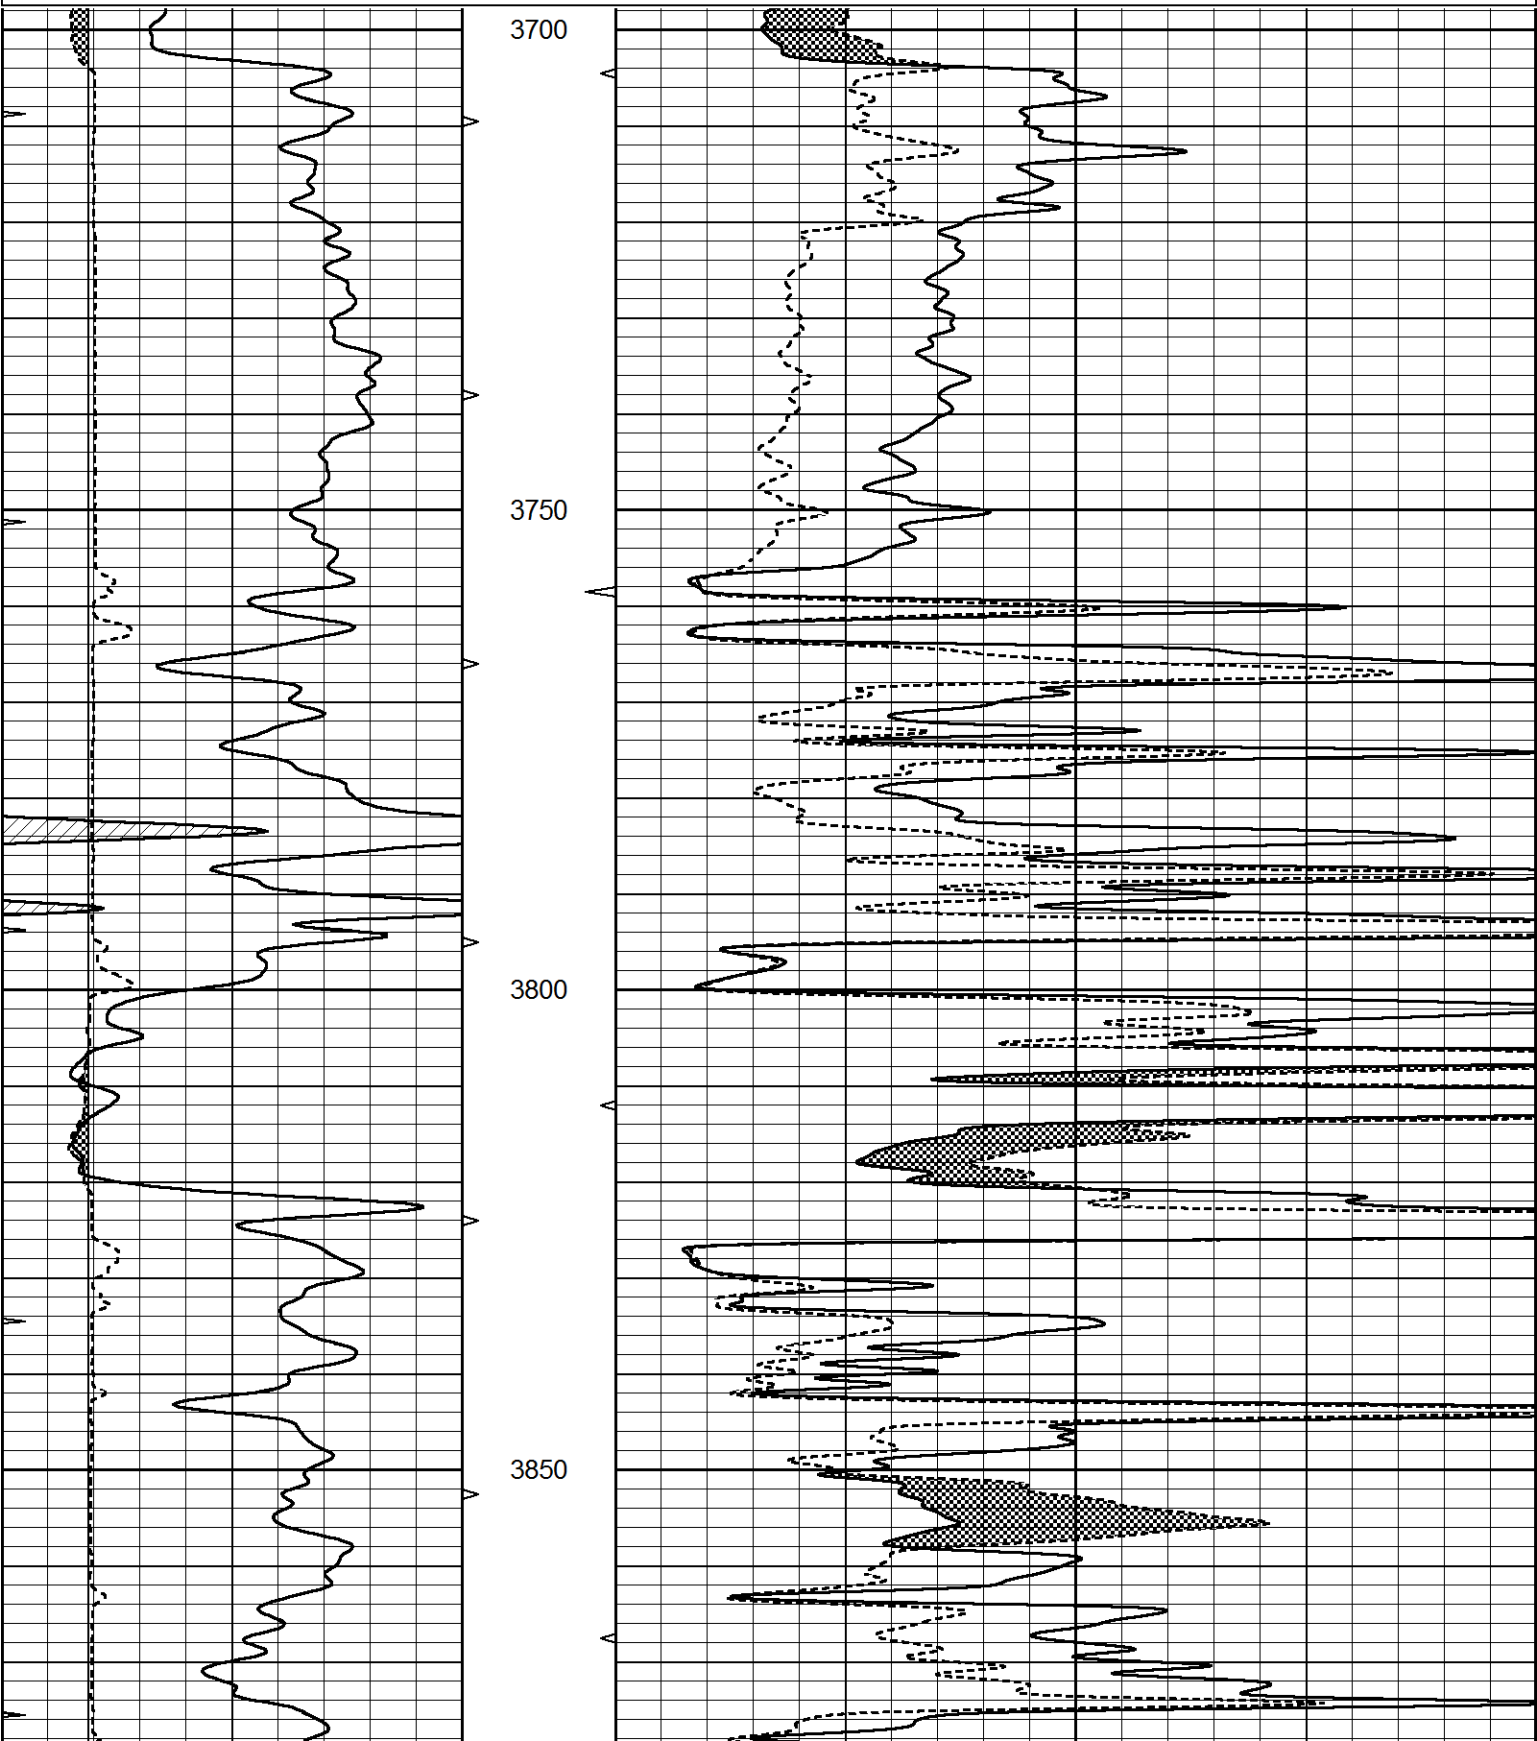

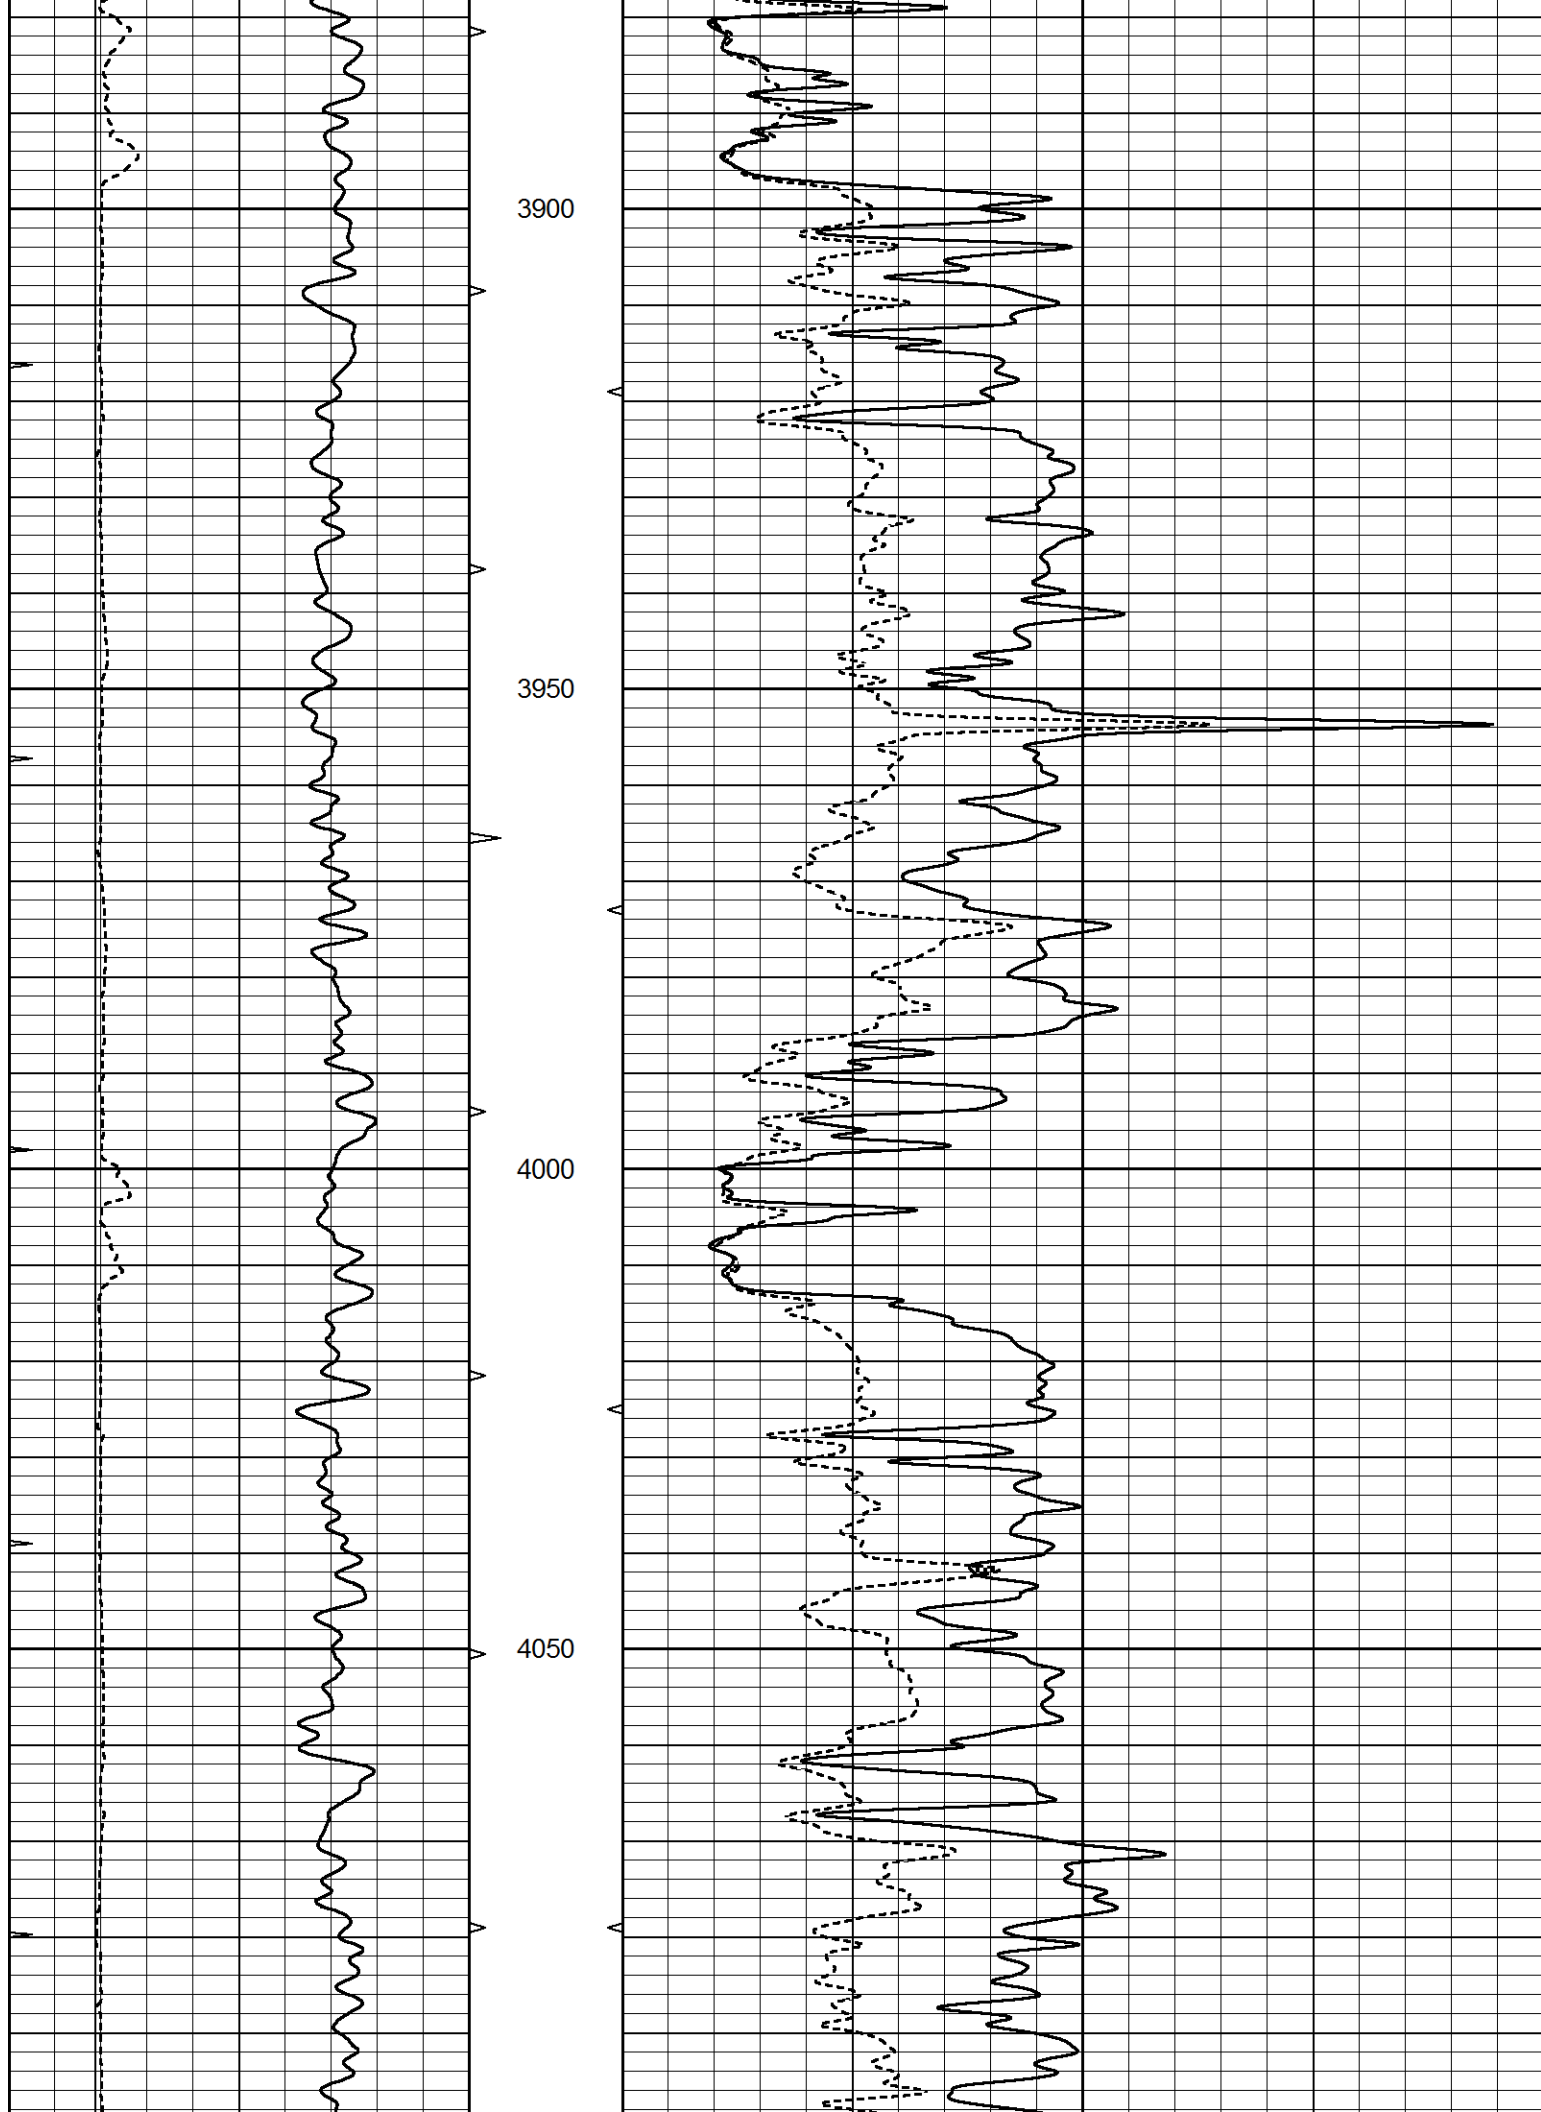

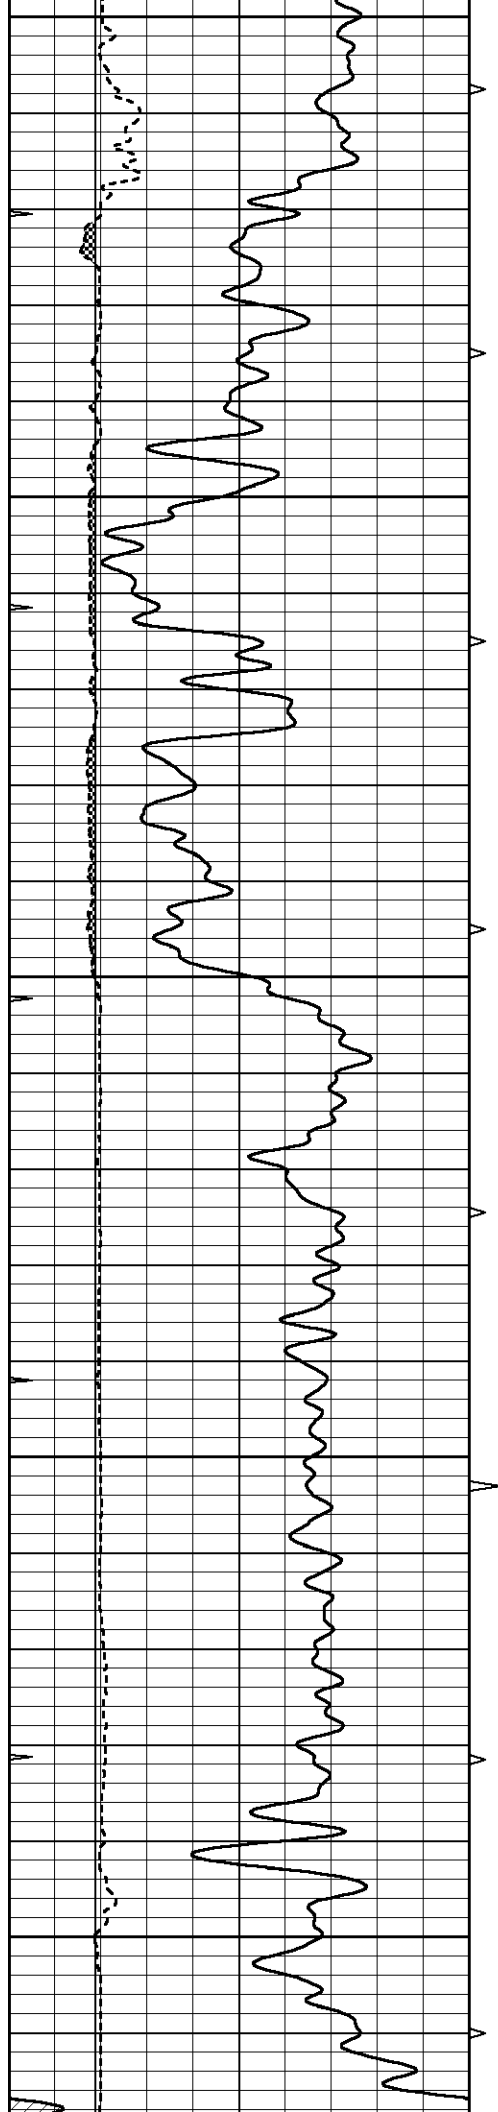


4100


4150

4200

4250

4300

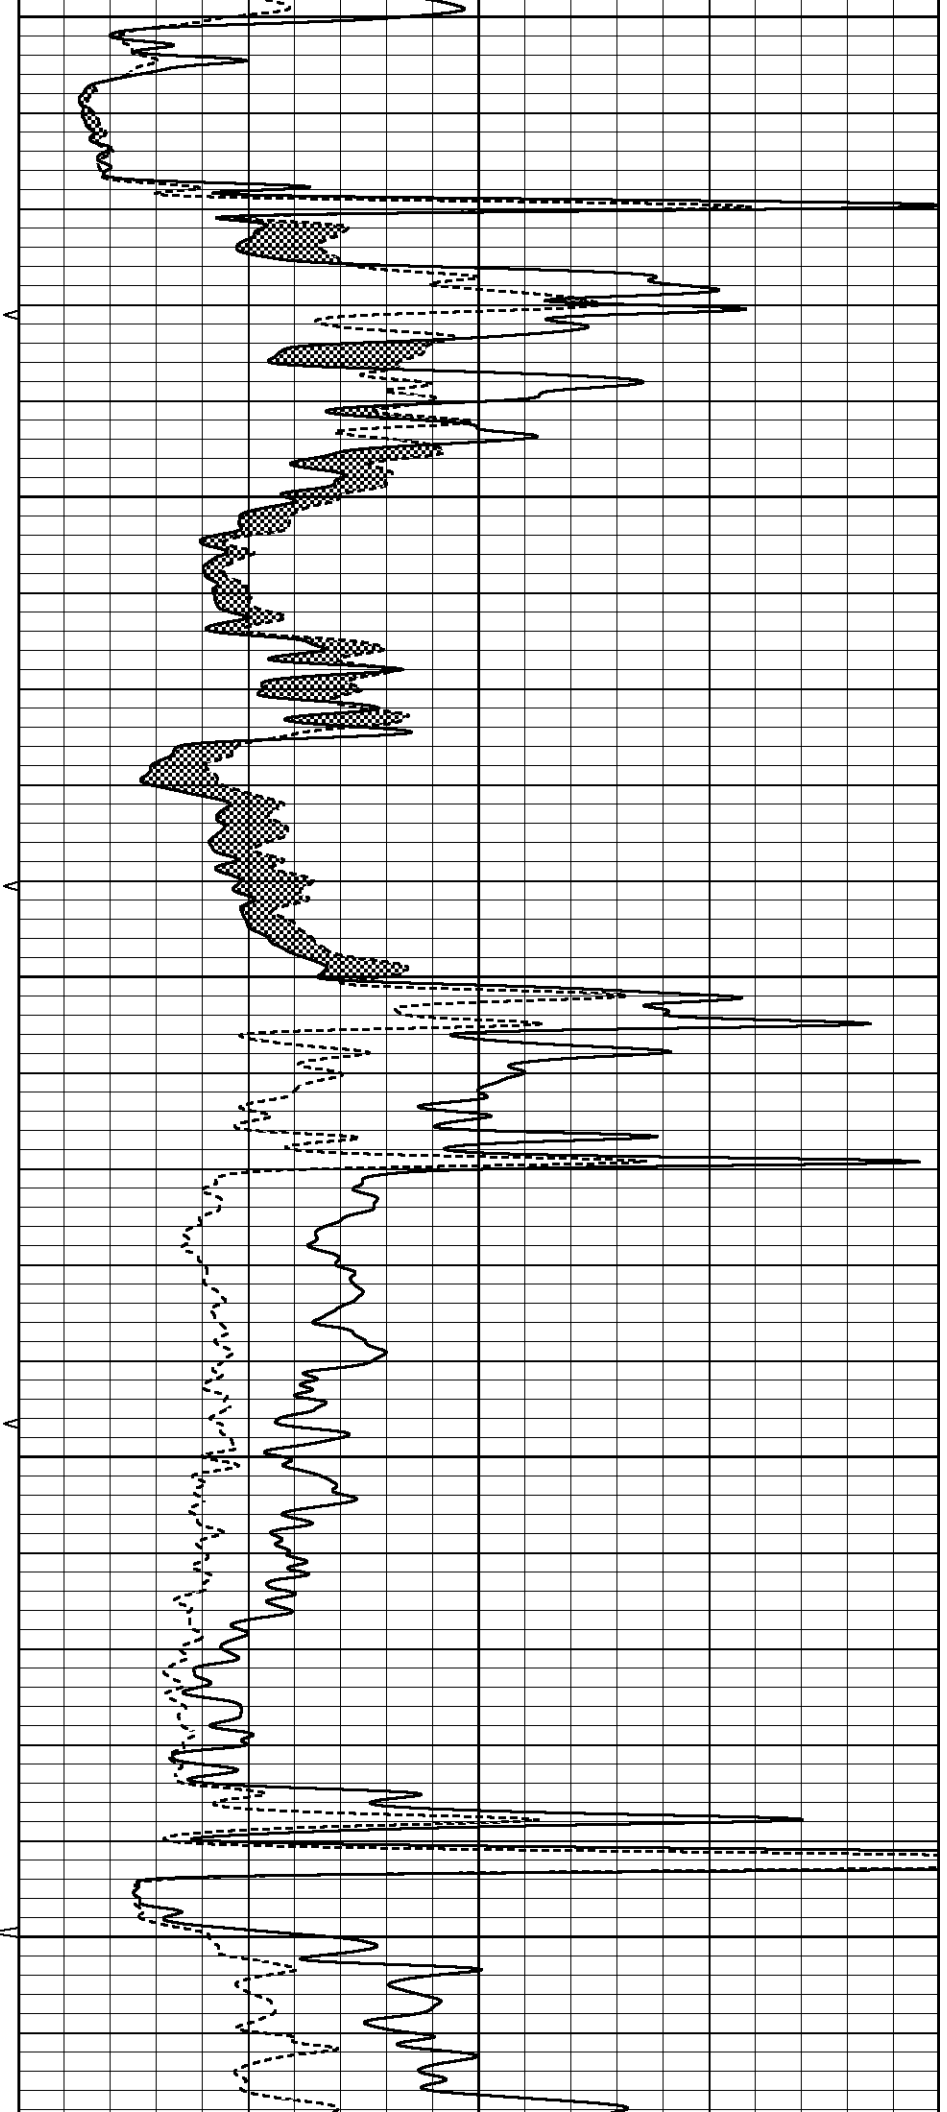

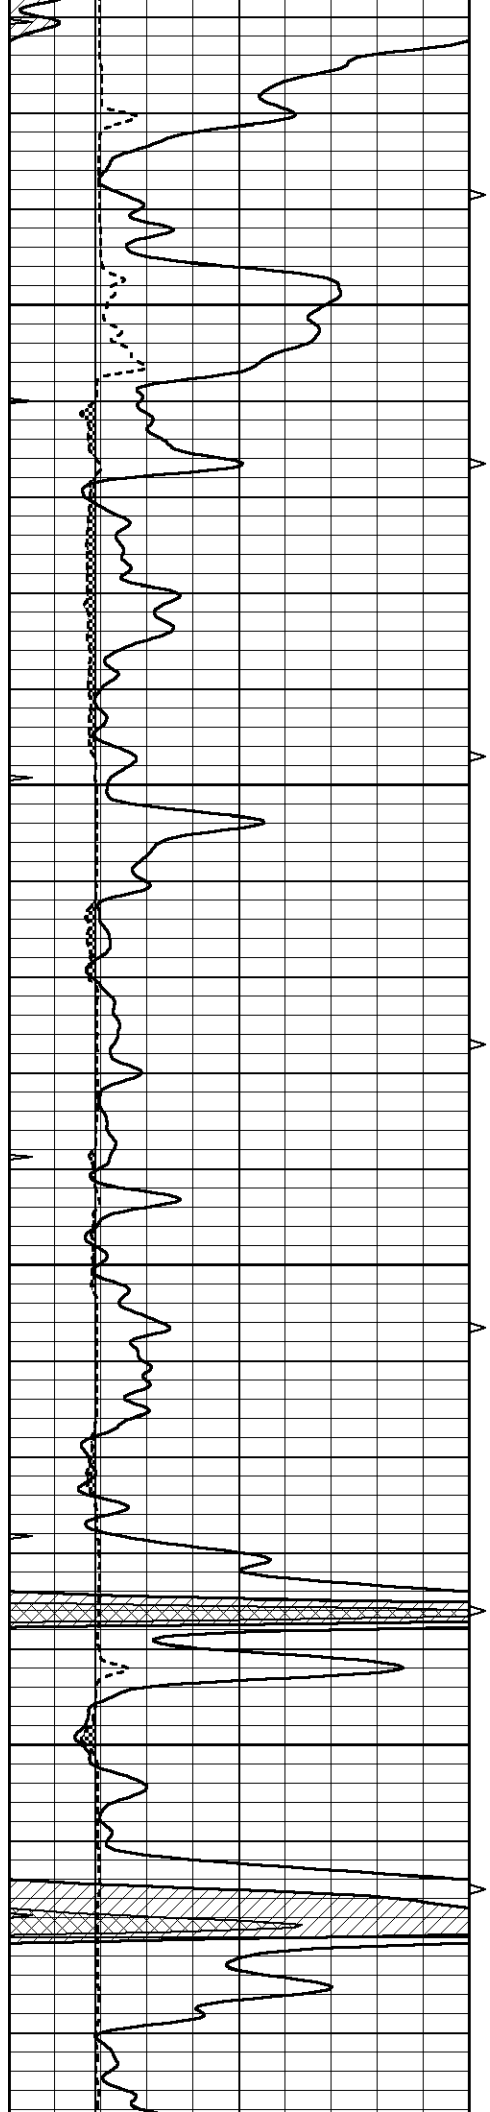



4350



4400


4450

4500

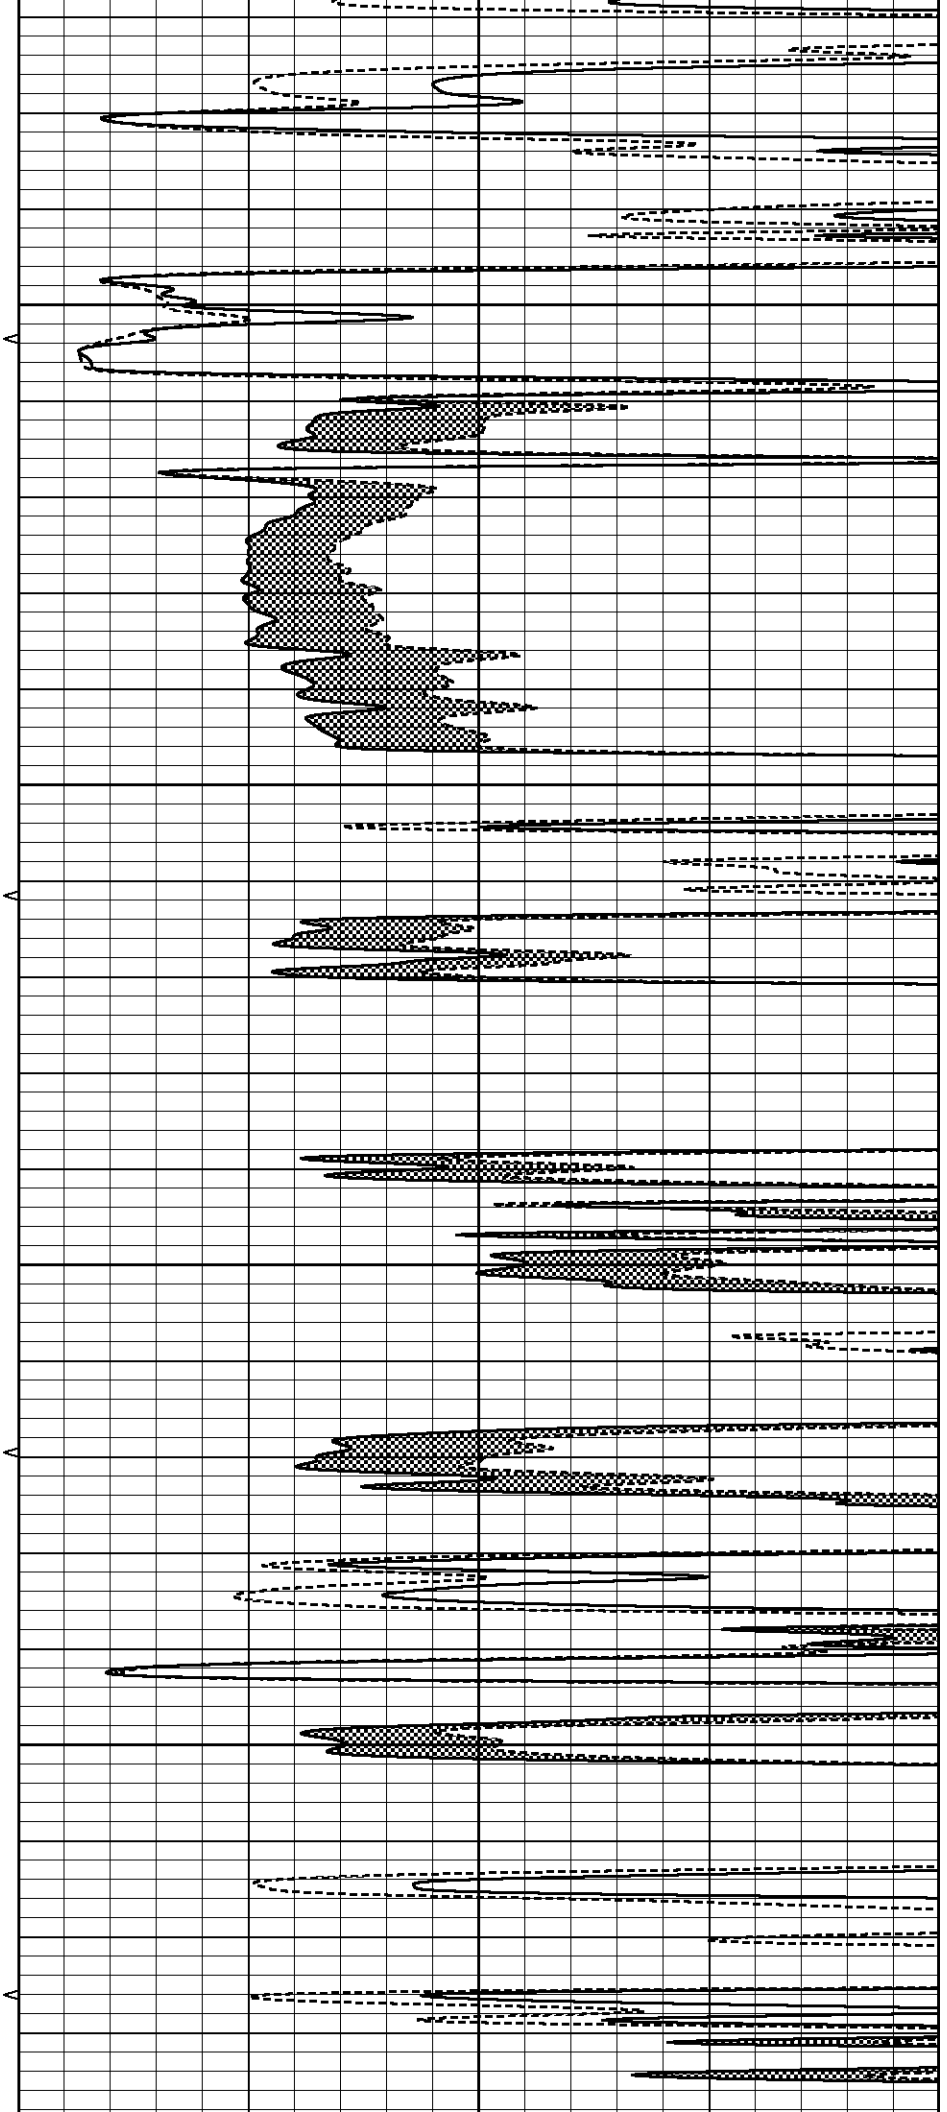

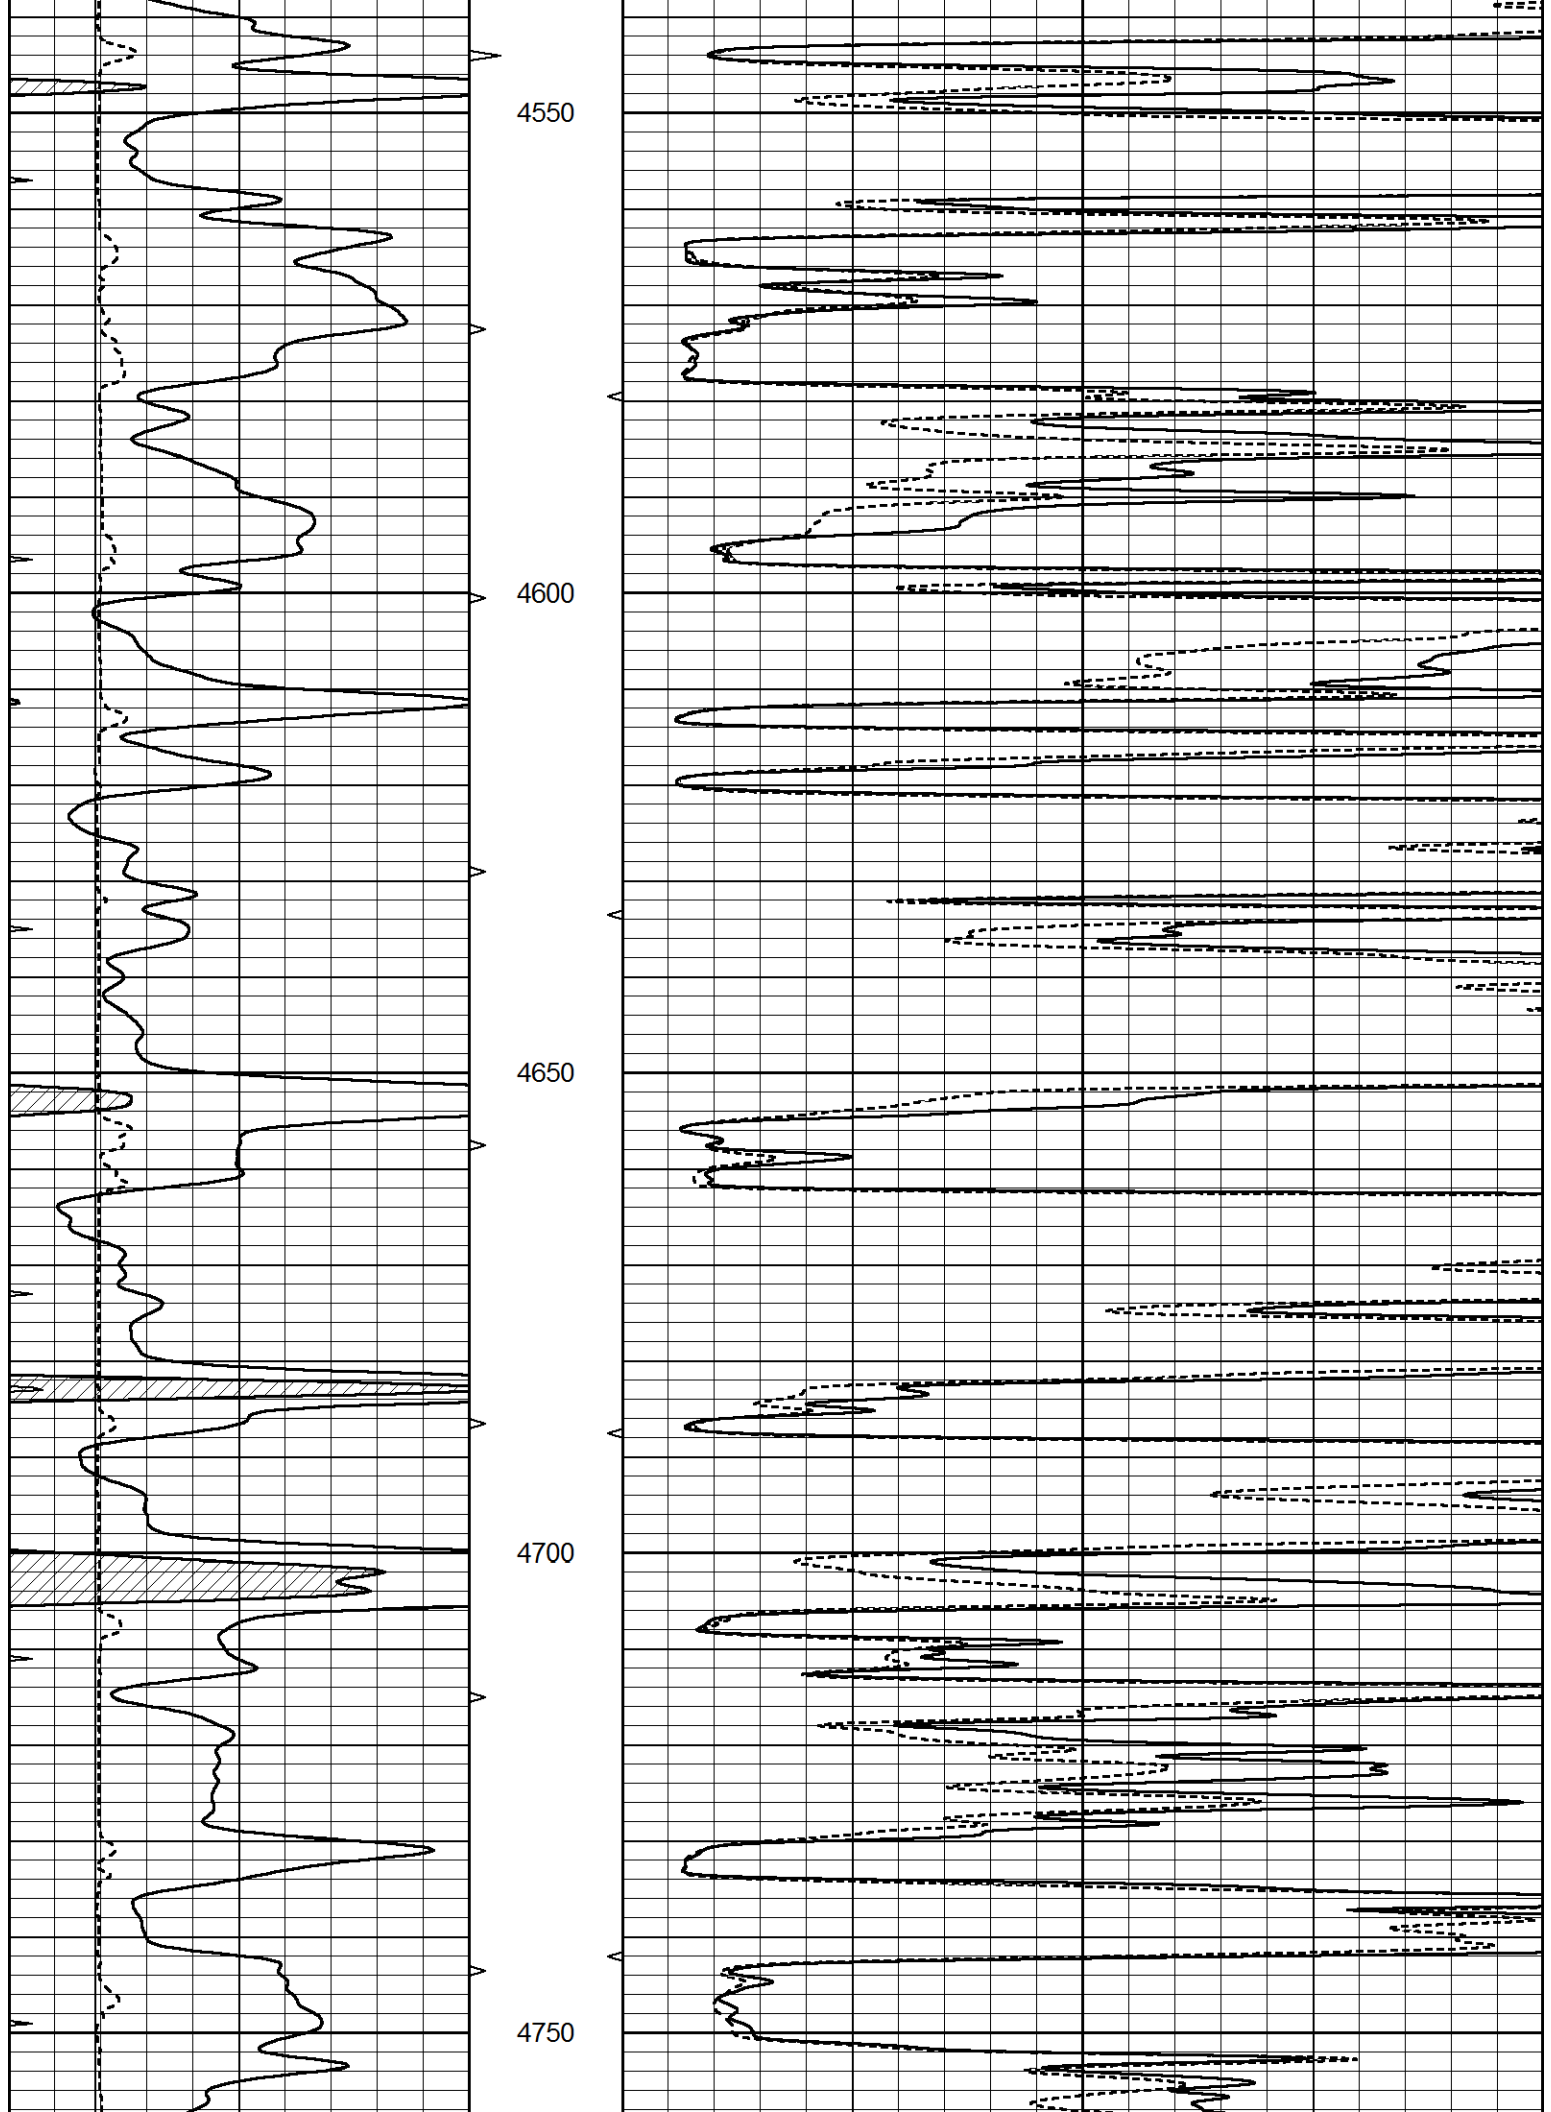

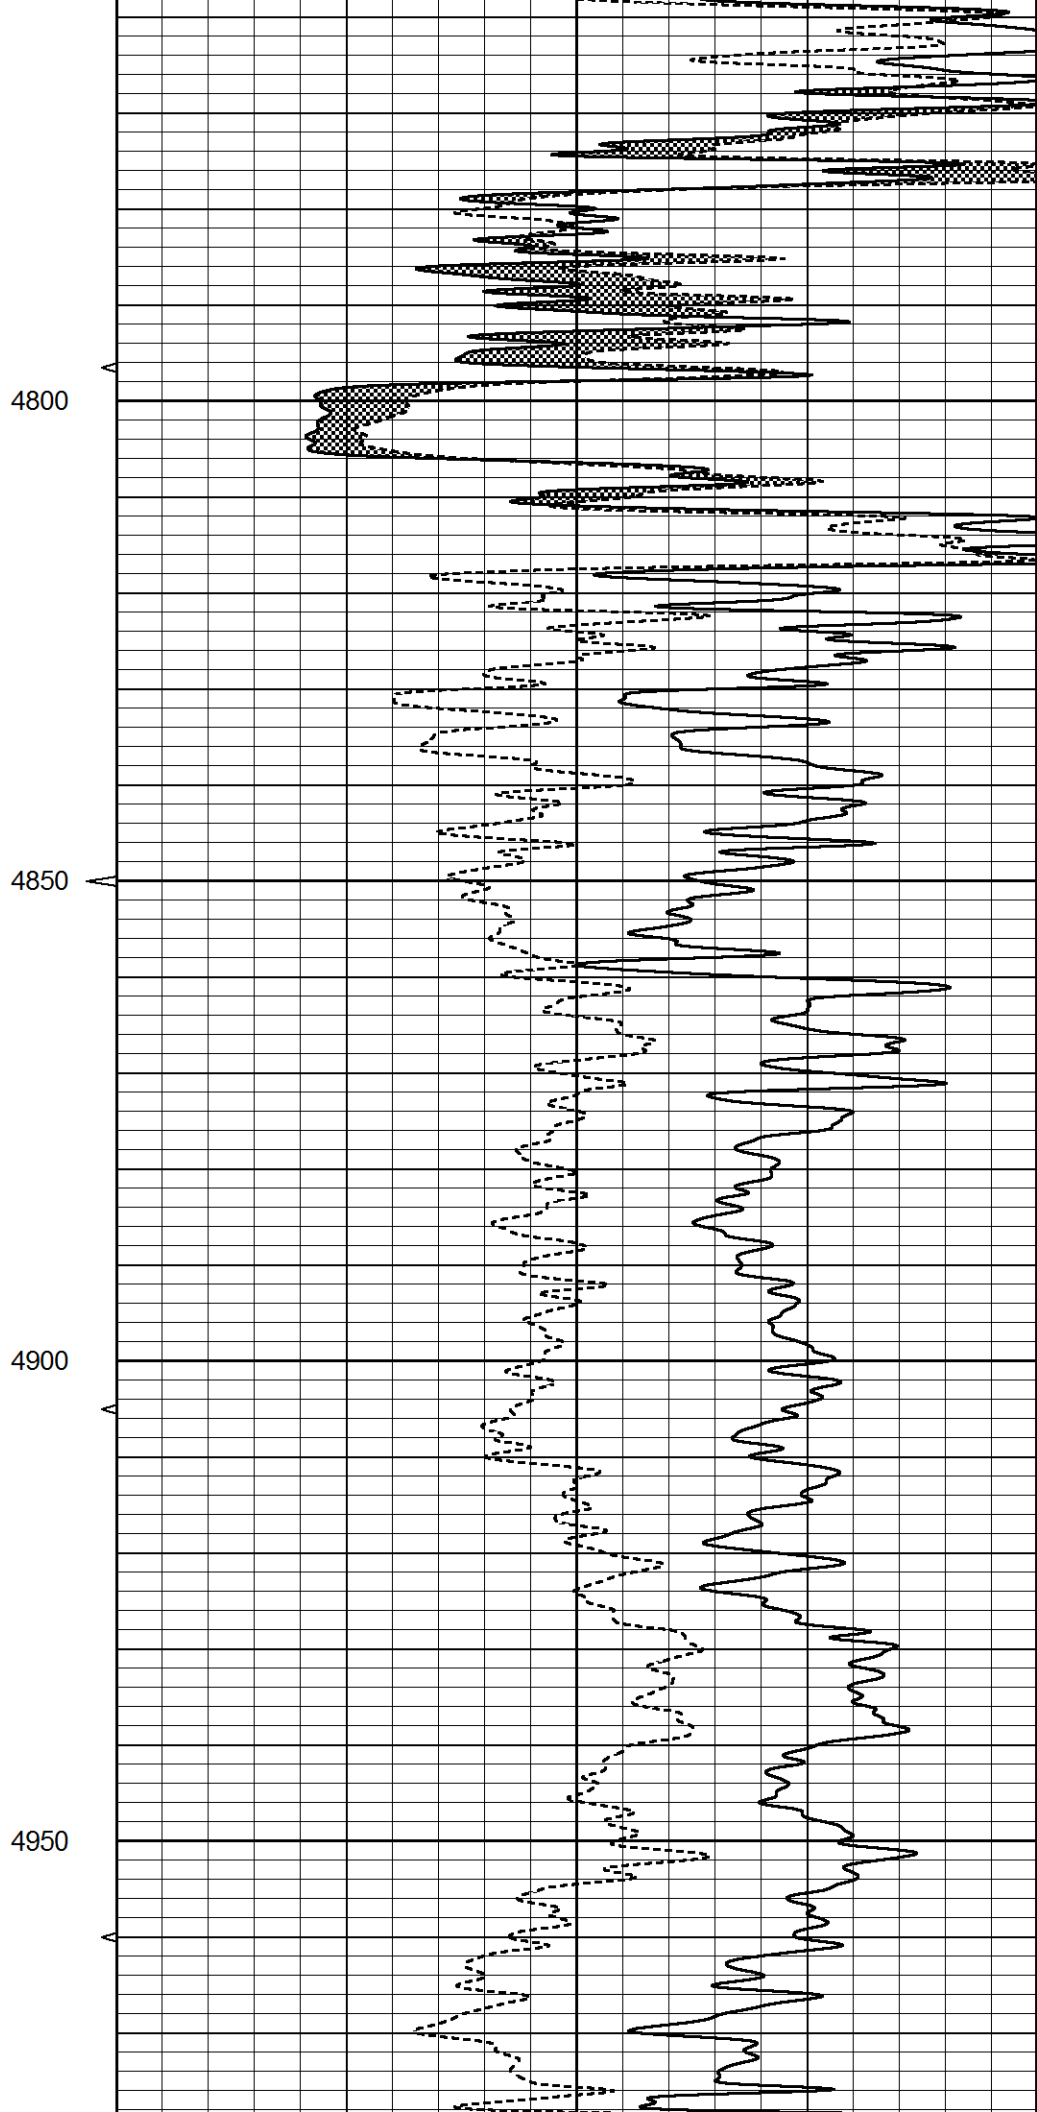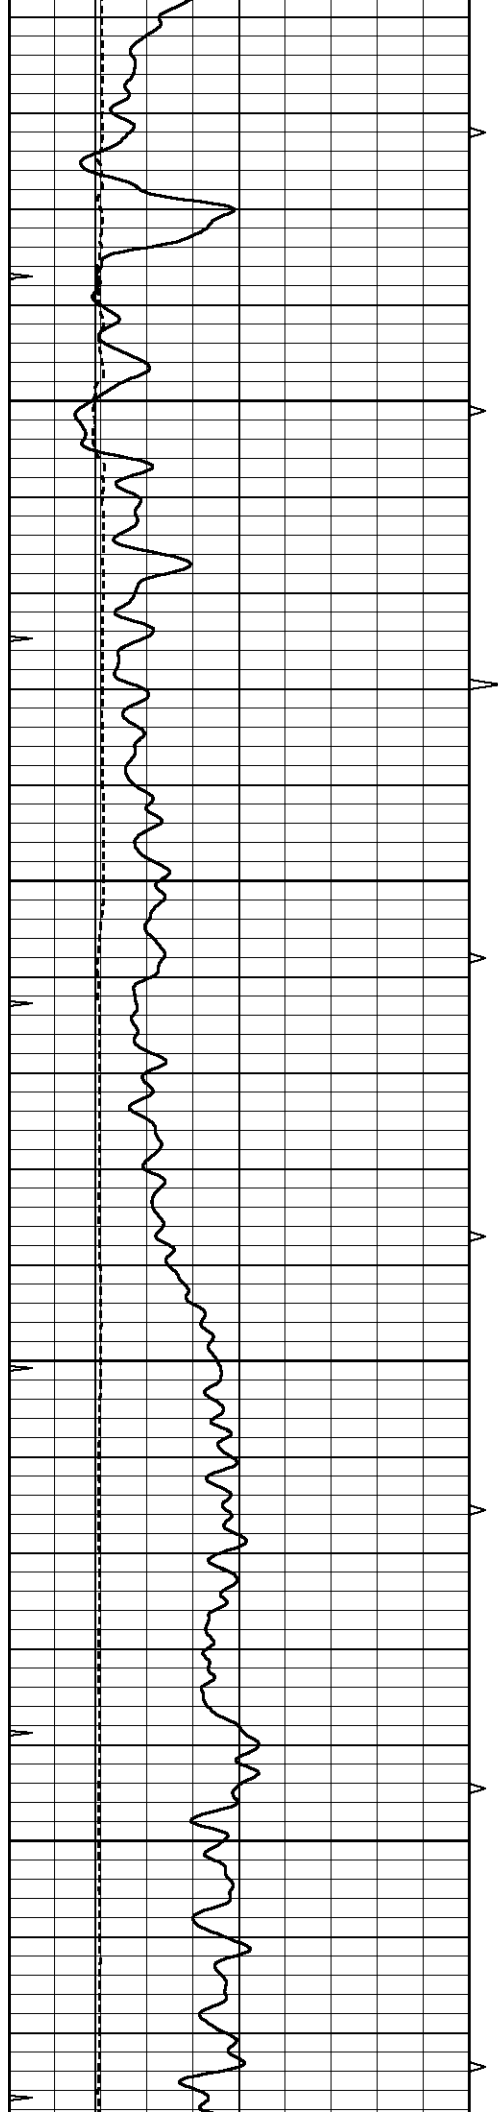

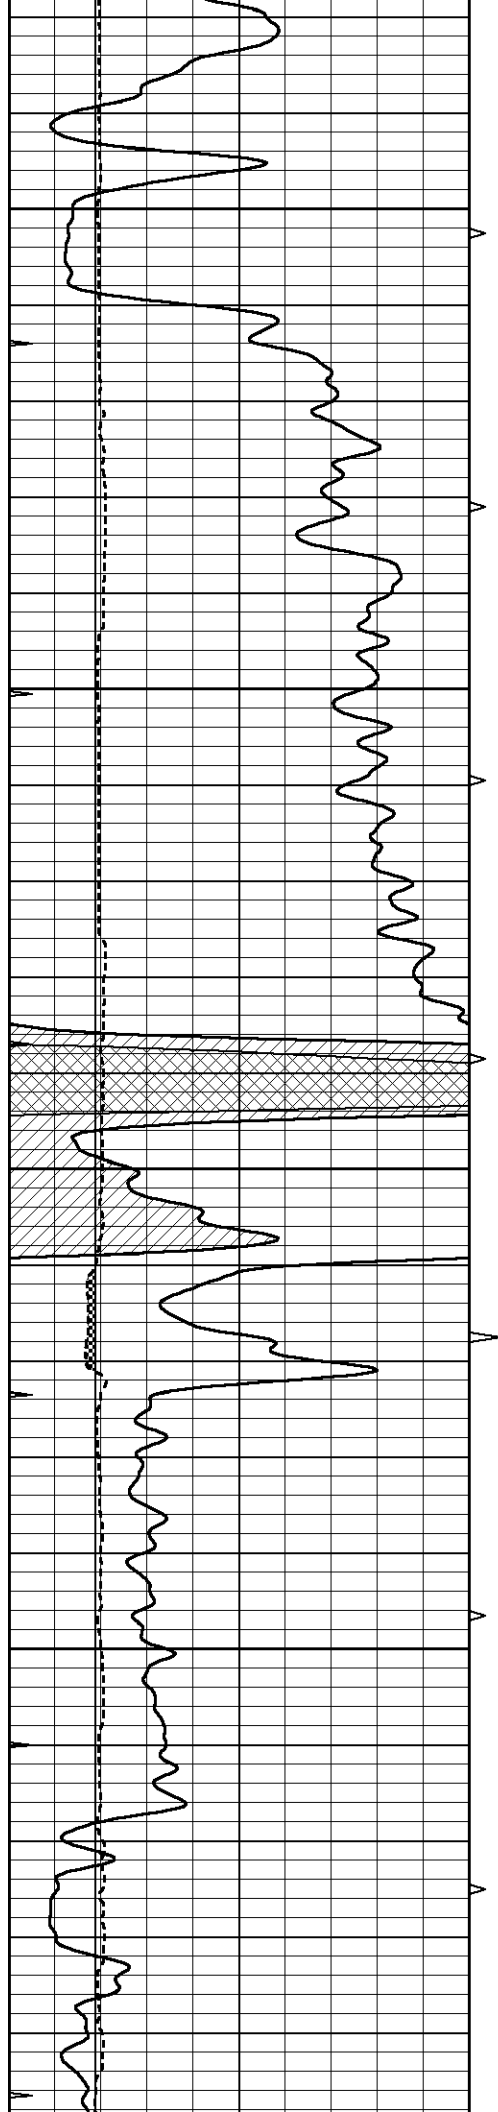



5000

5050

5100

5150

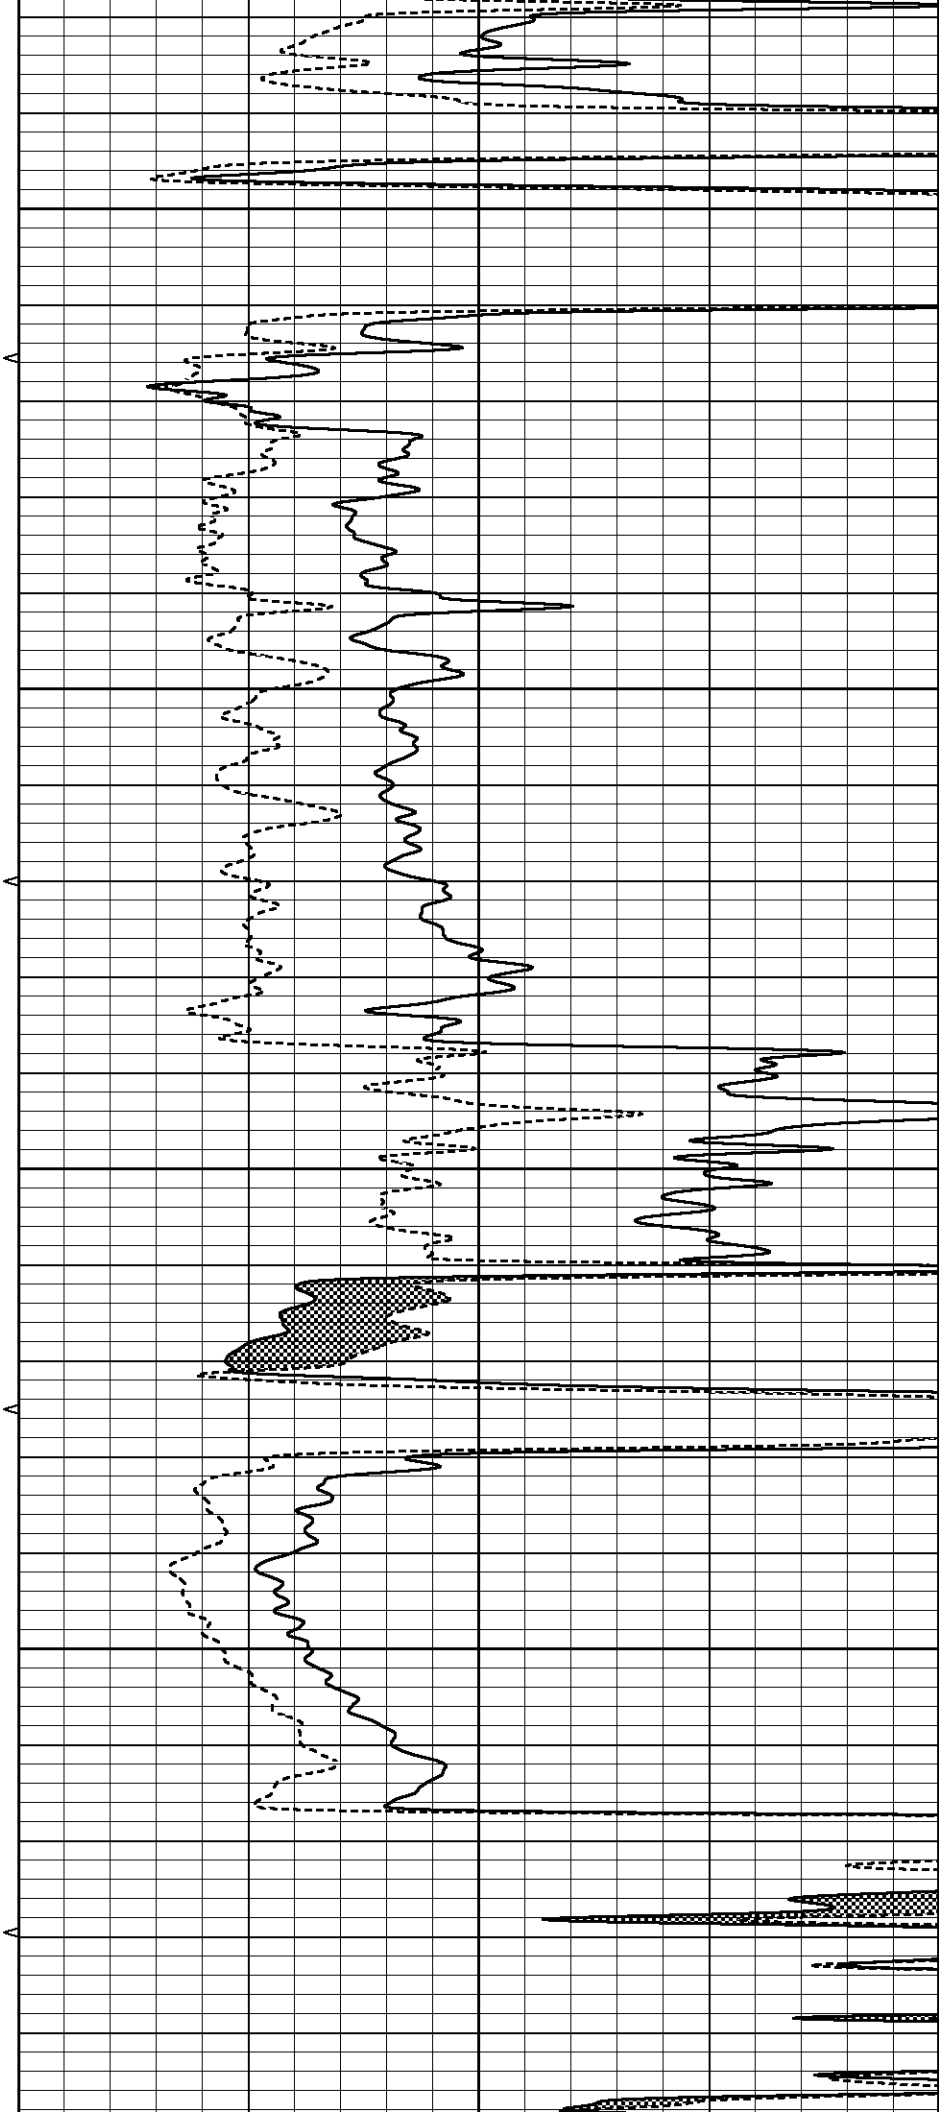

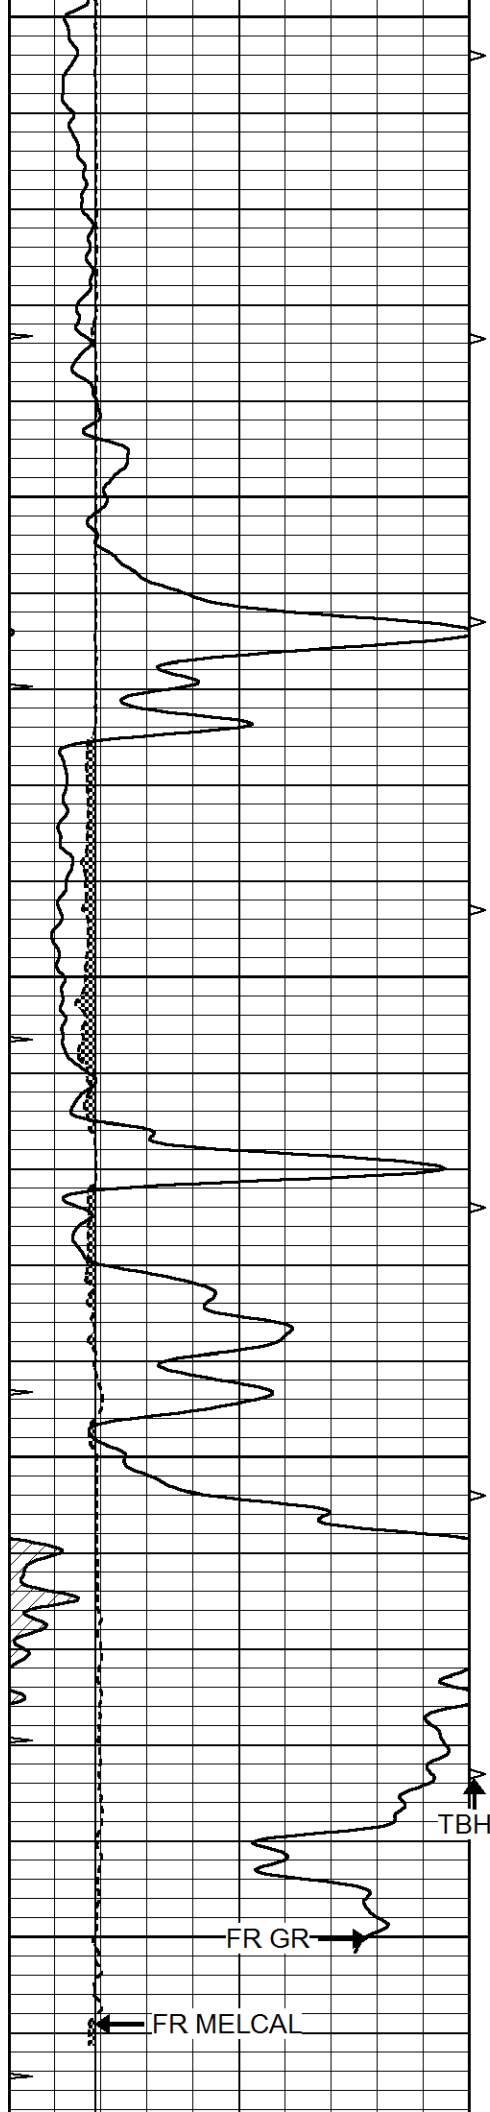

5200

5250

5300


5350

5400

FR GR

FR MELCAL

TBHV

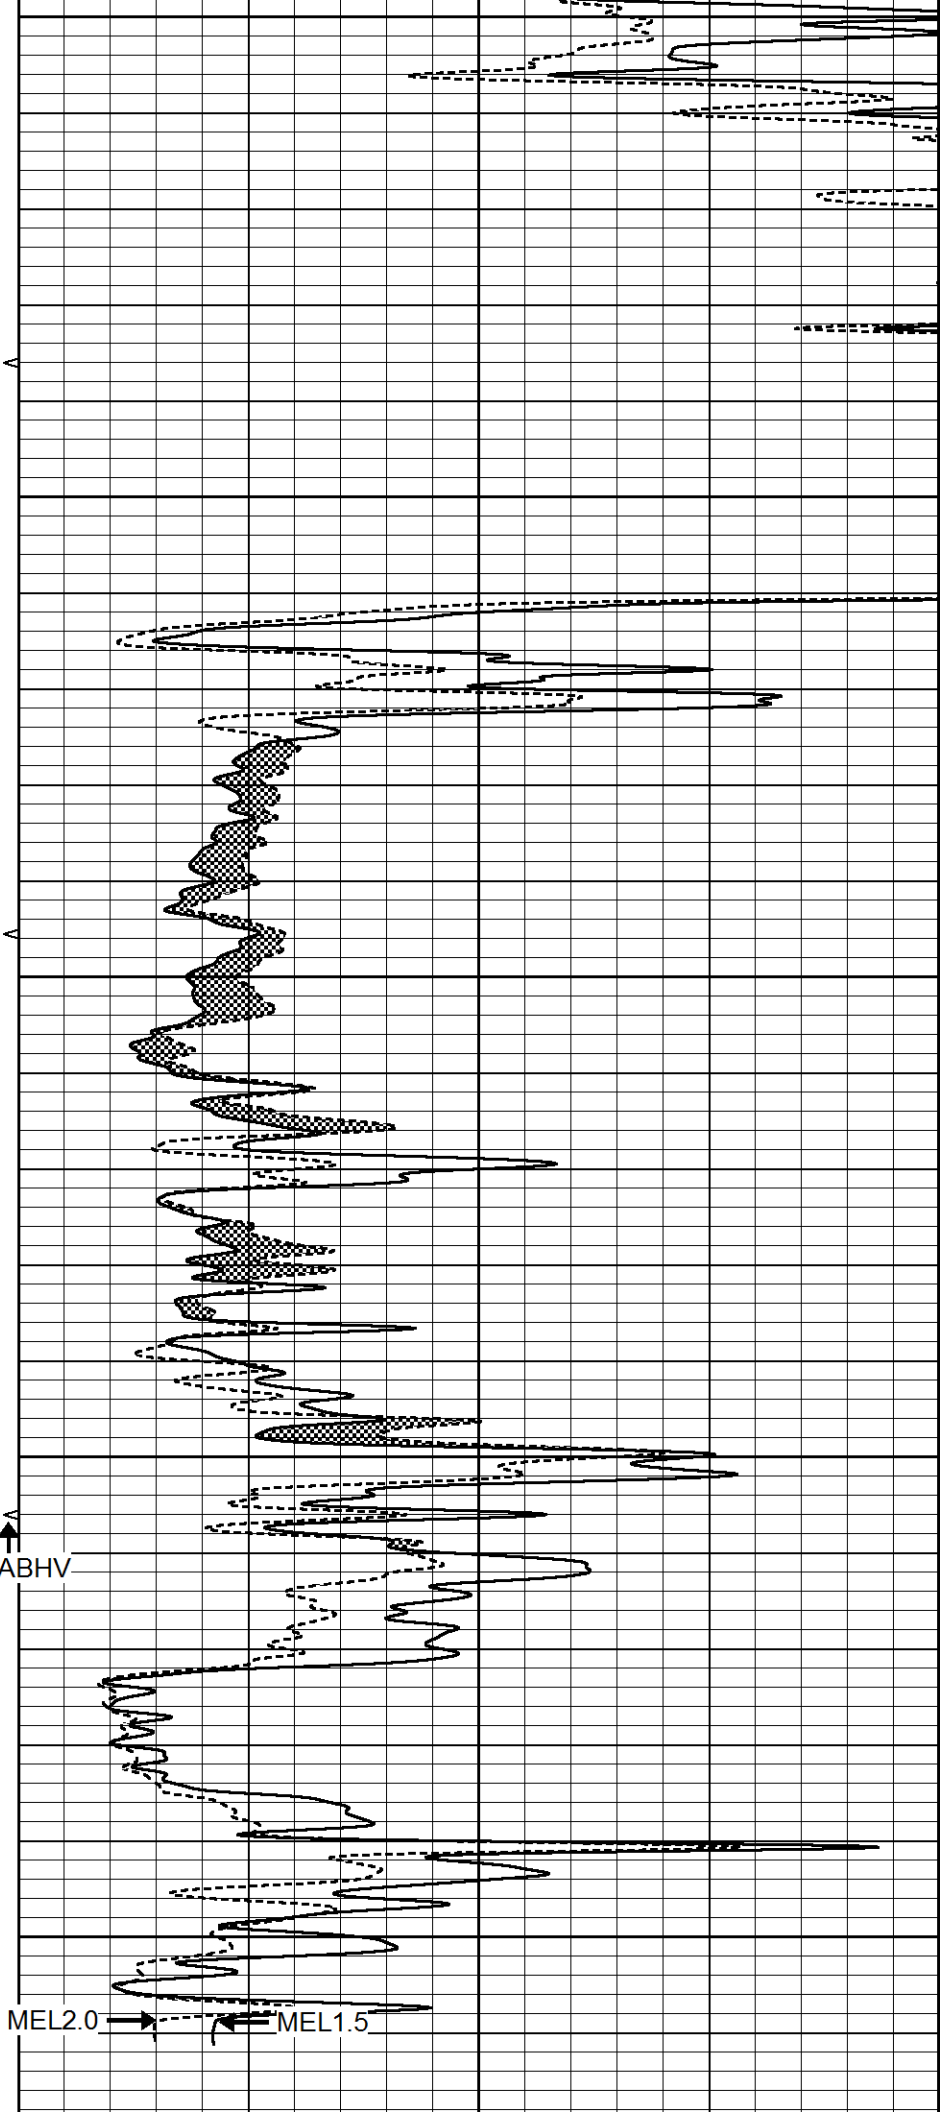

MEL2.0

MEL1.5

5.5" ABHV

5400

5350

5300


5250


5200

TBHV

Database File	6717pe.db
Dataset Pathname	pass6.4
Presentation Format	_micro
Dataset Creation	Tue Nov 08 16:53:55 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

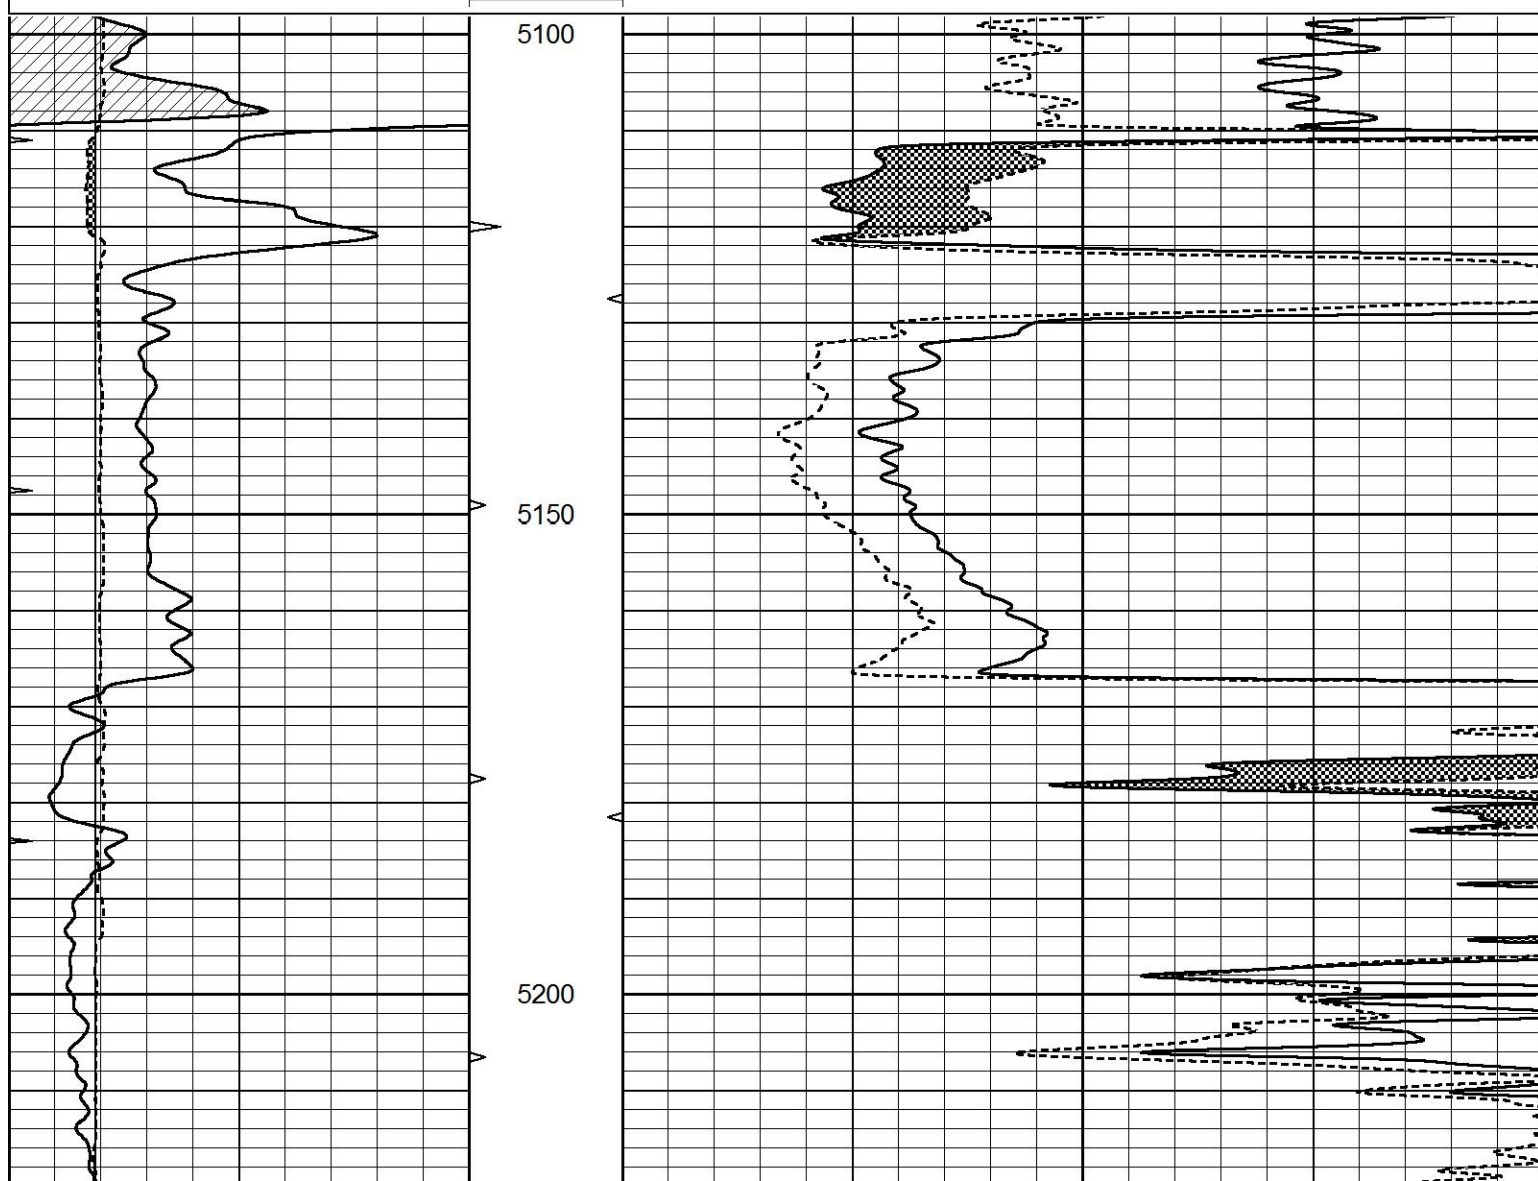

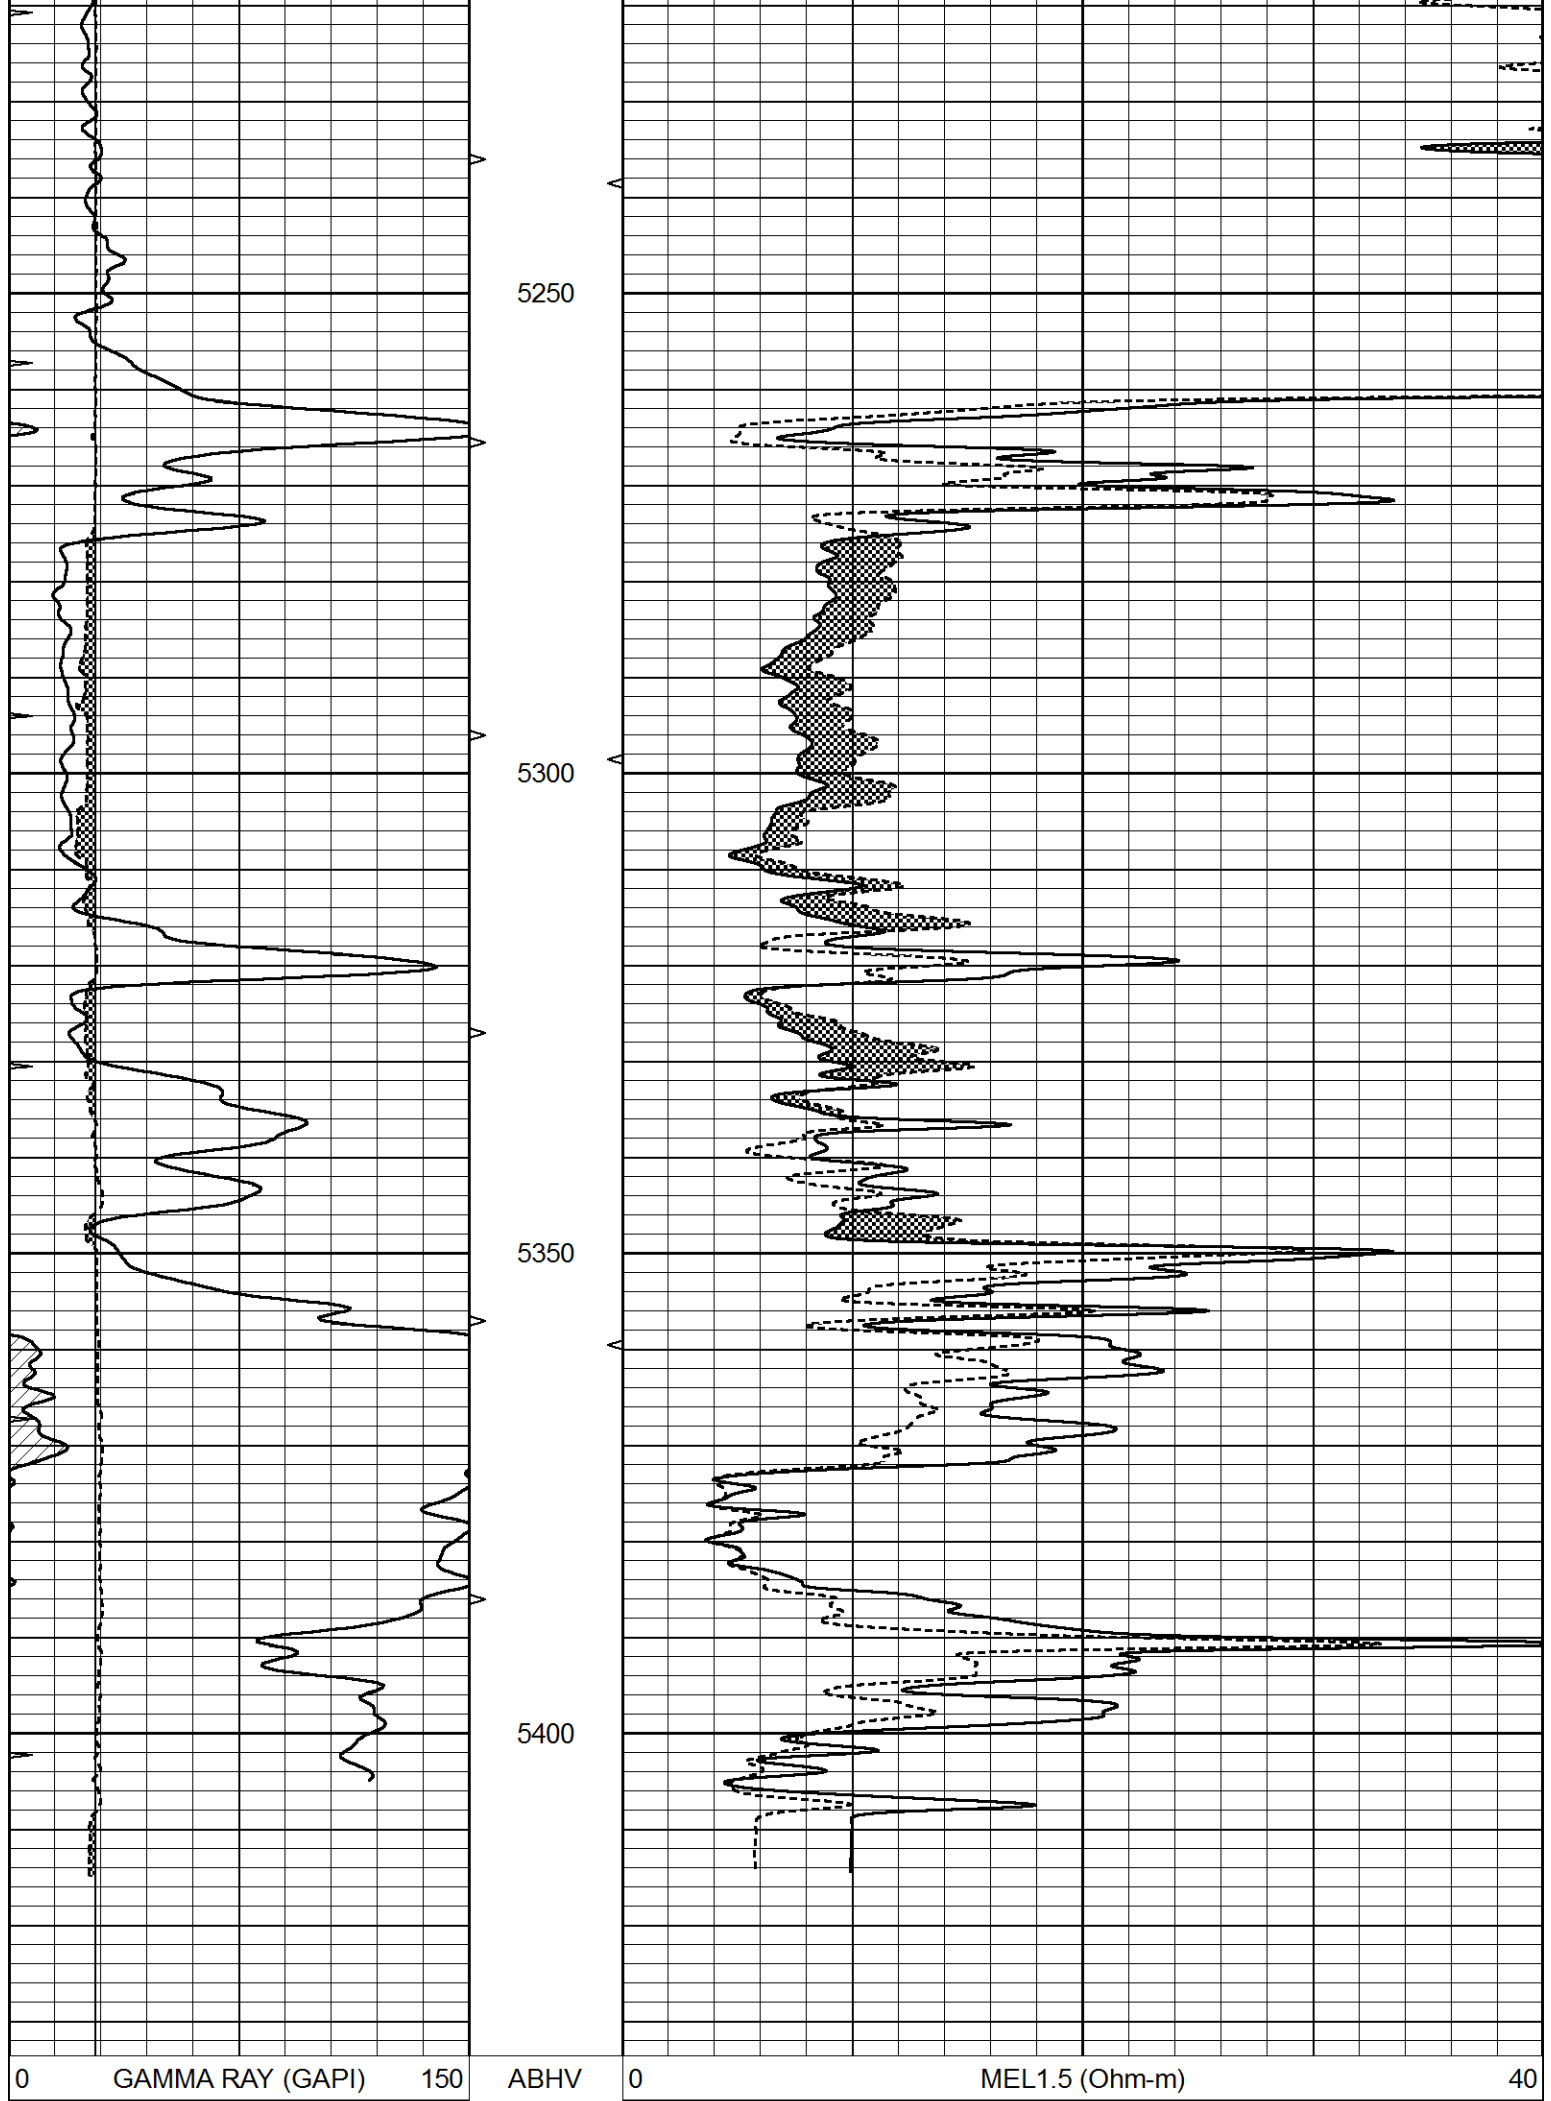

6	CALIPER (in)	16	10 (ft3)	0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV				
			0 (ft3) 10				

Calibration Report			
Database File	6717pe.db		
Dataset Pathname	pass7.2		
Dataset Creation	Tue Nov 08 17:10:27 2022		
MICRO Calibration Report			
Serial Number:	MICRO6		
Tool Model:	PROBE		
Performed:	Tue Nov 08 16:46:50 2022		
Caliper Calibration:	Gain=-2.862	Offset=18.733	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	3.750	0.955	
1.5" Calibration:	Gain=46.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.002	0.624	
2" Calibration:	Gain=54.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.006	0.468	
Gamma Ray Calibration Report			
Serial Number:	GR5		
Tool Model:	OPEN		
Performed:	Wed Jul 20 23:52:54 2022		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.5600	GAPI/cps	