

MICRO LOG

Company	DIXON OPERATING COMPANY, LLC.	
Well	LOIS PLATT #2	
Field	HARDTNER	
County	BARBER	State KANSAS
Location:	API # : 15-007-24446-0000 990' FNL & 1650' FEL SE - NW - NE	
Permanent Datum	SEC 8 TWP 35S RGE 12W	Other Services CDL/CNL/PE DIL/SON
Log Measured From	GROUND LEVEL Elevation 1451 KELLY BUSHING 13' A.G.L.	
Drilling Measured From	KELLY BUSHING	Elevation K.B. 1464 D.F. 1462 G.L. 1451
Date	10/28/22	
Run Number	THREE	
Depth Driller	5675	
Depth Logger	5677	
Bottom Logged Interval	5661	
Top Log Interval	3800	
Casing Driller	8 5/8" @ 268	
Casing Logger	268	
Bit Size	7 7/8	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 10,000 PPM
Density / Viscosity	9.4/53	
pH / Fluid Loss	9.5/9.6	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	.950 @ 80F	
Rmf @ Meas. Temp	.713 @ 80F	
Rmc @ Meas. Temp	1.14 @ 80F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.585 @ 130F	
Time Circulation Stopped	5.5 HOURS	
Time Logger on Bottom	5.30 A.M.	
Maximum Recorded Temperature	130F	
Equipment Number	3802	
Location	HAYS, KANSAS	
Recorded By	COLE ROBBEN	
Witnessed By	TIM PRIEST	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:


FROM HARDTNER, KANSAS GO NORTH ON MAIN STREET PAST OLD HOSPITAL, THEN EAST INTO ON FIRST LEASE ROAD OUT OF TOWN ACROSS FROM THE CEMETARY

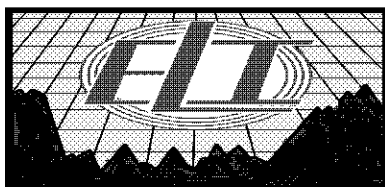


MAIN SECTION

Database File	7241pe.db
Dataset Pathname	pass9.3
Presentation Format	_micro
Dataset Creation	Fri Oct 28 07:43:46 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

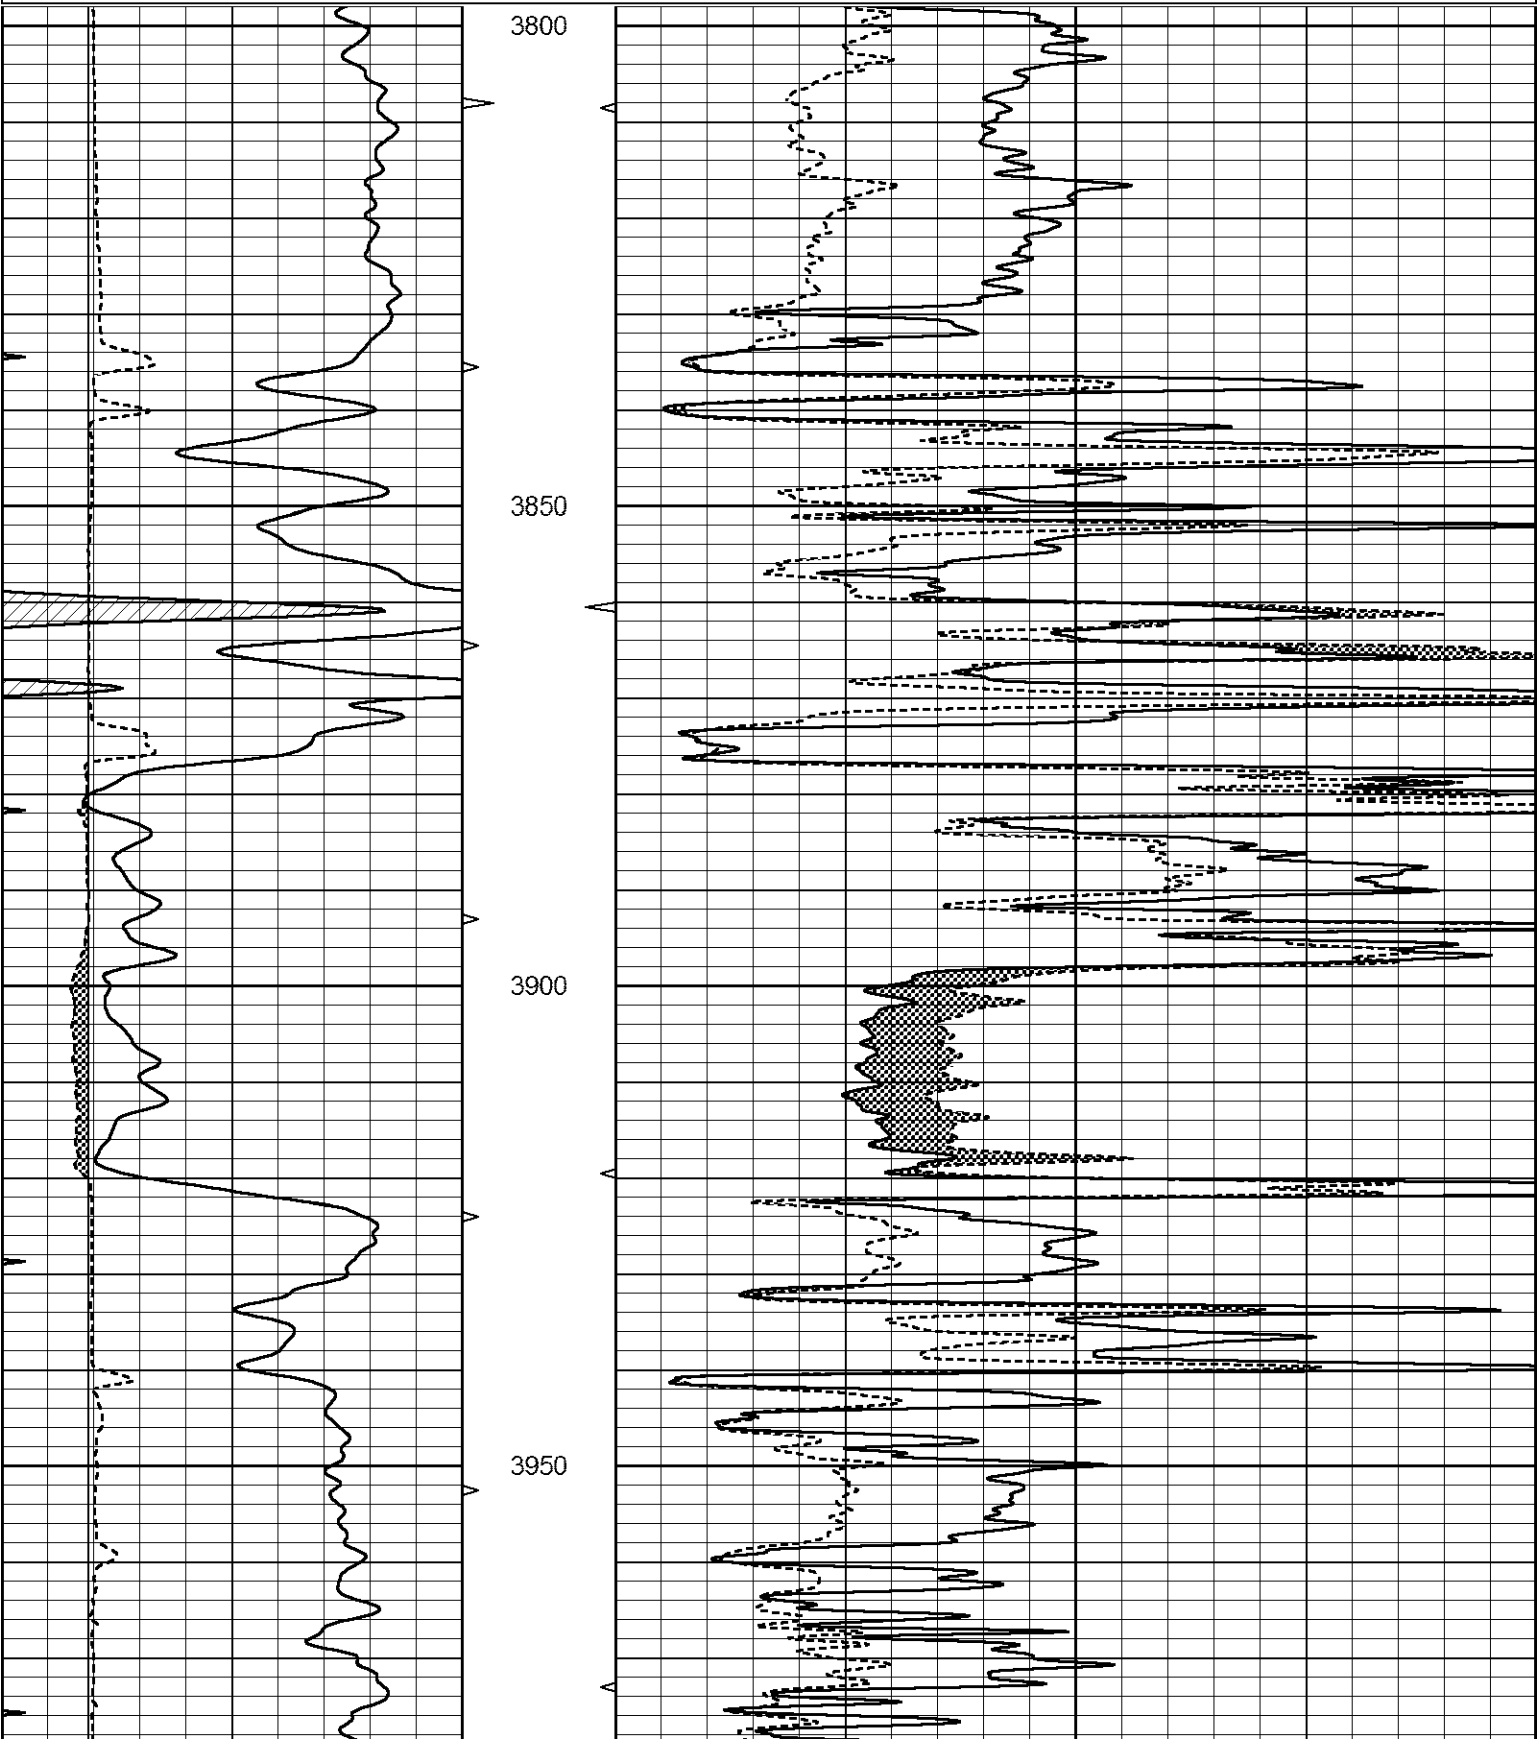

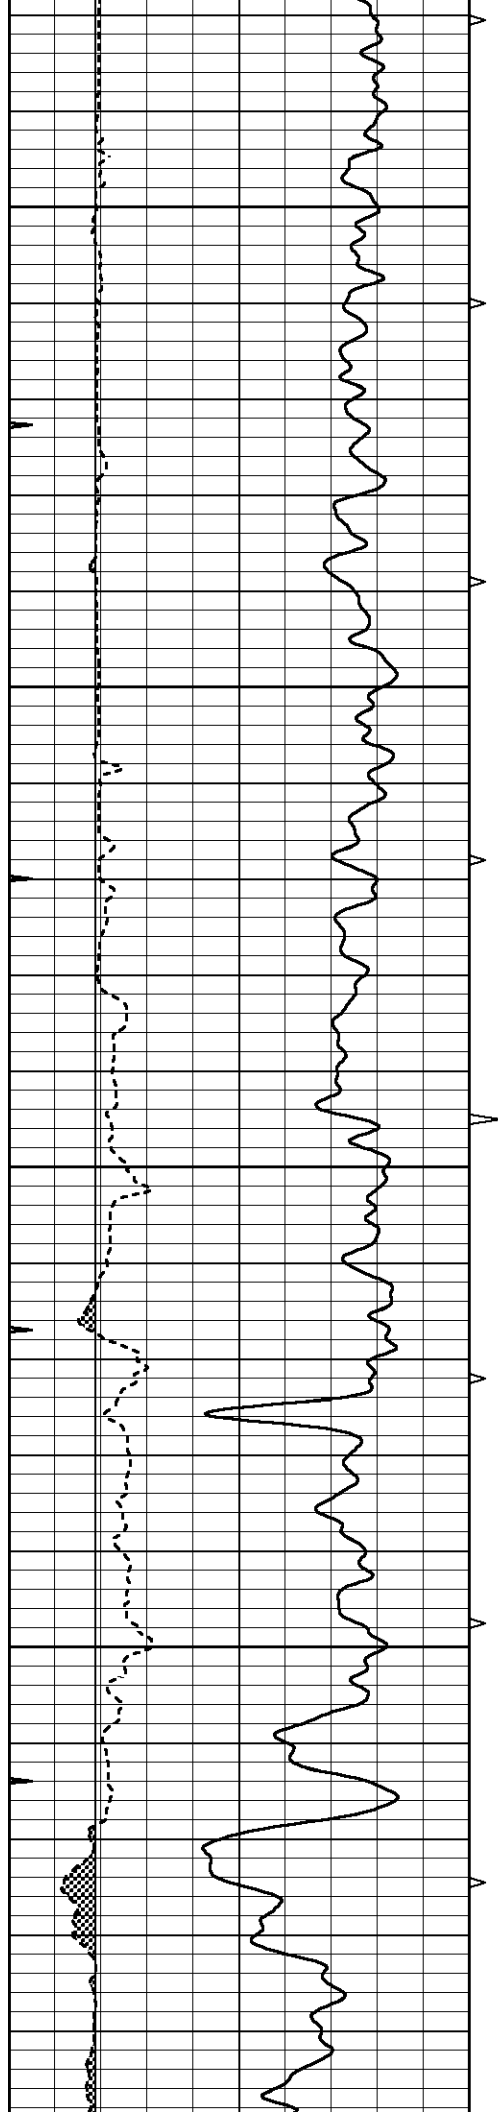




4000


4050

4100

4150

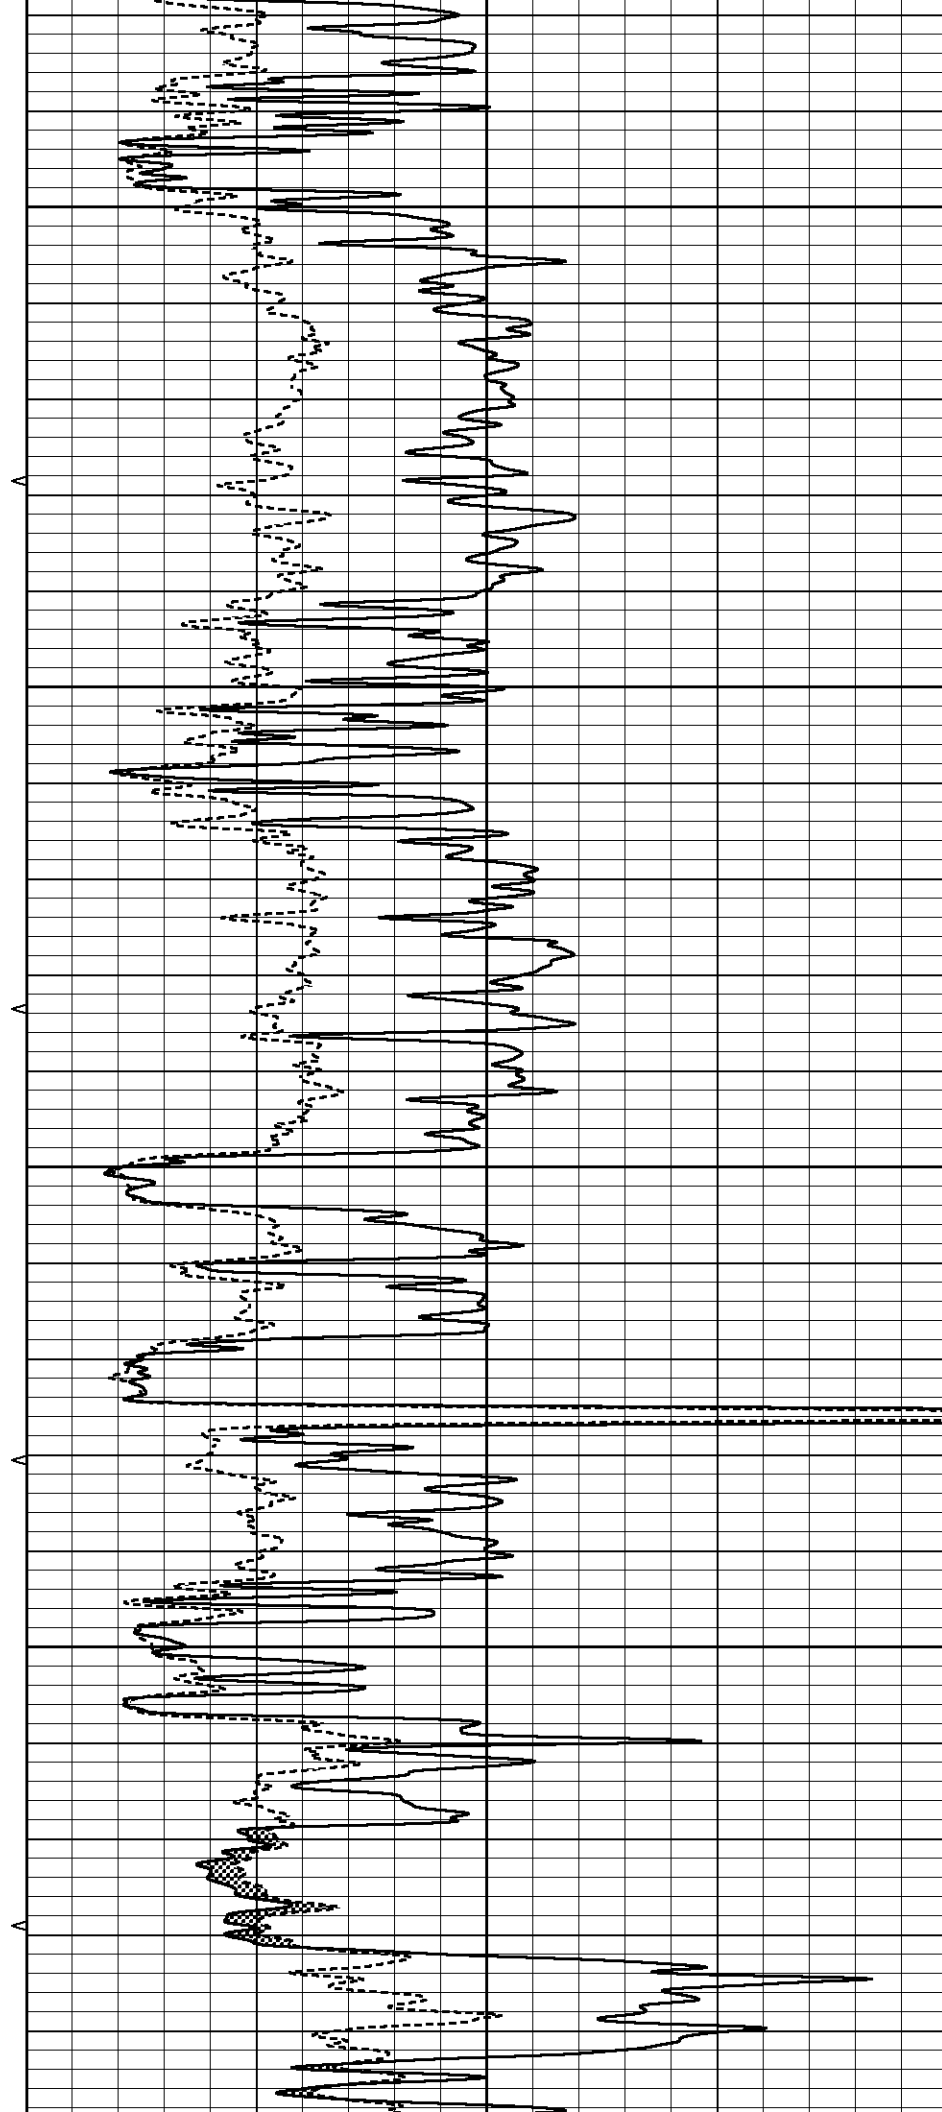

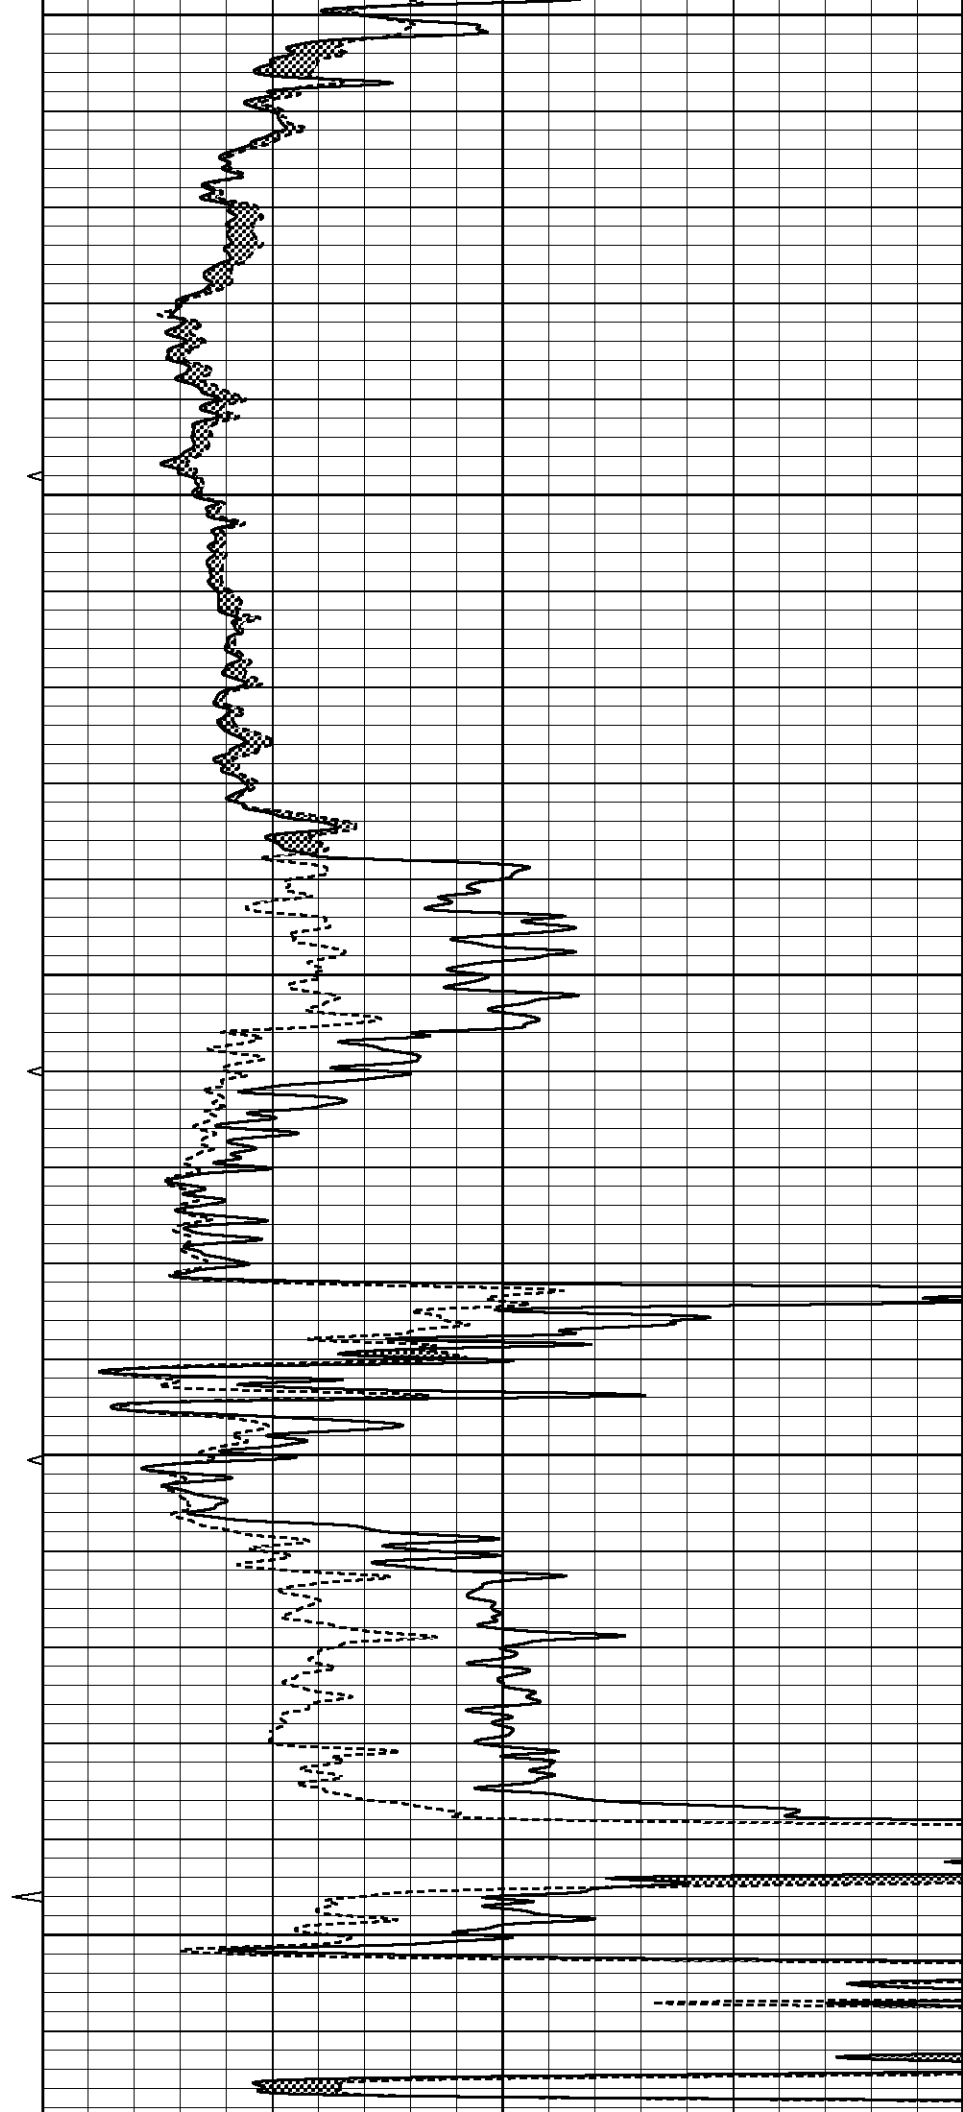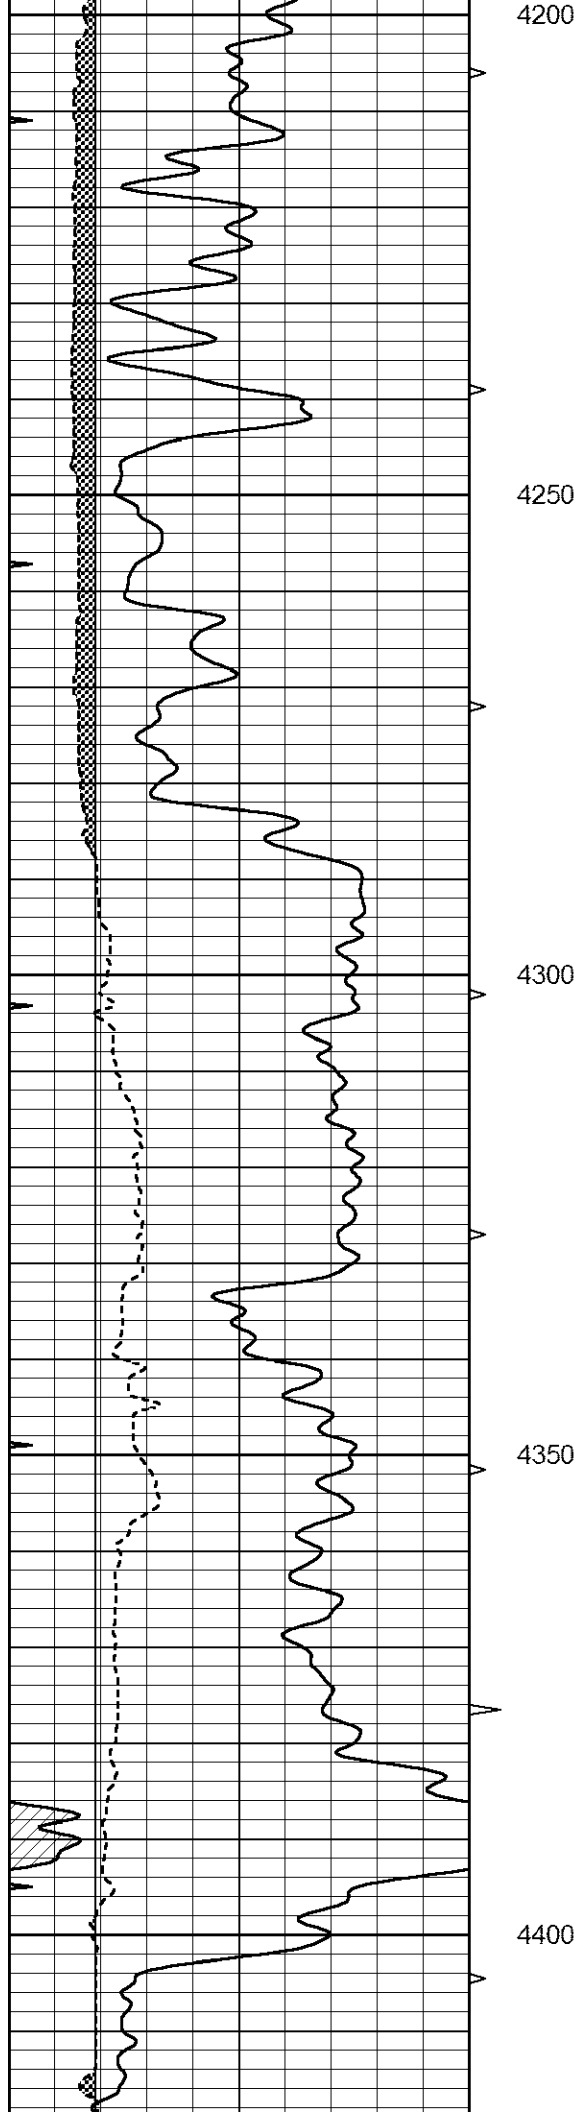

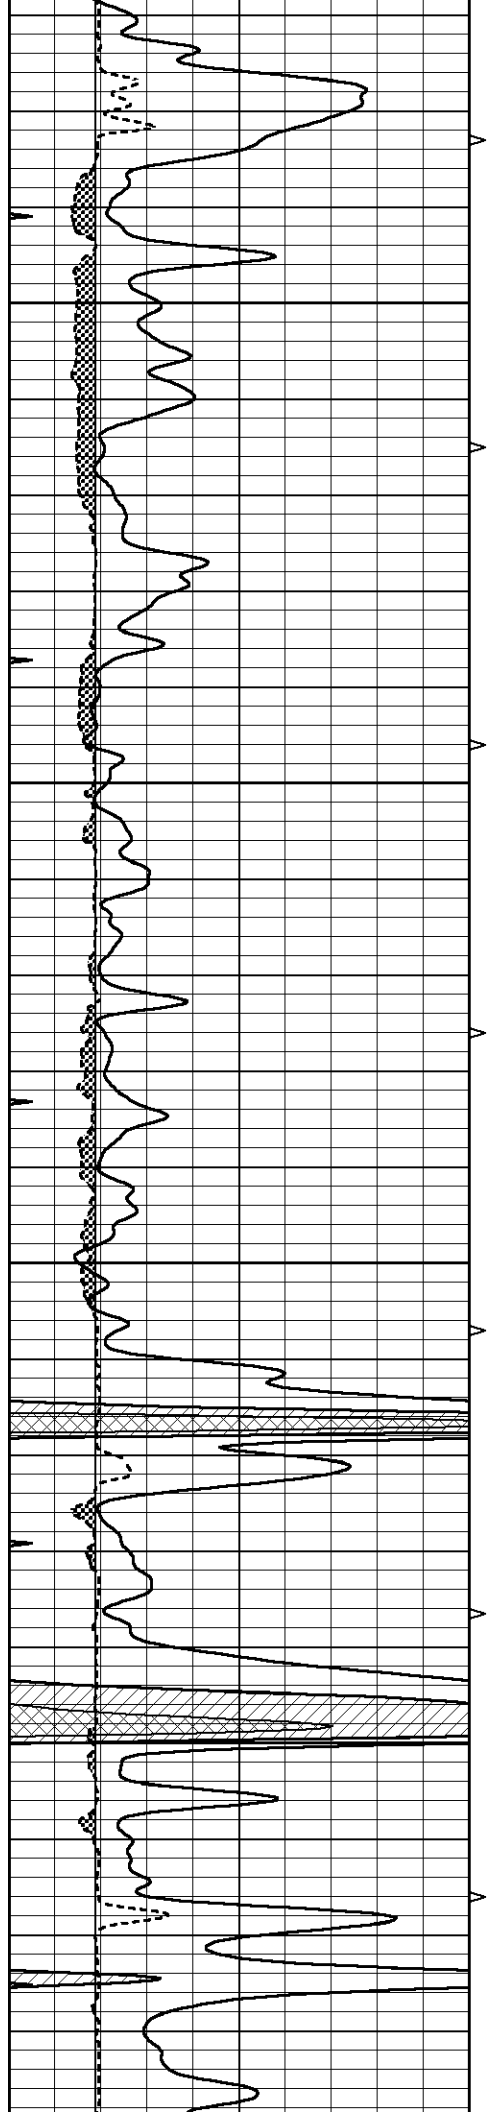



4450

4500

4550

4600

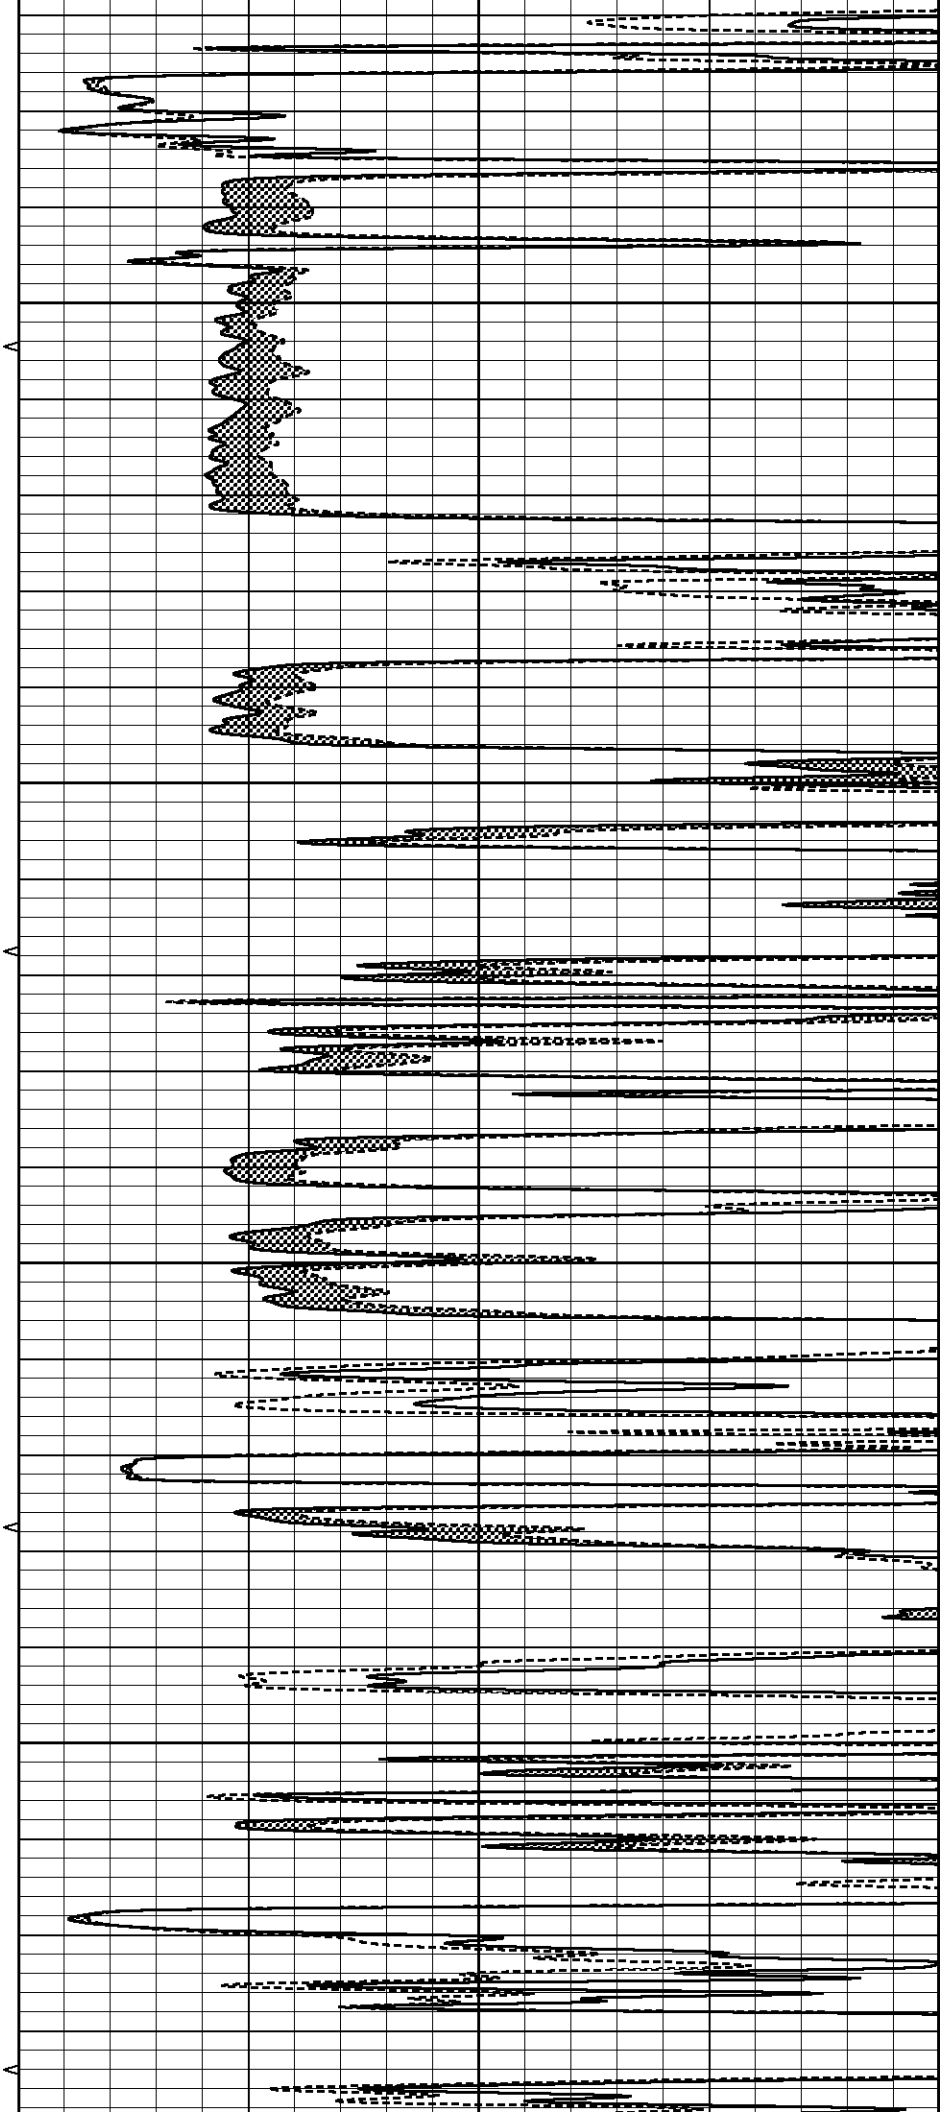

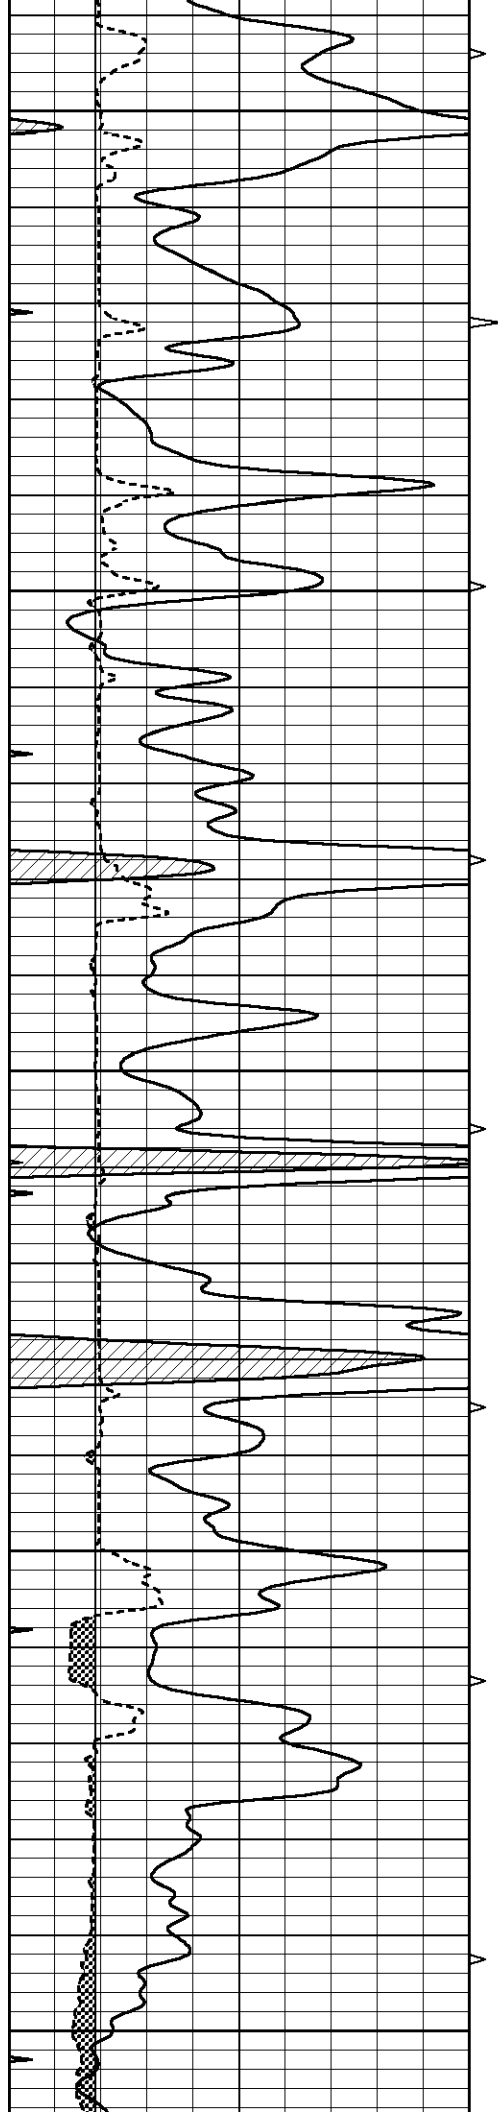


4650


4700

4750

4800

4850

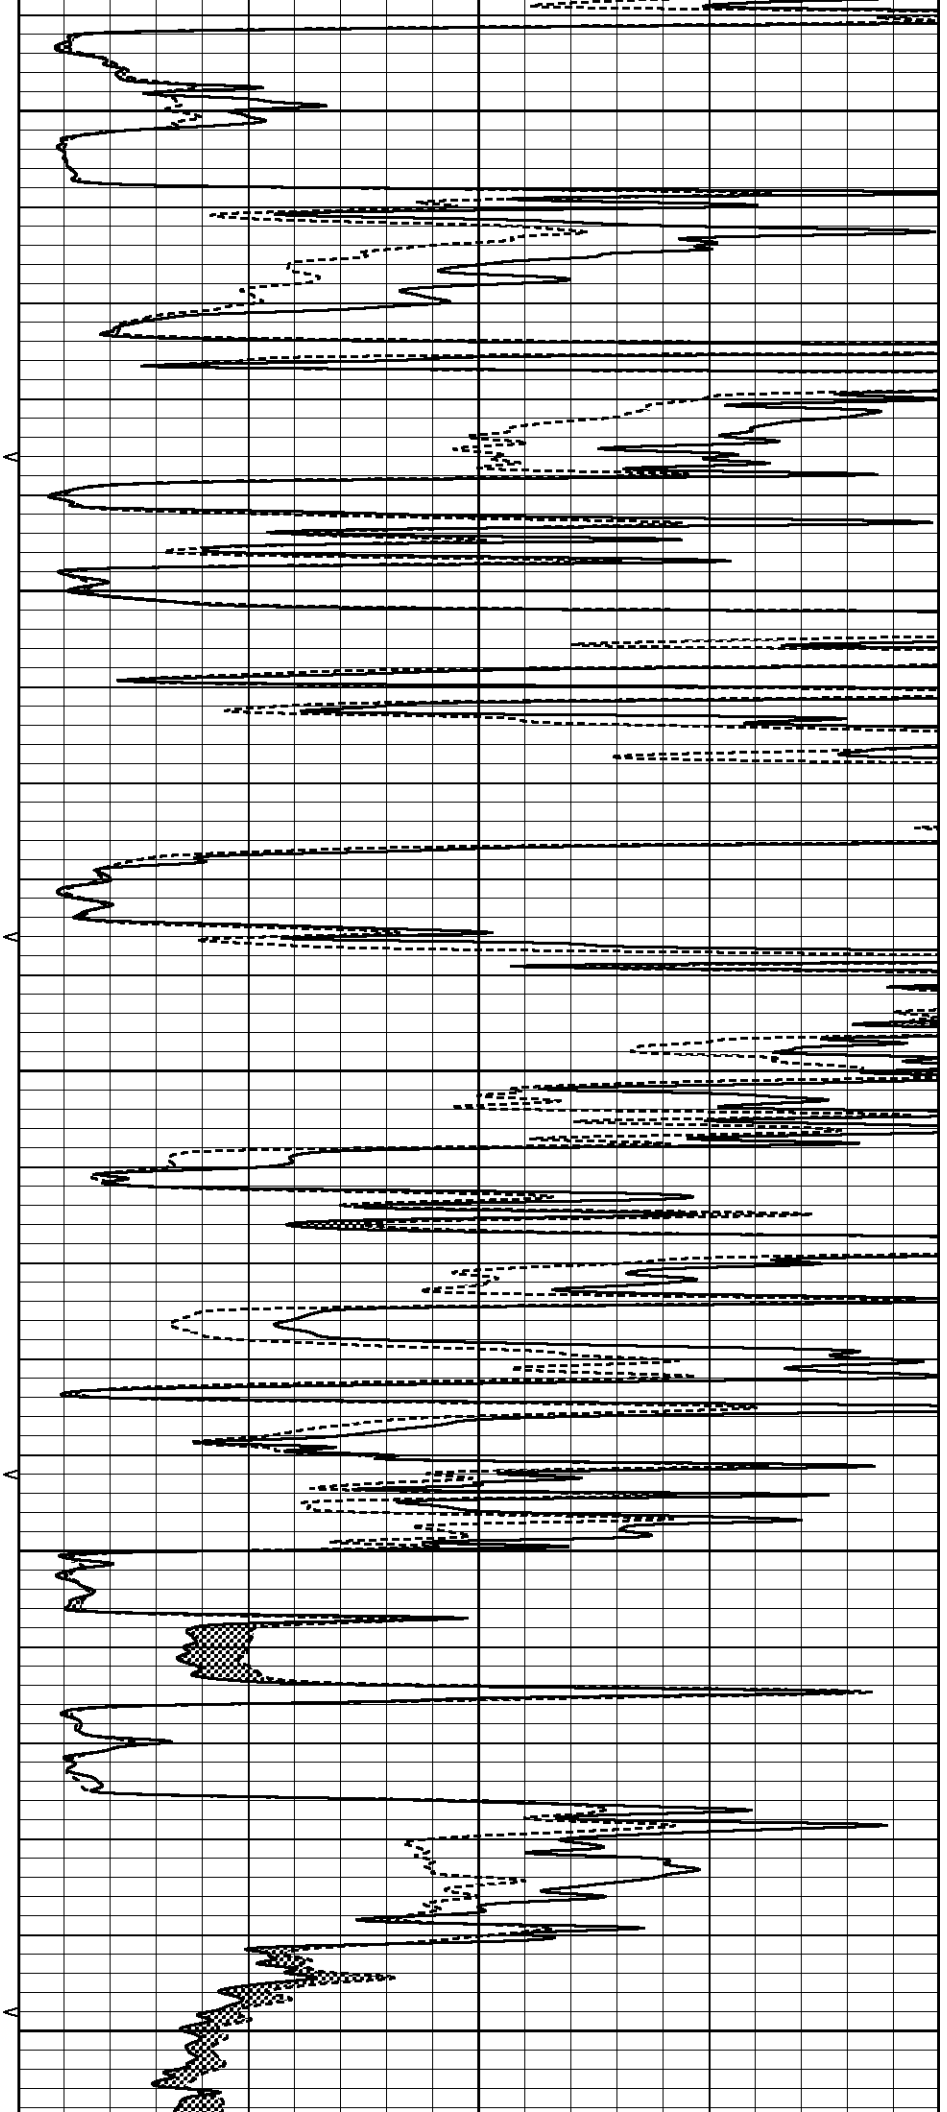

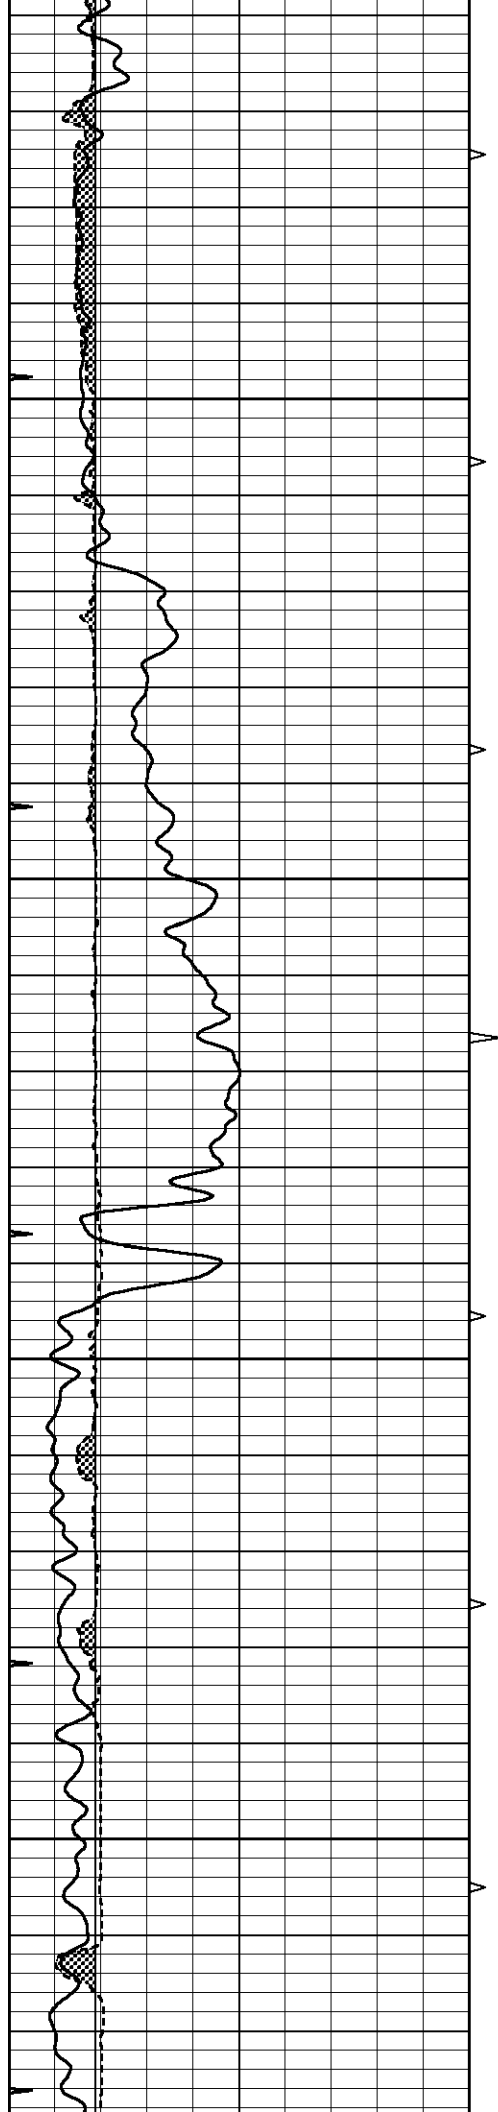



4900

4950

5000

5050

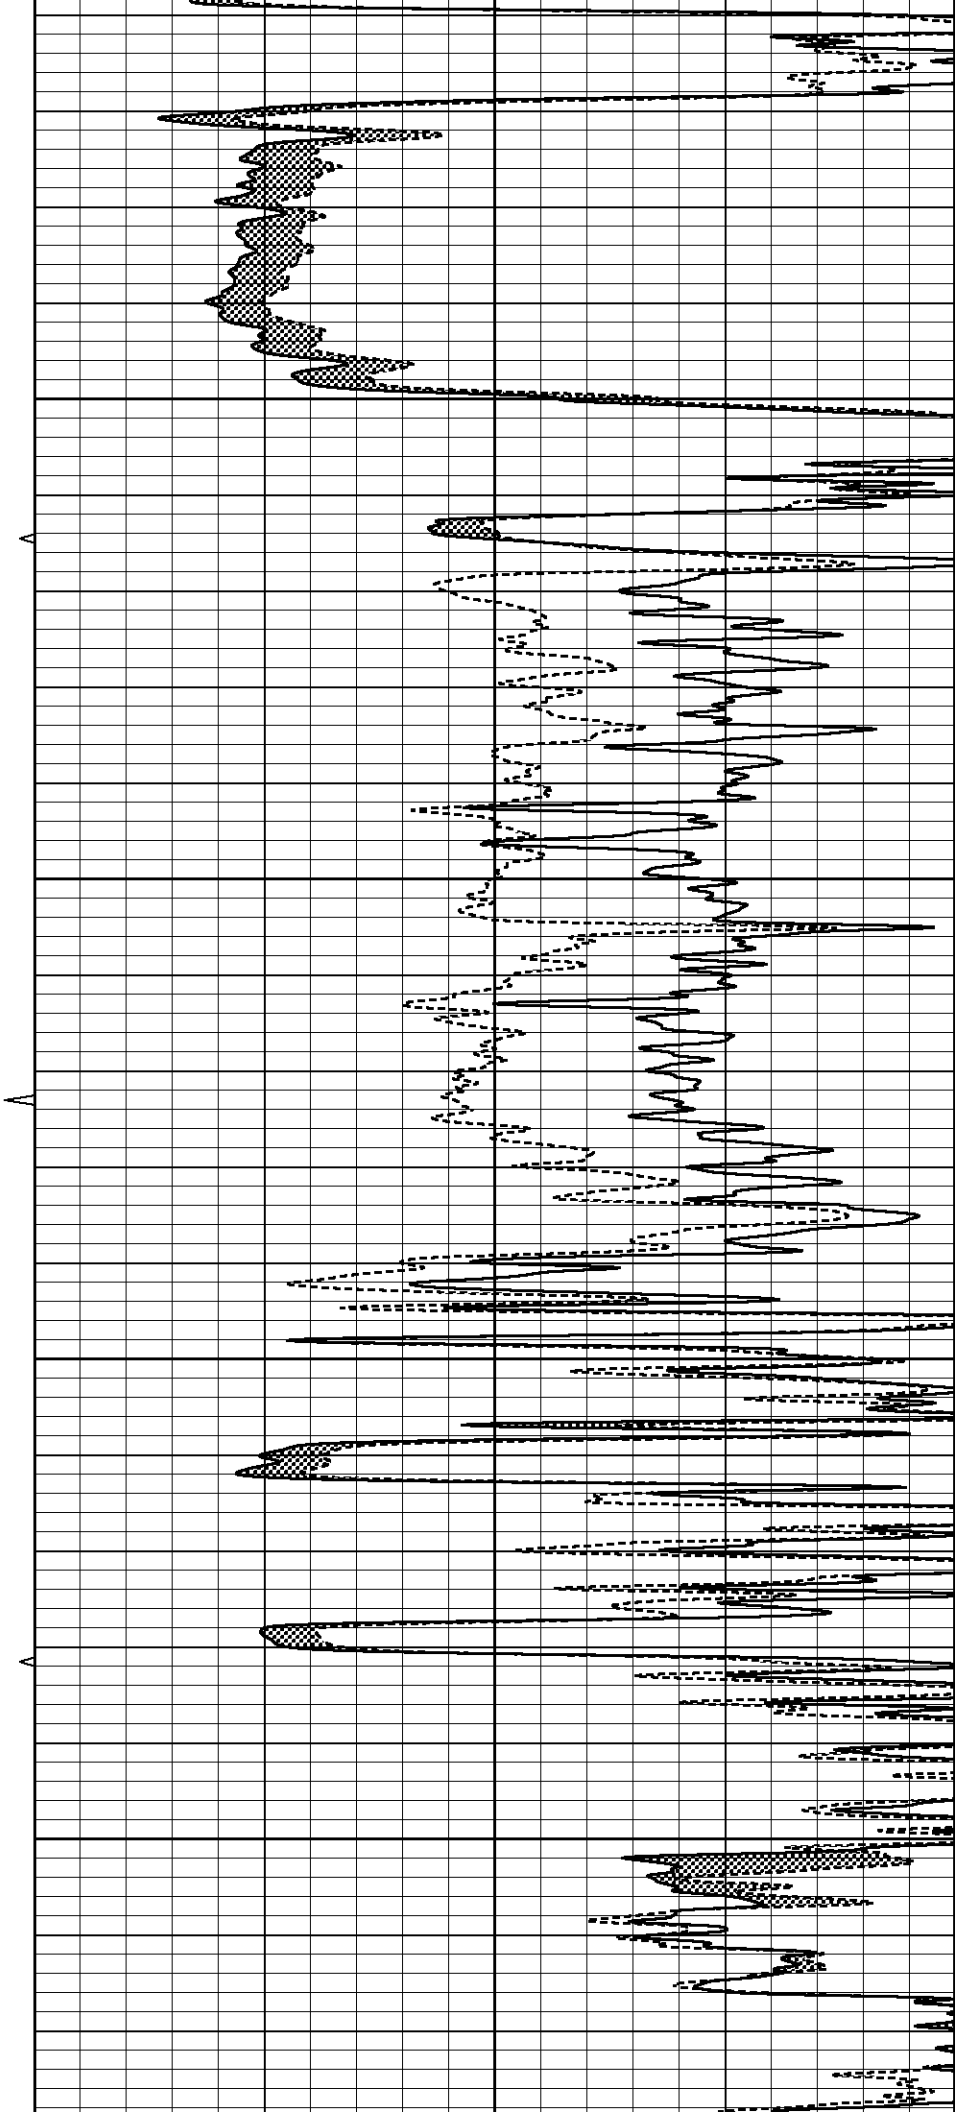

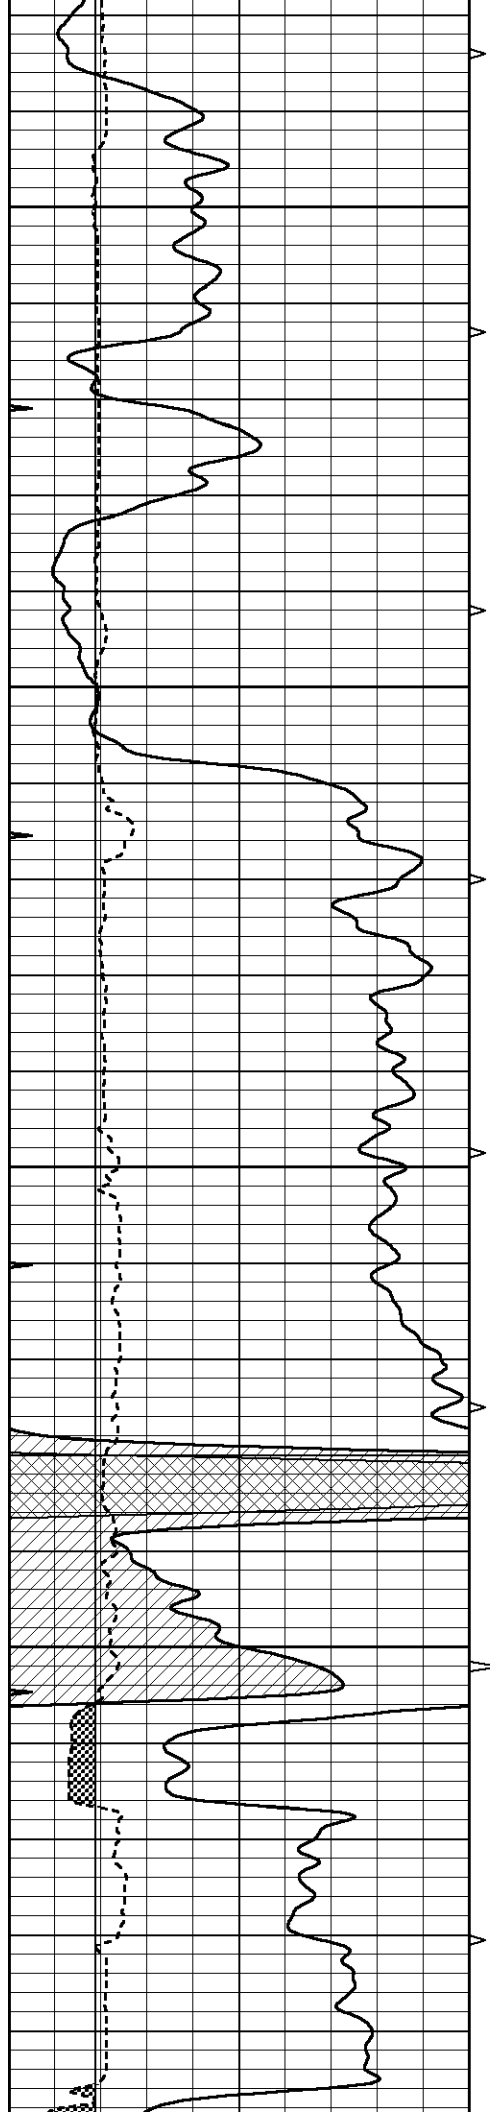



5100

5150

5200

5250

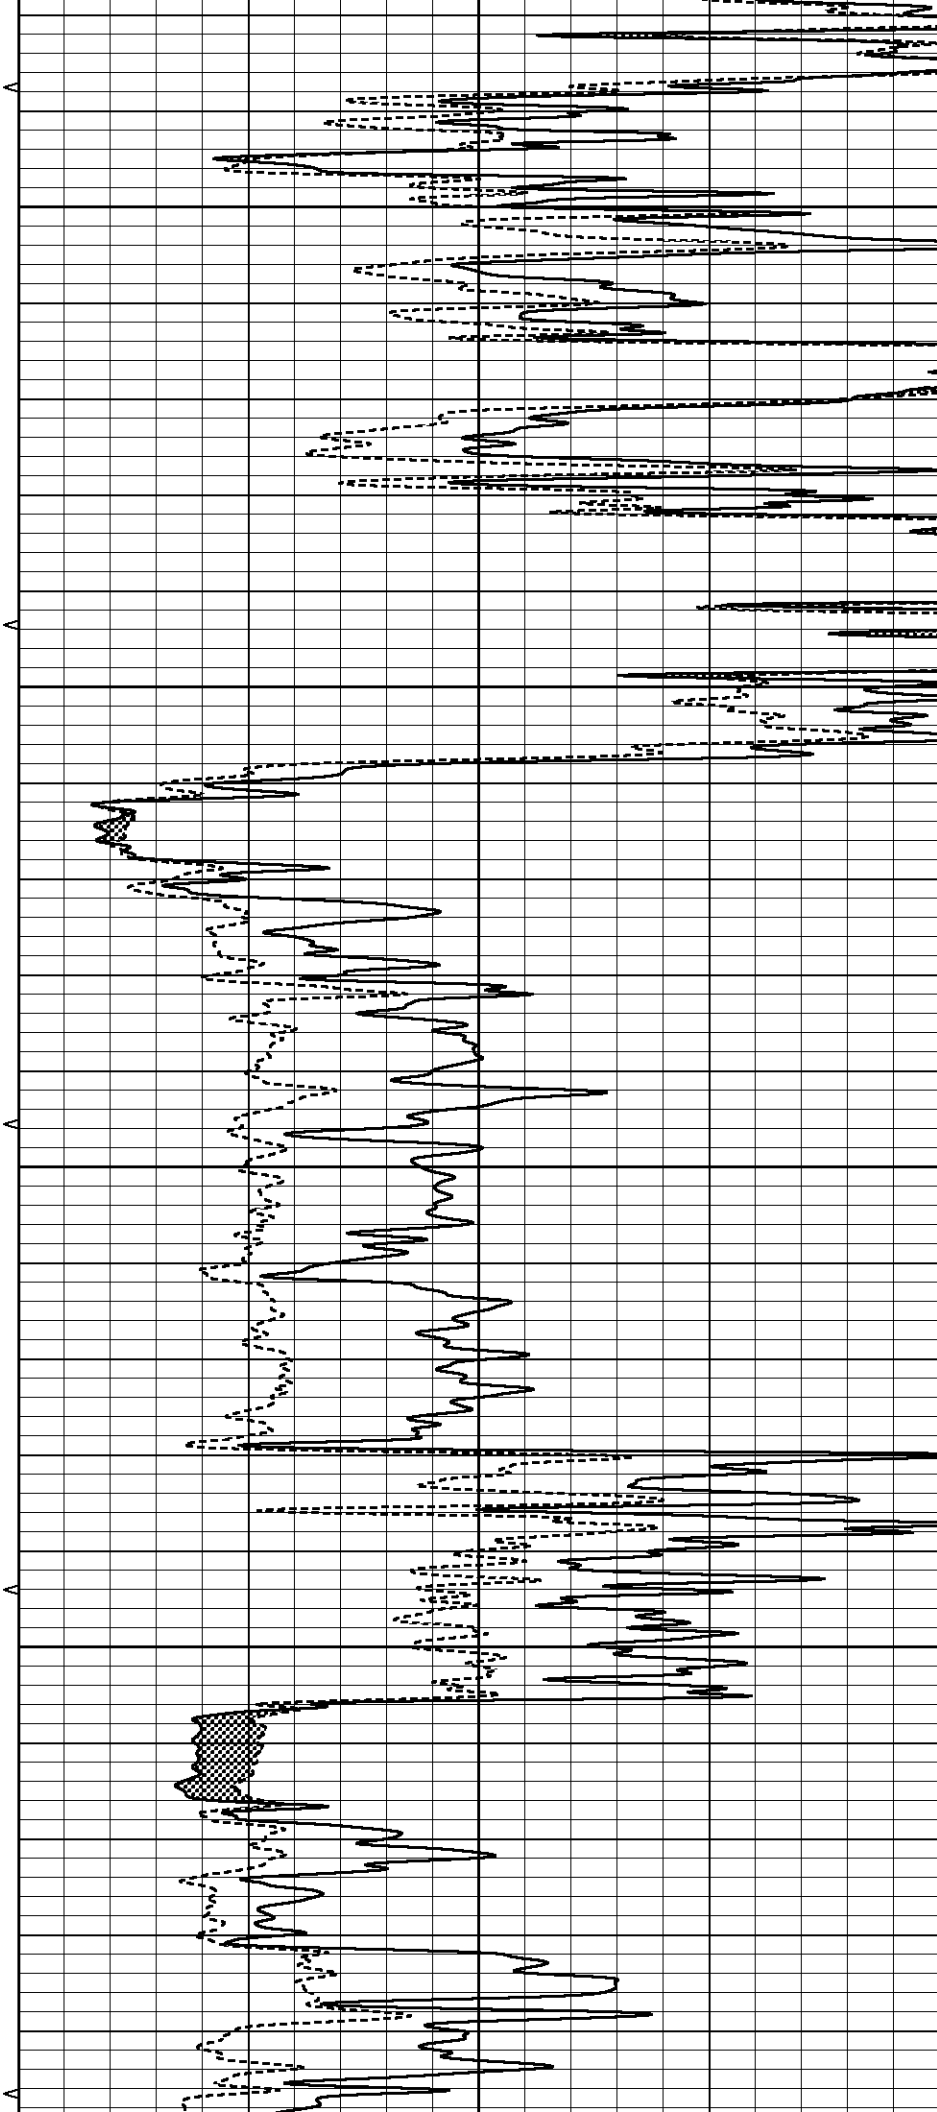

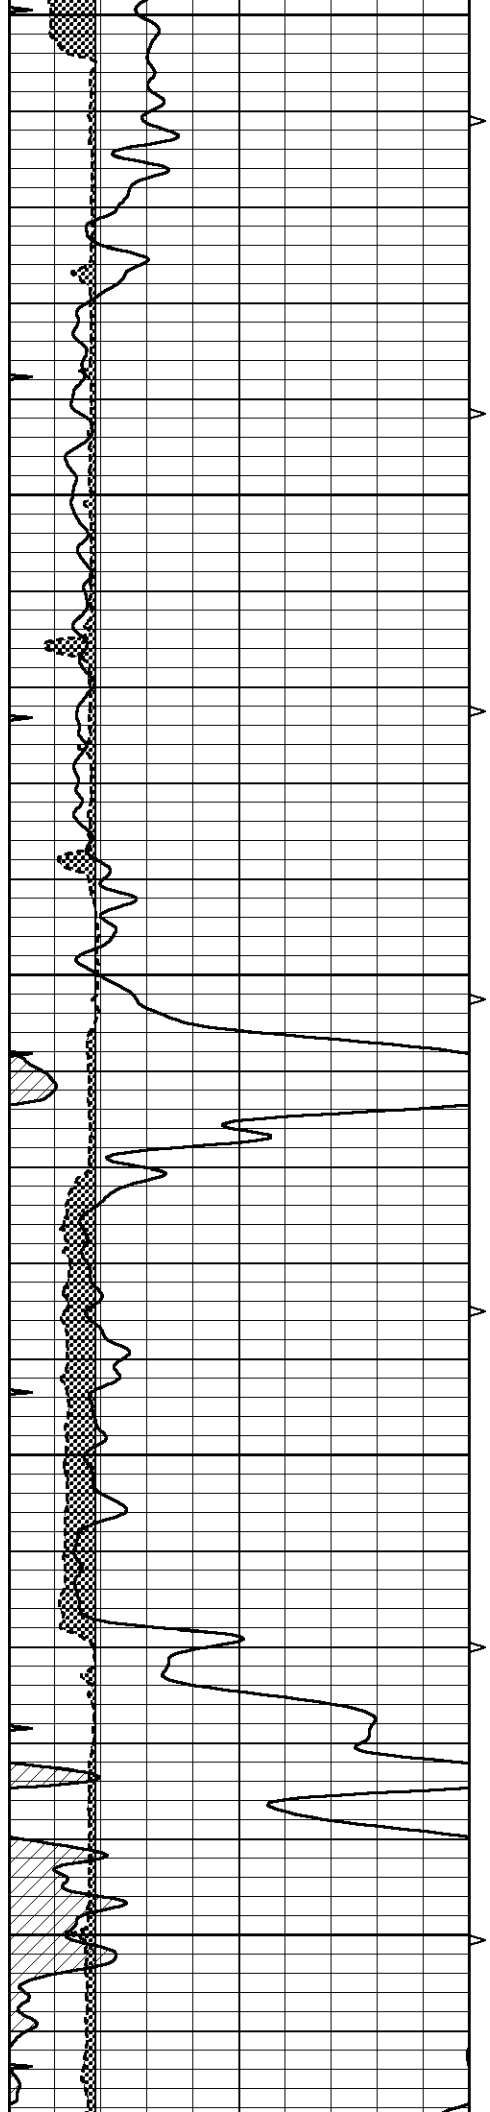

5300


5350



5400

5450

5500

5.5" ABHV

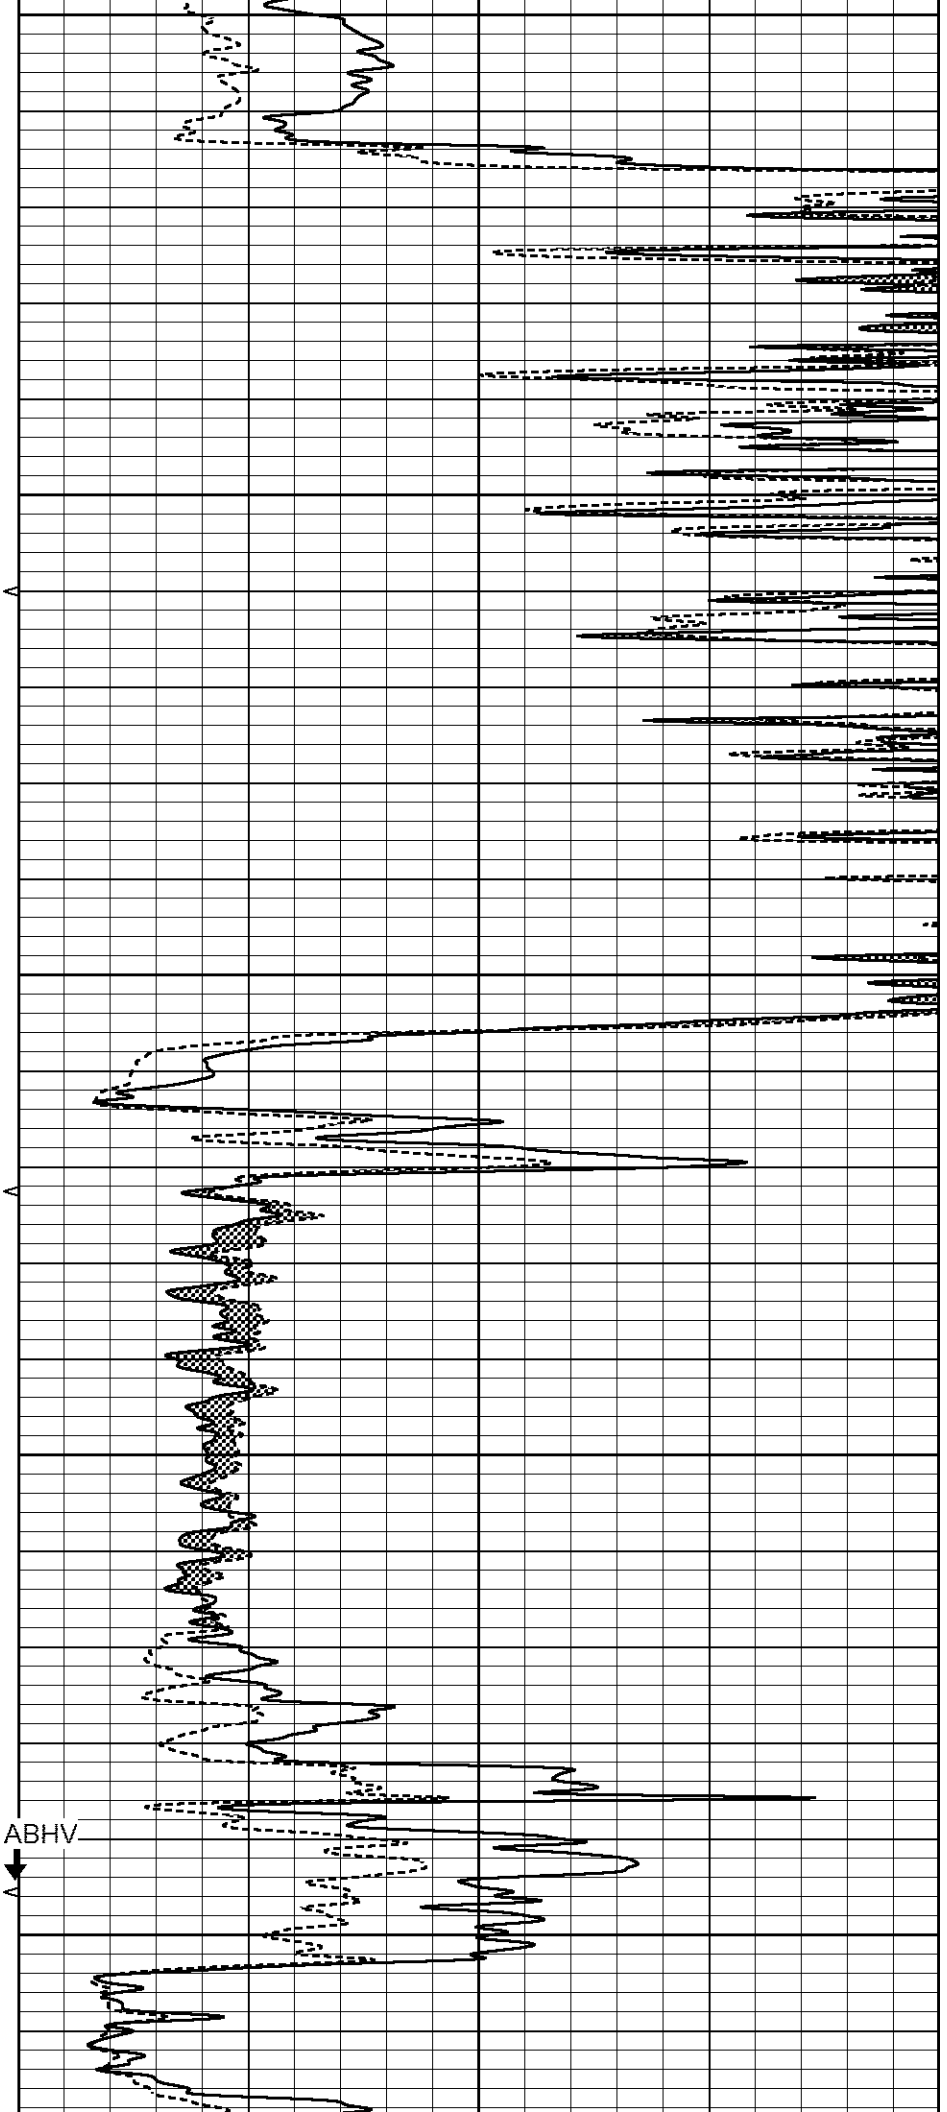


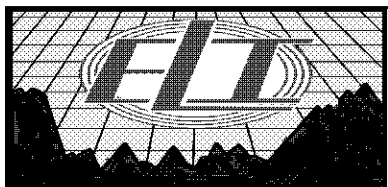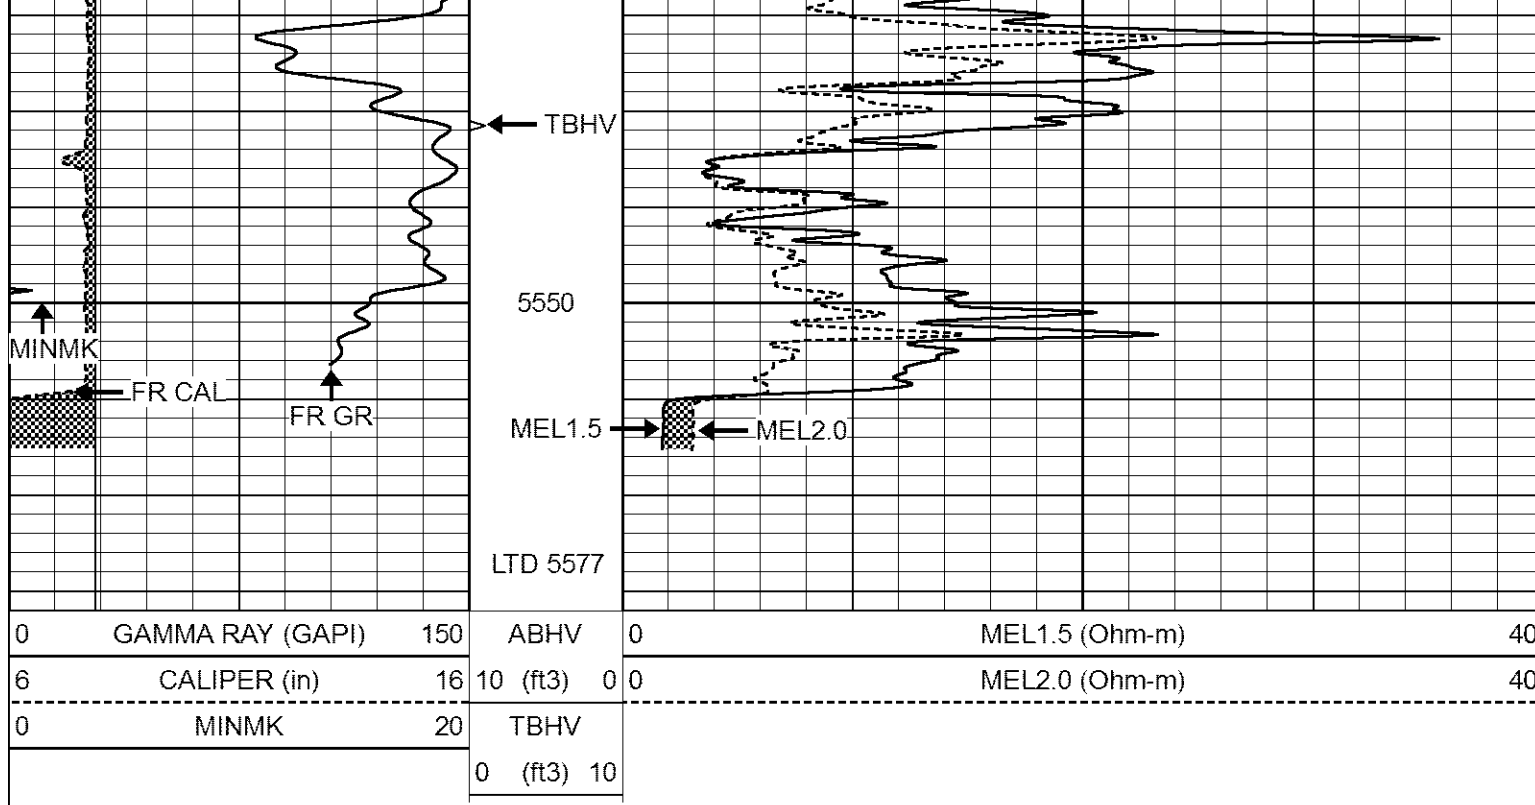


REPEAT SECTION

Database File 7241pe.db
 Dataset Pathname pass8.3
 Presentation Format _micro
 Dataset Creation Fri Oct 28 07:37:57 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

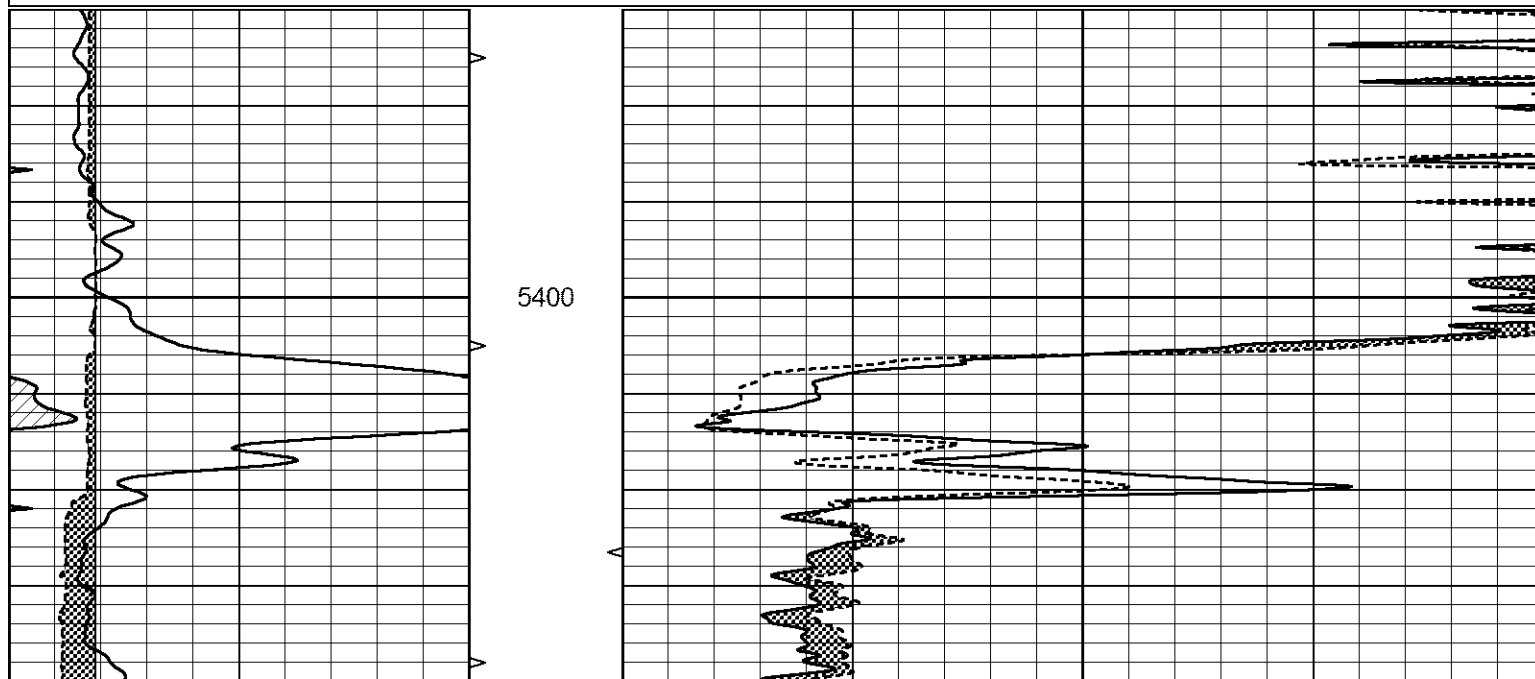

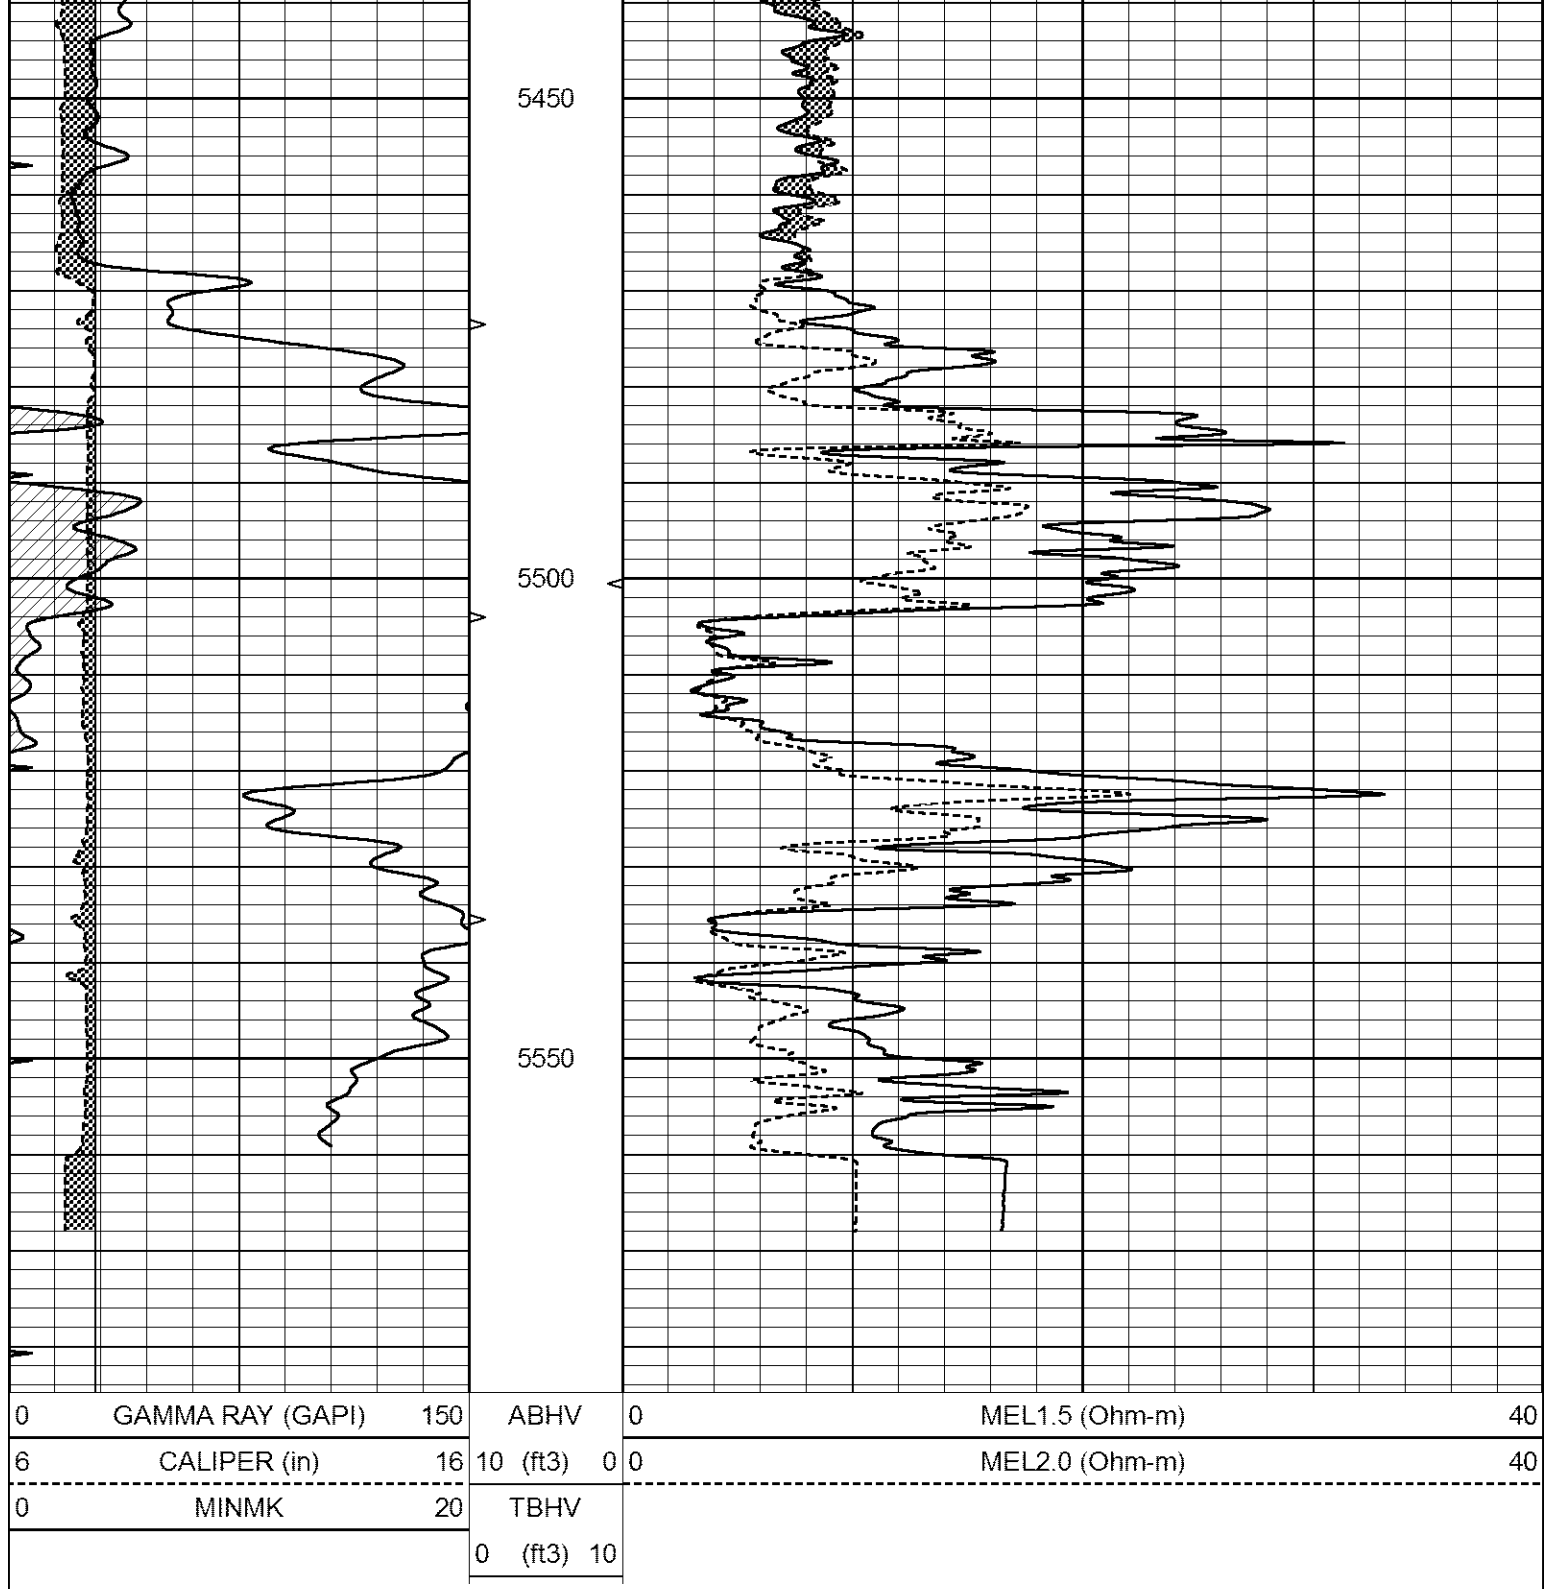

Calibration Report

Database File 7241pe.db
 Dataset Pathname pass9.3
 Dataset Creation Fri Oct 28 07:43:46 2022

MICRO_USR Calibration Report

Serial Number: 070911
 Tool Model: Probel
 Performed: Sun Oct 16 04:04:35 2022

Caliper Calibration: Gain=4.500 Offset=0.250

References Low Cal 8.000 High Cal 14.000

