



MICRO LOG

Company VINCENT OIL CORPORATION

Well CLOSE #3-2

Field SODVILLE

County FORD State KANSAS

Location: API #: 15-057-21075-0000

SEC 2 TWP 29S RGE 23W
843' FSL & 1617' FEL
SE - NE - SW - SE

Other Services
CDL/CNL/PE
DIL/SONIC

Permanent Datum GROUND LEVEL Elevation 2544

Log Measured From KELLY BUSHING 12' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation
K.B. 2556
D.F. 2554
G.L. 2544

Date 11/10/22

Run Number TWO

Depth Driller 5350

Depth Logger 5348

Bottom Logged Interval 5332

Top Log Interval 4300

Casing Driller 8 5/8" @ 654'

Casing Logger 654

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD CHLORIDES: 5,700 PPM

Density / Viscosity 9.2/69

pH / Fluid Loss 11.0/6.8

Source of Sample FLOWLINE

Rm @ Meas. Temp .600 @ 77F

Rmf @ Meas. Temp .450 @ 77F

Rmc @ Meas. Temp .720 @ 77F

Source of Rmf / Rmc MEASURED

Rm @ BHT .361 @ 128F

Time Circulation Stopped 5 HOURS

Time Logger on Bottom 7:15 P.M.

Maximum Recorded Temperature 128F

Equipment Number 8916

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By TOM DUDGEON

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
KINGSDOWN, KS., 1N. ON "RD. 125" TO "WILDFIRE RD.", 2 1/4W., N. INTO




MAIN SECTION

Database File	6720pe.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Thu Nov 10 19:53:20 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

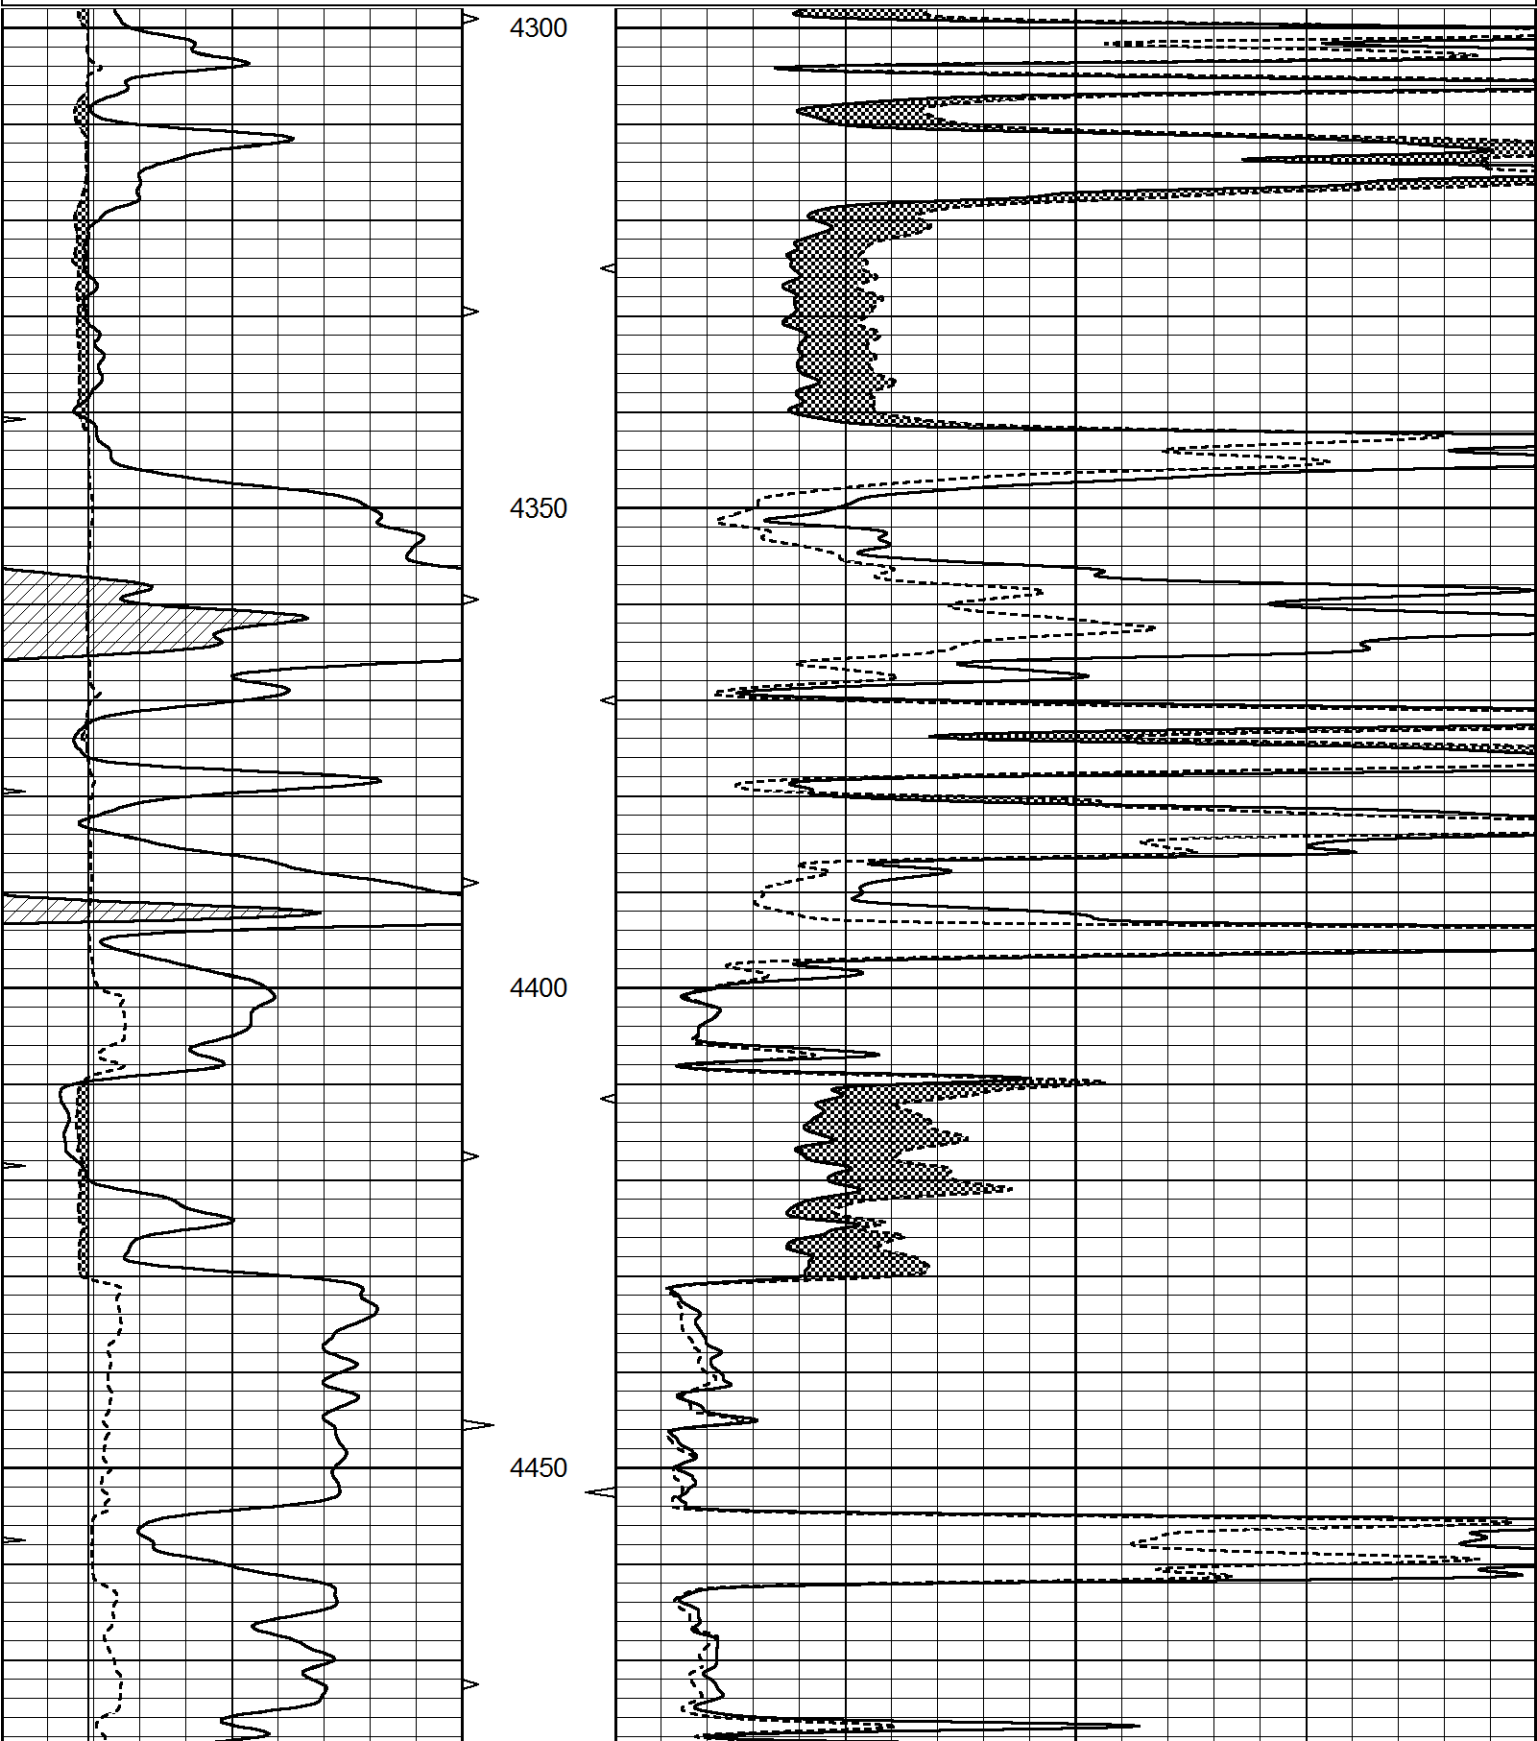

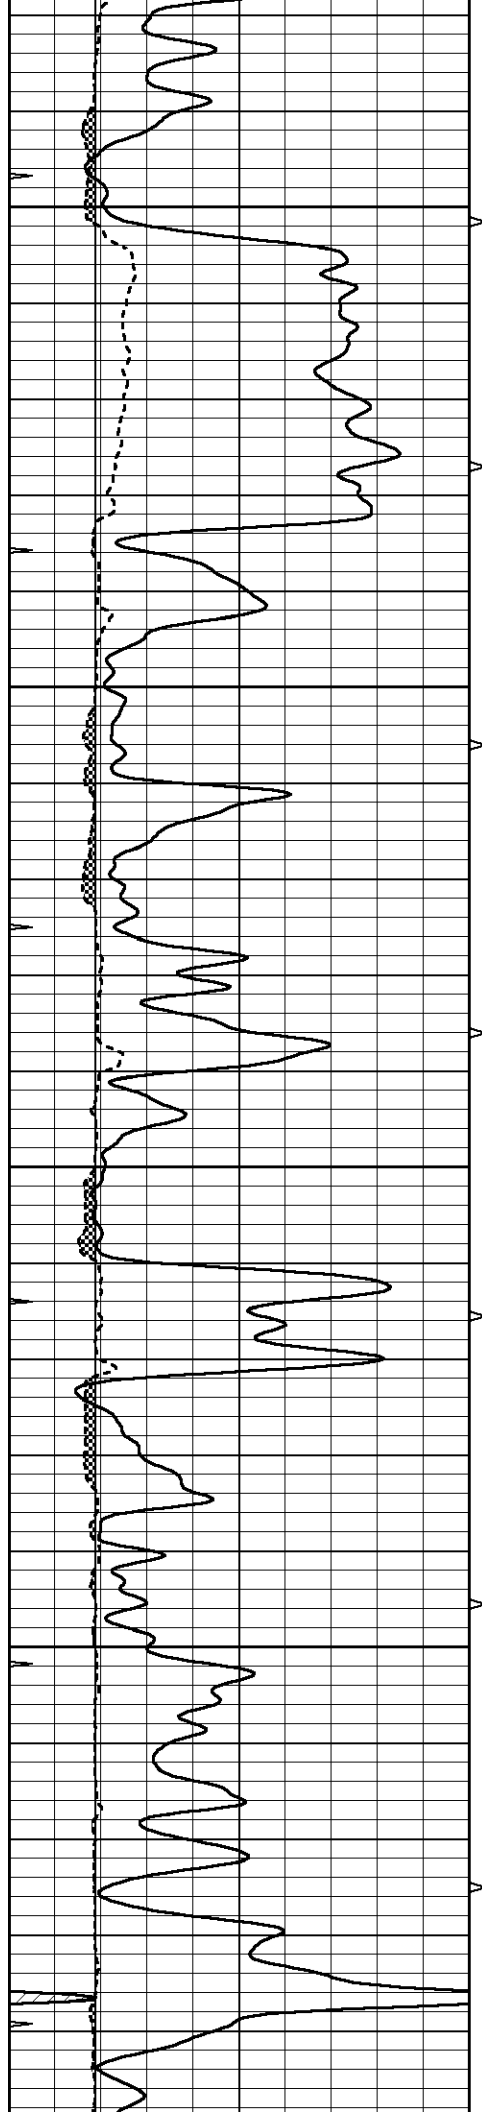



4500

4550

4600

4650

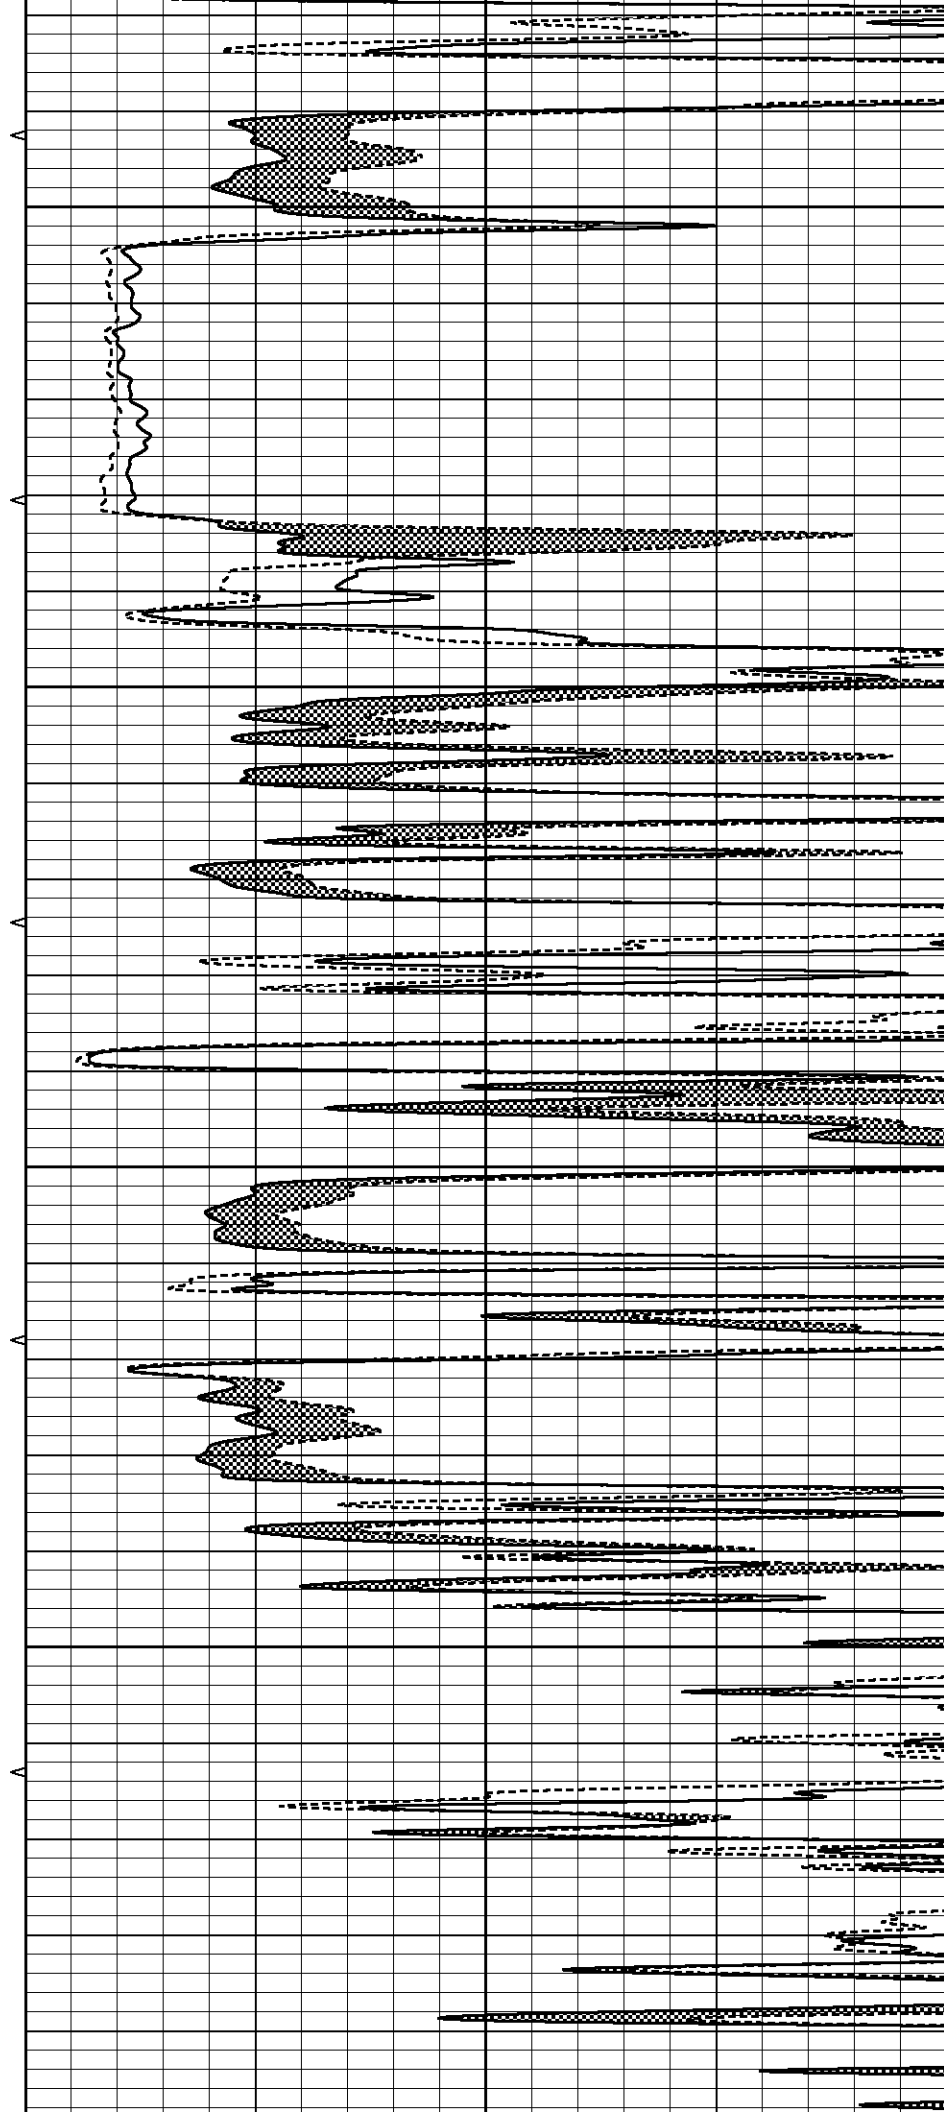

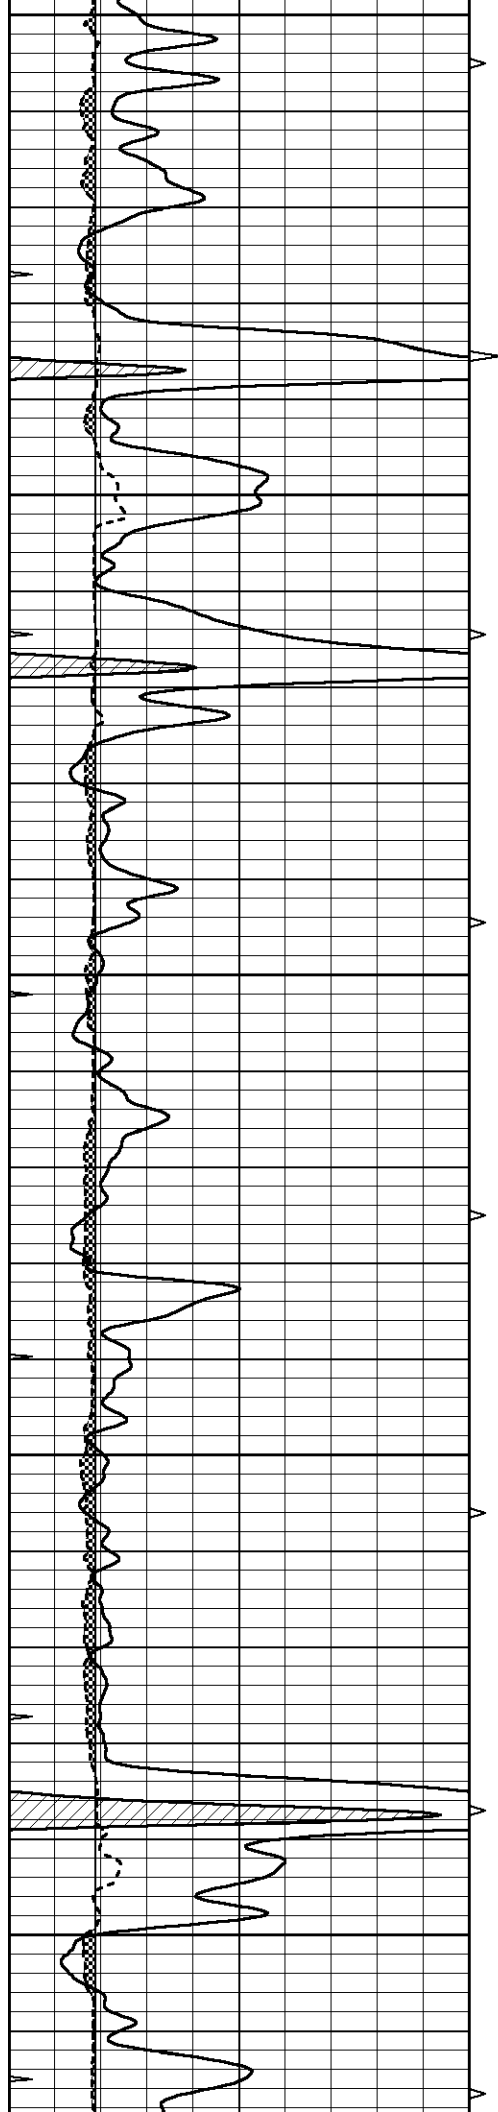


4700


4750

4800

4850

4900

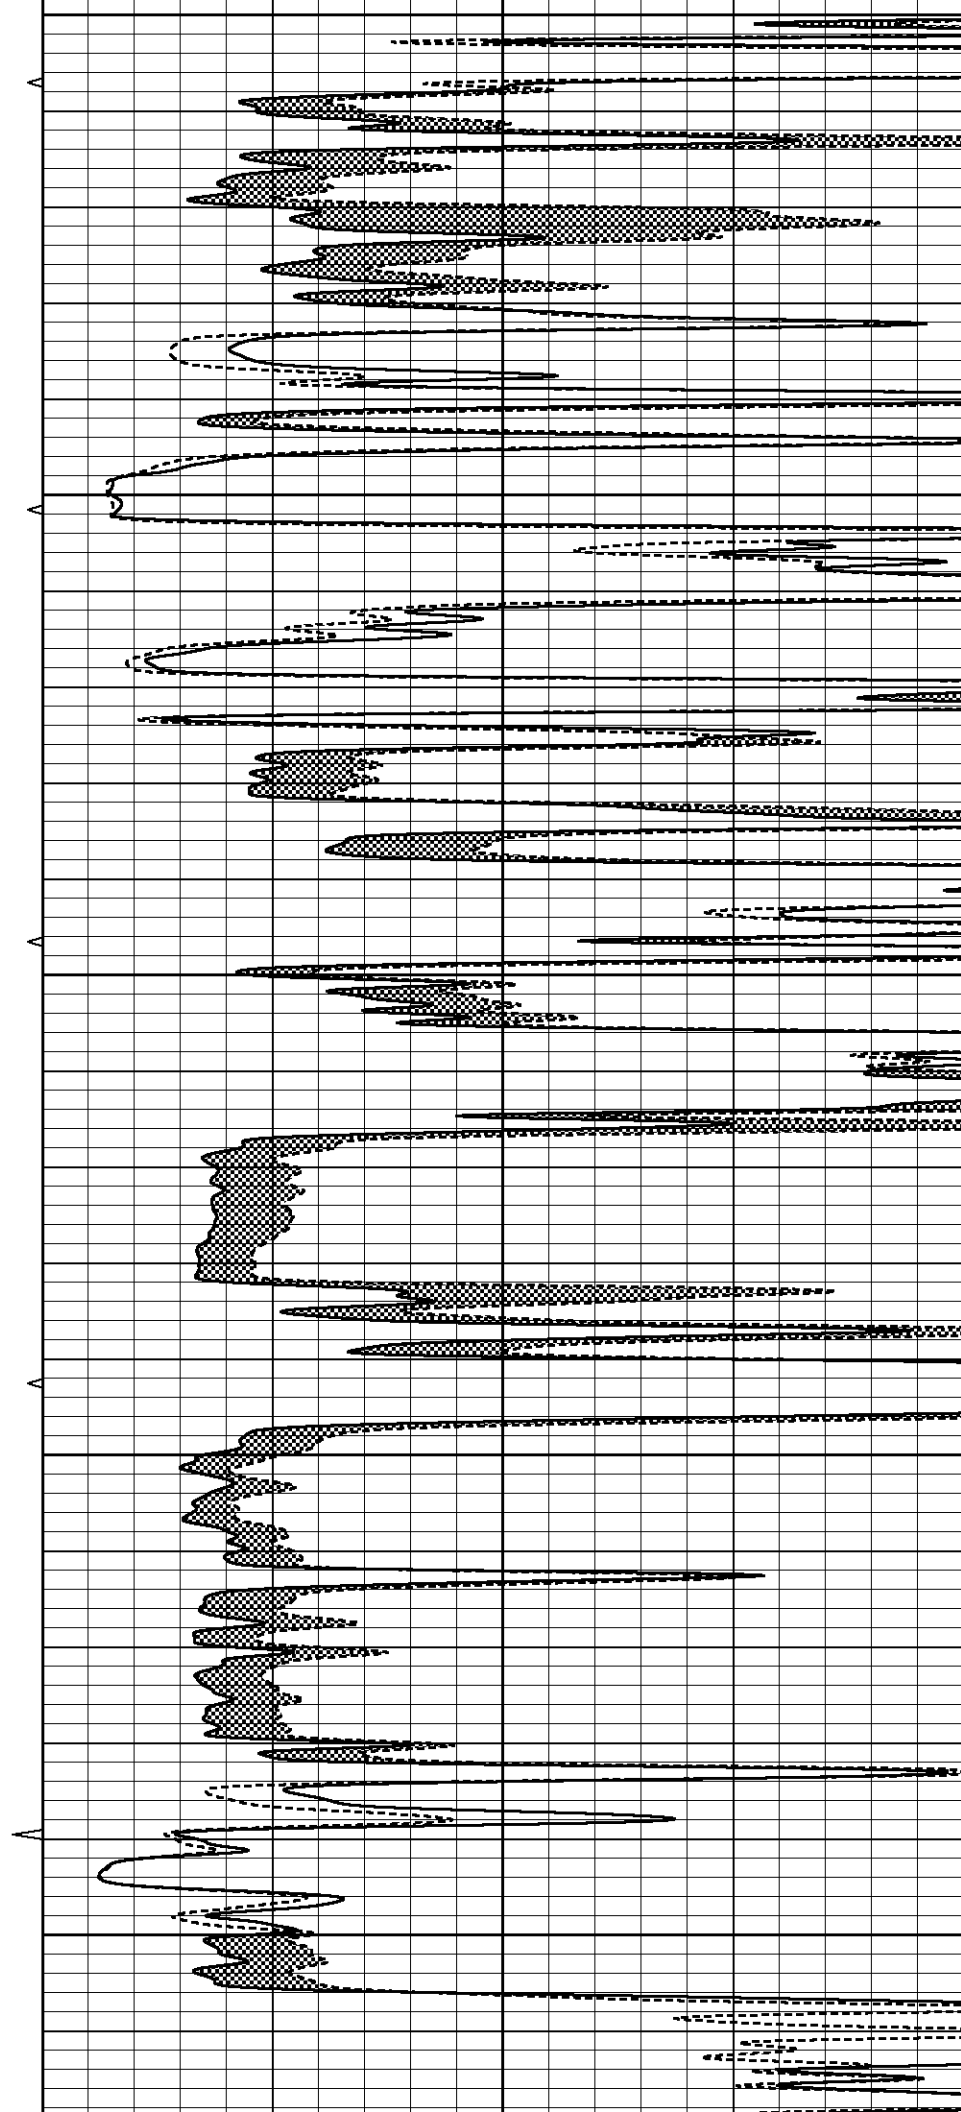

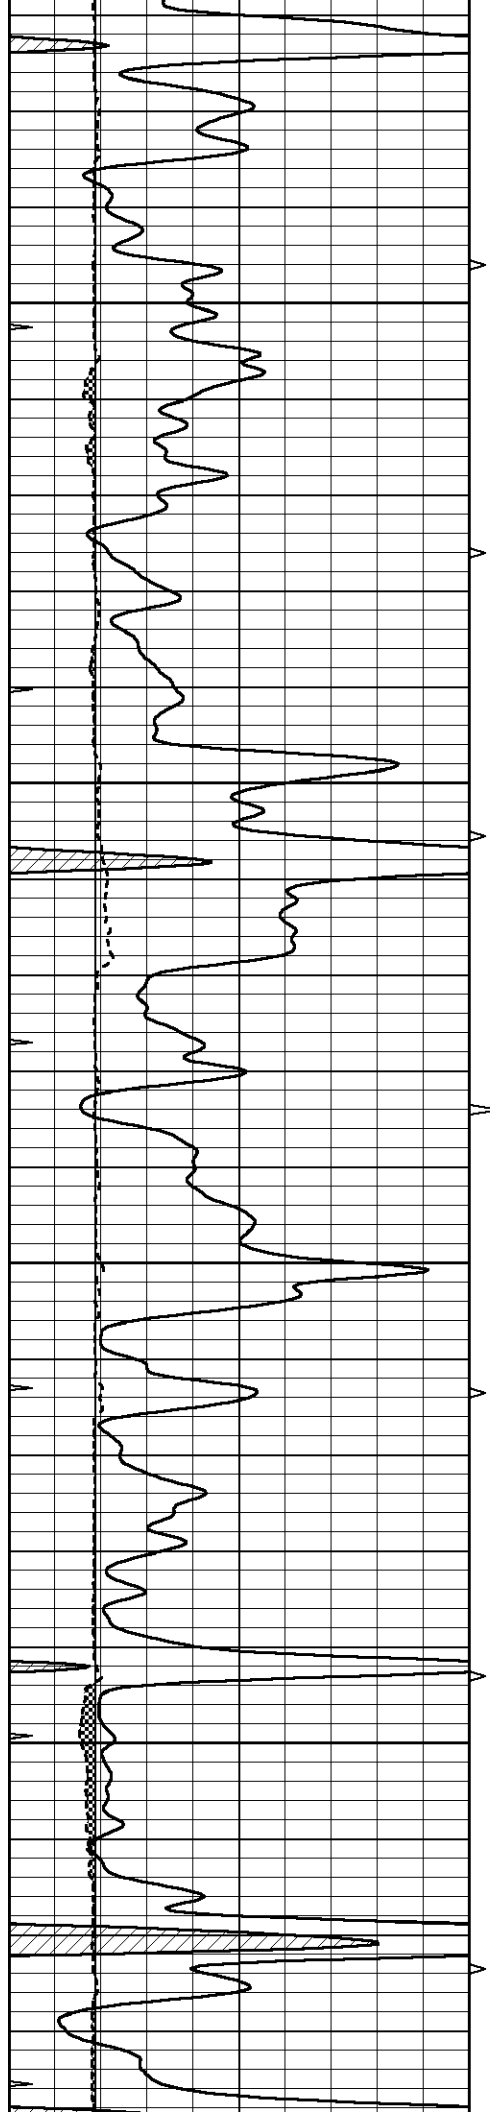



4950

5000

5050

5100

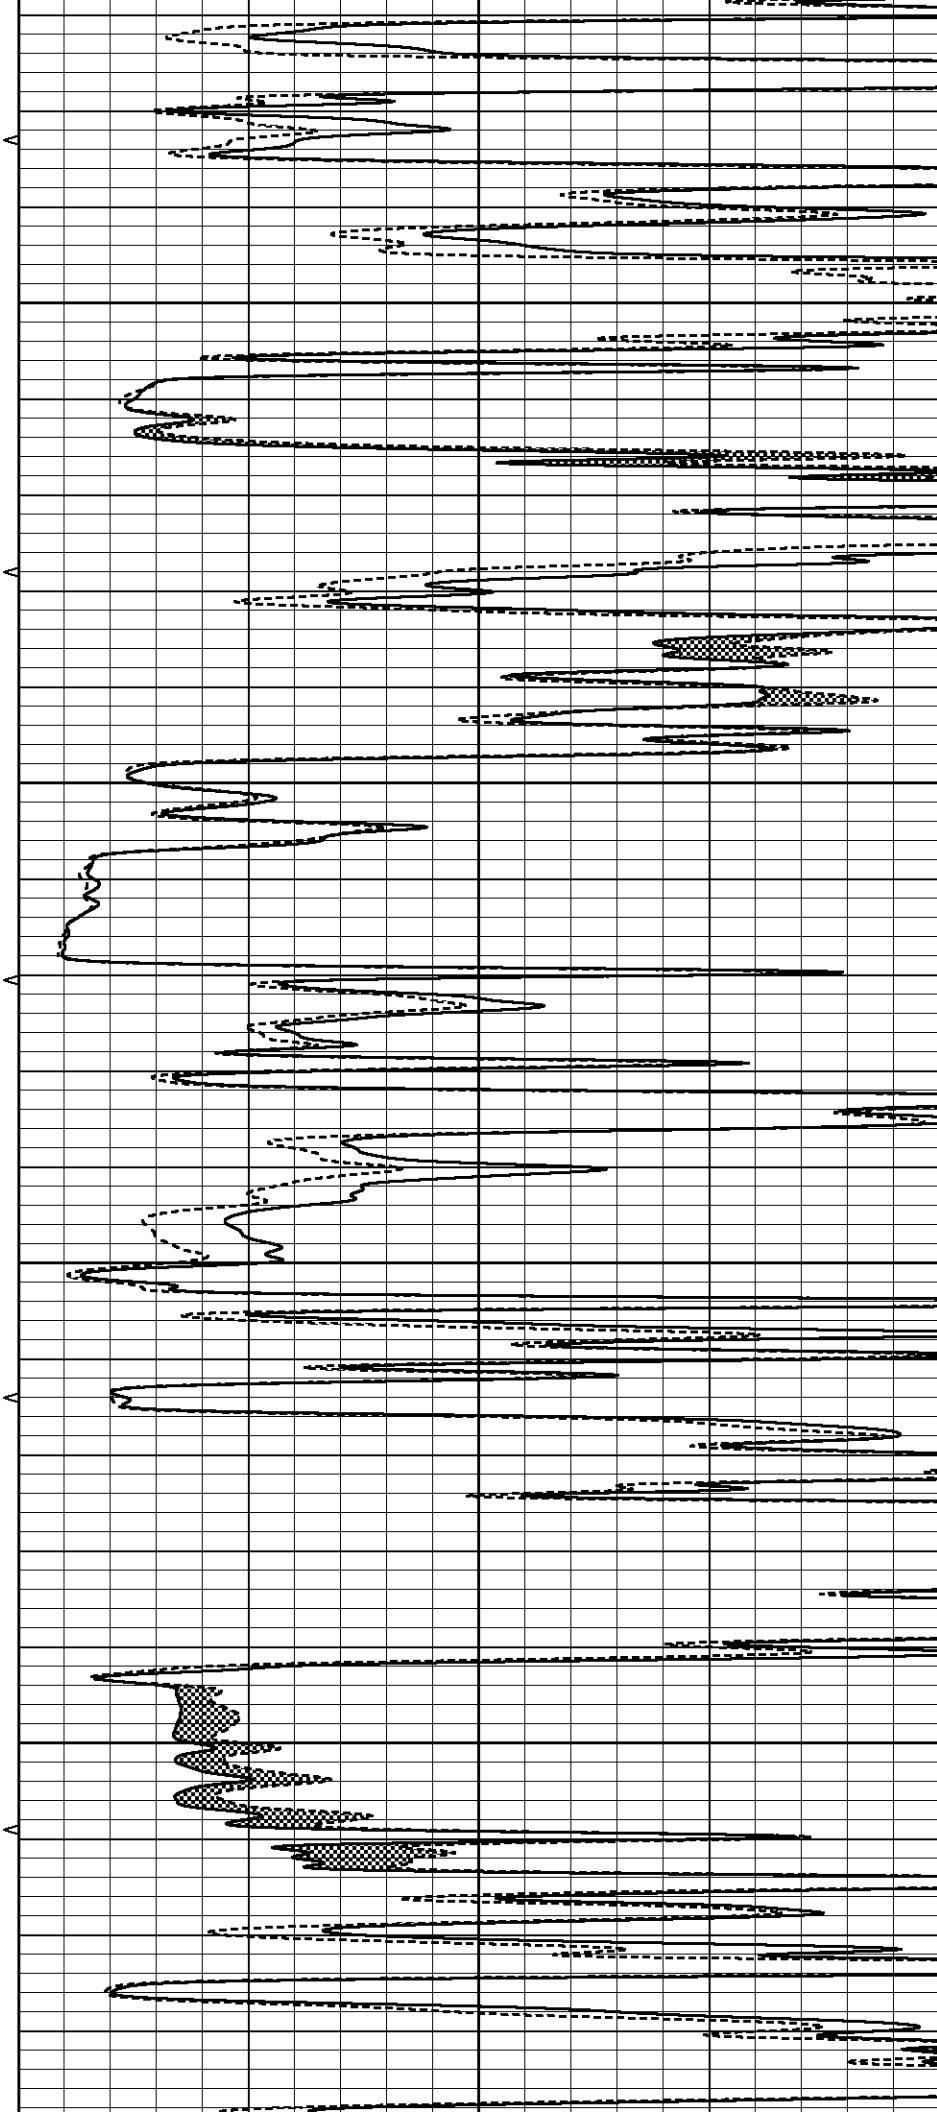

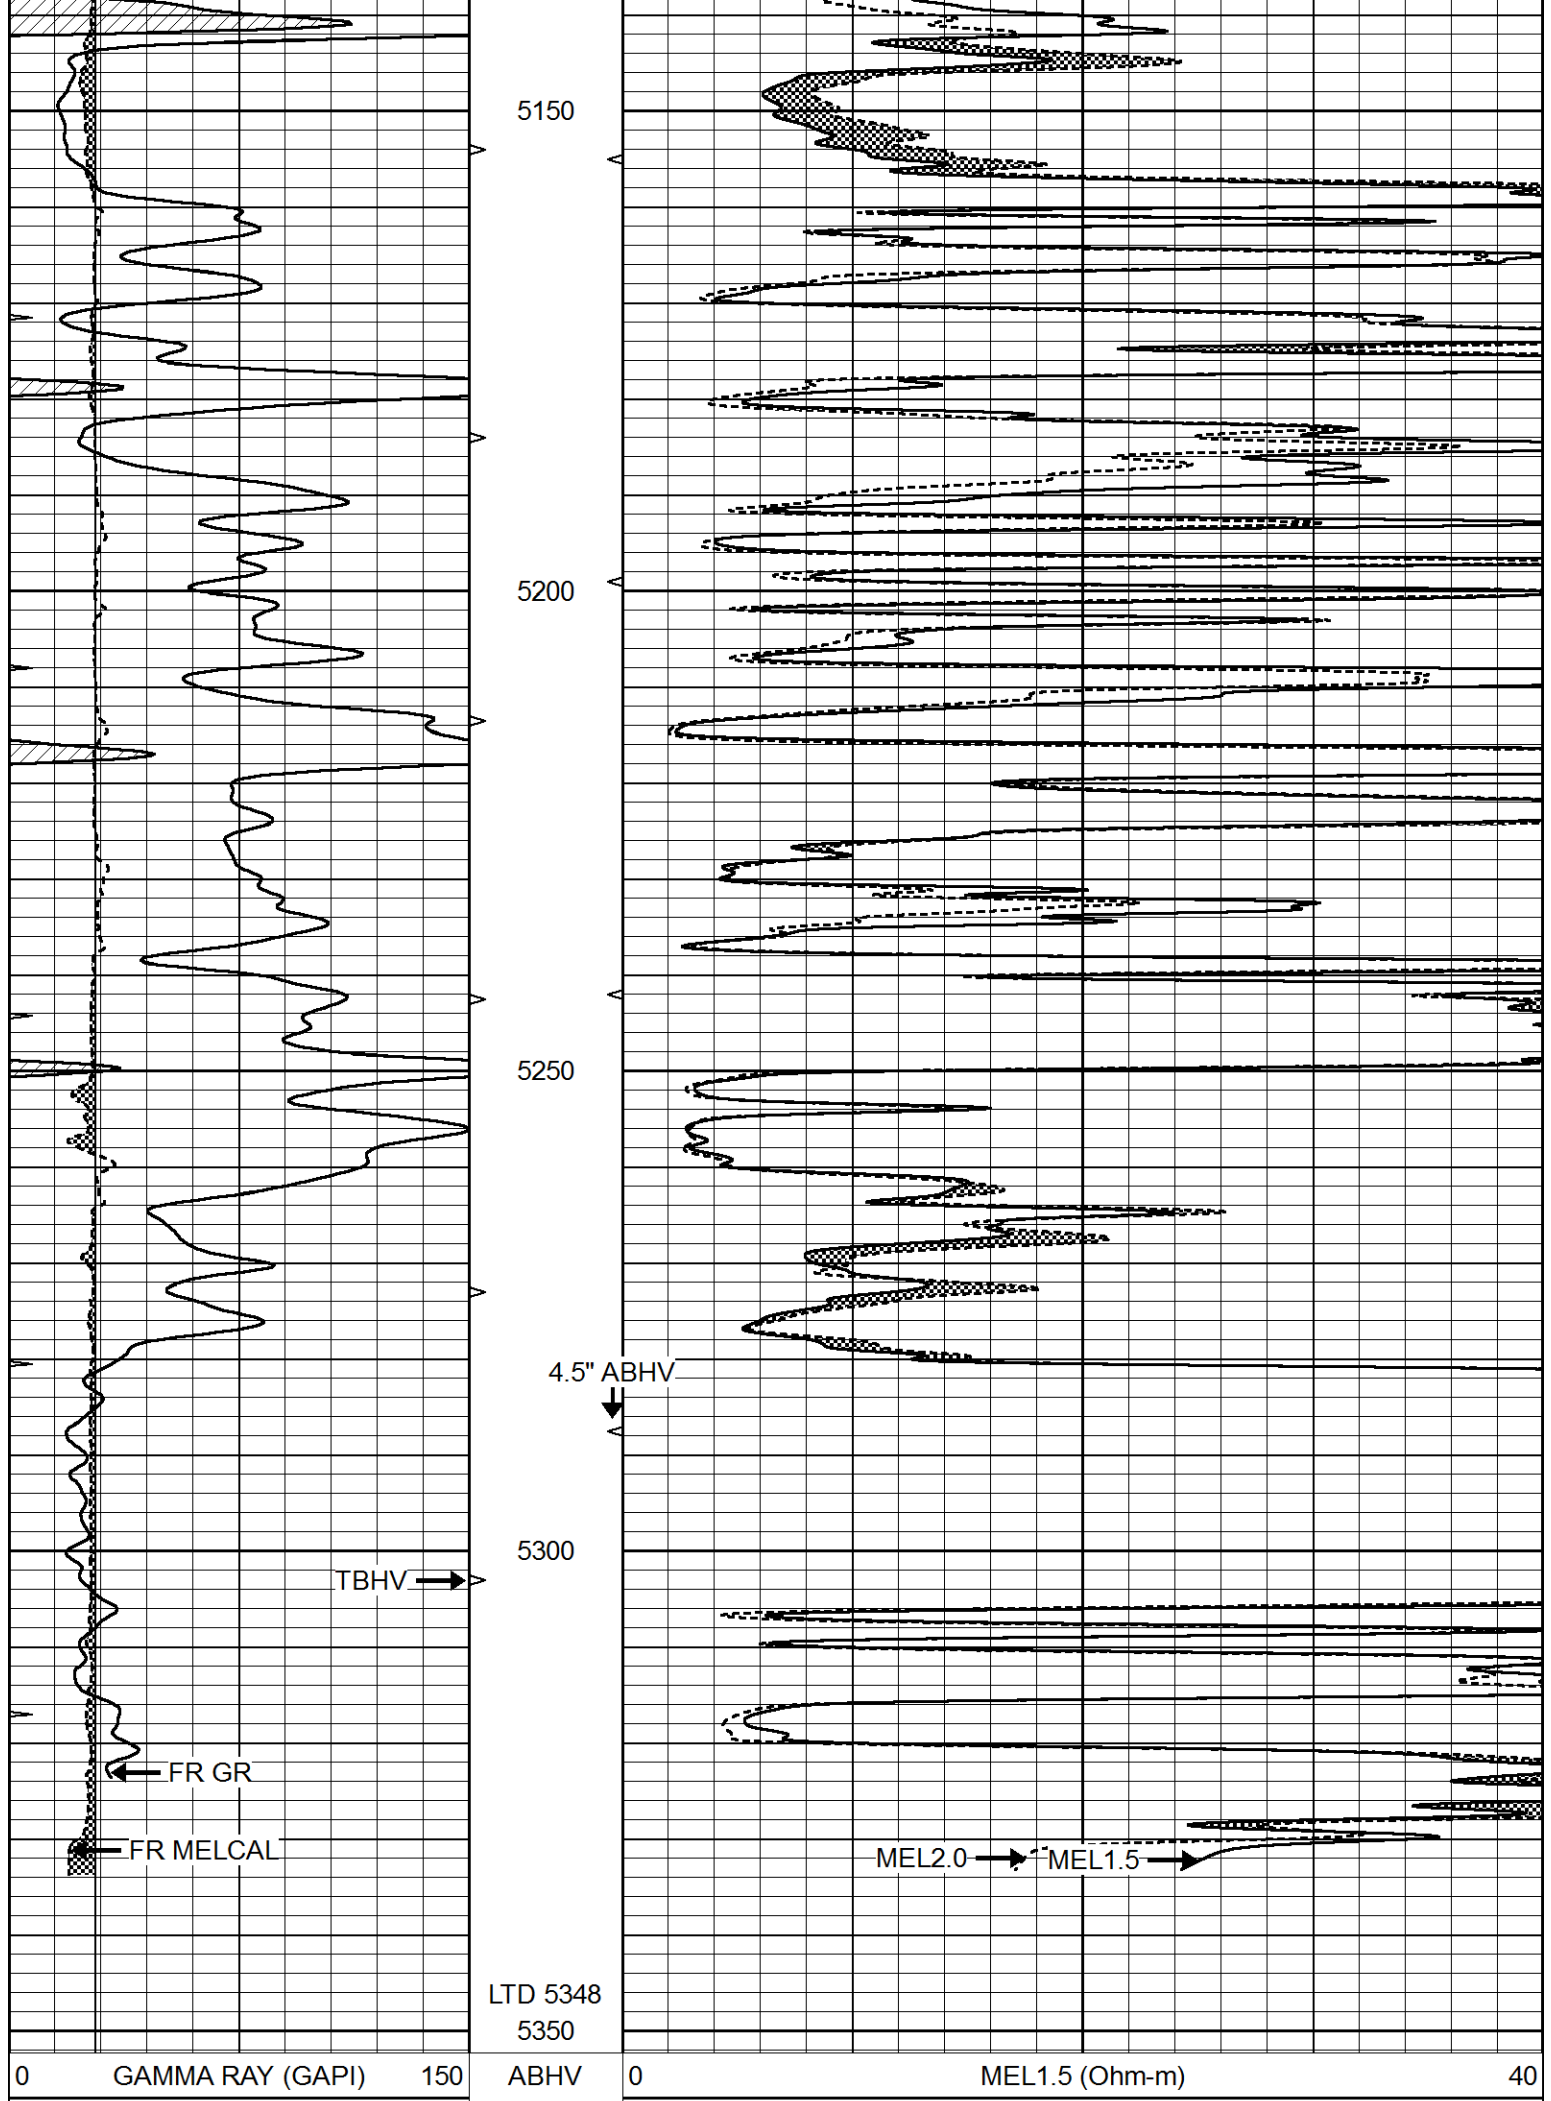


6	CALIPER (in)	16	10 (ft3)	0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV				
			0 (ft3)	10			




REPEAT SECTION

Database File 6720pe.db
 Dataset Pathname pass5.3
 Presentation Format _micro
 Dataset Creation Thu Nov 10 19:32:08 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

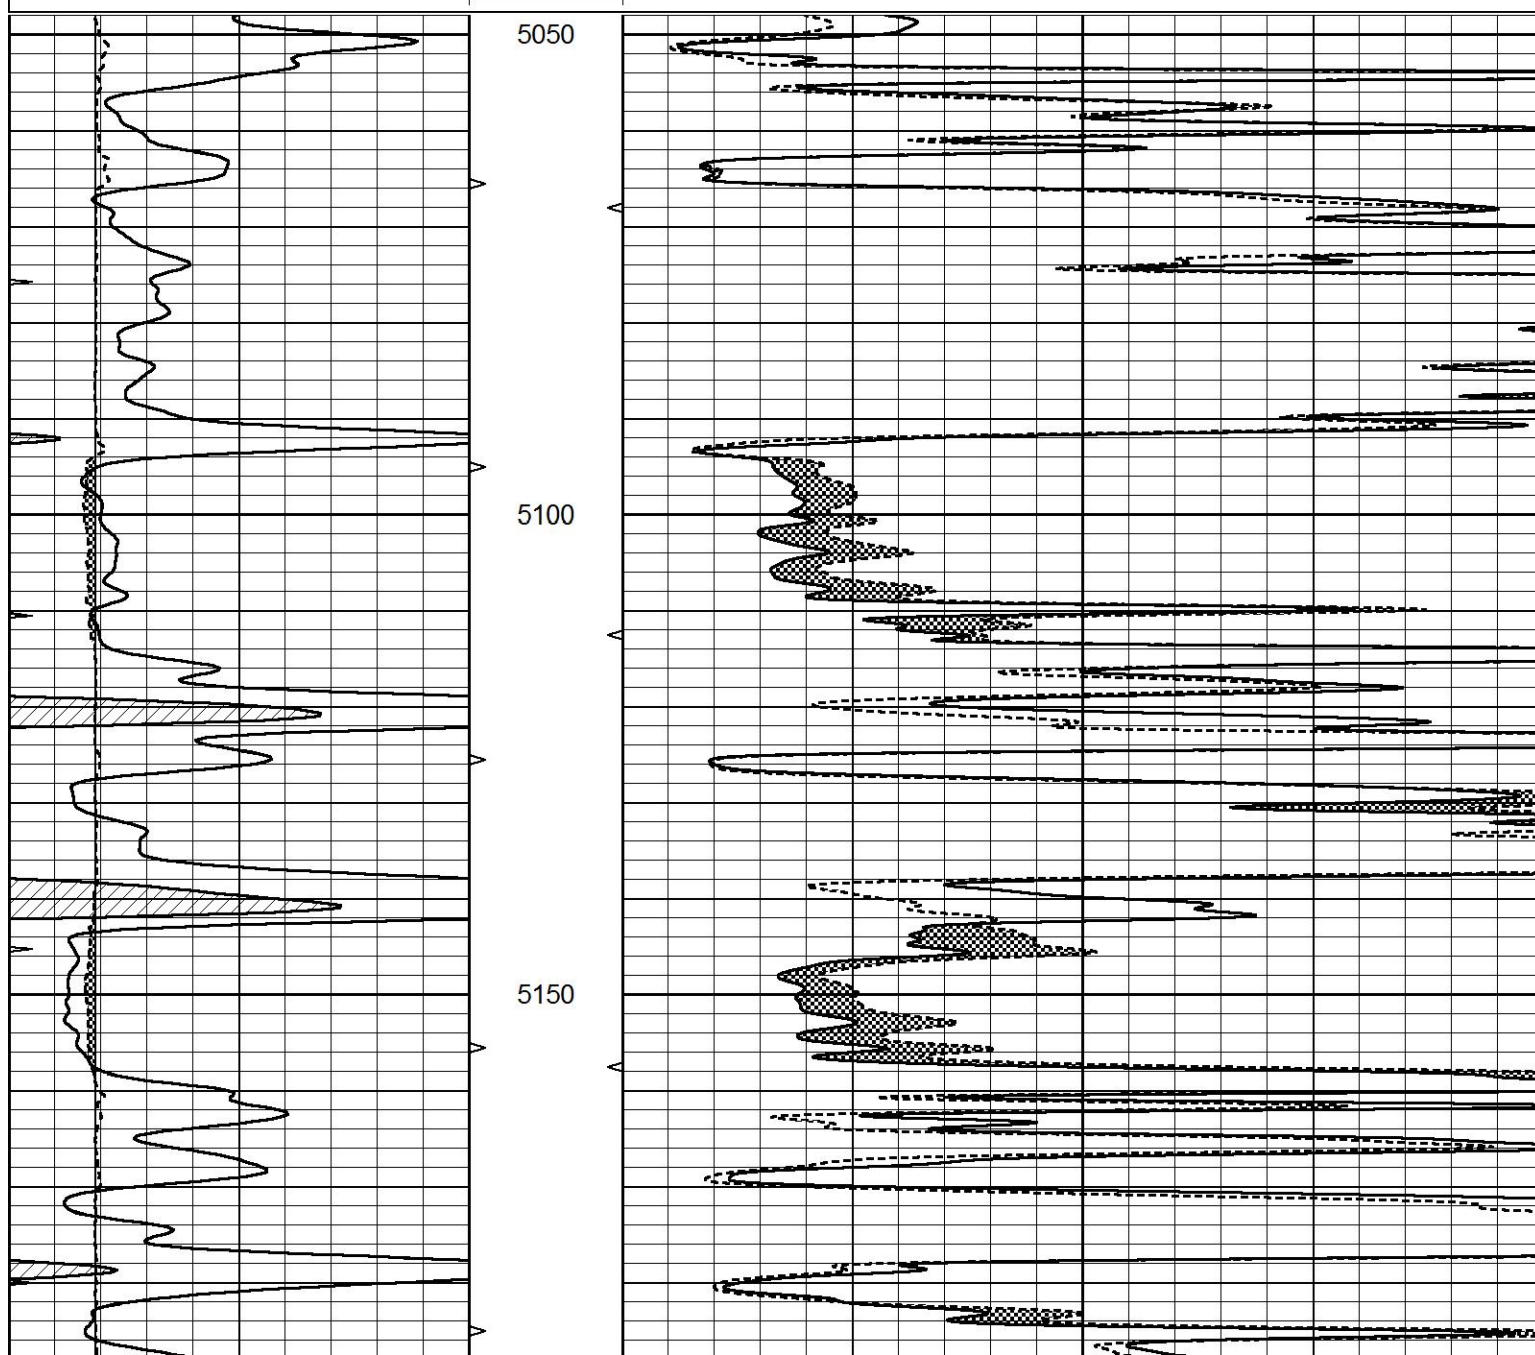

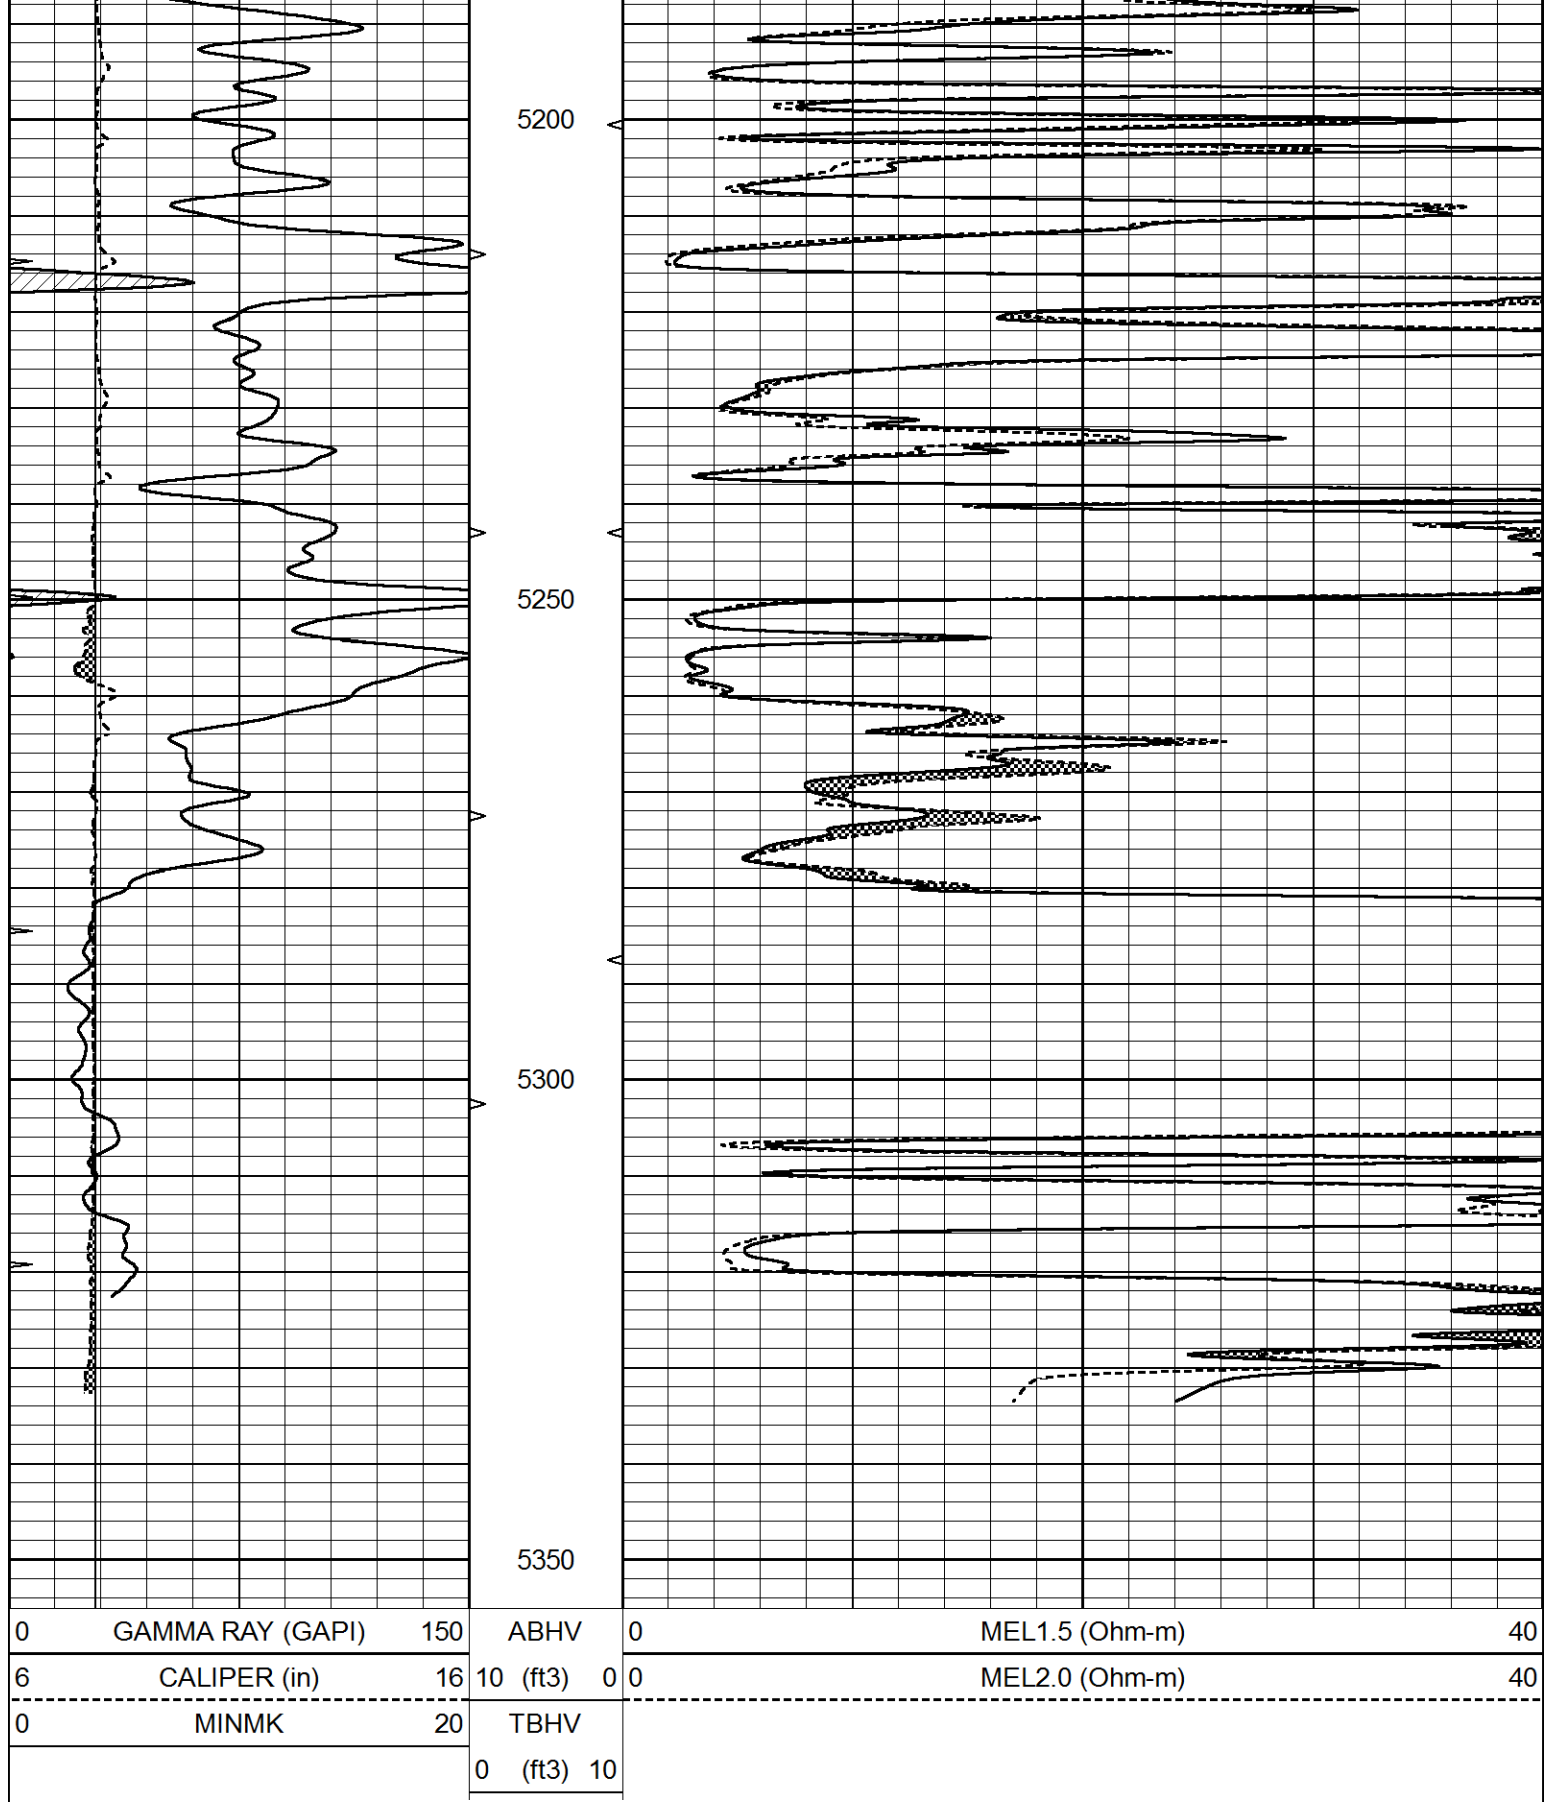

Calibration Report

Database File 6720pe.db
 Dataset Pathname pass6.1
 Dataset Creation Thu Nov 10 19:53:20 2022

MICRO Calibration Report

Serial Number:

MICRO6

Serial Number:	MICROSCOPE	
Tool Model:	PROBE	
Performed:	Wed Nov 09 00:05:30 2022	
Caliper Calibration:	Gain=-2.914	Offset=18.783
References	Low Cal	High Cal
Readings	8.000	16.000
	3.700	0.955
1.5" Calibration:	Gain=46.000	Offset=0.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.002	0.624
2" Calibration:	Gain=55.000	Offset=-0.300
References	Low Cal	High Cal
Readings	0.000	20.000
	0.006	0.468
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Wed Jul 20 23:52:54 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5600	GAPI/cps