MICRO LOG

Company SHAKESPEARE OIL COMPANY, INC.
Well BLOOM #2-22
Field UNNAMED
County GOVE State KANSAS

Location: API # : 15-063-22420-0000
1470' FNL & 1740' FWL
NE - NW - SE - NW

SEC 22 TWP 11S RGE 31W

Other Services
CDL/CNL/PE
DIL

Elevation
K.B. 2978
D.F. 2976
G.L. 2967

Permanent Datum GROUND LEVEL Elevation 2967
Log Measured From KELLY BUSHING 11' A.G.L.
Drilling Measured From KELLY BUSHING

Date	10/21/22		
Run Number	TWO		
Depth Driller	4680		
Depth Logger	4681		
Bottom Logged Interval	4679		
Top Log Interval	3500		
Casing Driller	8 5/8"@225'		
Casing Logger	225		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4,000 PPM	
Density / Viscosity	9.1/53		
pH / Fluid Loss	11.0/7.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.60@66F		
Rmf @ Meas. Temp	1.20@66F		
Rmc @ Meas. Temp	1.92@66F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.866@122F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	12:15 P.M.		
Maximum Recorded Temperature	122F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KENT MATSON		

Company SHAKESPEARE OIL COMPANY, INC.
Well BLOOM #2-22
Field UNNAMED
County GOVE
State KANSAS

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

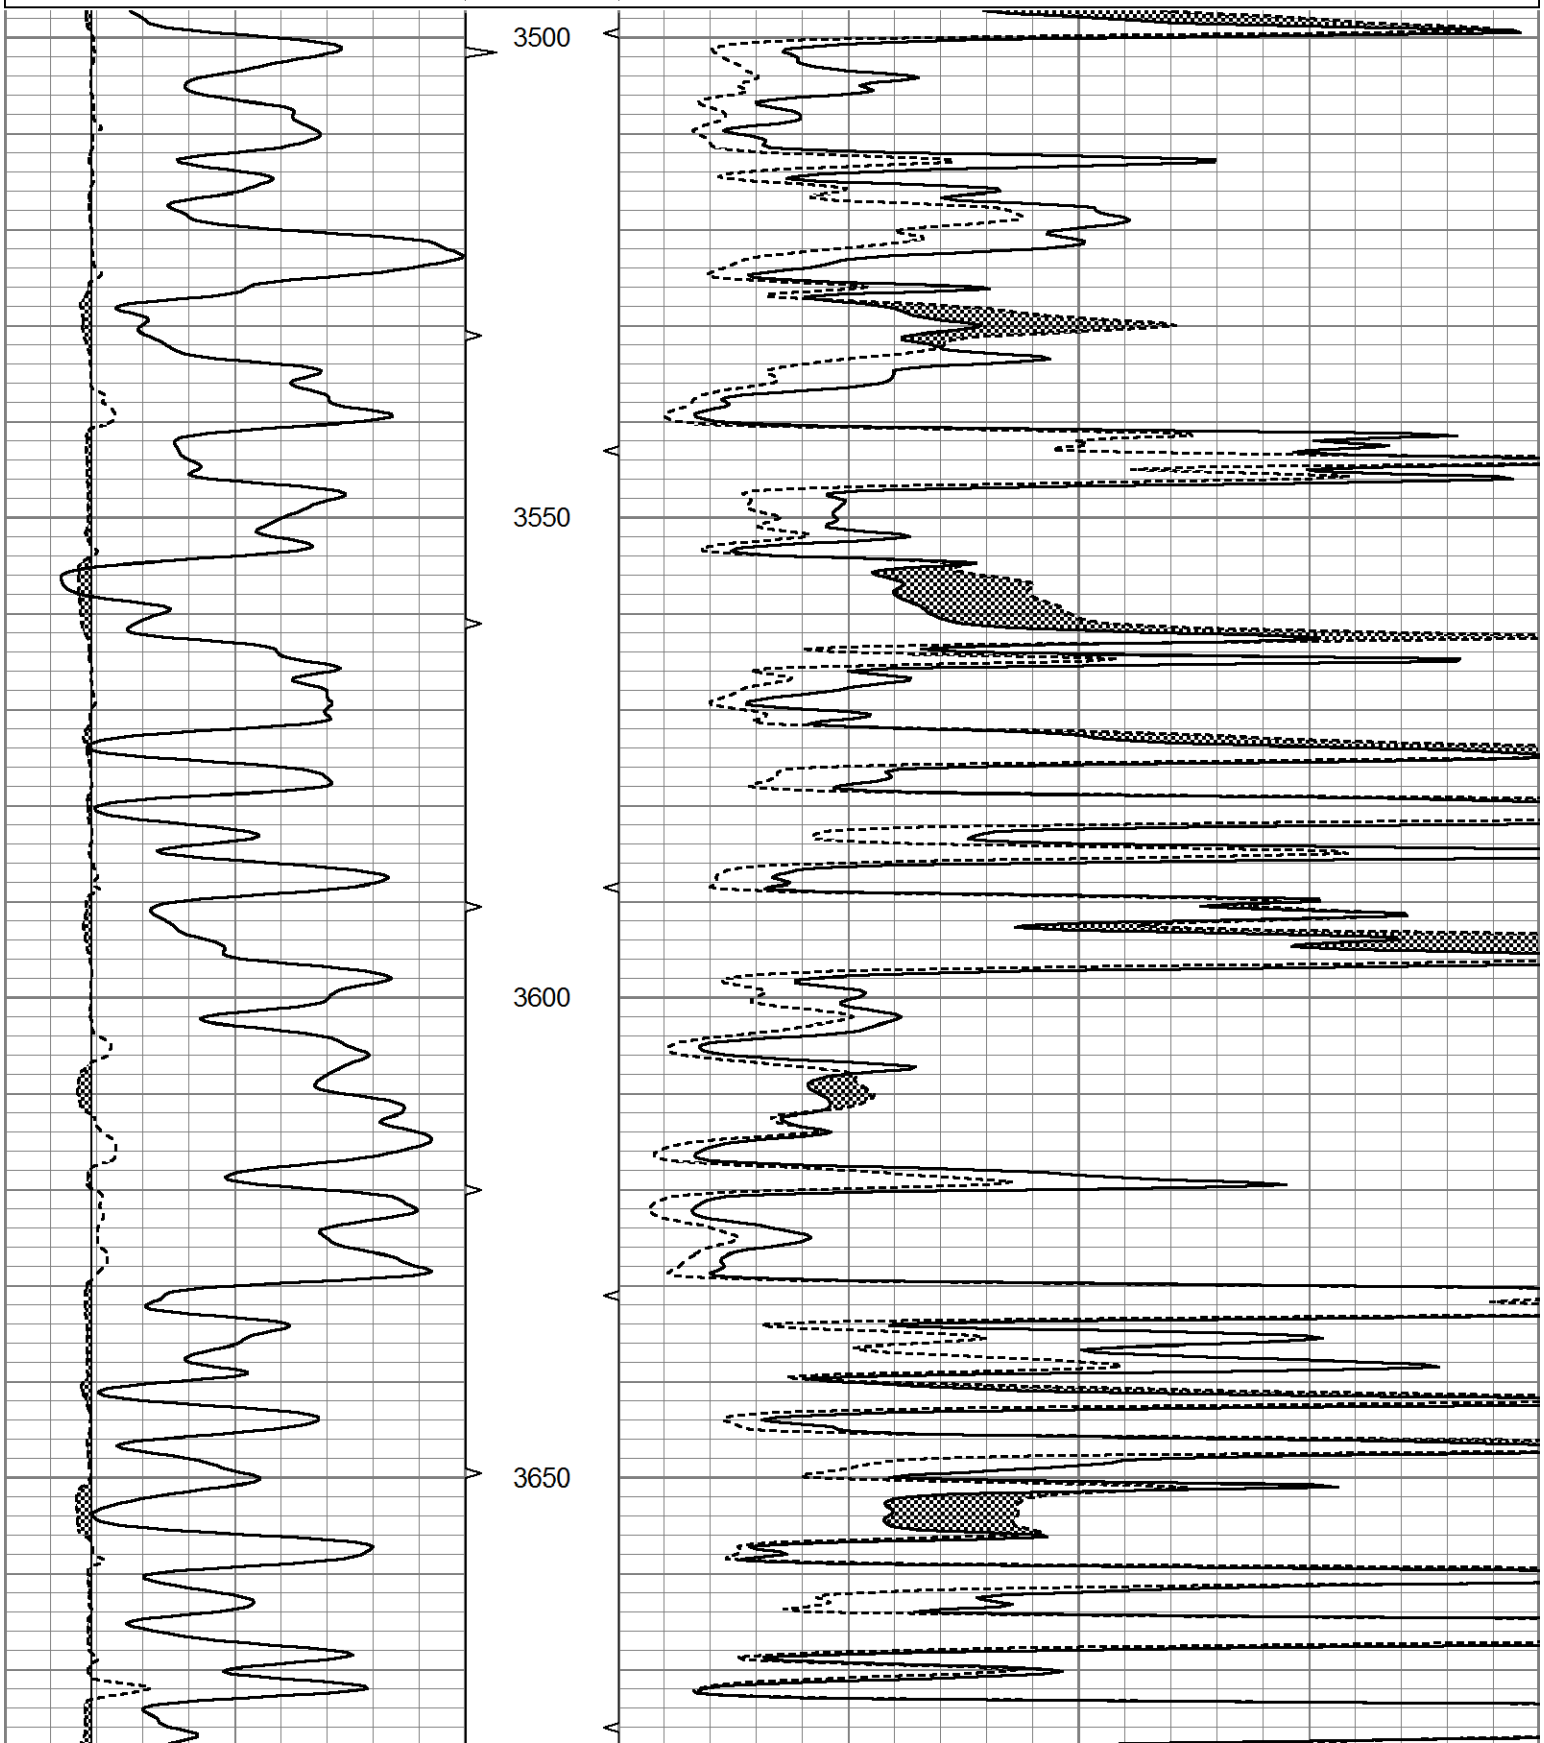
15-063-22420-0000

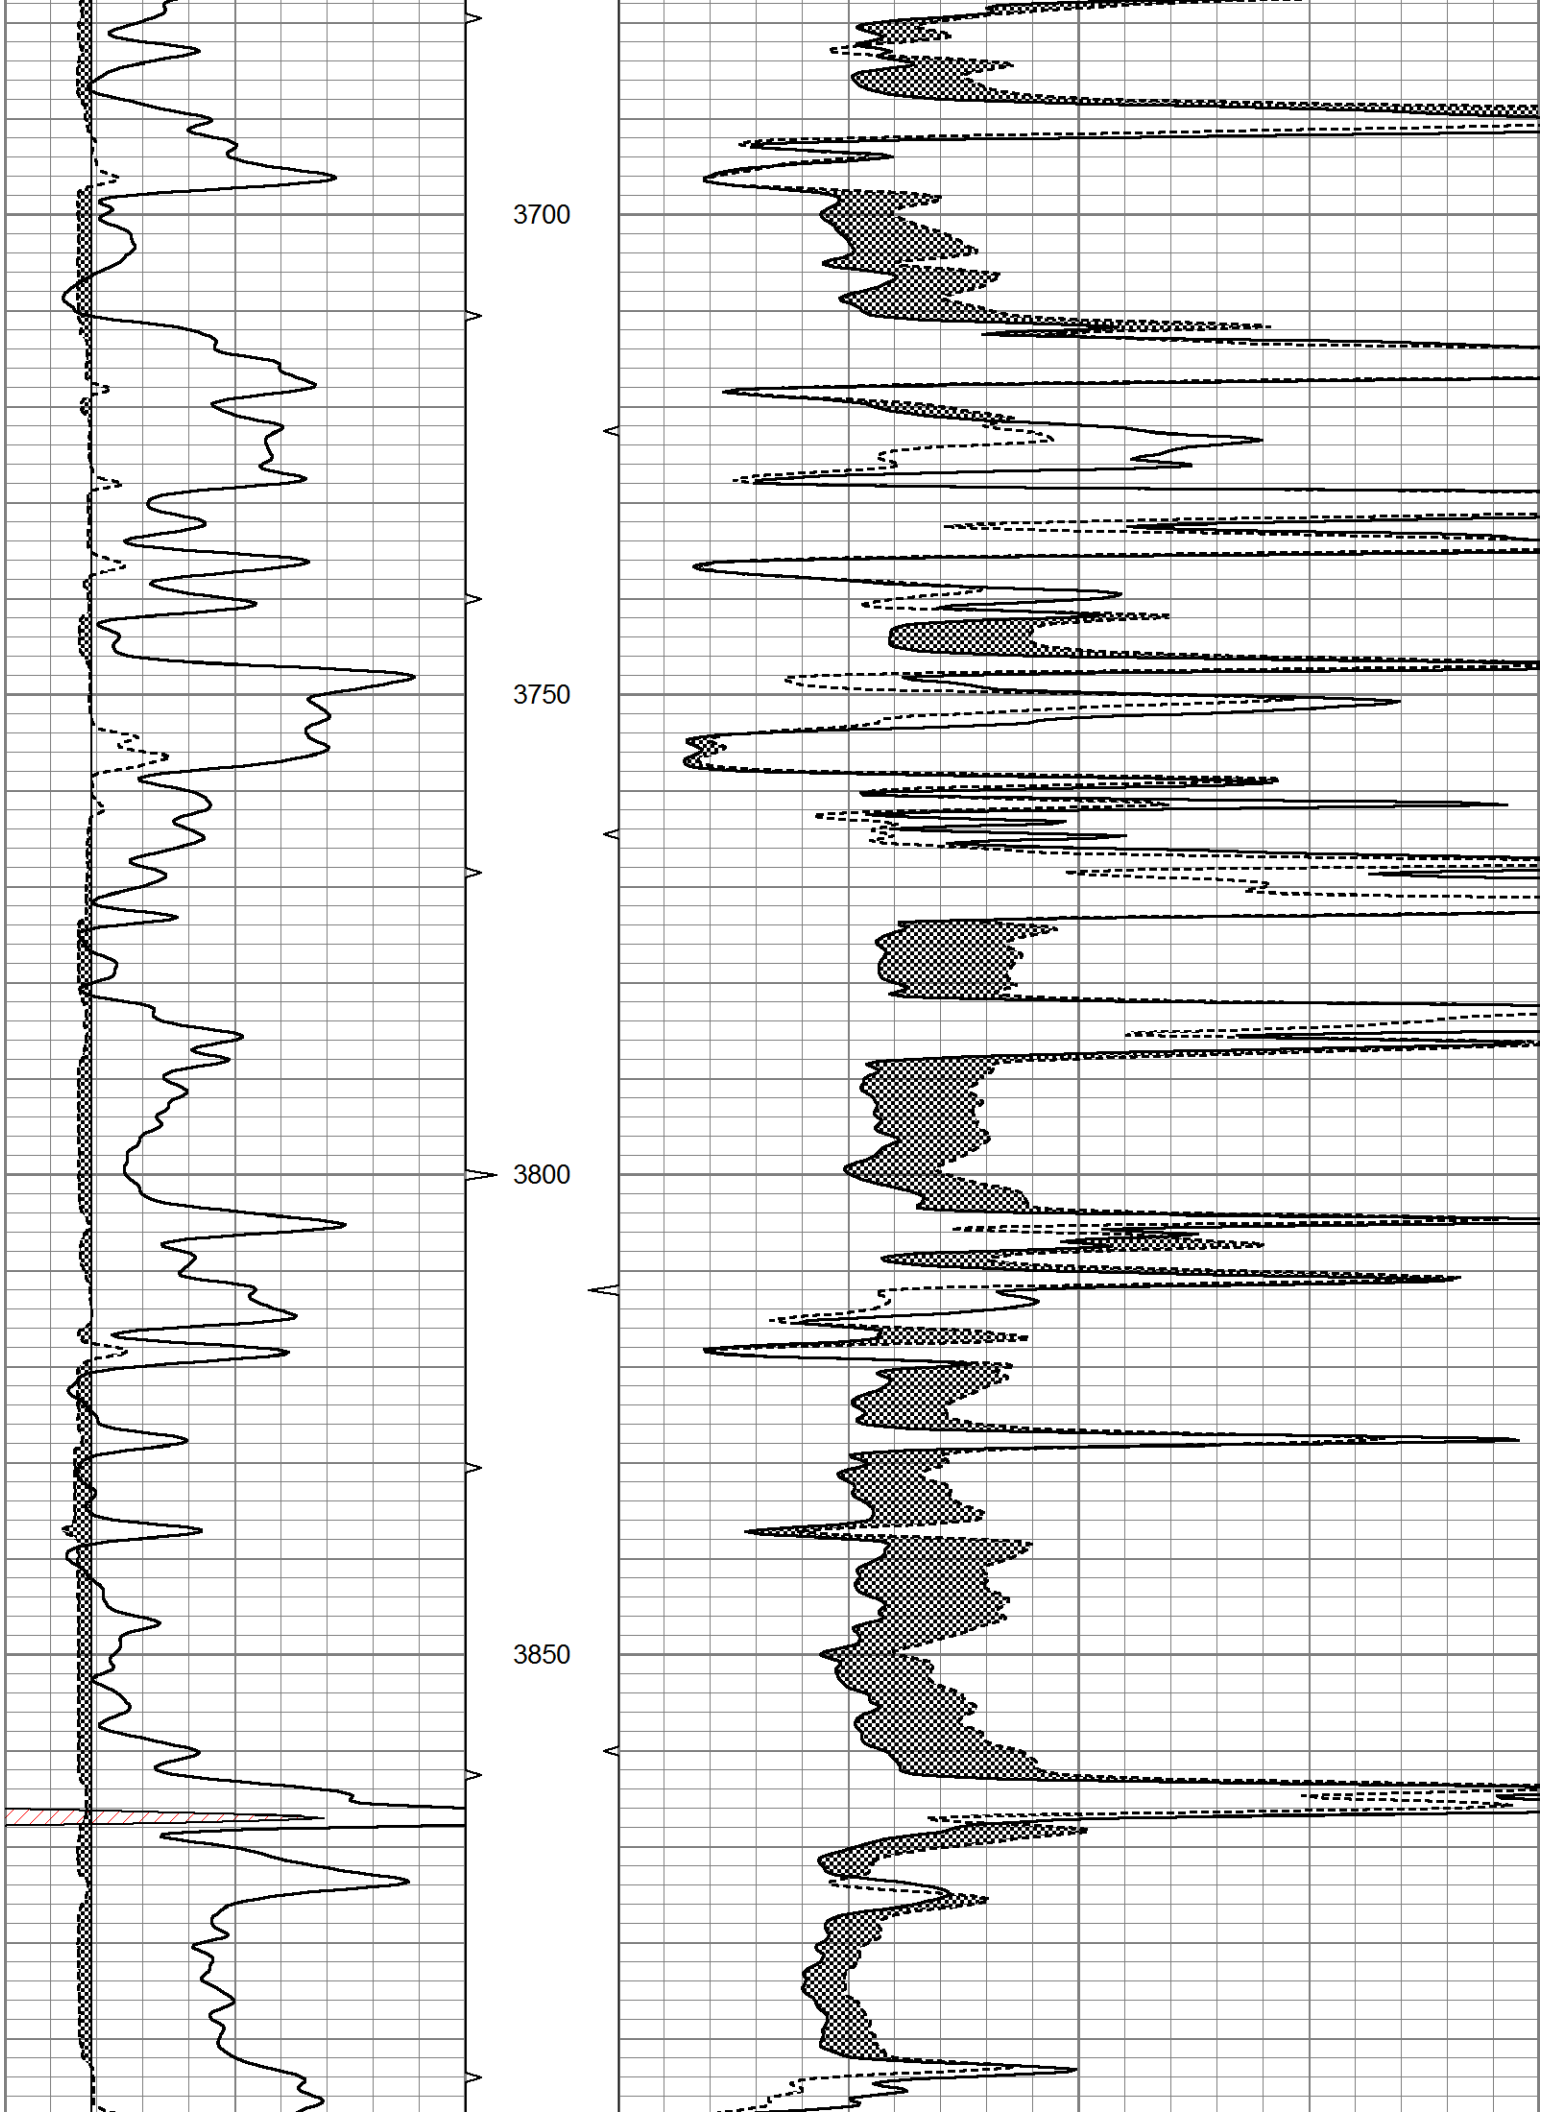
THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
CAMPUS & I-70, 1 1/2S., 1/2 W., S. INTO

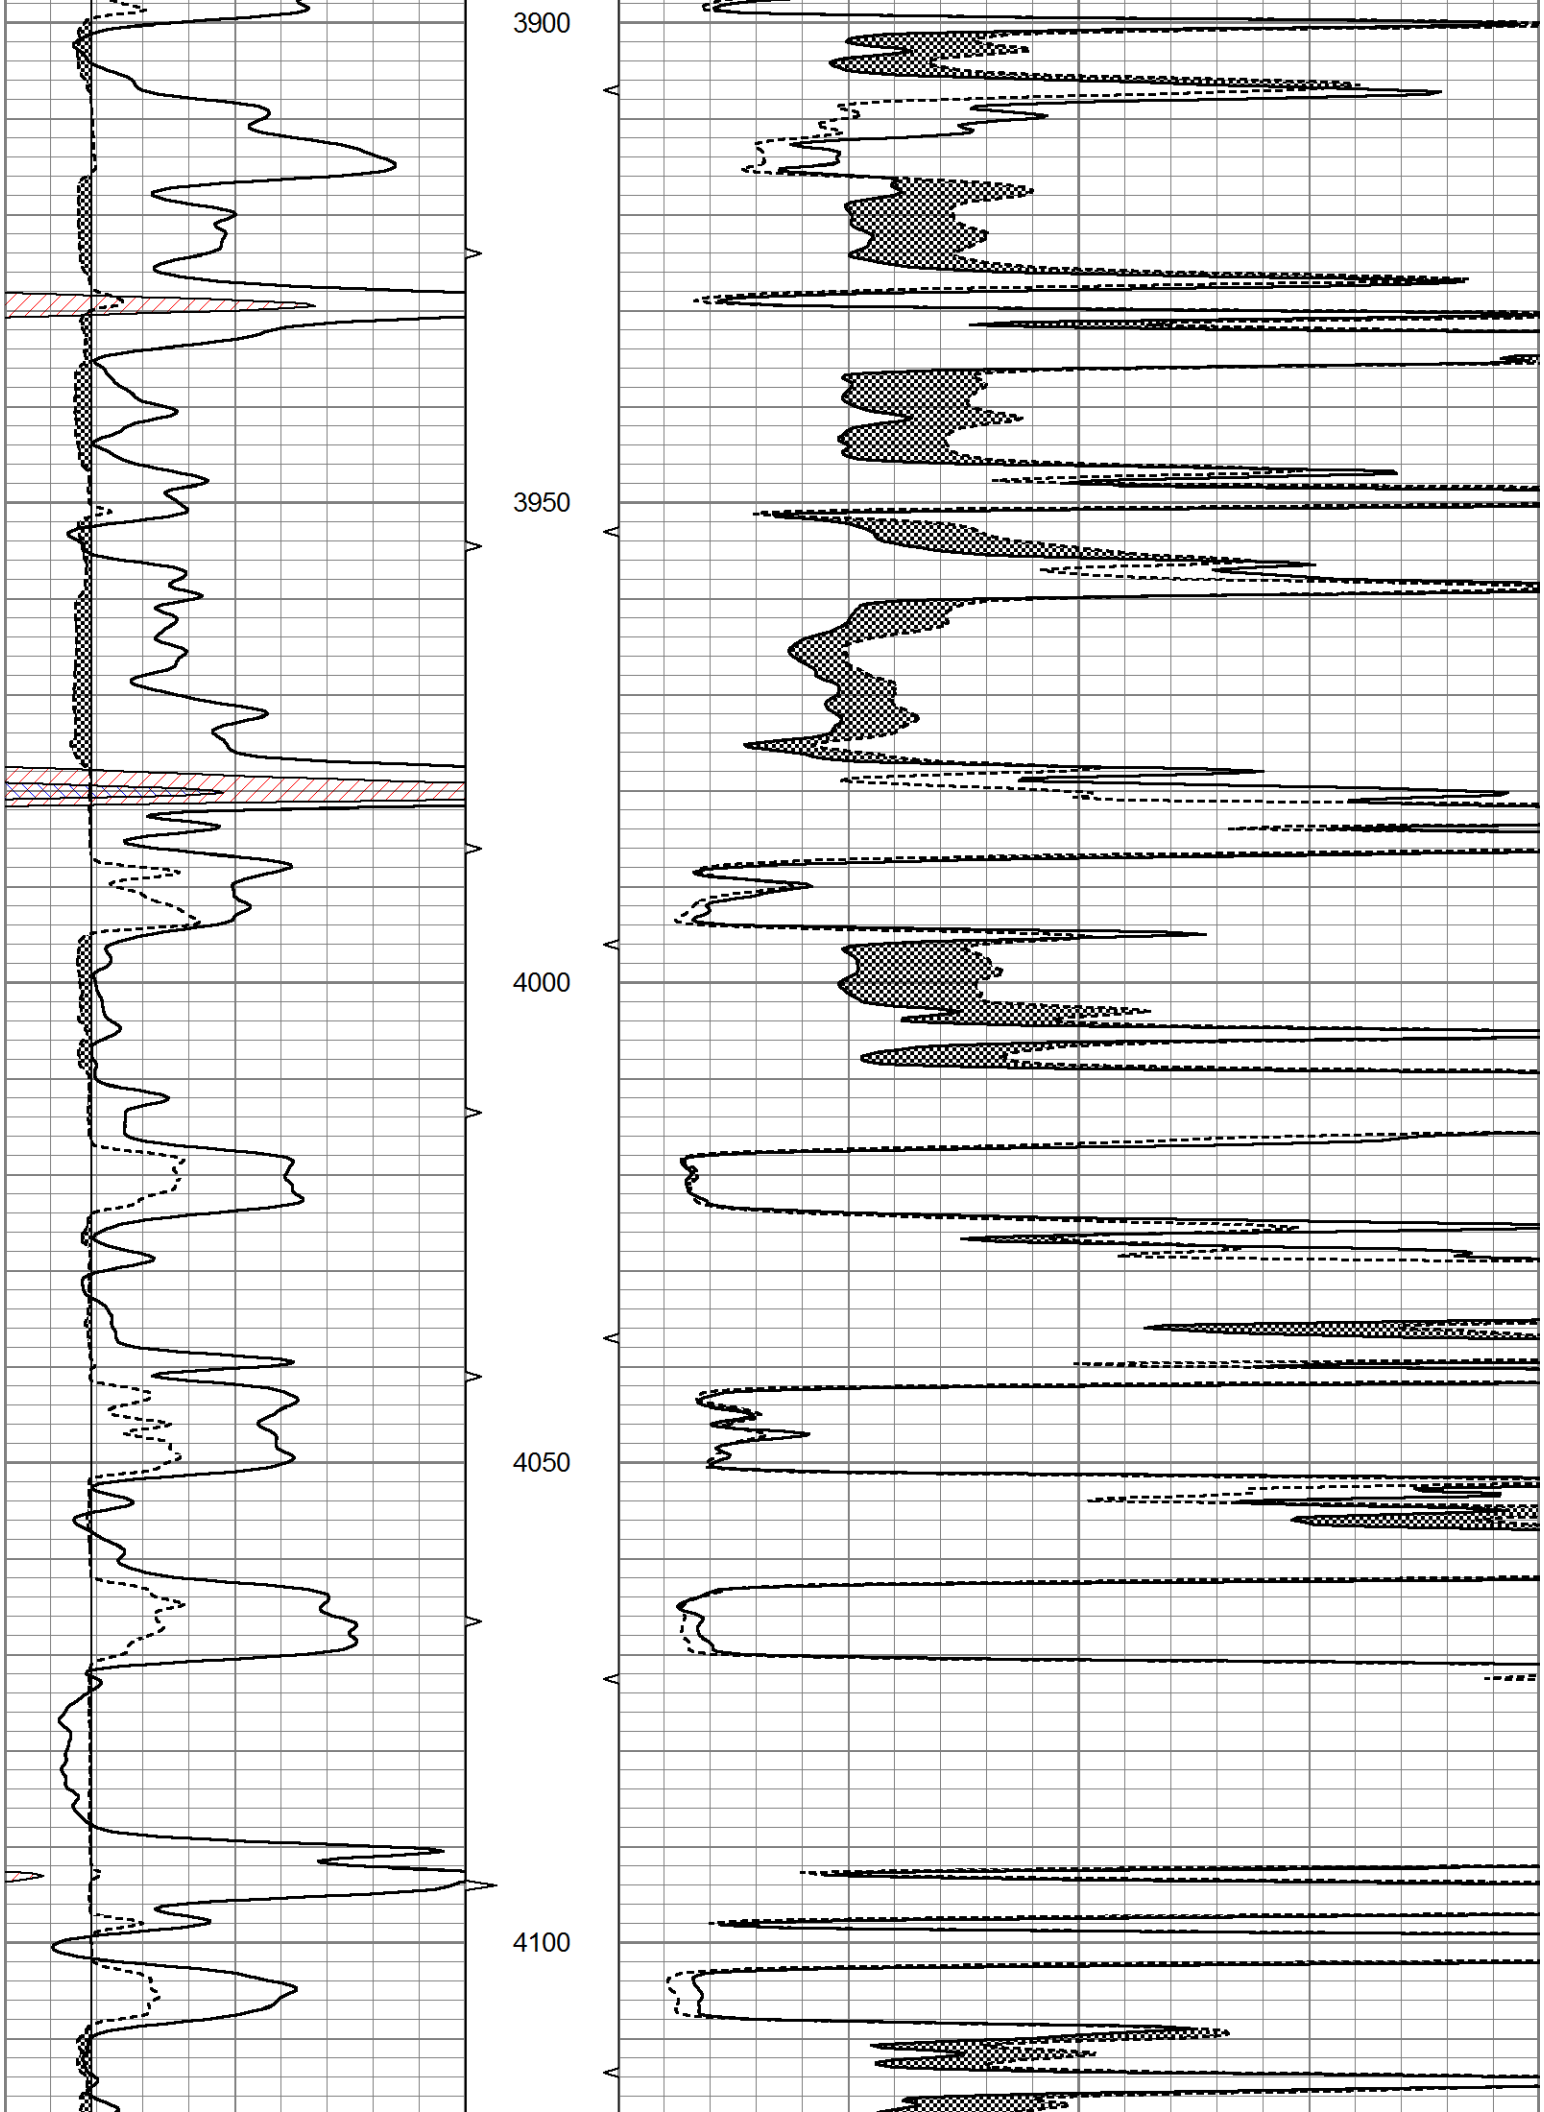
MAIN SECTION

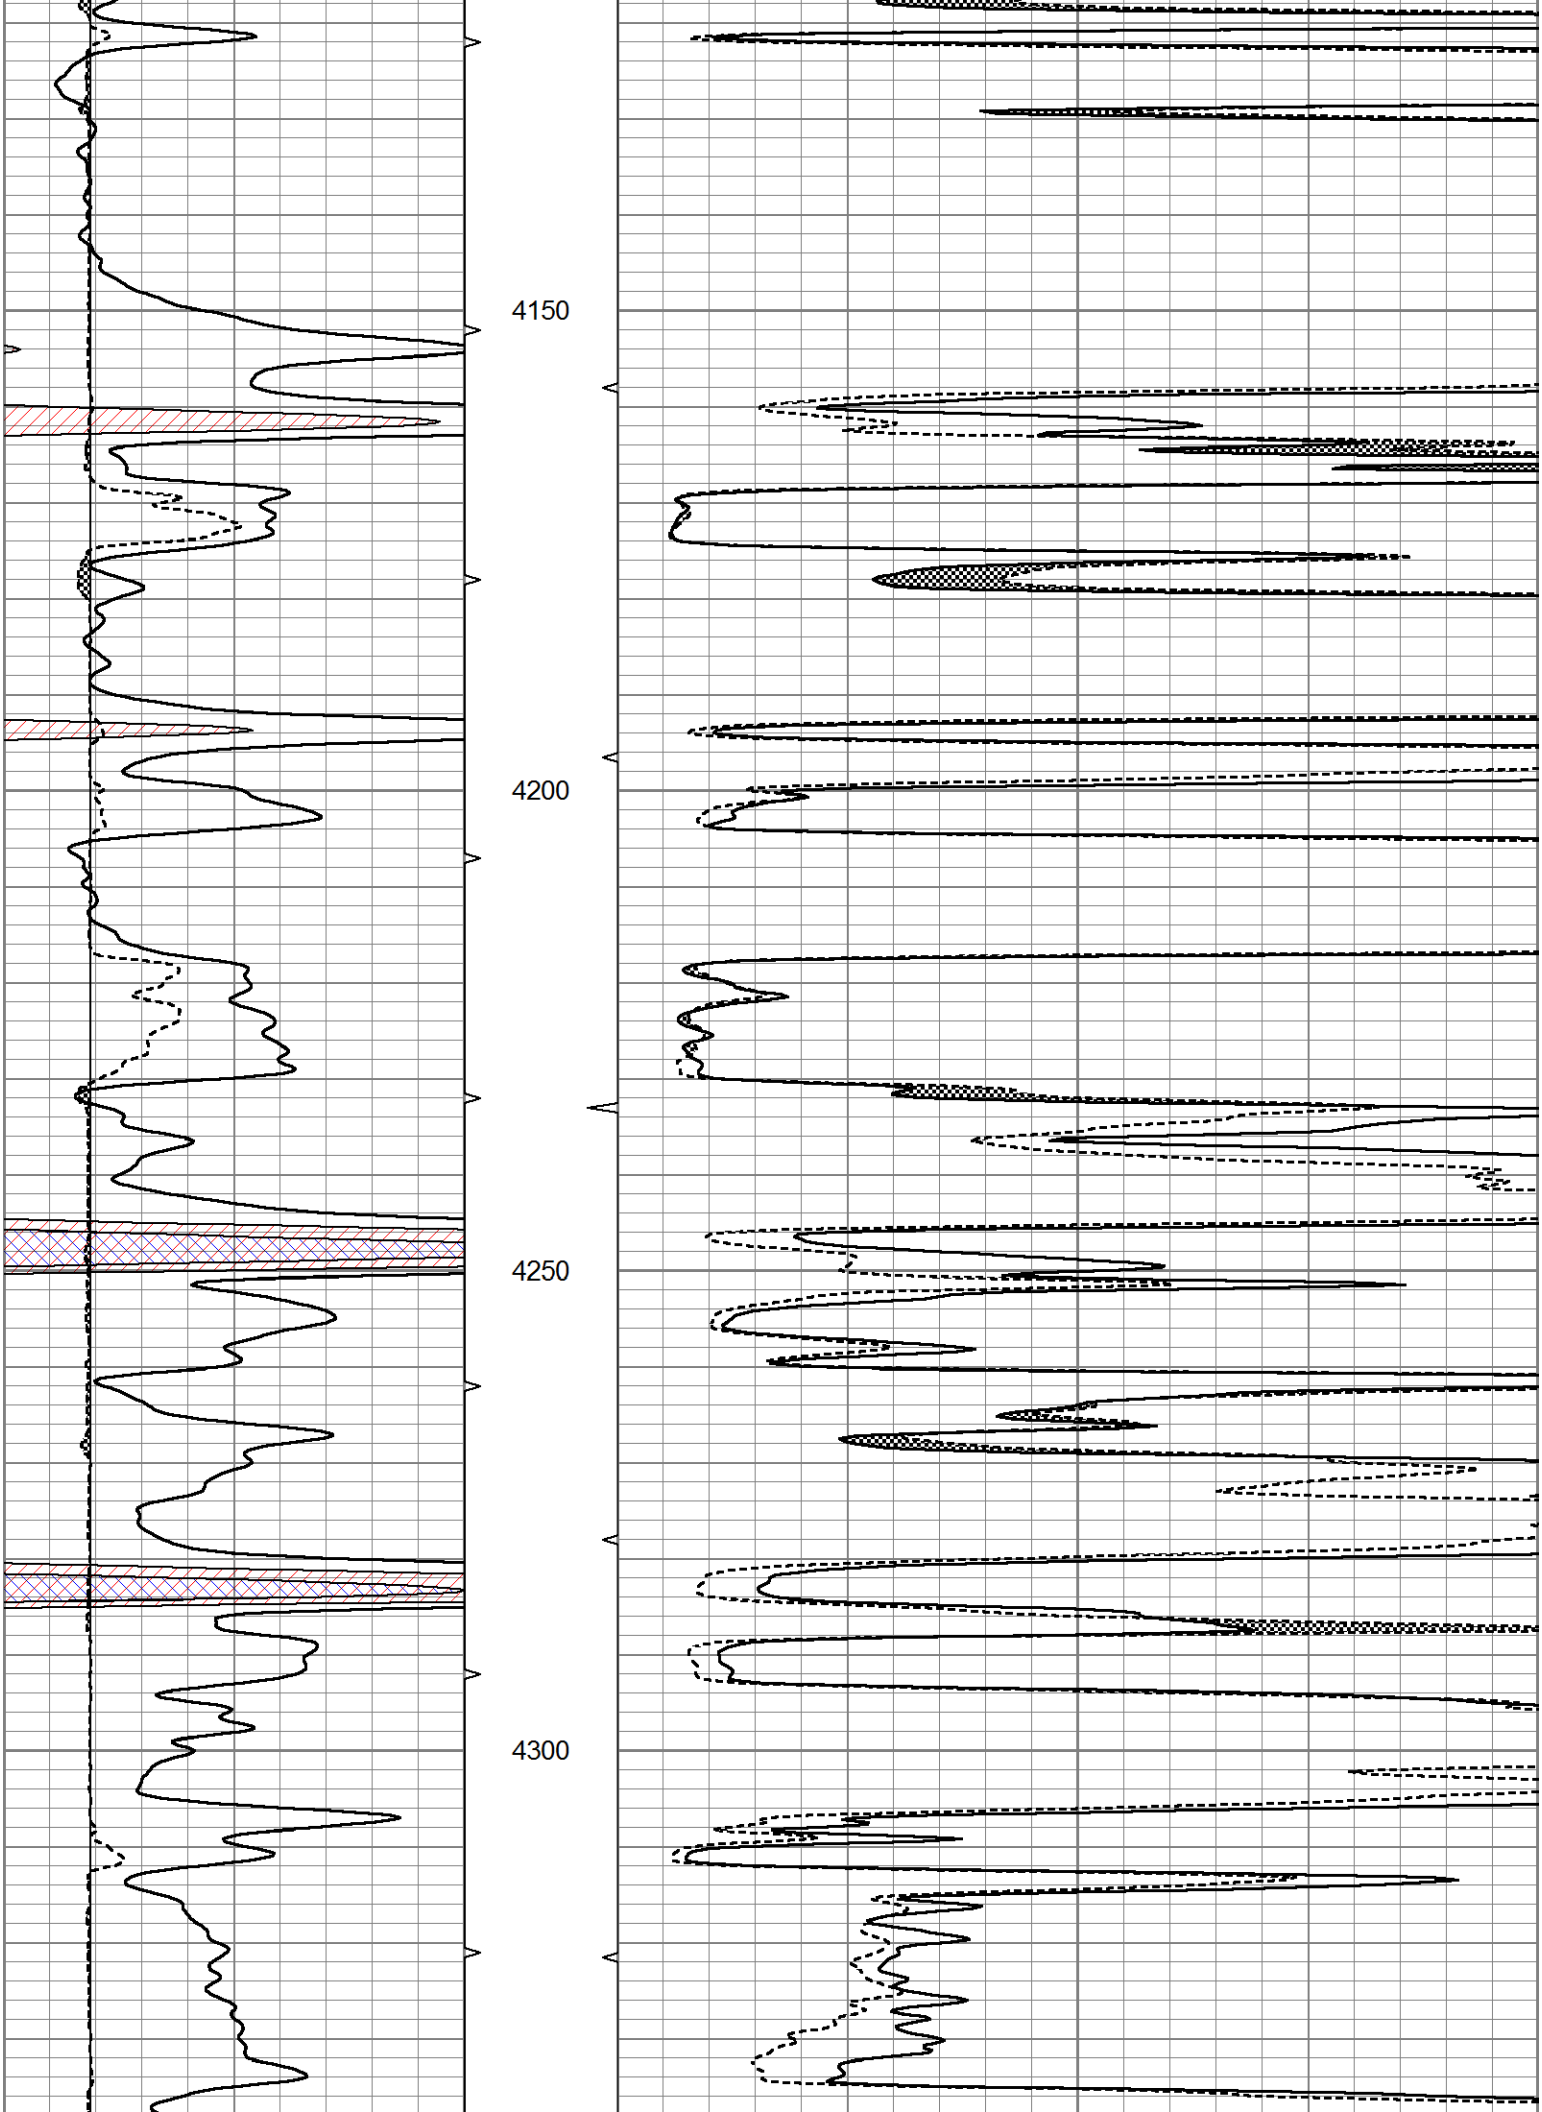
Database File	7099pe.db
Dataset Pathname	pass6.2
Presentation Format	micro
Dataset Creation	Fri Oct 21 12:58:53 2022
Charted by	Depth in Feet scaled 1:240

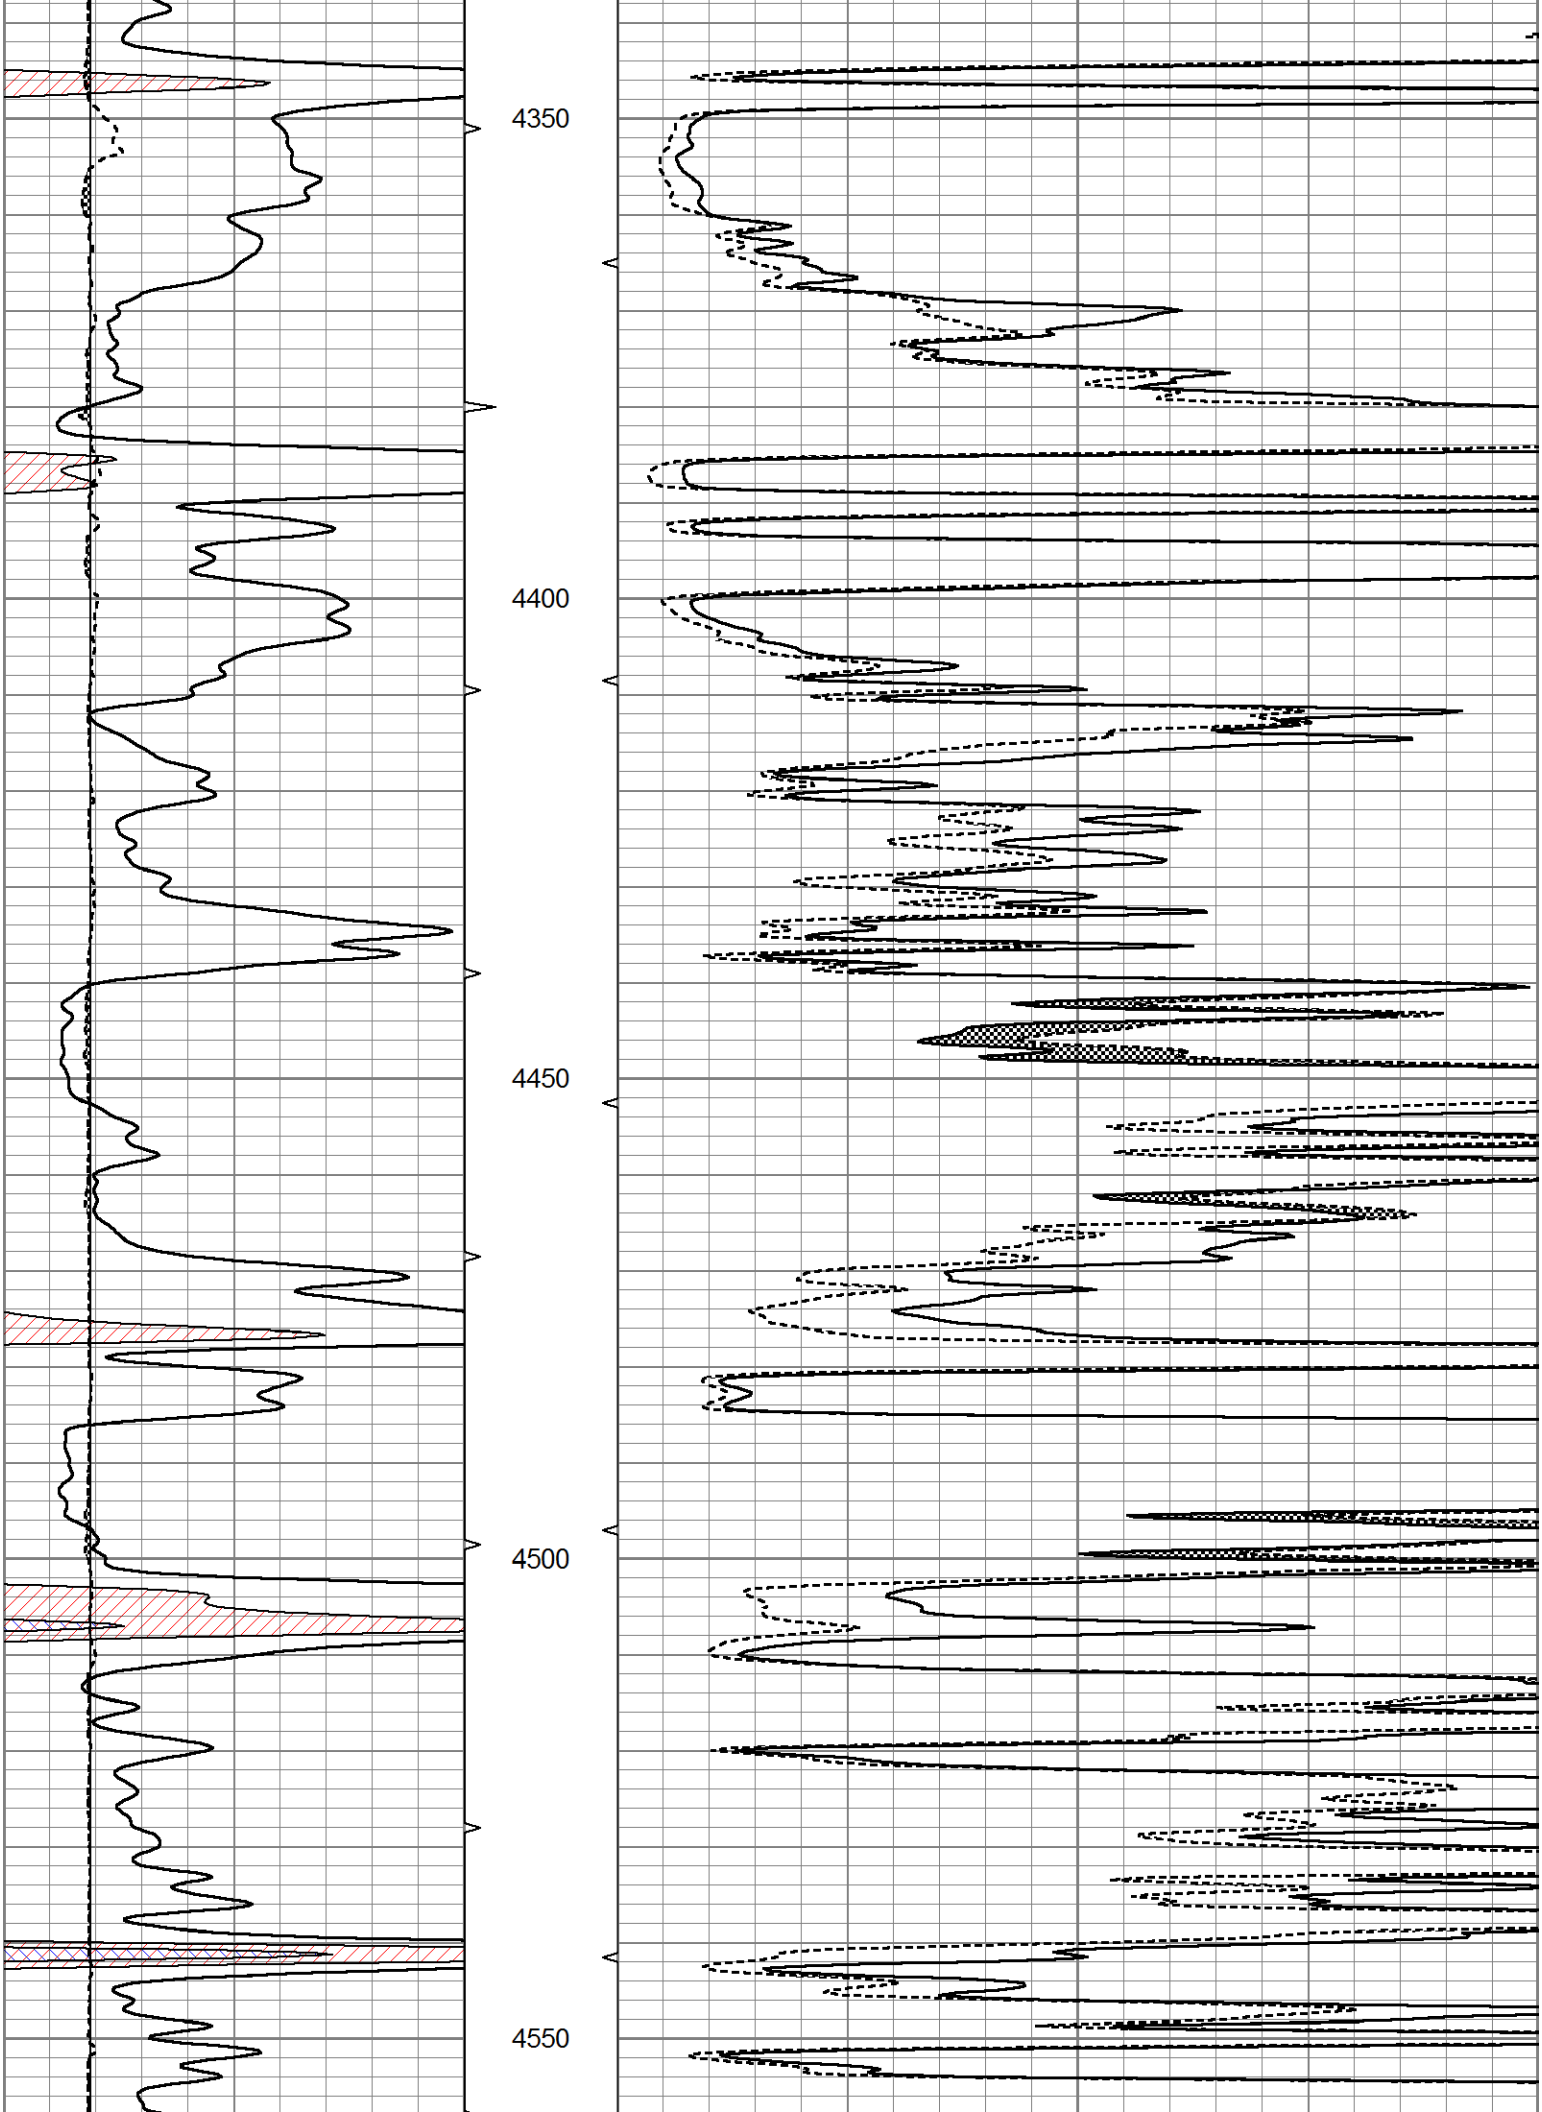
0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV		
			0 (ft3) 10		

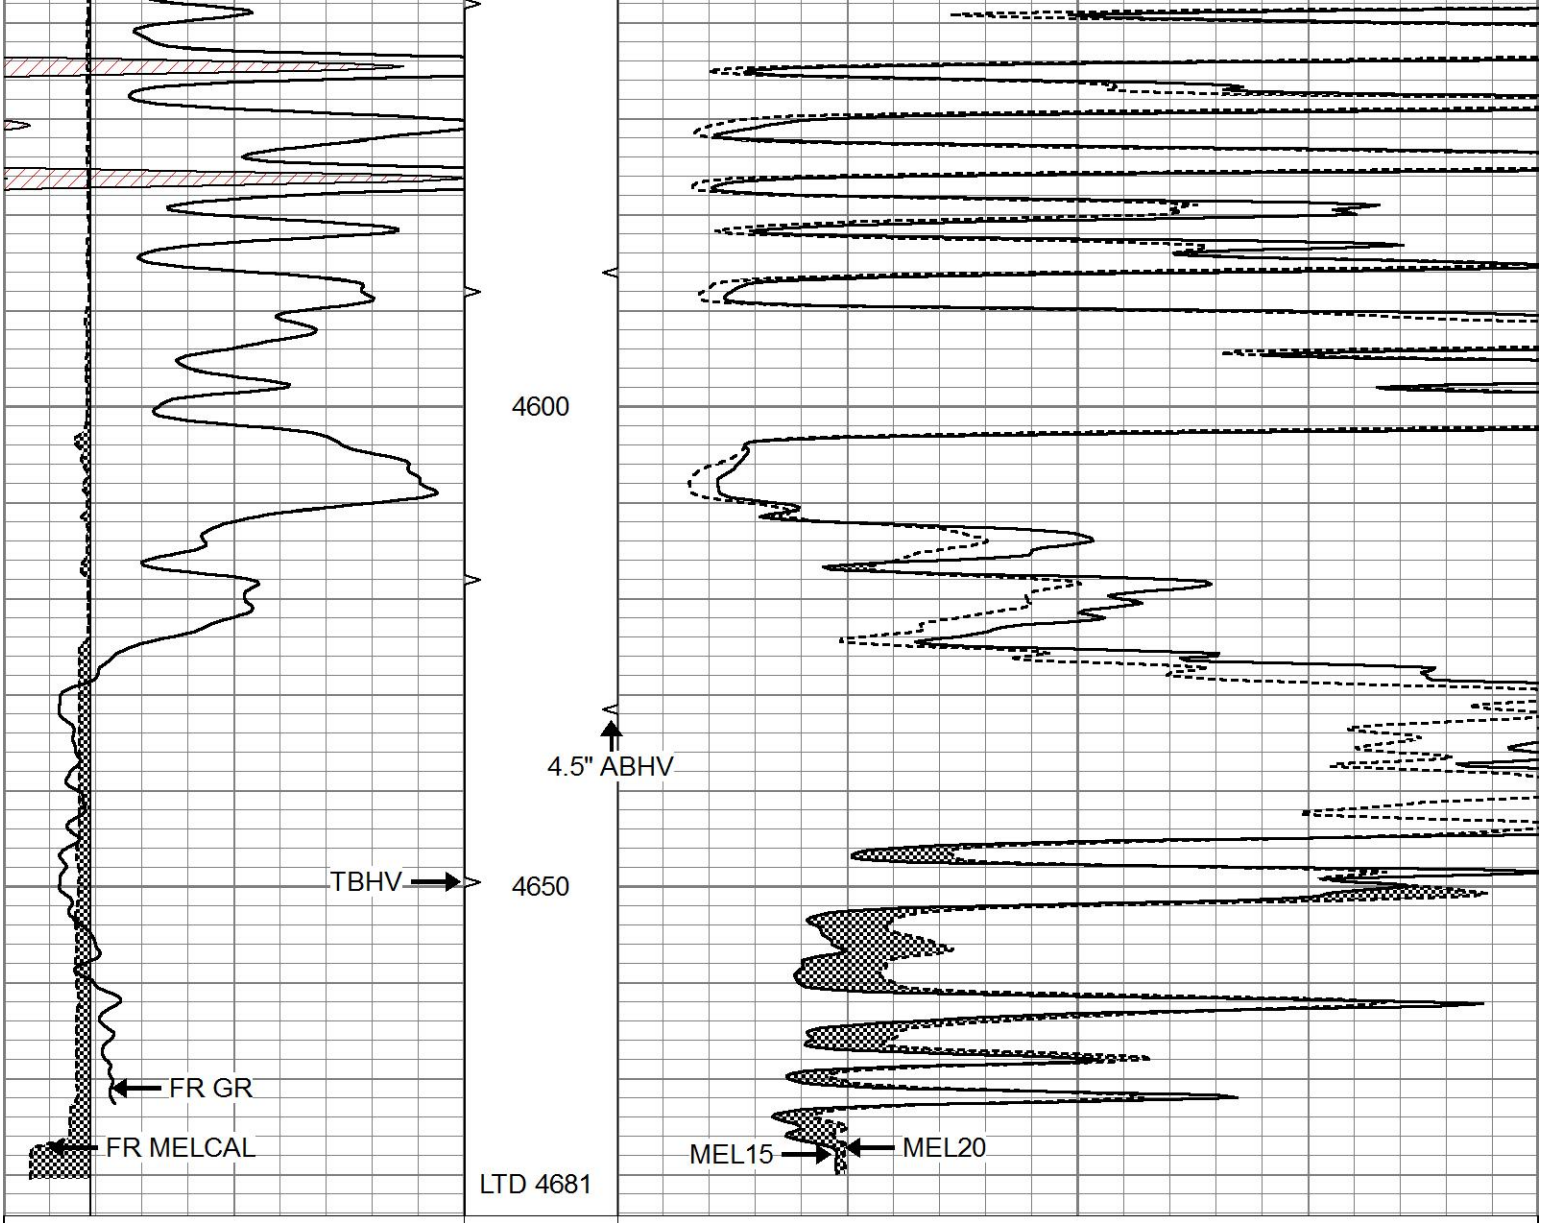



3700
3750
3800
3850


3900
3950
4000
4050
4100


4150
4200
4250
4300


4350
4400
4450
4500
4550



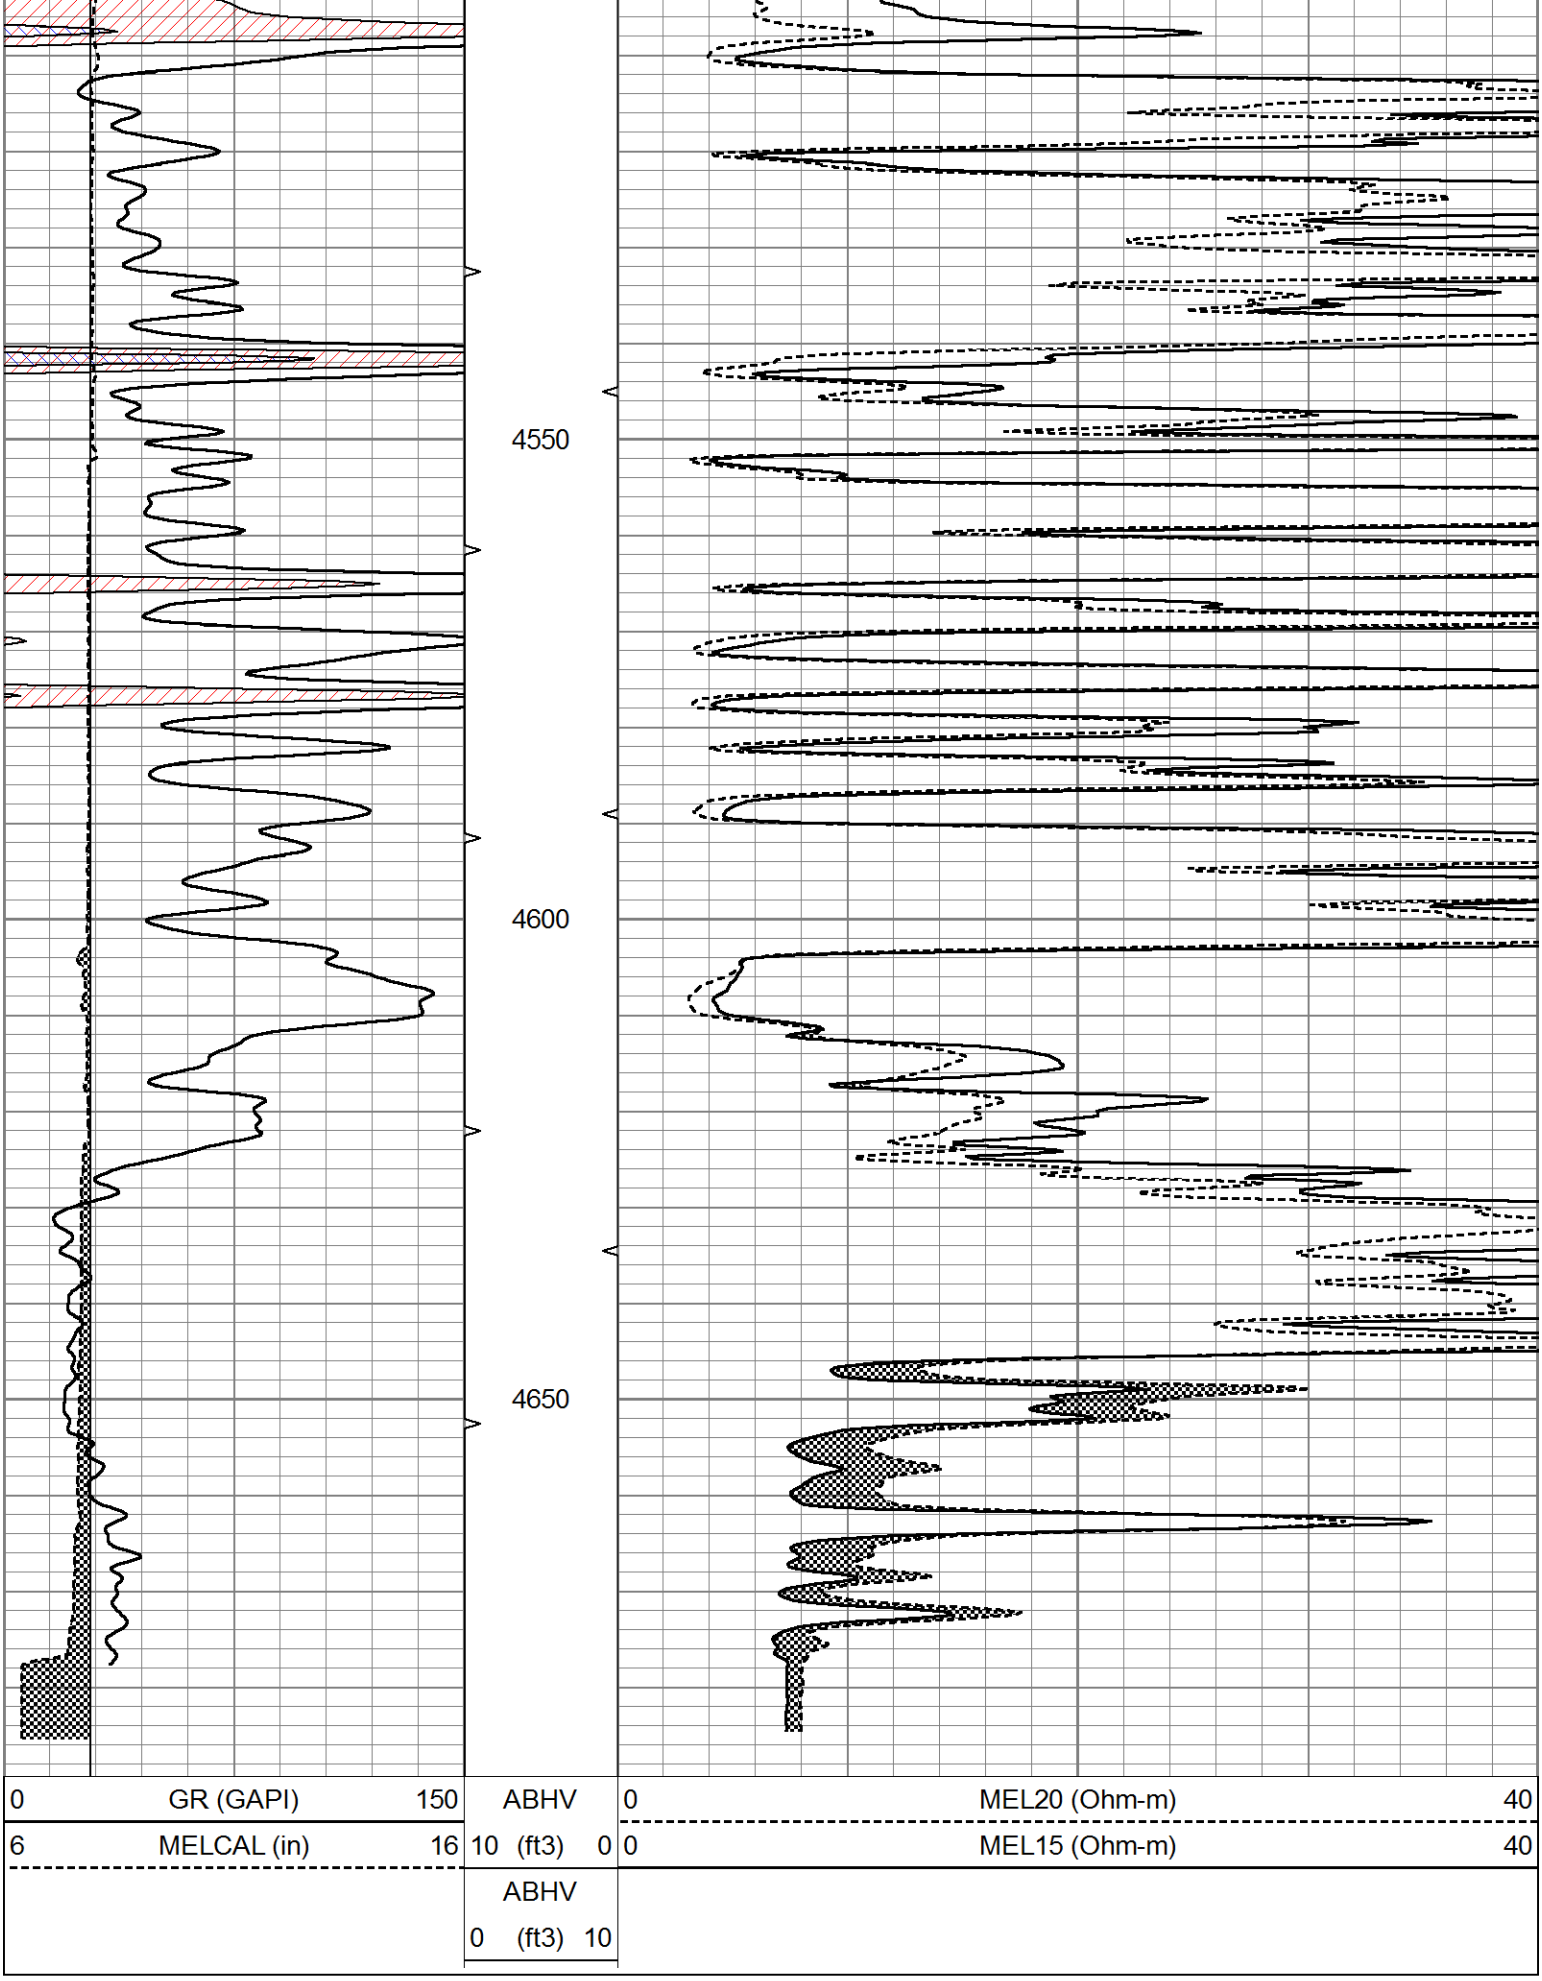
0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m) 40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m) 40
			ABHV		
			0 (ft3) 10		

REPEAT SECTION

Database File	7099pe.db
Dataset Pathname	pass5.1
Presentation Format	micro
Dataset Creation	Fri Oct 21 13:02:22 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m) 40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m) 40
			ABHV		
			0 (ft3) 10		





Calibration Report

Database File 7099pe.db

Dataset Pathname	pass6.2
Dataset Creation	Fri Oct 21 12:58:53 2022

MICRO Calibration Report

Serial Number:	070911	
Tool Model:	ProbeN	
Performed:	Wed Oct 19 11:05:22 2022	
Caliper Calibration:	Gain=4.624	Offset=2.358
	Low Cal	High Cal
References	8.000	16.000
Readings	1.220	2.950
1.5" Calibration:	Gain=35.000	Offset=0.500
	Low Cal	High Cal
References	0.000	20.000
Readings	0.001	1.291
2" Calibration:	Gain=50.000	Offset=-0.500
	Low Cal	High Cal
References	0.000	20.000
Readings	0.003	1.103

Gamma Ray Calibration Report

Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Sat Oct 08 03:50:38 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3200	GAPI/cps