



MICRO LOG

Company JOHN O. FARMER, INC.
 Well SCHMIDT B #1
 Field SCHEIMDLER SOUTHEAST
 County ELLIS
 State Kansas

Company JOHN O. FARMER, INC.
 Well SCHMIDT B #1
 Field SCHEIMDLER SOUTHEAST
 County ELLIS State Kansas

Location: API #: 15 051 27047
 330' FNL & 1510' FWL
 SEC 34 TWP 12S RGE 17W
 Permanent Datum Ground Level Elevation 2036
 Log Measured From KB 8' AGL
 Drilling Measured From KB
 Other Services
 DIL
 CDNL
 Elevation
 K.B. 2044
 D.F. 2042
 G.L. 2036

Date	10/05/22
Run Number	TWO
Depth Driller	3660
Depth Logger	3660
Bottom Logged Interval	3658
Top Log Interval	3000
Casing Driller	8 5/8"@223'
Casing Logger	223
Bit Size	7 7/8"
Type Fluid in Hole	Chemical
Density / Viscosity	9.3/59
pH / Fluid Loss	10.6.8
Source of Sample	Pit
Rm @ Meas. Temp	1.1@80degf
Rmf @ Meas. Temp	.83@80degf
Rmc @ Meas. Temp	1.32@80degf
Source of Rmf / Rmc	Calculated
Rm @ BHT	82@107degf
Time Circulation Stopped	9:00 AM
Time Logger on Bottom	10:30 AM
Maximum Recorded Temperature	107degf
Equipment Number	T-605
Location	Hays, KS.
Recorded By	GUS PFANENSTIEL
Witnessed By	AUSTIN KLAUS

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

WELD TECH SHOP NORTH TO EMMERAM RD. 1/4 EAST NORTH INTO.
 Thanks for using Gemini Wireline LLC
 785-625-1182





MAIN PASS

Database File jofschmidt#1oh.db
 Dataset Pathname pass7.1
 Presentation Format kml
 Dataset Creation Wed Oct 05 12:35:03 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

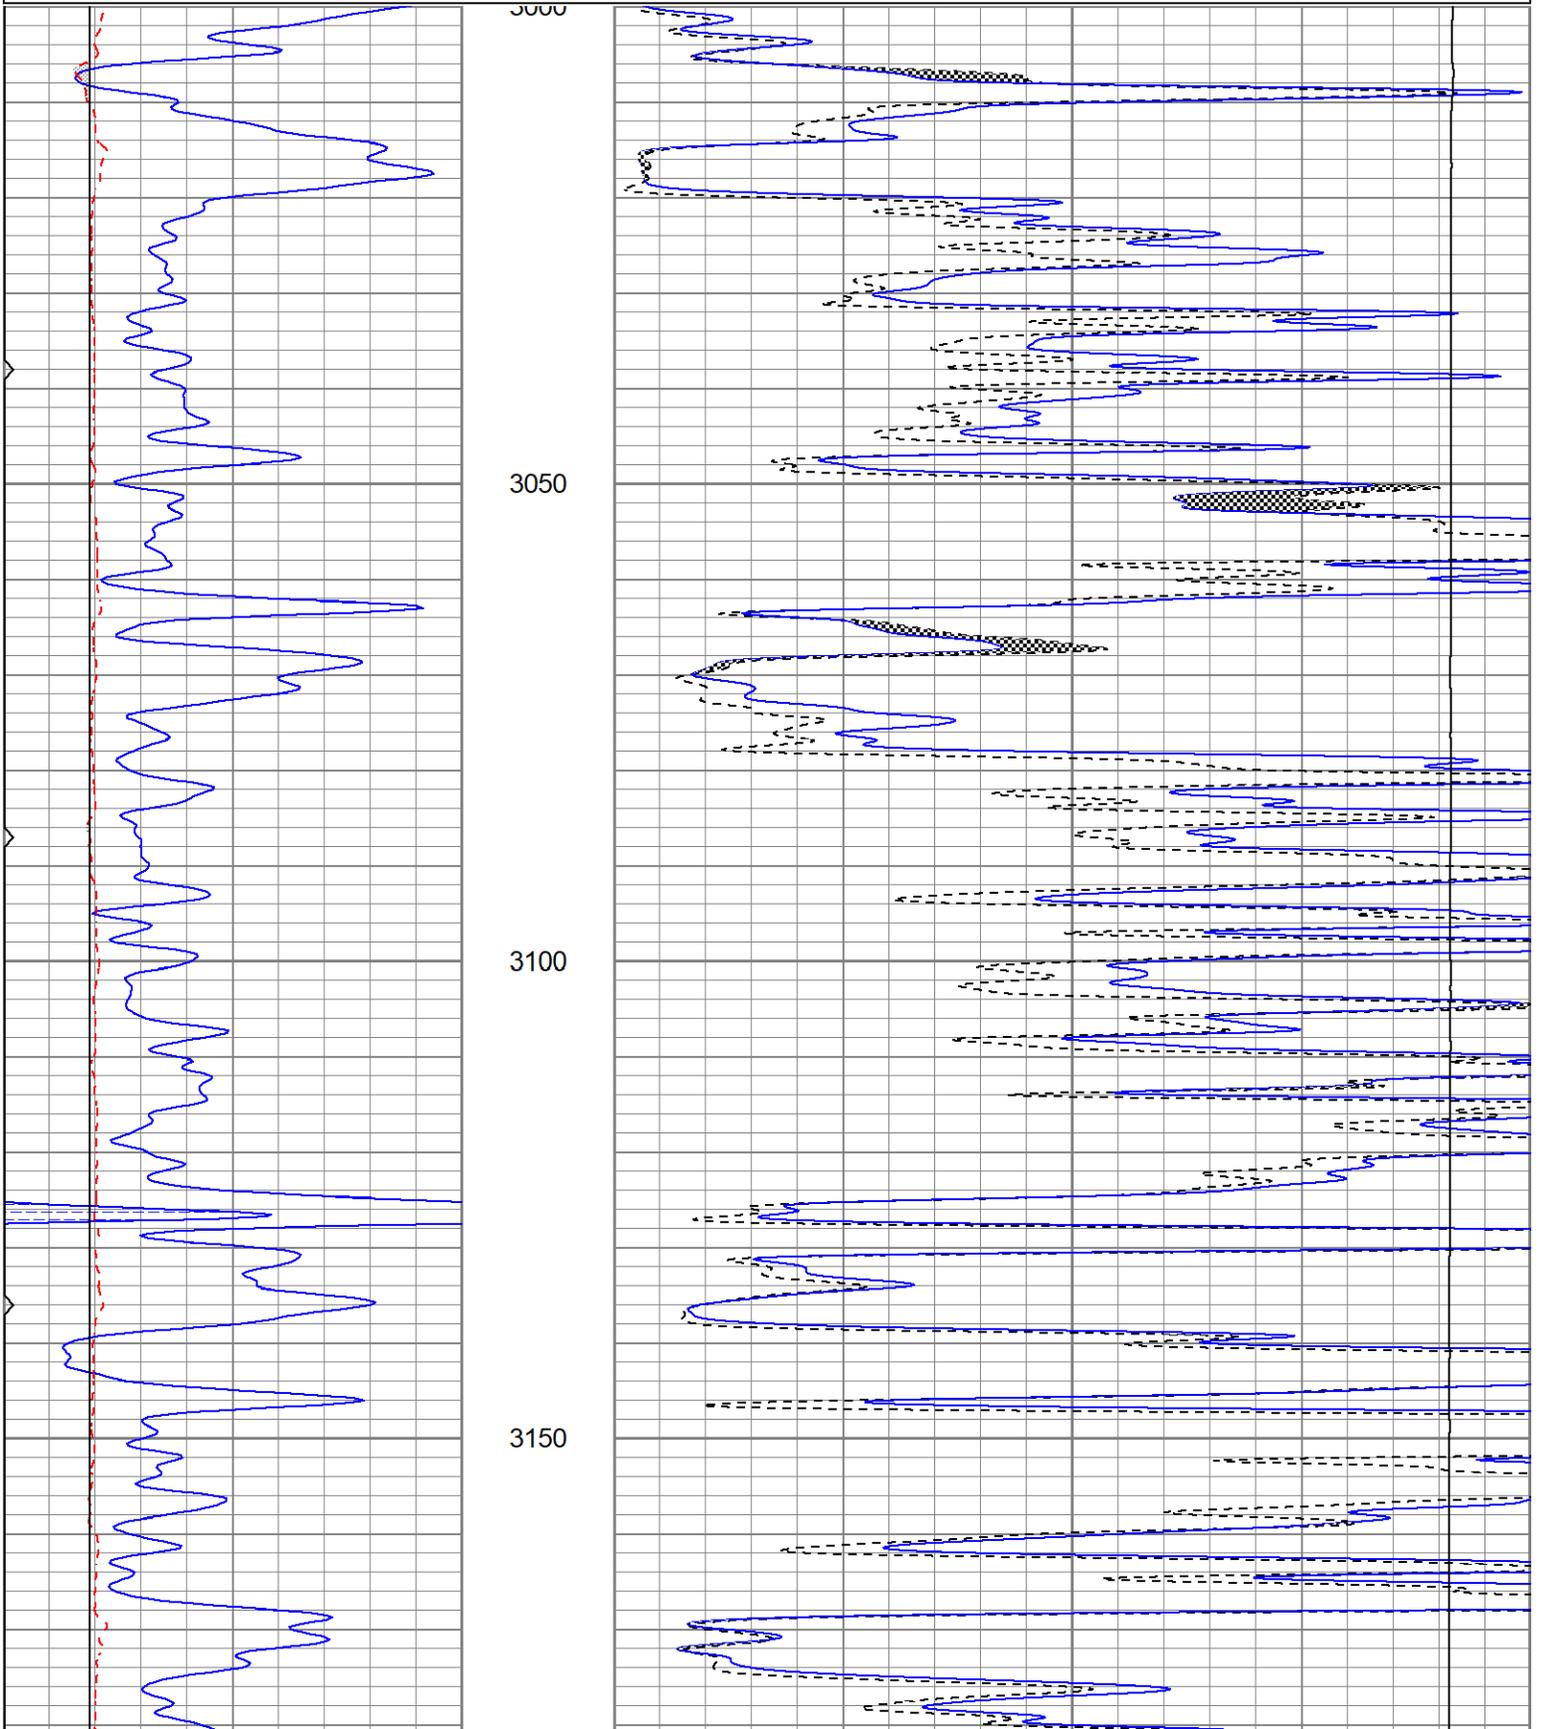

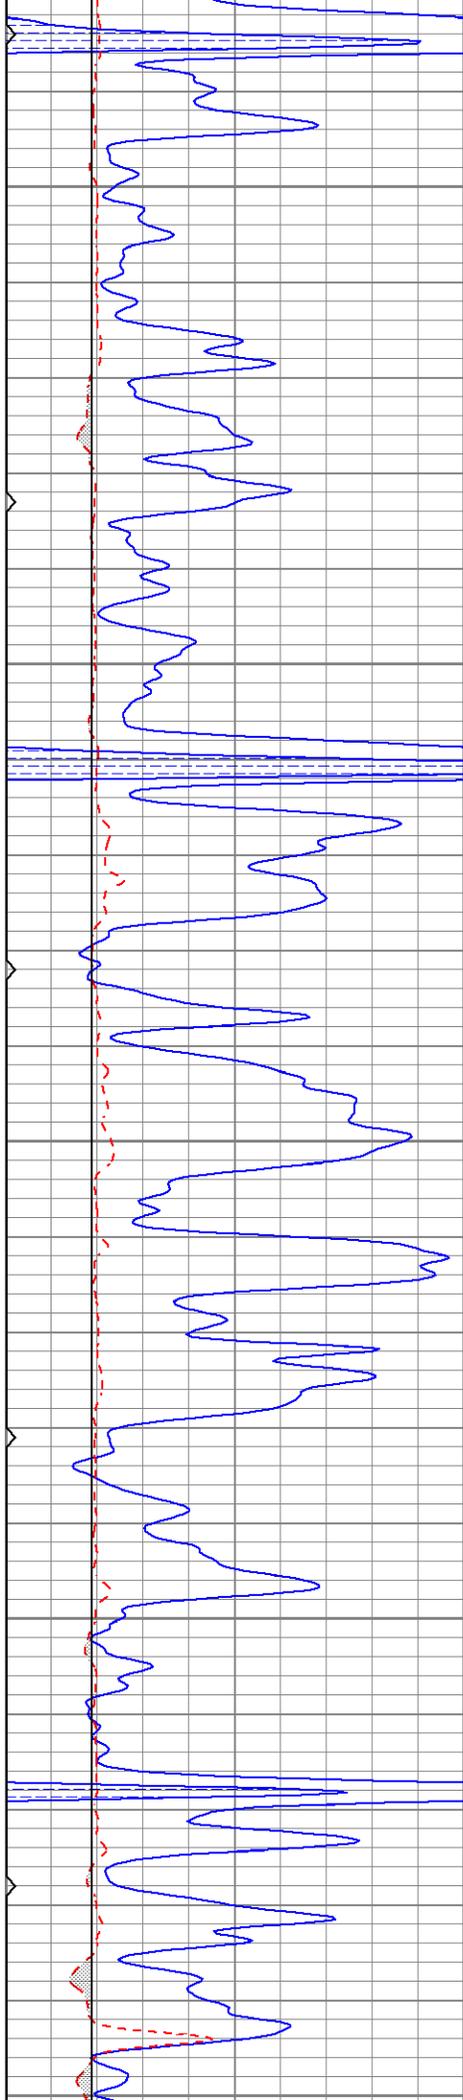


3200

3250

3300

3350

3400

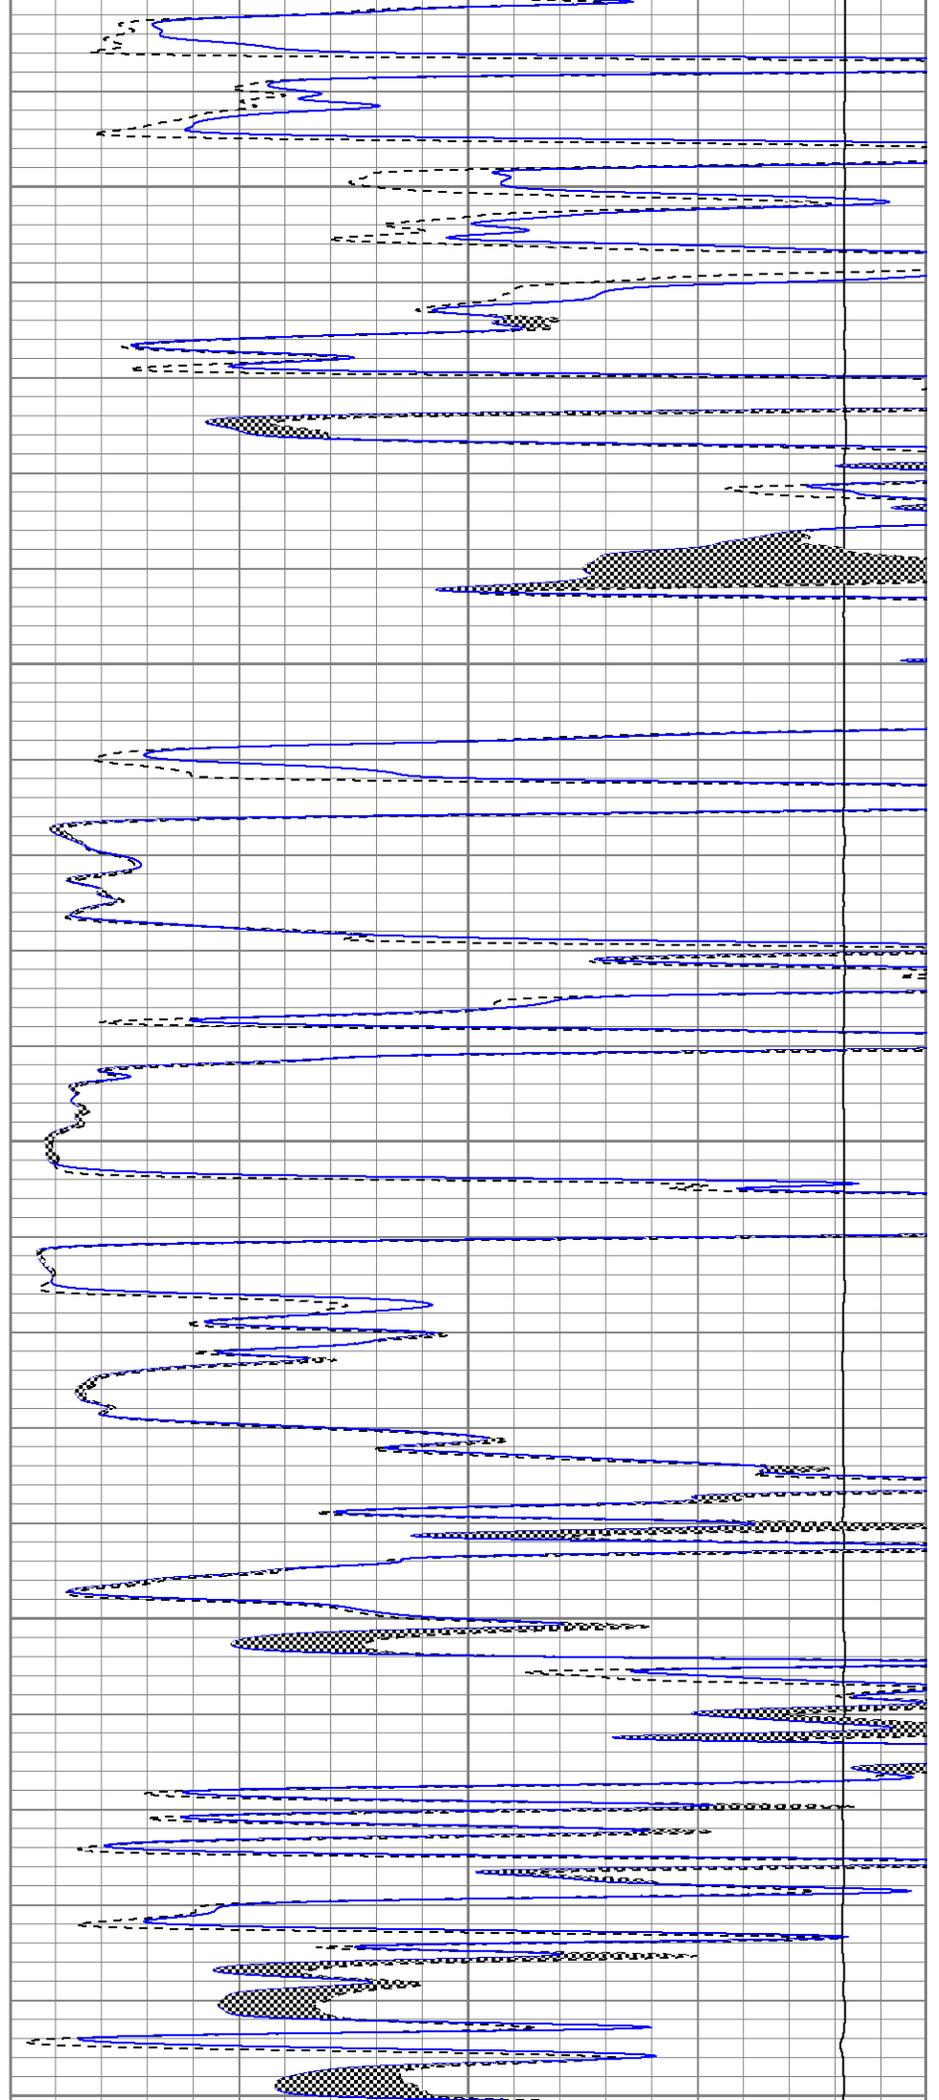



3400


3450

3500

3550


3600

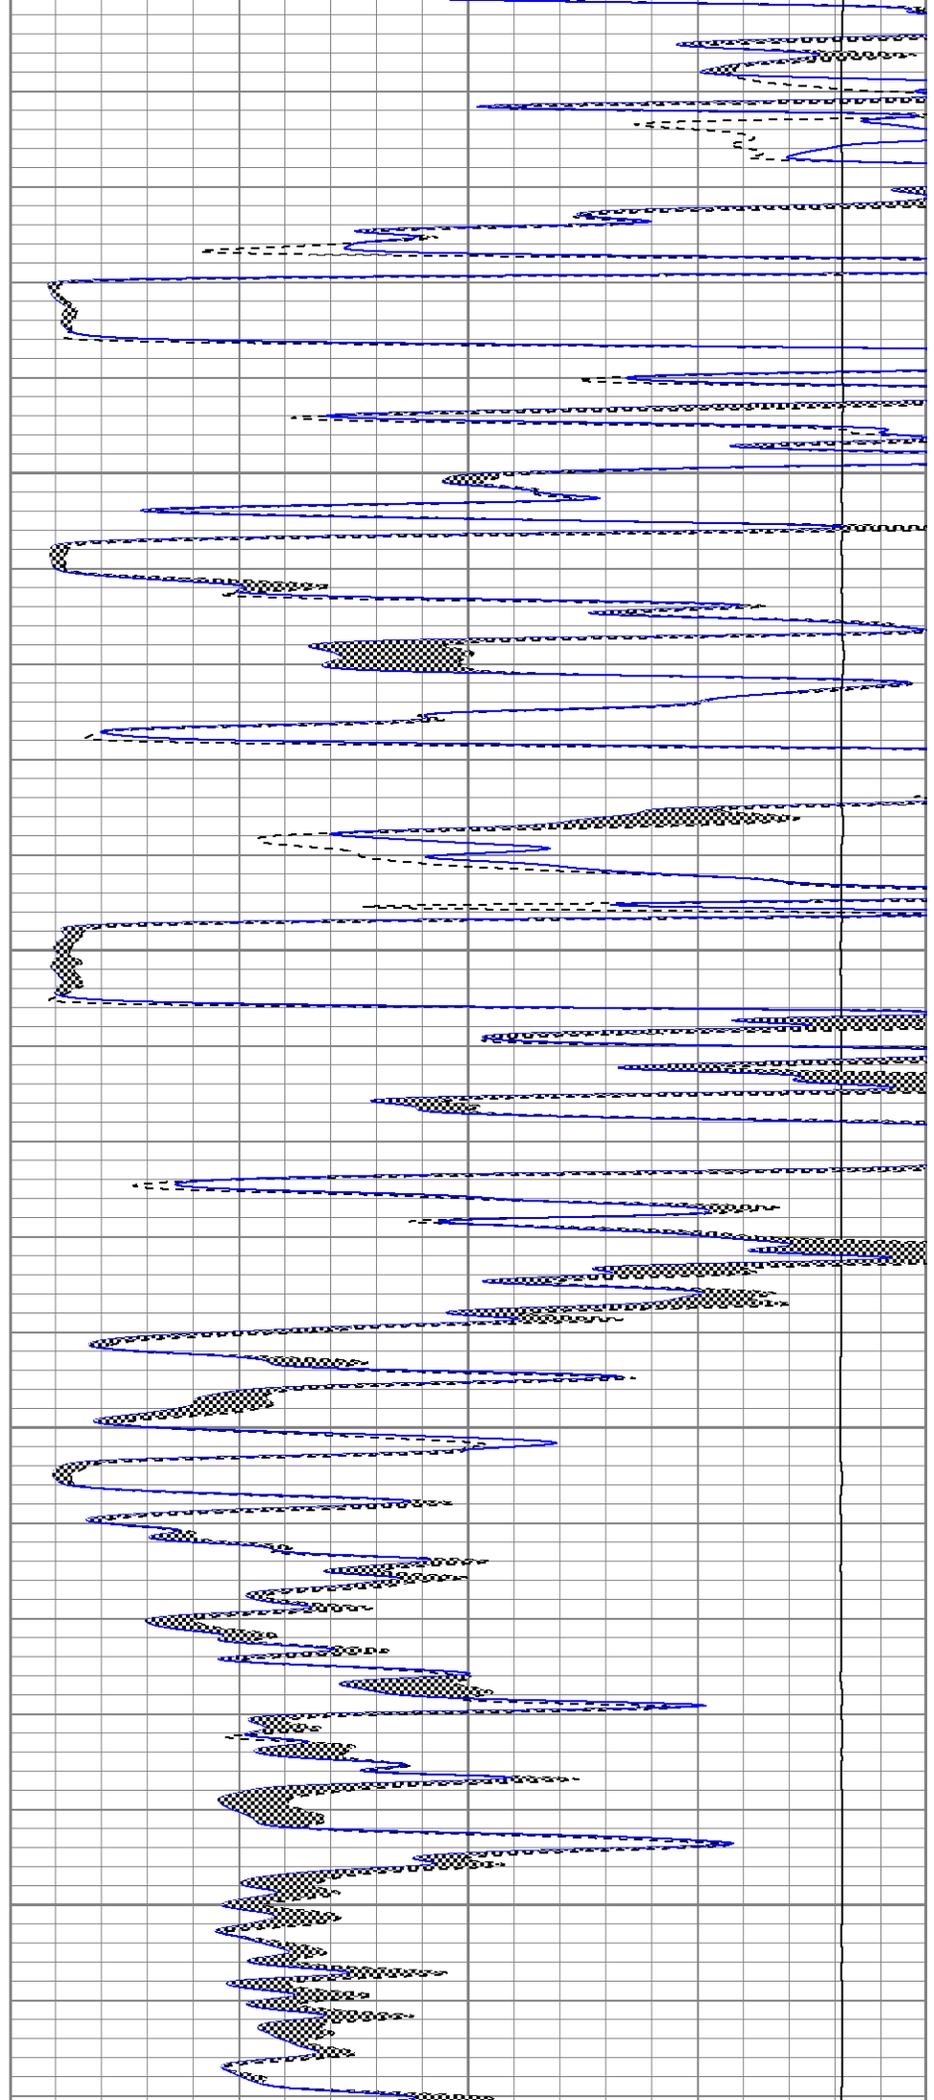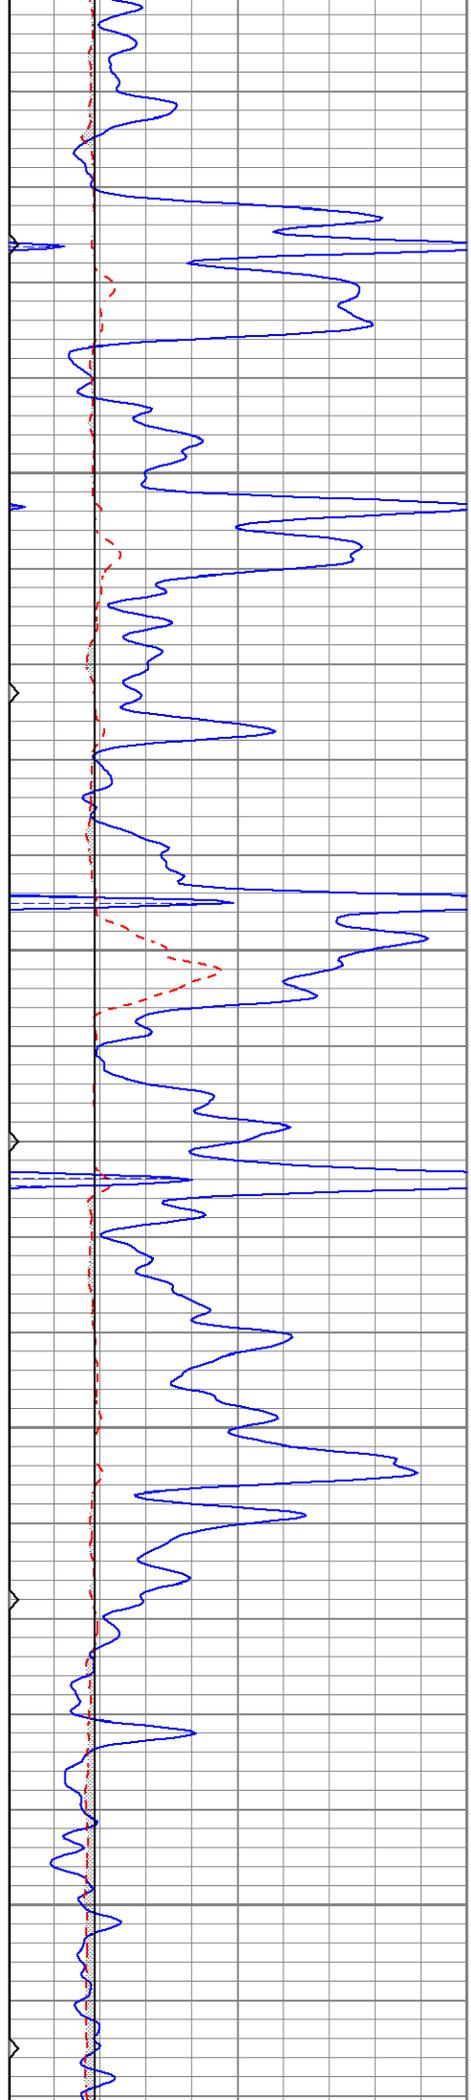

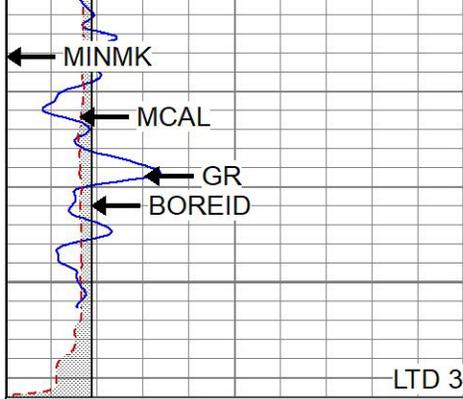

LTD 3660

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

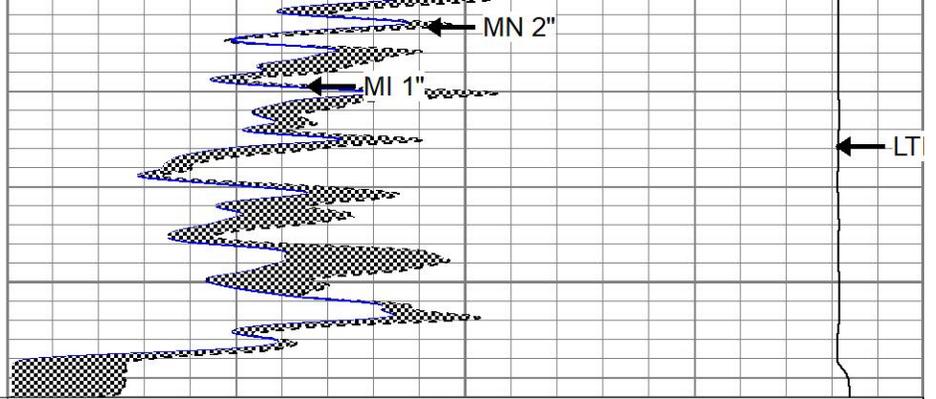

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0




REPEAT SECTION


Database File jofschmidt#1oh.db
 Dataset Pathname pass6RP
 Presentation Format kml
 Dataset Creation Wed Oct 05 12:19:07 2022
 Charted by Depth in Feet scaled 1:240


0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

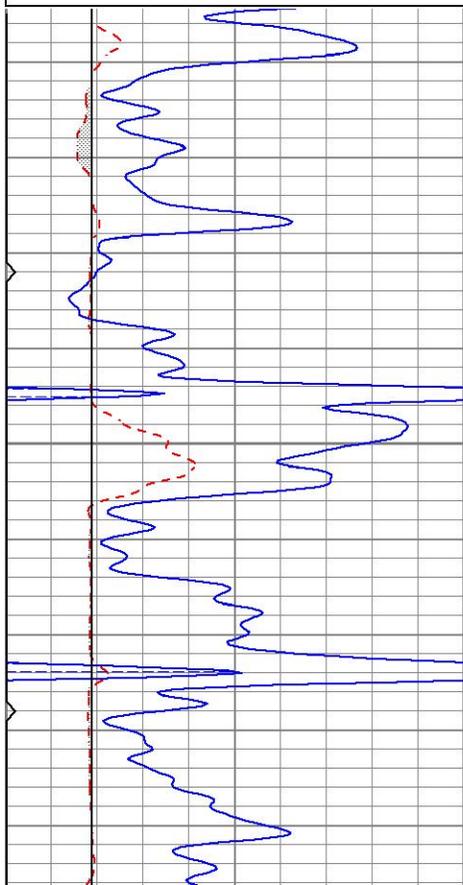

3500

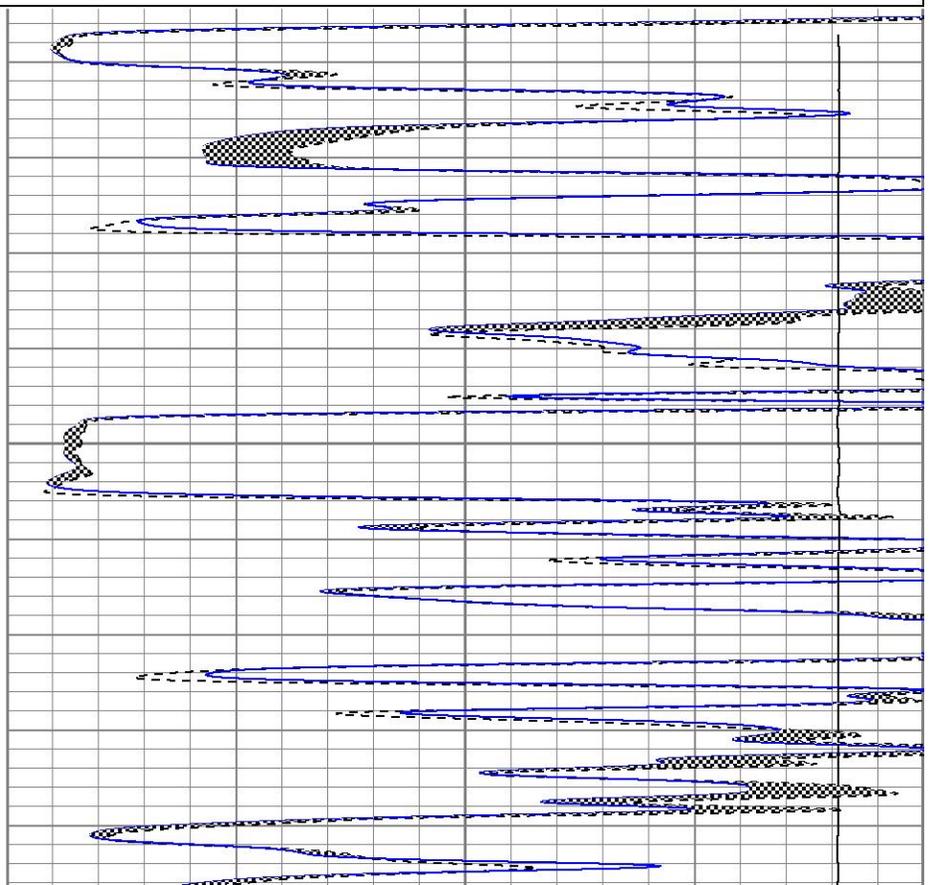

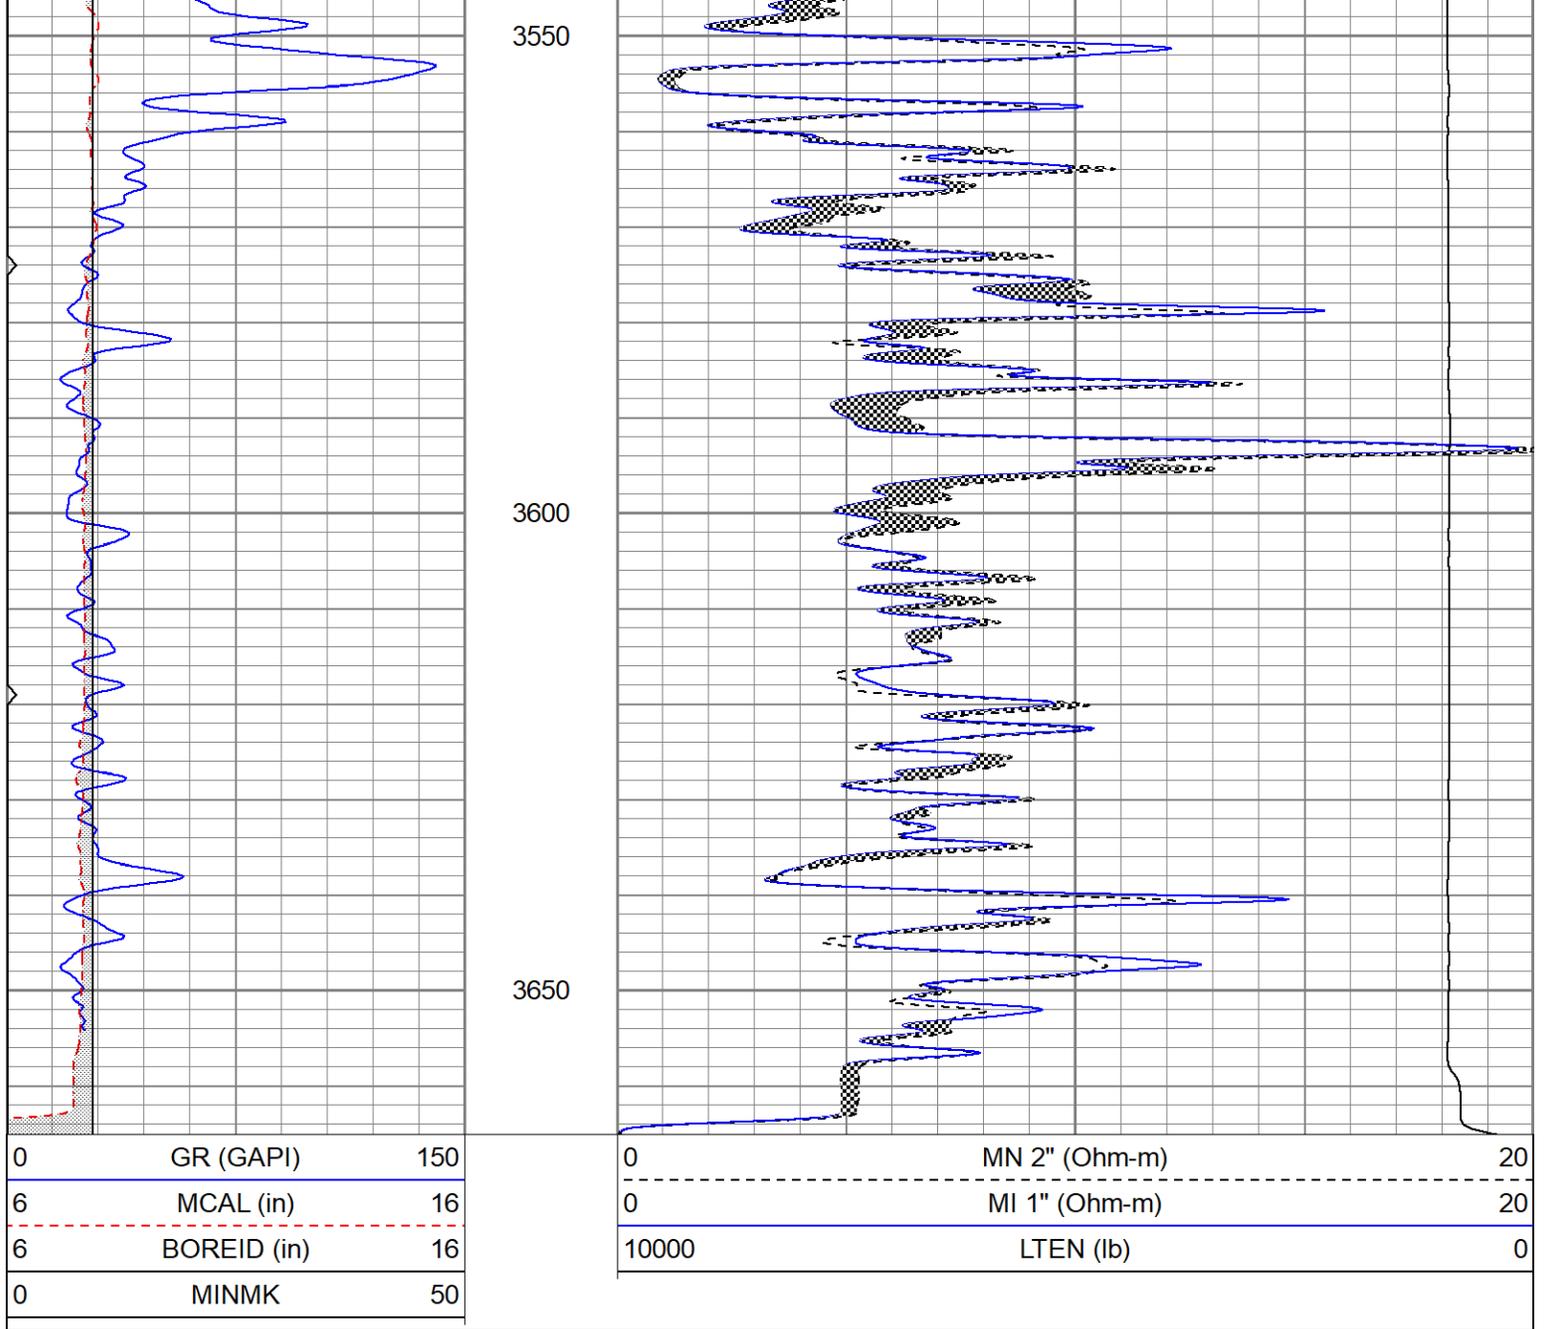

Calibration Report

Database File jofschmidtb#1oh.db
 Dataset Pathname pass6RP
 Dataset Creation Wed Oct 05 12:19:07 2022

Microlog Calibration Report

Serial-Model: 1600-Pengo
 Performed: Wed Oct 5 12:09:42 2022

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	-0.0031	0.4858	V	0.0000	10.0000	Ohm-m	20.4569	0.0629
Inverse	-0.0021	0.6371	V	0.0000	10.0000	Ohm-m	13.6446	0.0324
Caliper	3.2319	6.4483	V	8.0000	15.0000	in	2.1364	1.2662

Gamma Ray Calibration Report

Serial Number: 2000
 Tool Model: P2000
 Performed: Sun May 6 10:04:13 2018

Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.8200	GAPI/cps