





| GENERAL | | | GAMMA | | ACOUSTIC | | DENSITY | | | NEUTRON | | | | |
|--|-------|-------|--------|-------|----------|---------|---------|-----------|---------|---------|-----------|---------|---------|--------|
| Run No. | Depth | | Speed | Scale | | Scale | | Matrix | Scale | | Matrix | Scale | | Matrix |
| | From | To | ft/min | L | R | L | R | | L | R | | L | R | |
| ONE | 5167' | 3600' | REC | 0gapi | 150gapi | 0.3decP | 0.0decP | 47.6 uspf | 0.3decP | 0.0decP | 2.71 g/cc | 0.3decP | 0.0decP | LIME |
| ONE | 3600' | 1798' | REC | 0gapi | 150gapi | 0.3decP | 0.0decP | | | | | | | |
| DIRECTIONAL INFORMATION | | | | | | | | | | | | | | |
| Maximum Deviation | | | | | @ | | | | | KOP @ | | | | |
| Remarks: FIRST LOG ON WELL, POSITIVE DEPTH CONTROL APPLIED | | | | | | | | | | | | | | |
| SCALES AND PRESENTATIONS AS PER CLIENT REQUEST | | | | | | | | | | | | | | |
| TOOLS RAN IN COMBINATION AS PER TOOLSTRING DIAGRAM | | | | | | | | | | | | | | |
| ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING | | | | | | | | | | | | | | |
| CREW: C. HERRERA, B. EZEKWU | | | | | | | | | | | | | | |
| ***THANK YOU FOR CHOOSING HALLIBURTON ENERGY SERVICES*** | | | | | | | | | | | | | | |
| <p>HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.</p> | | | | | | | | | | | | | | |
| HALLIBURTON | | | | | | | | | | | | | | |

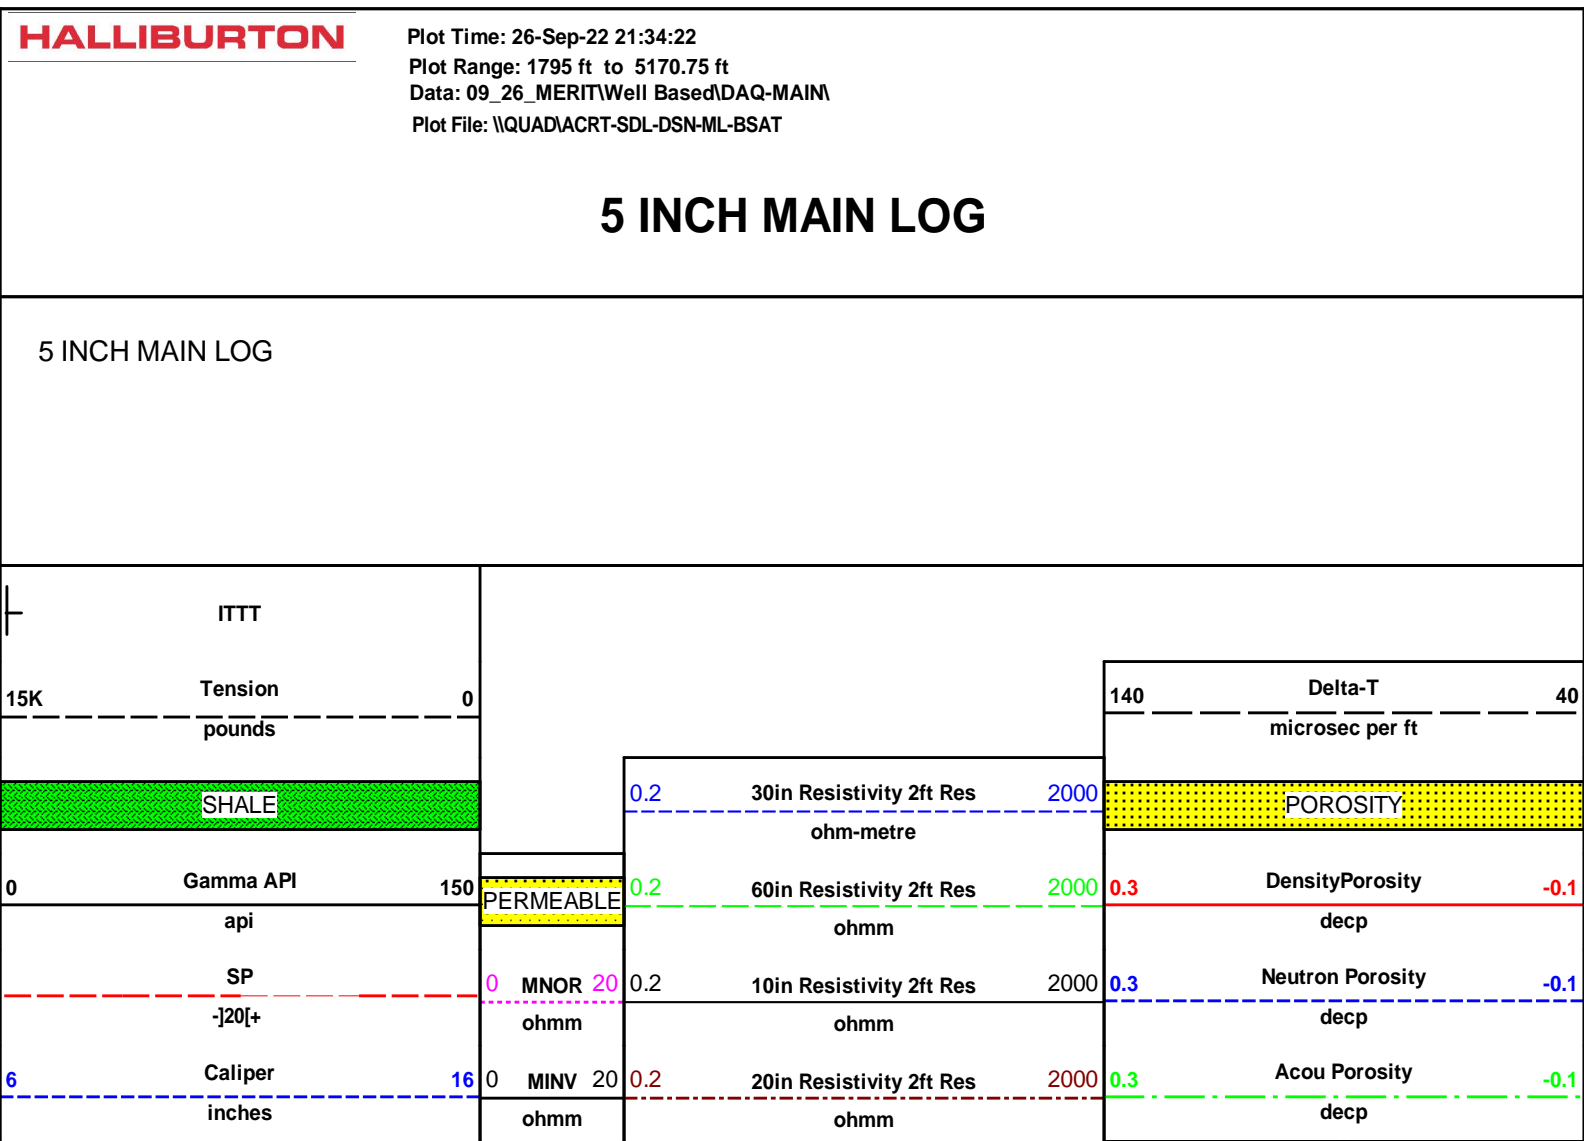

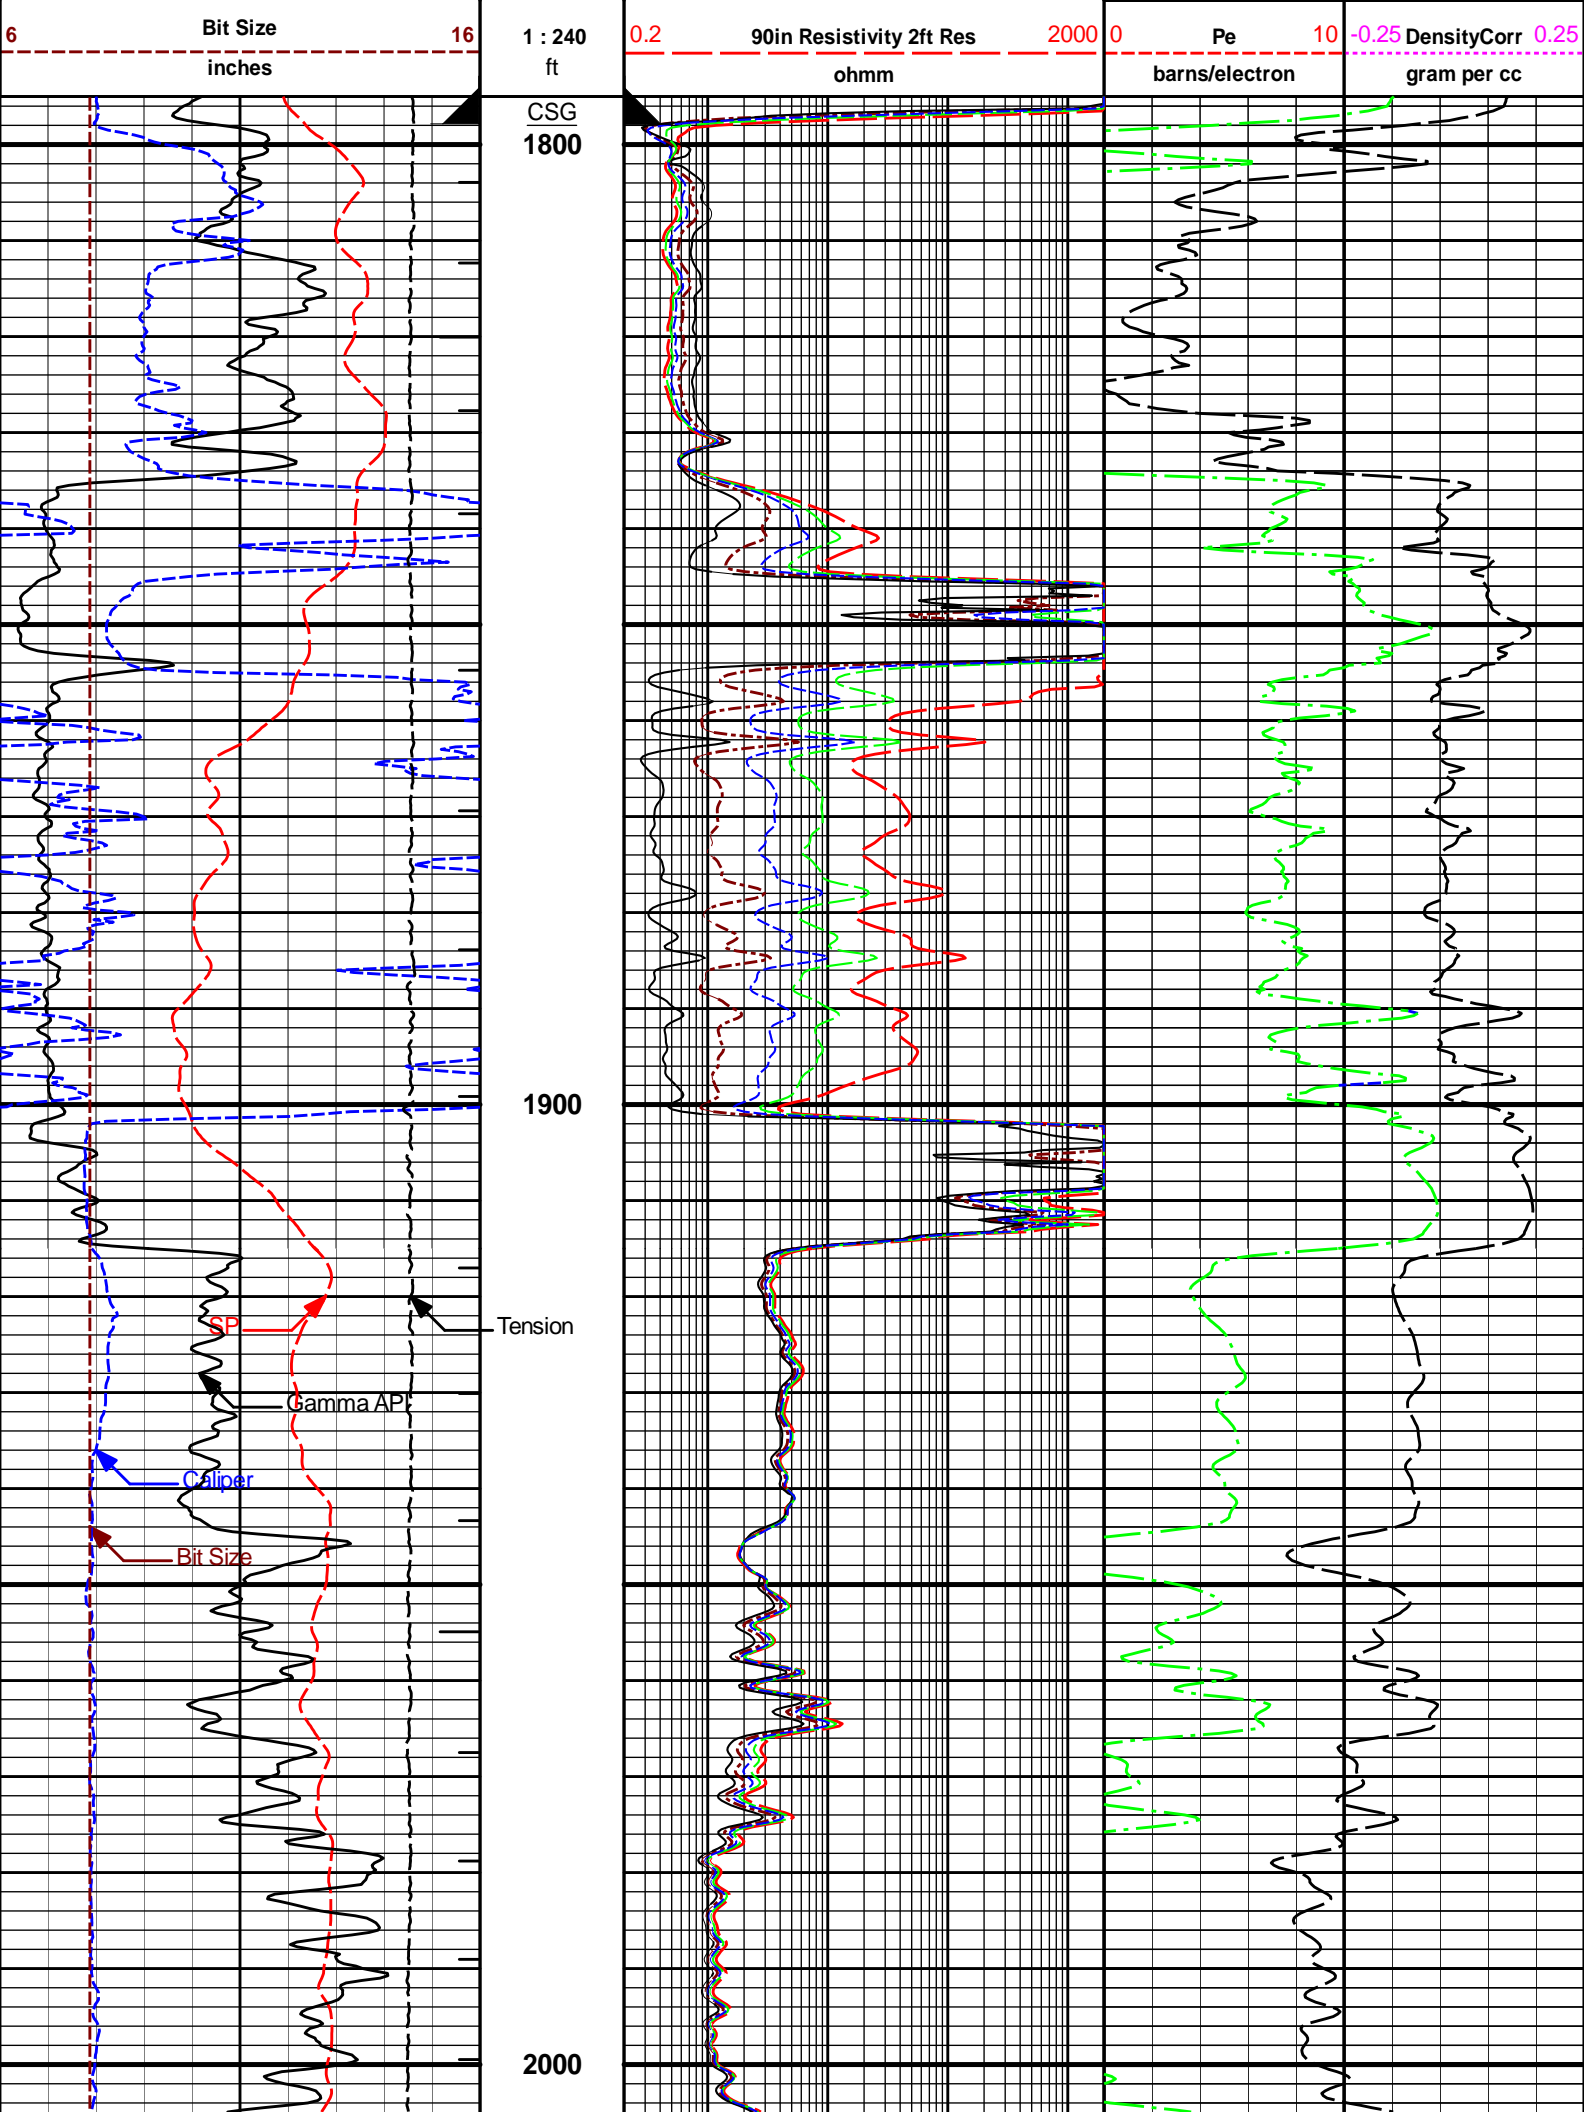


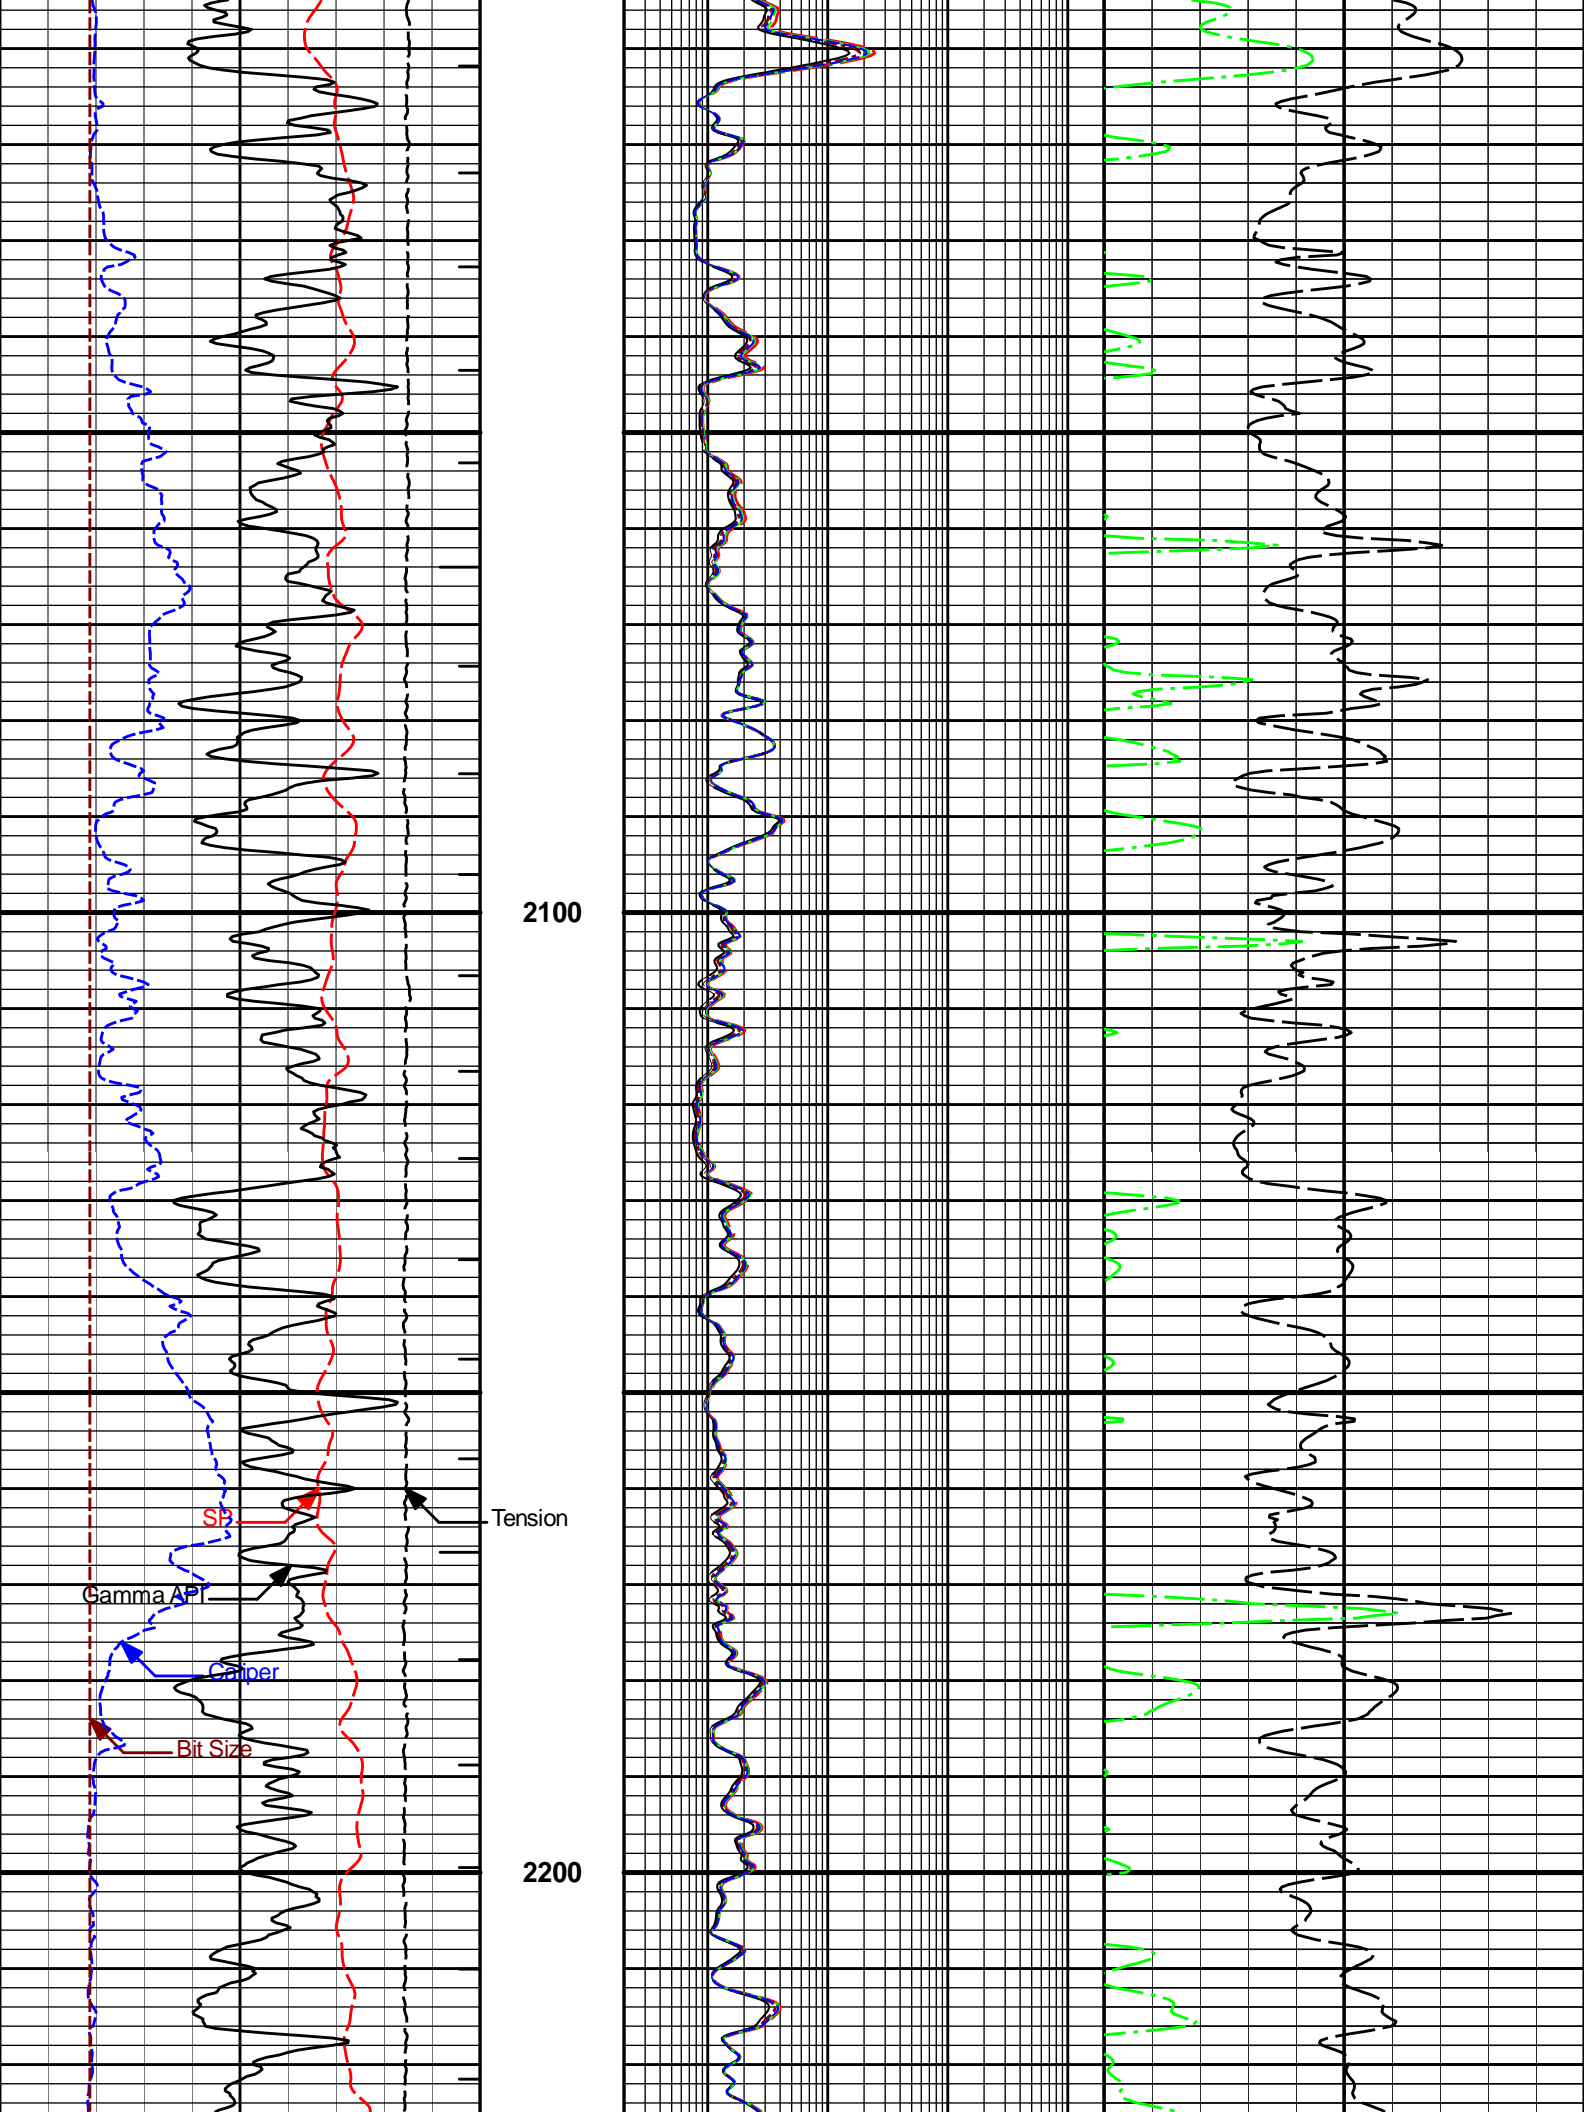


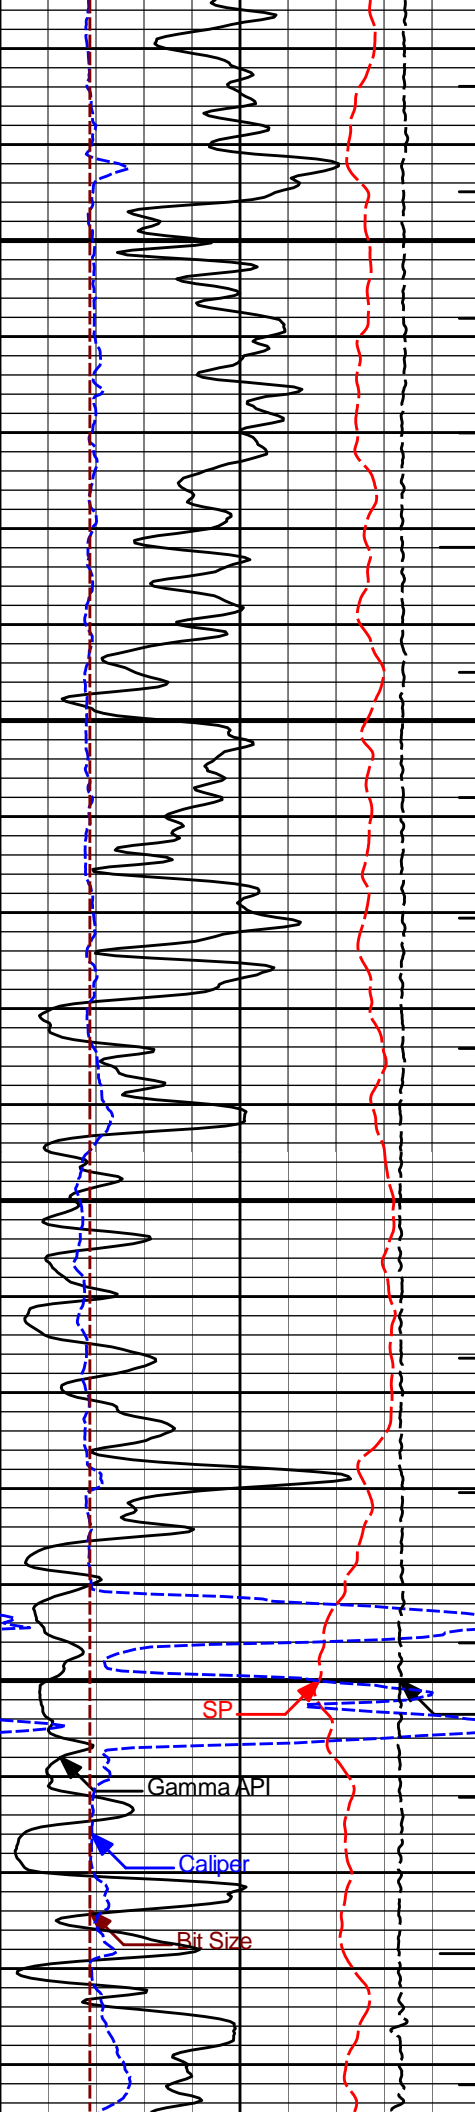

2300

2400
Tension

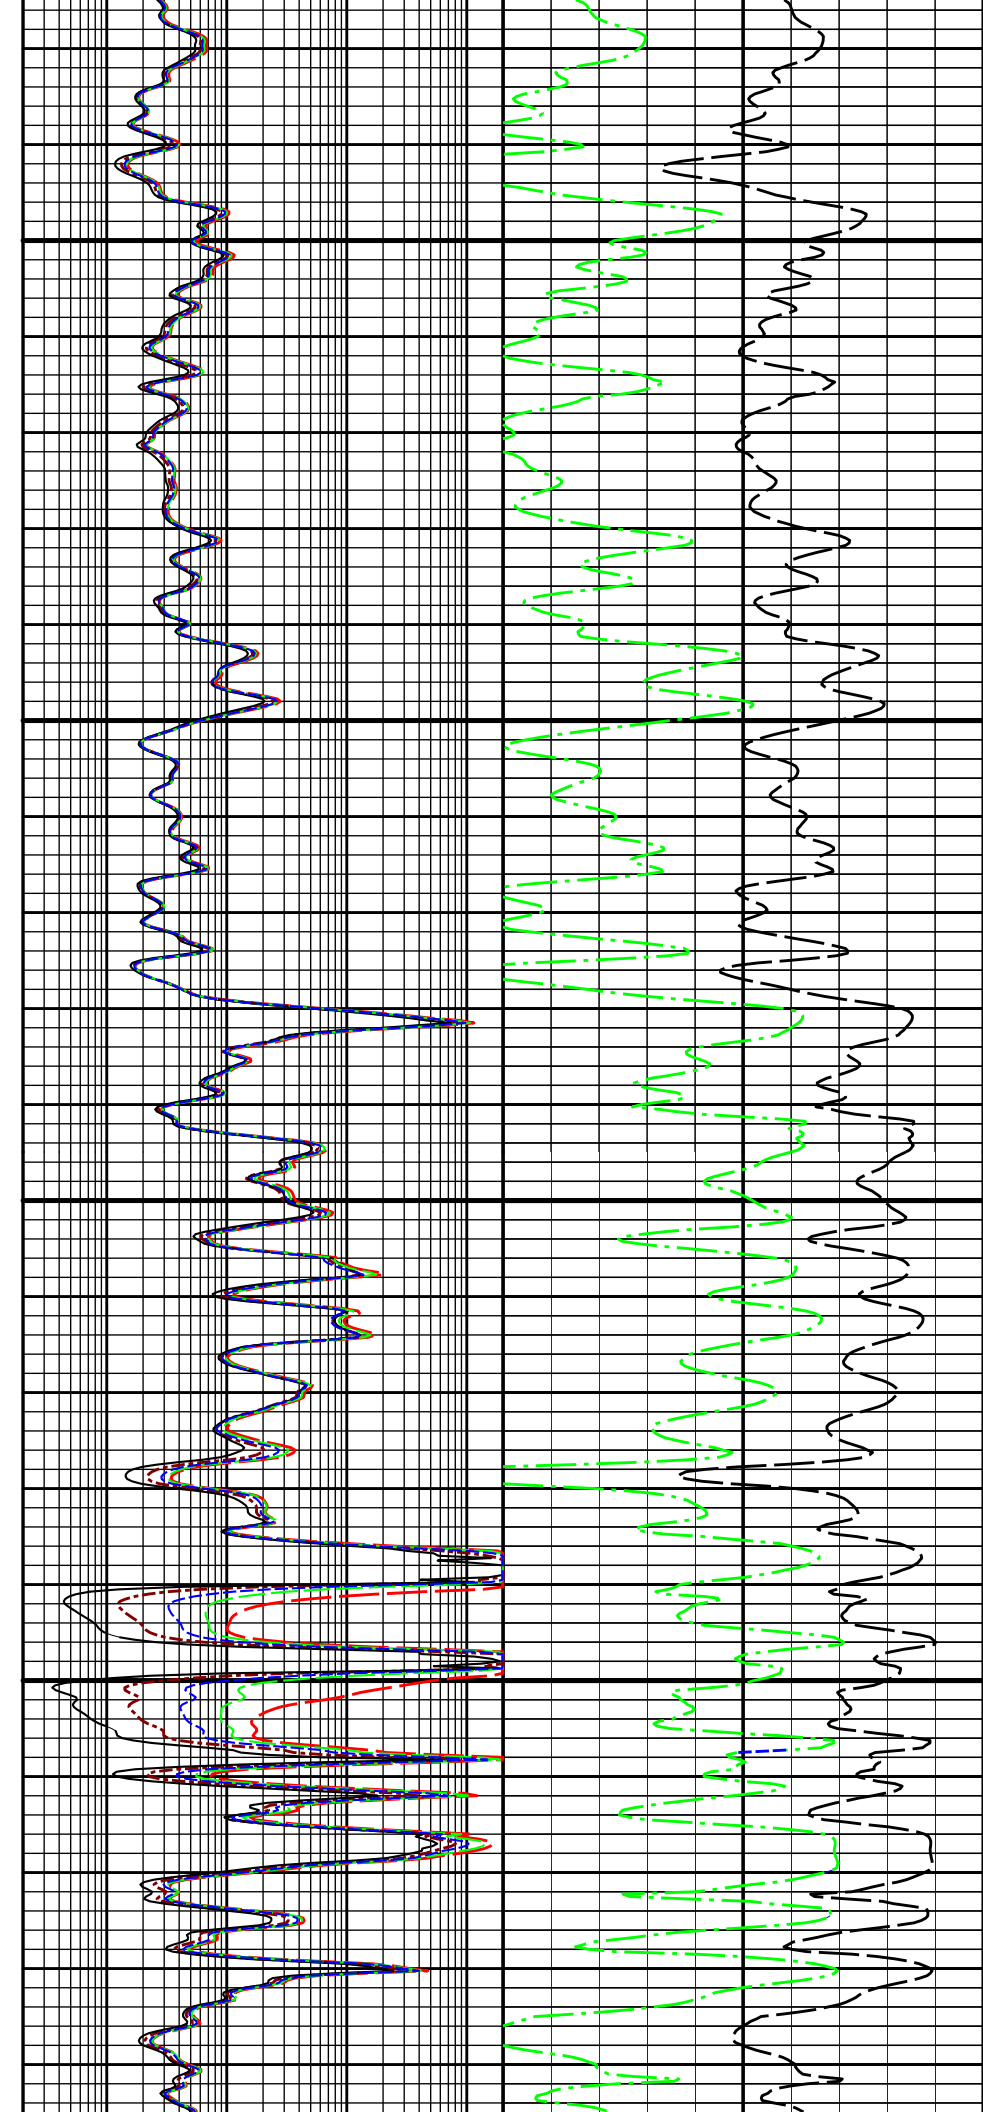

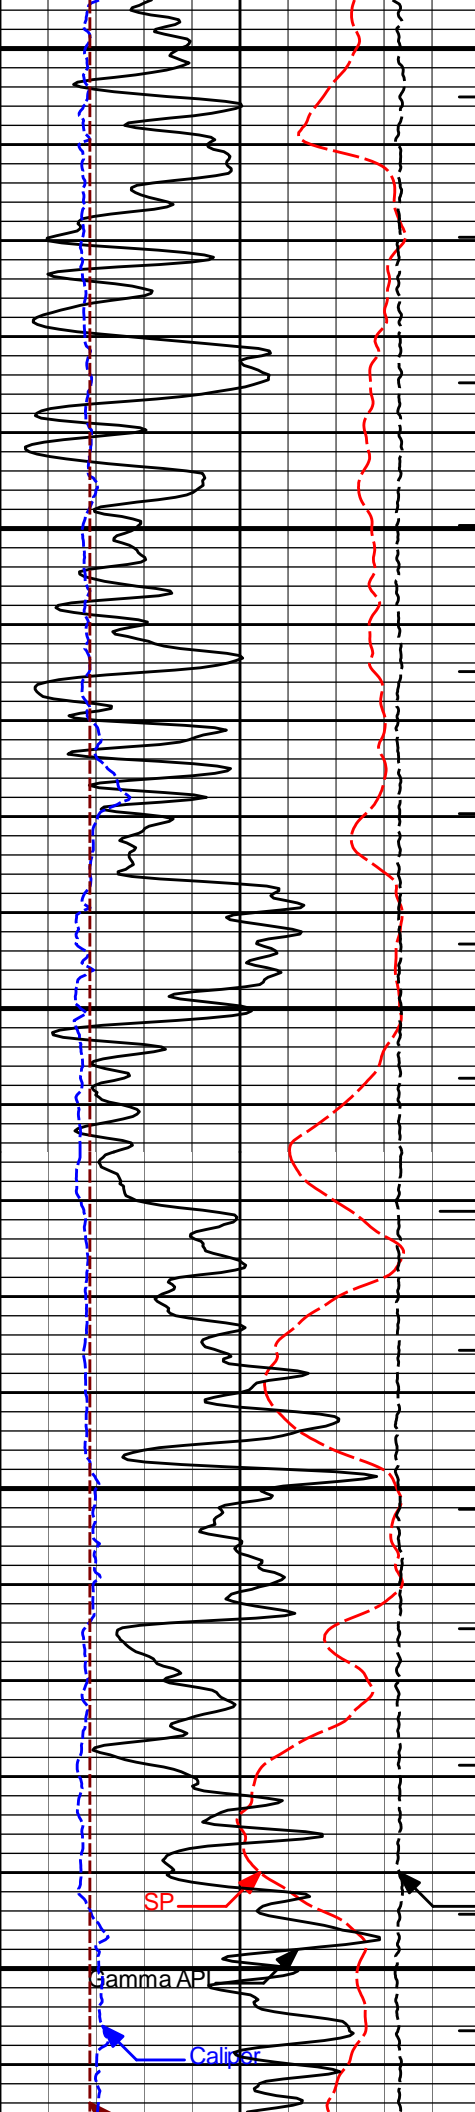

2500



2600



SP


Gamma API

Caliper

Tension

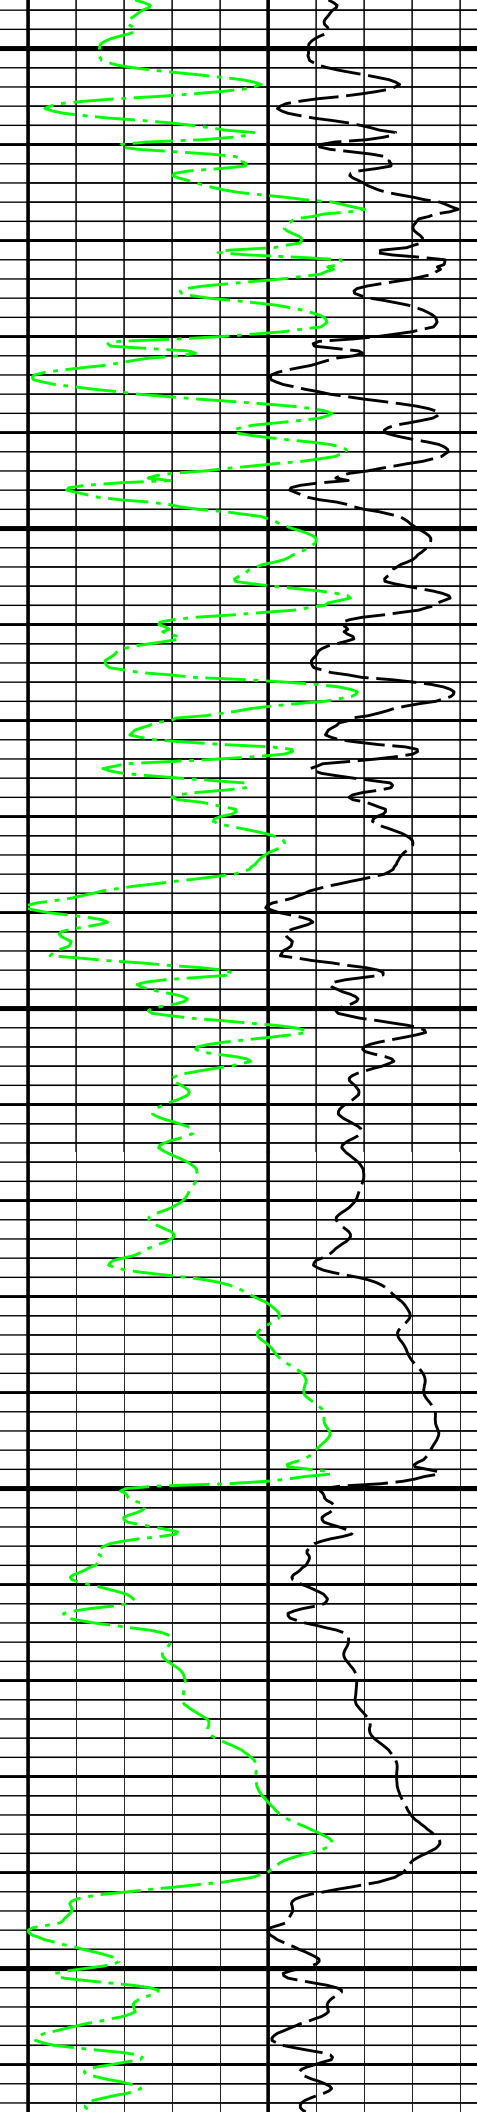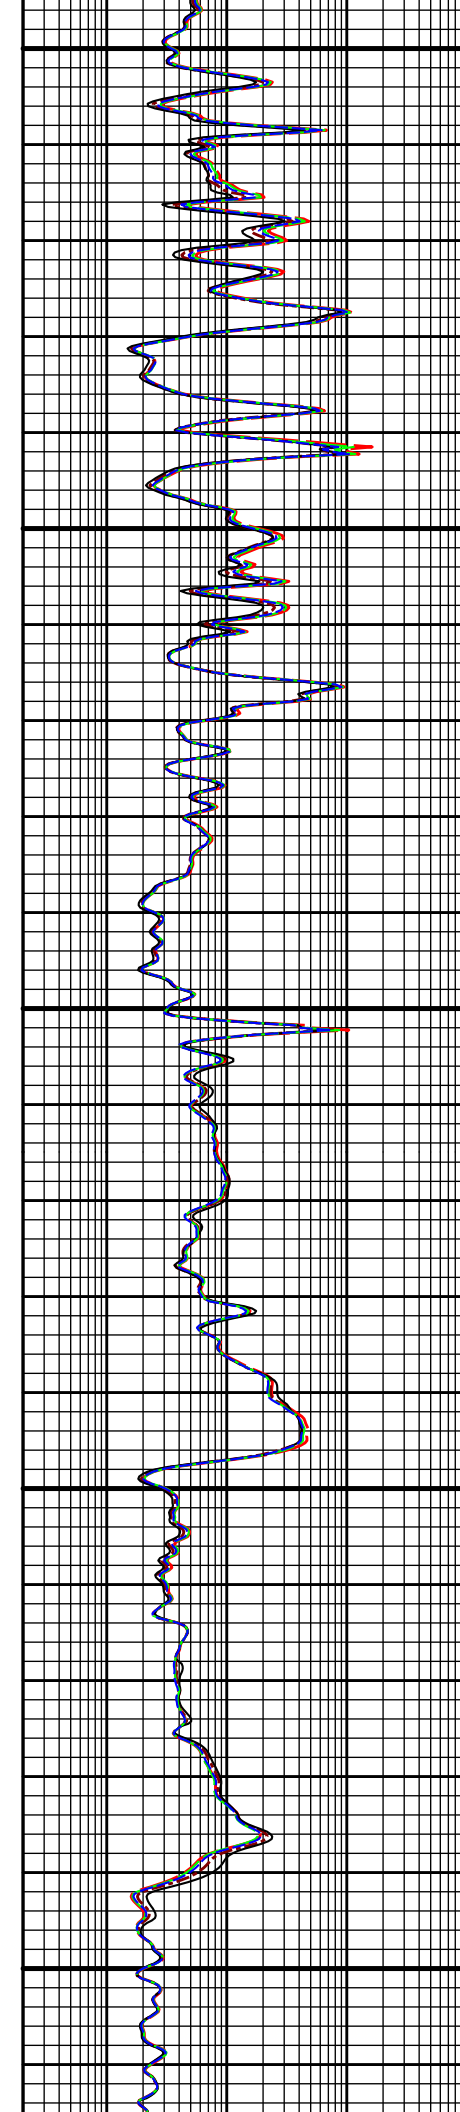

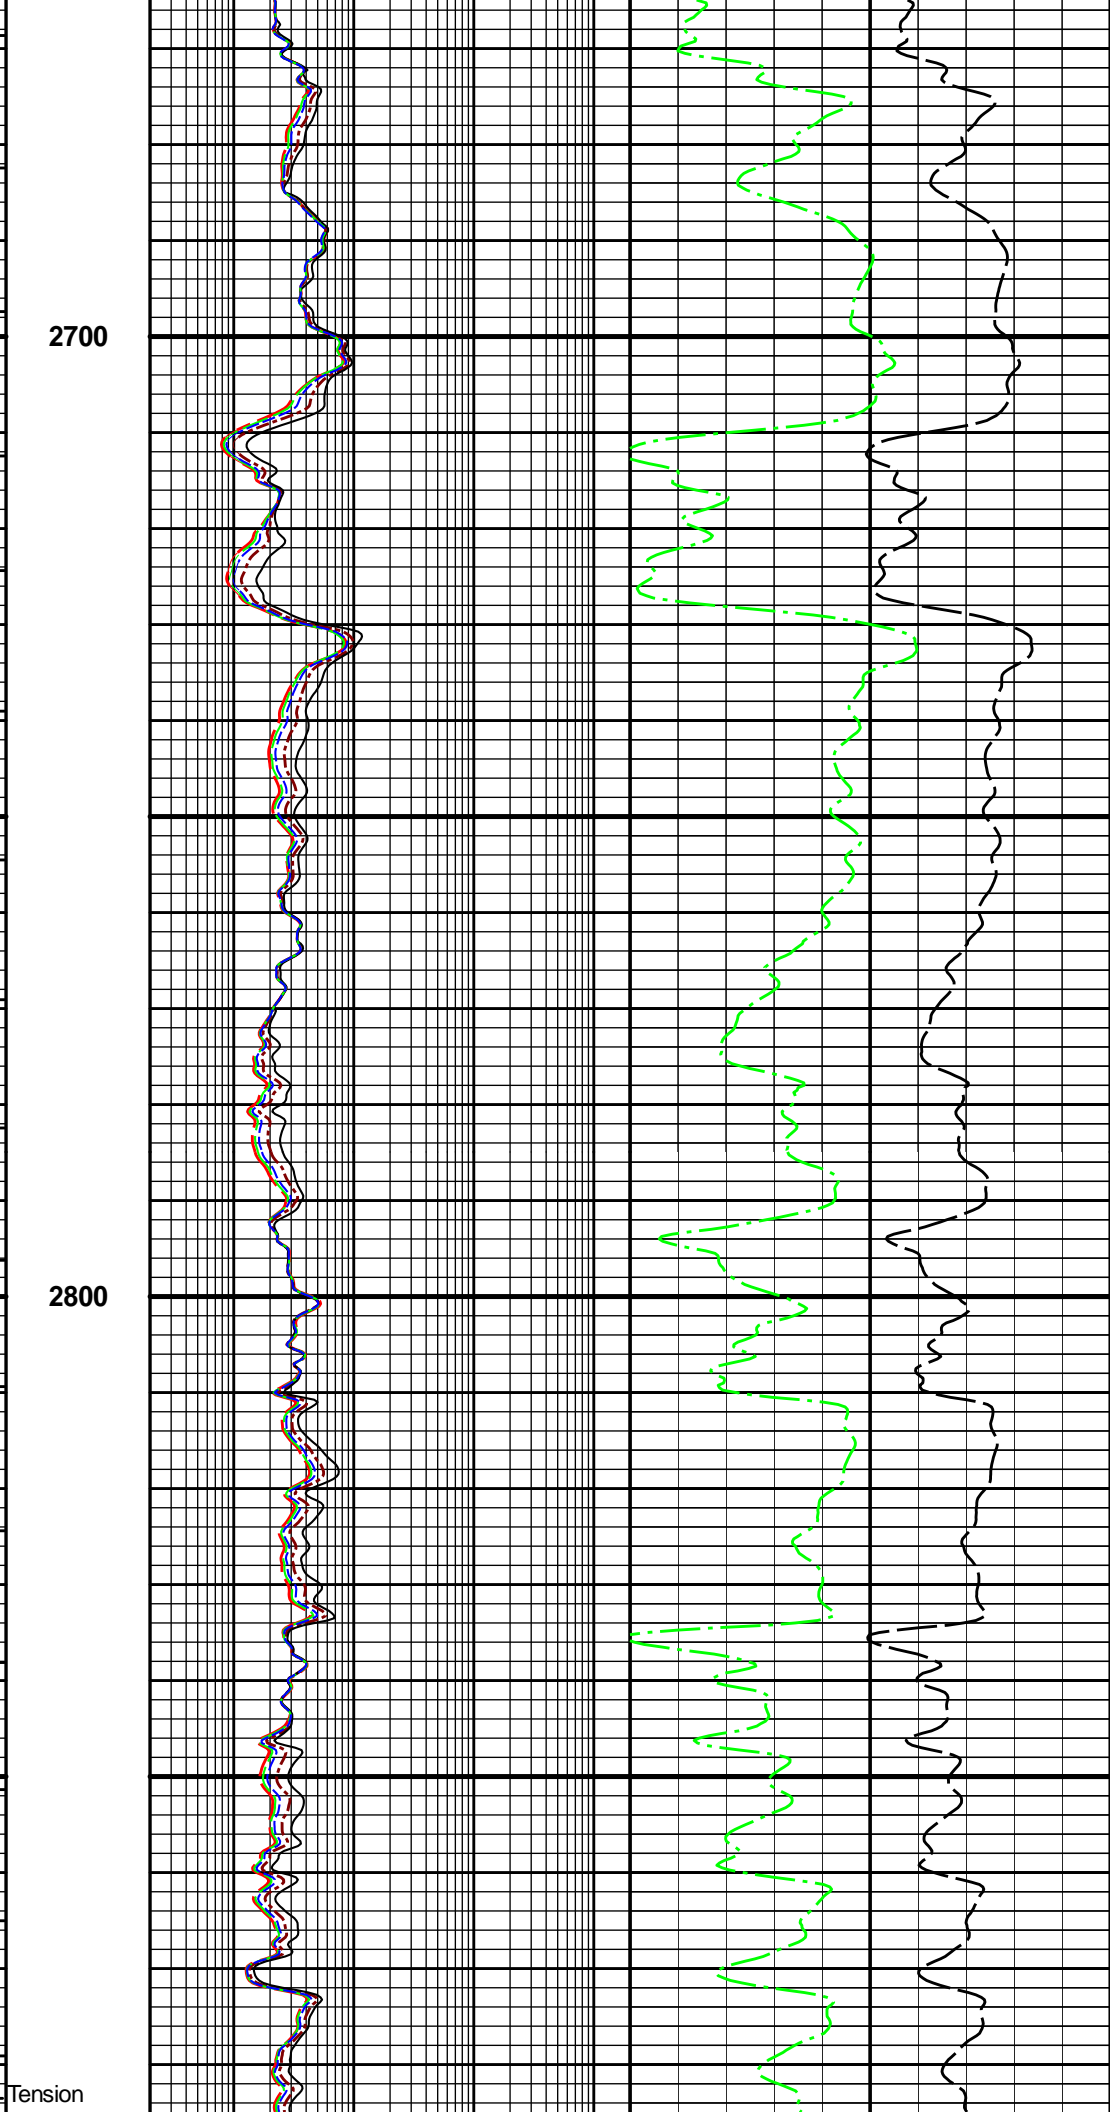
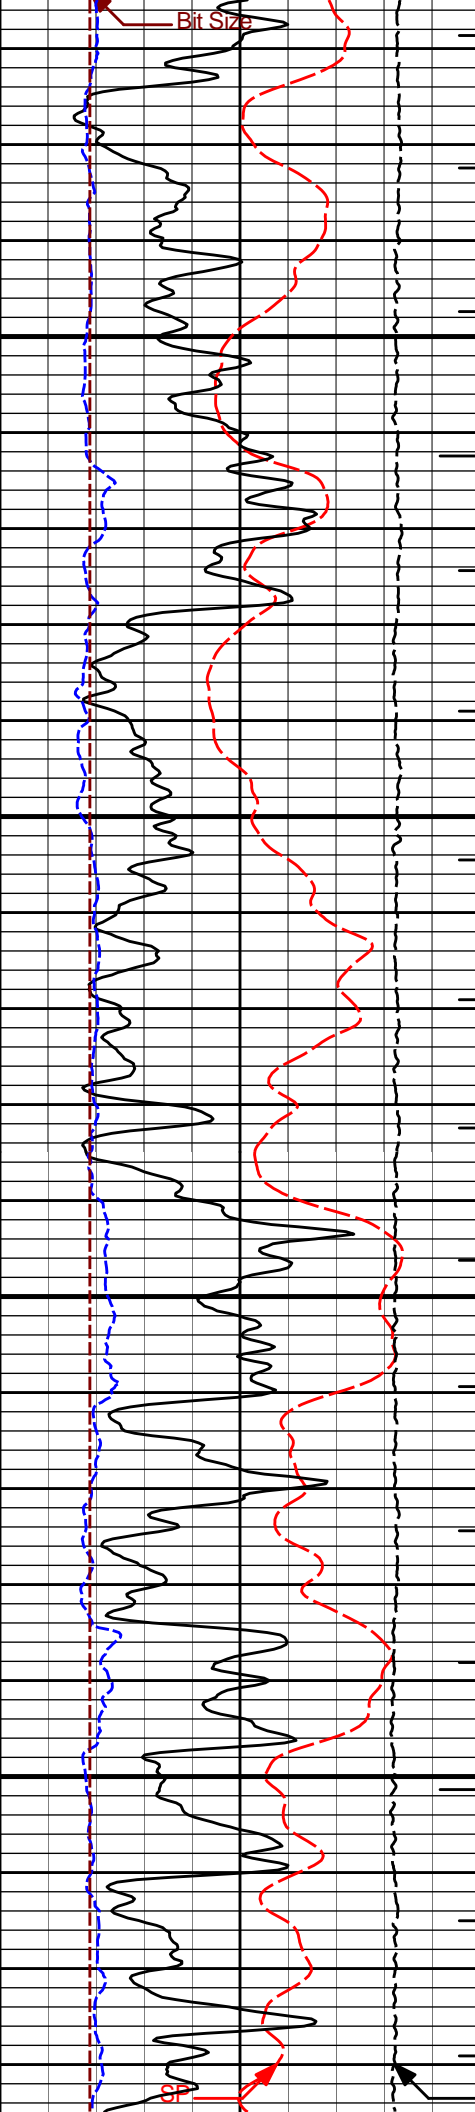


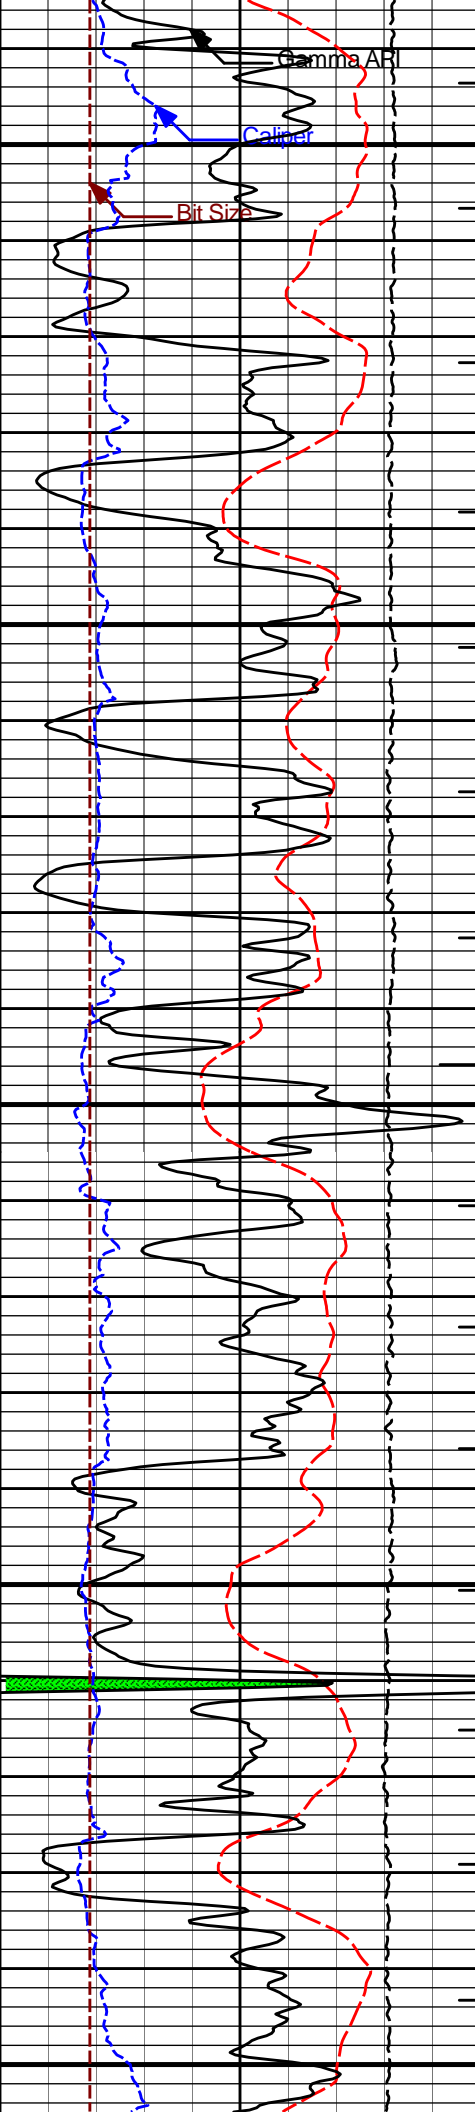


2900

3000

3100

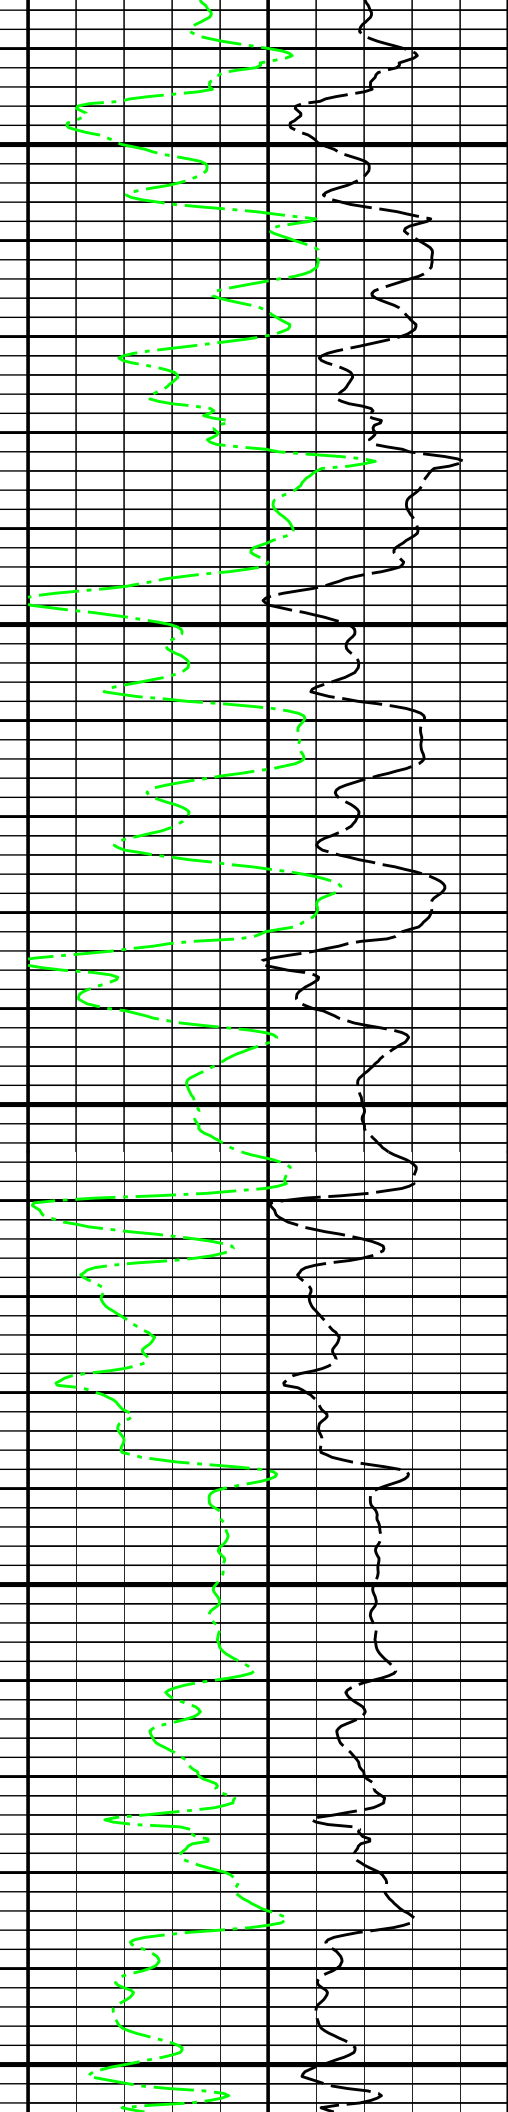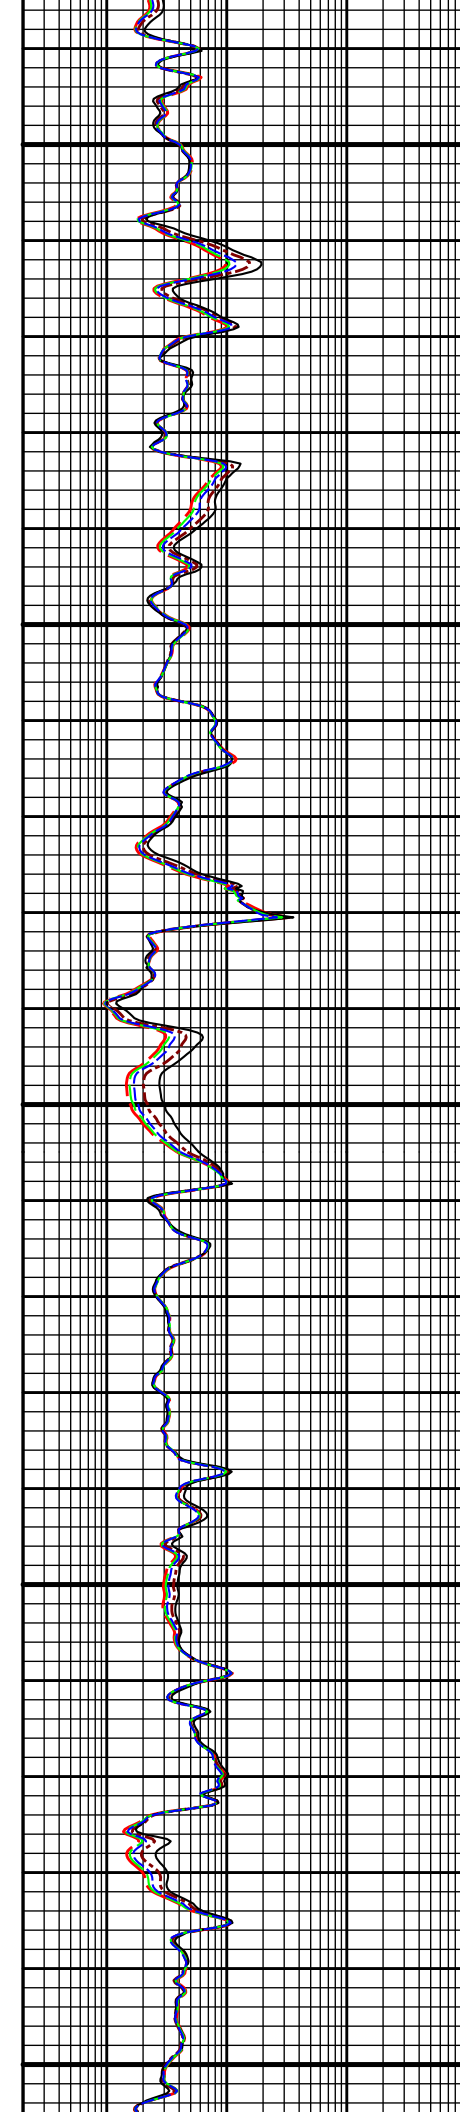

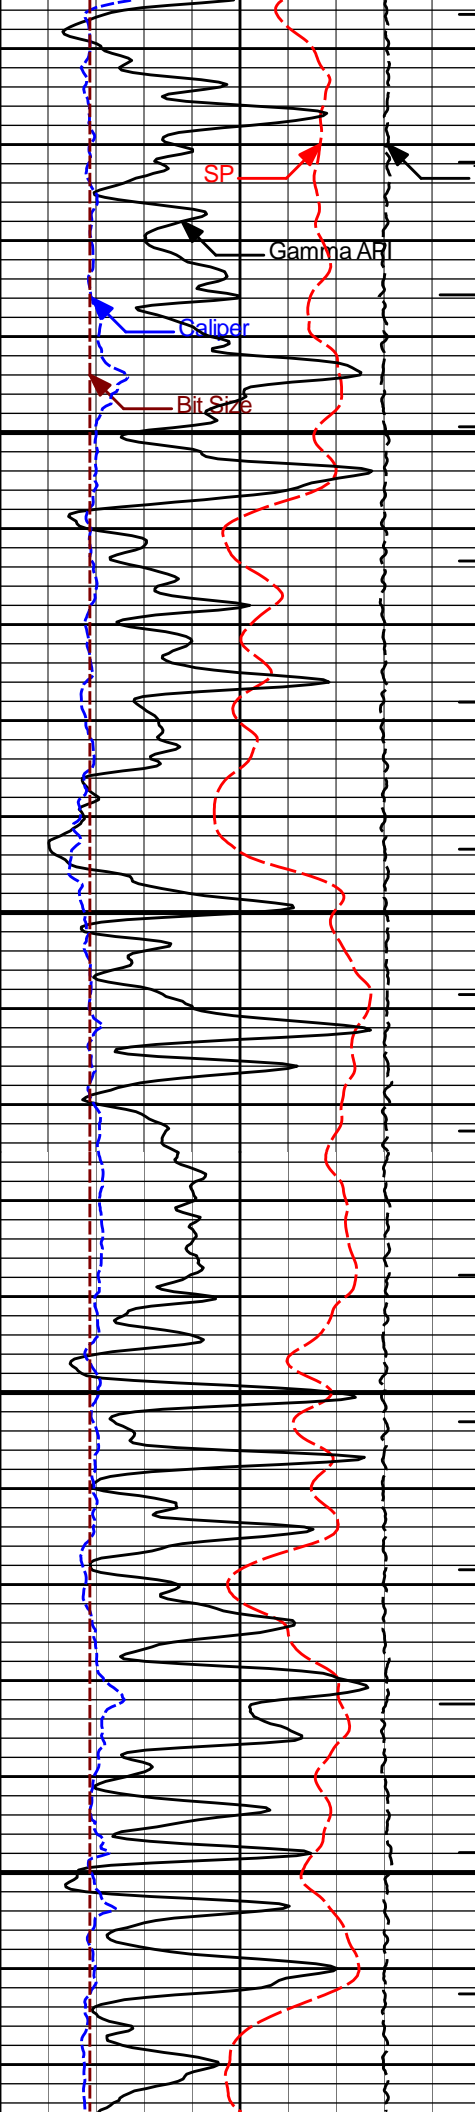

ension

SP



Gamma API


Caliper

Bit Size

3200



3300

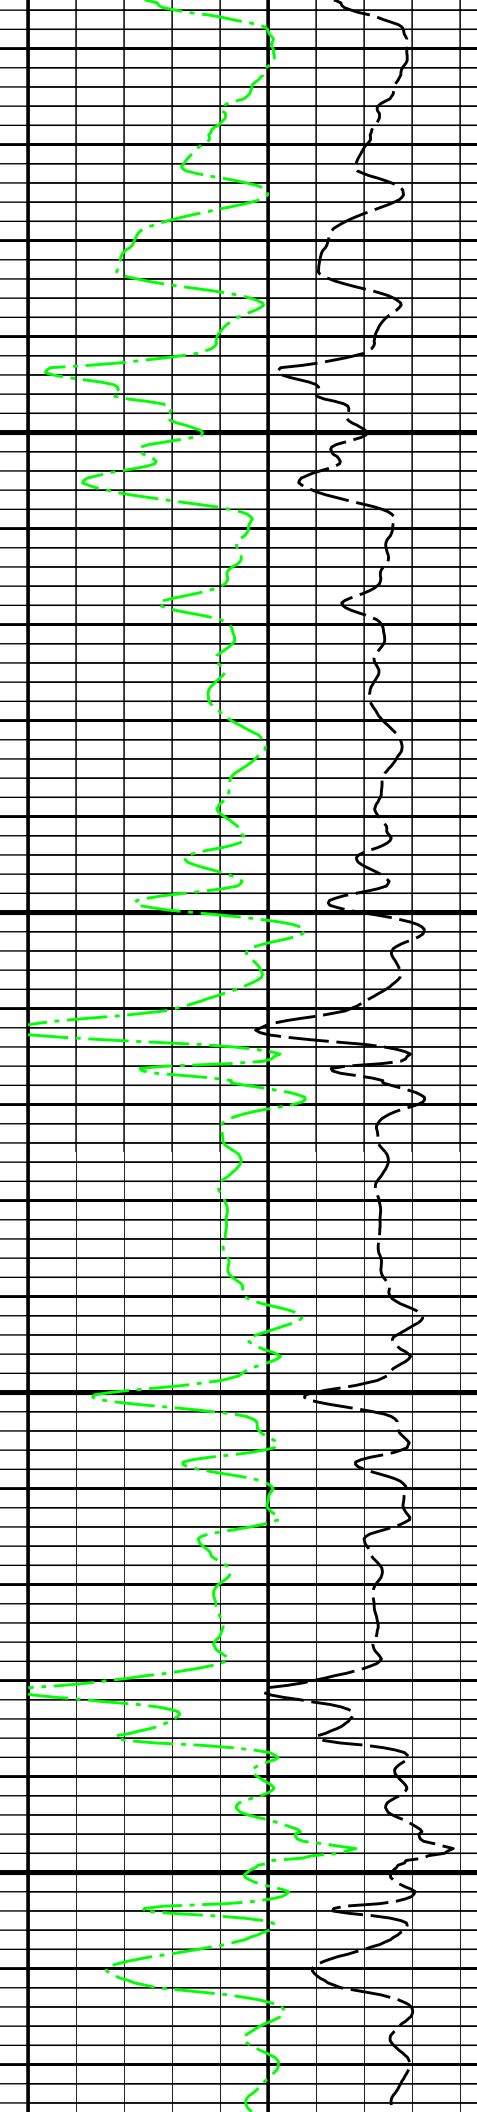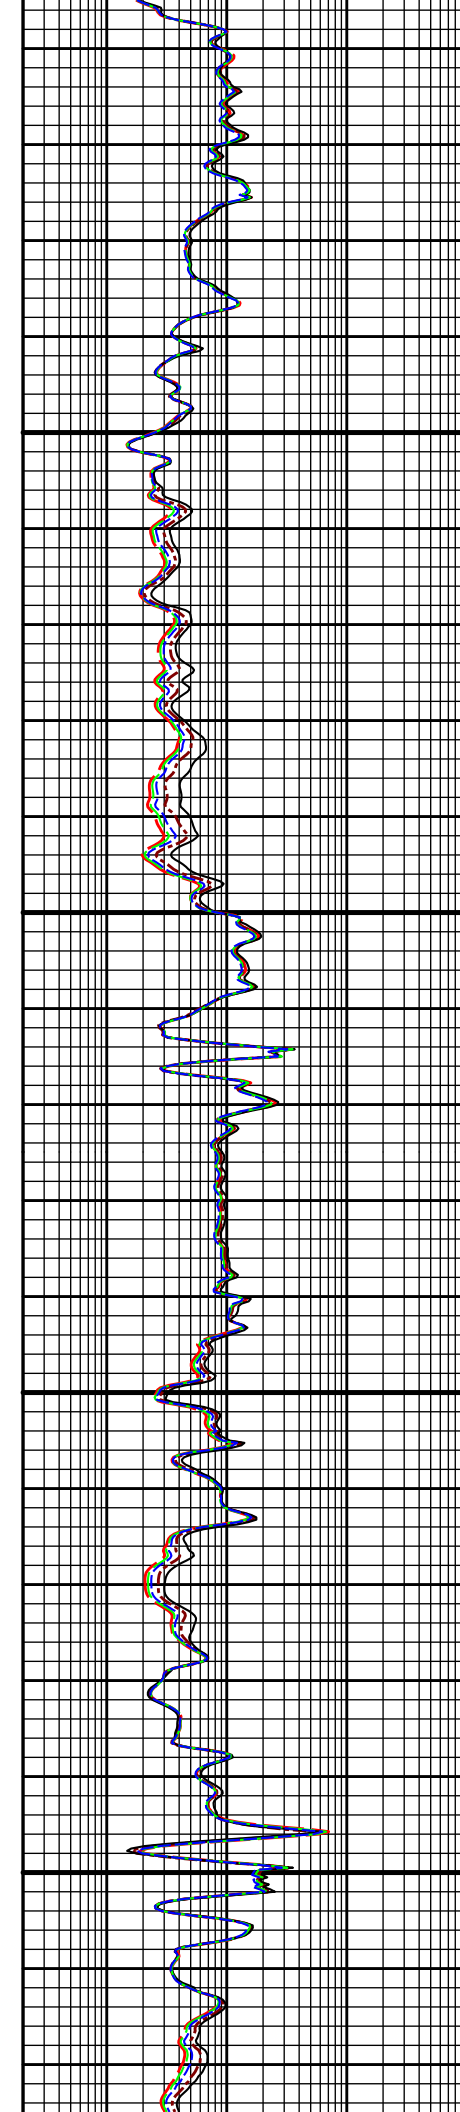


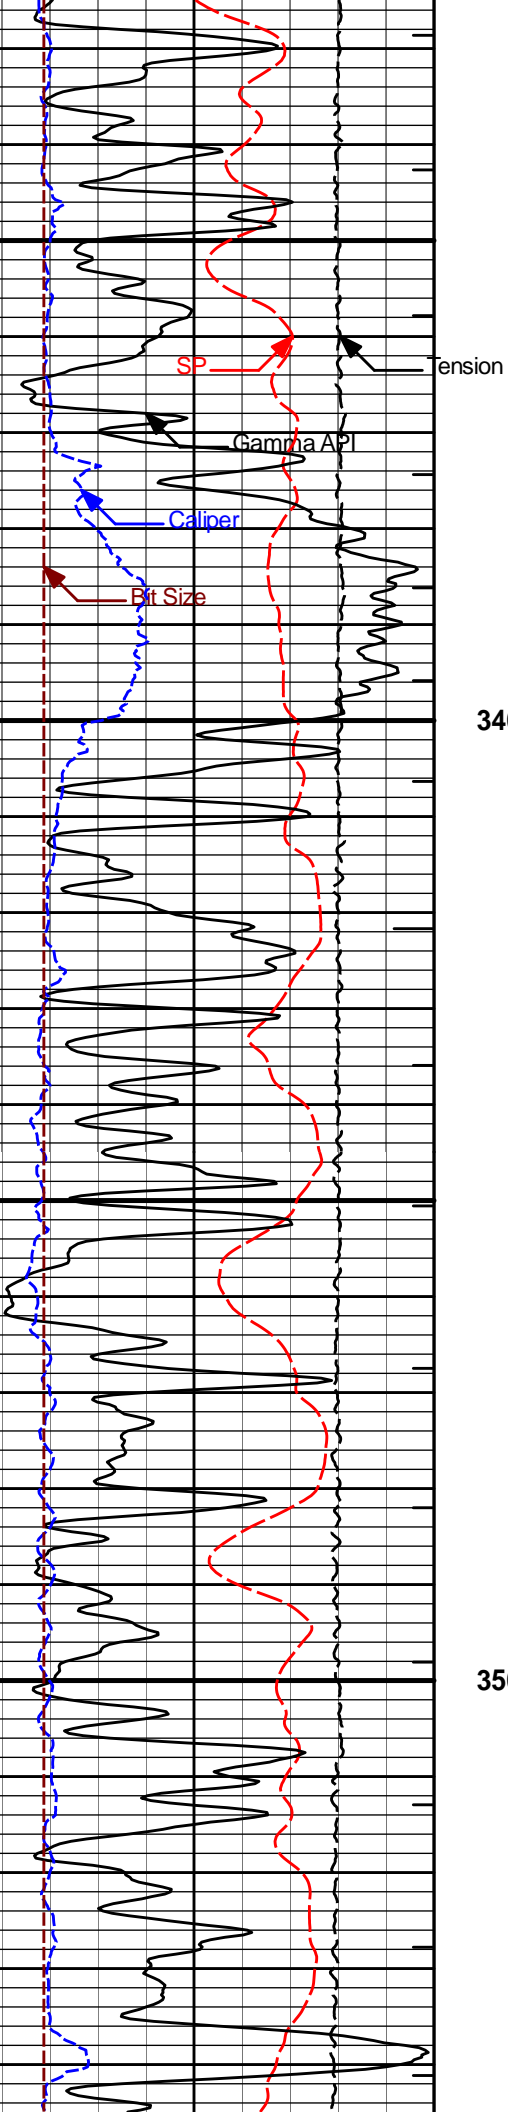



3400


3500

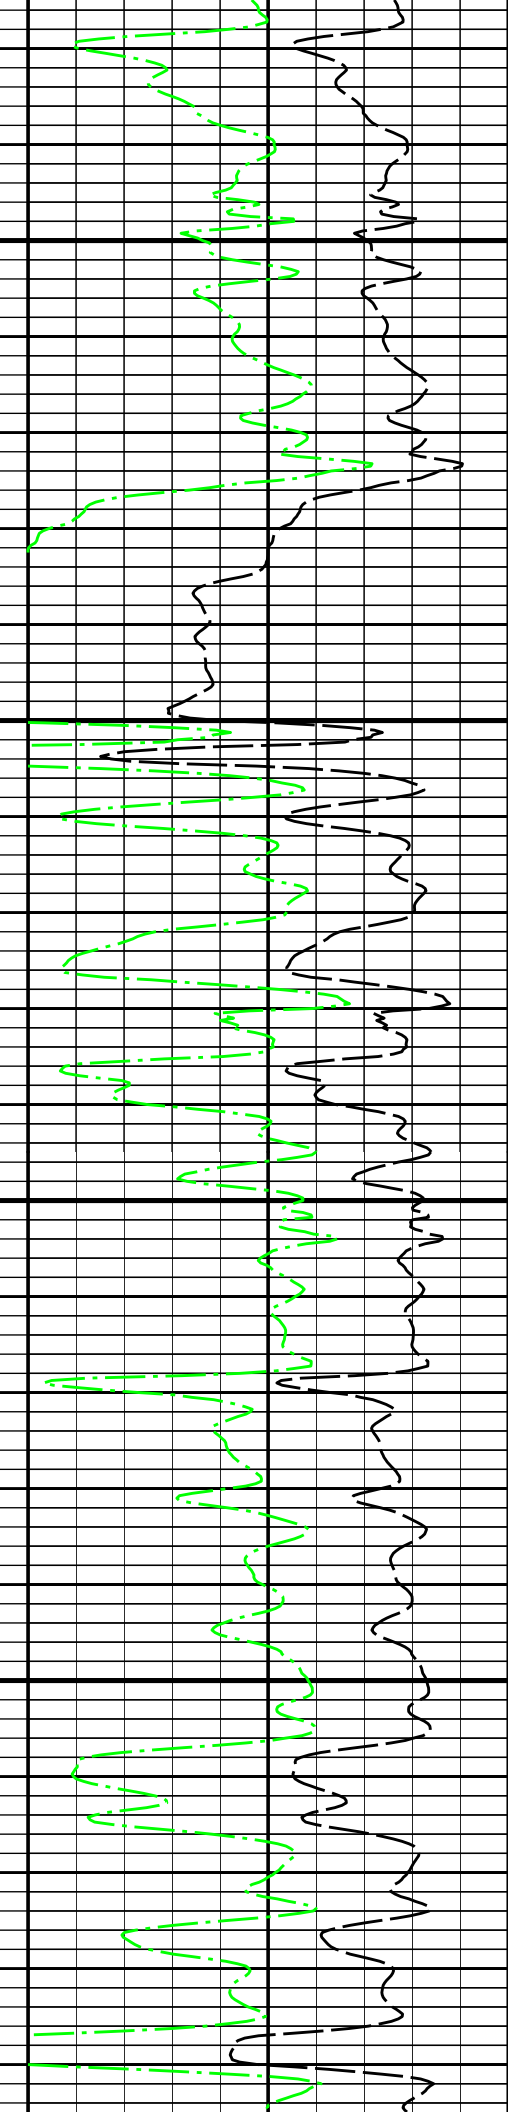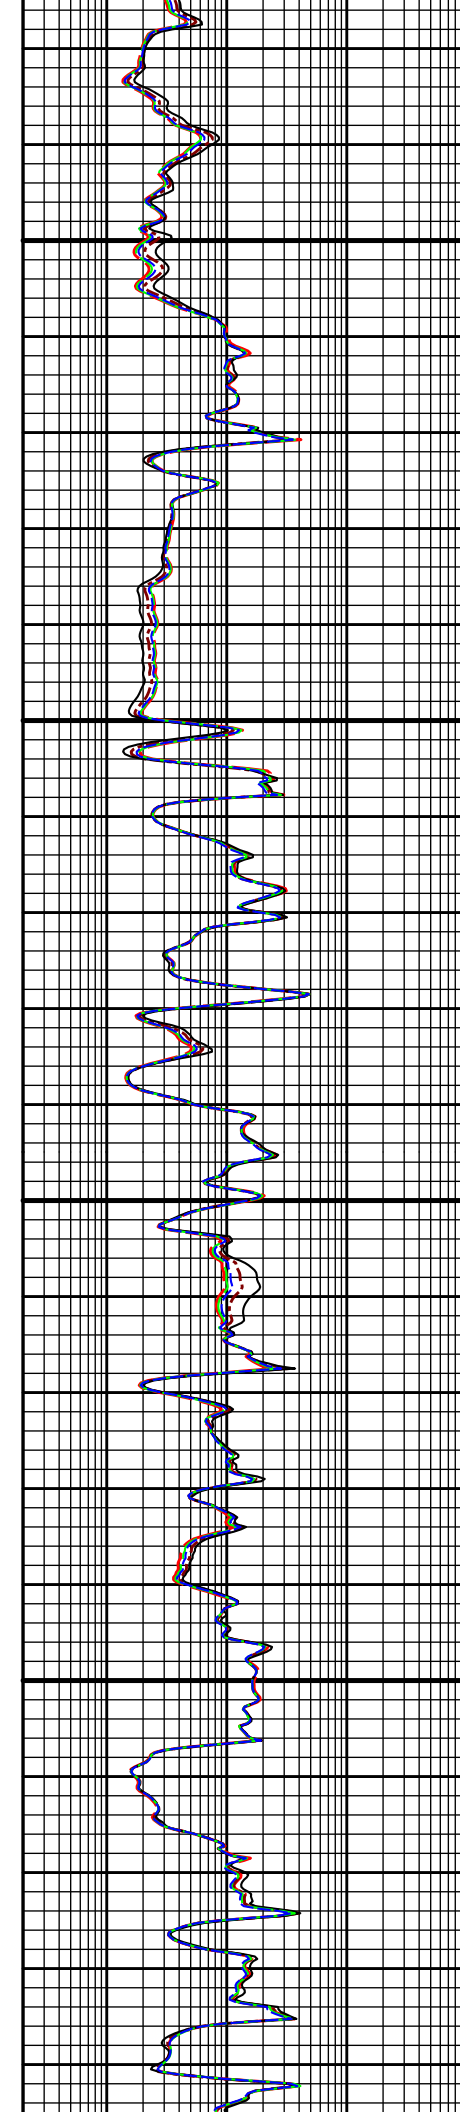


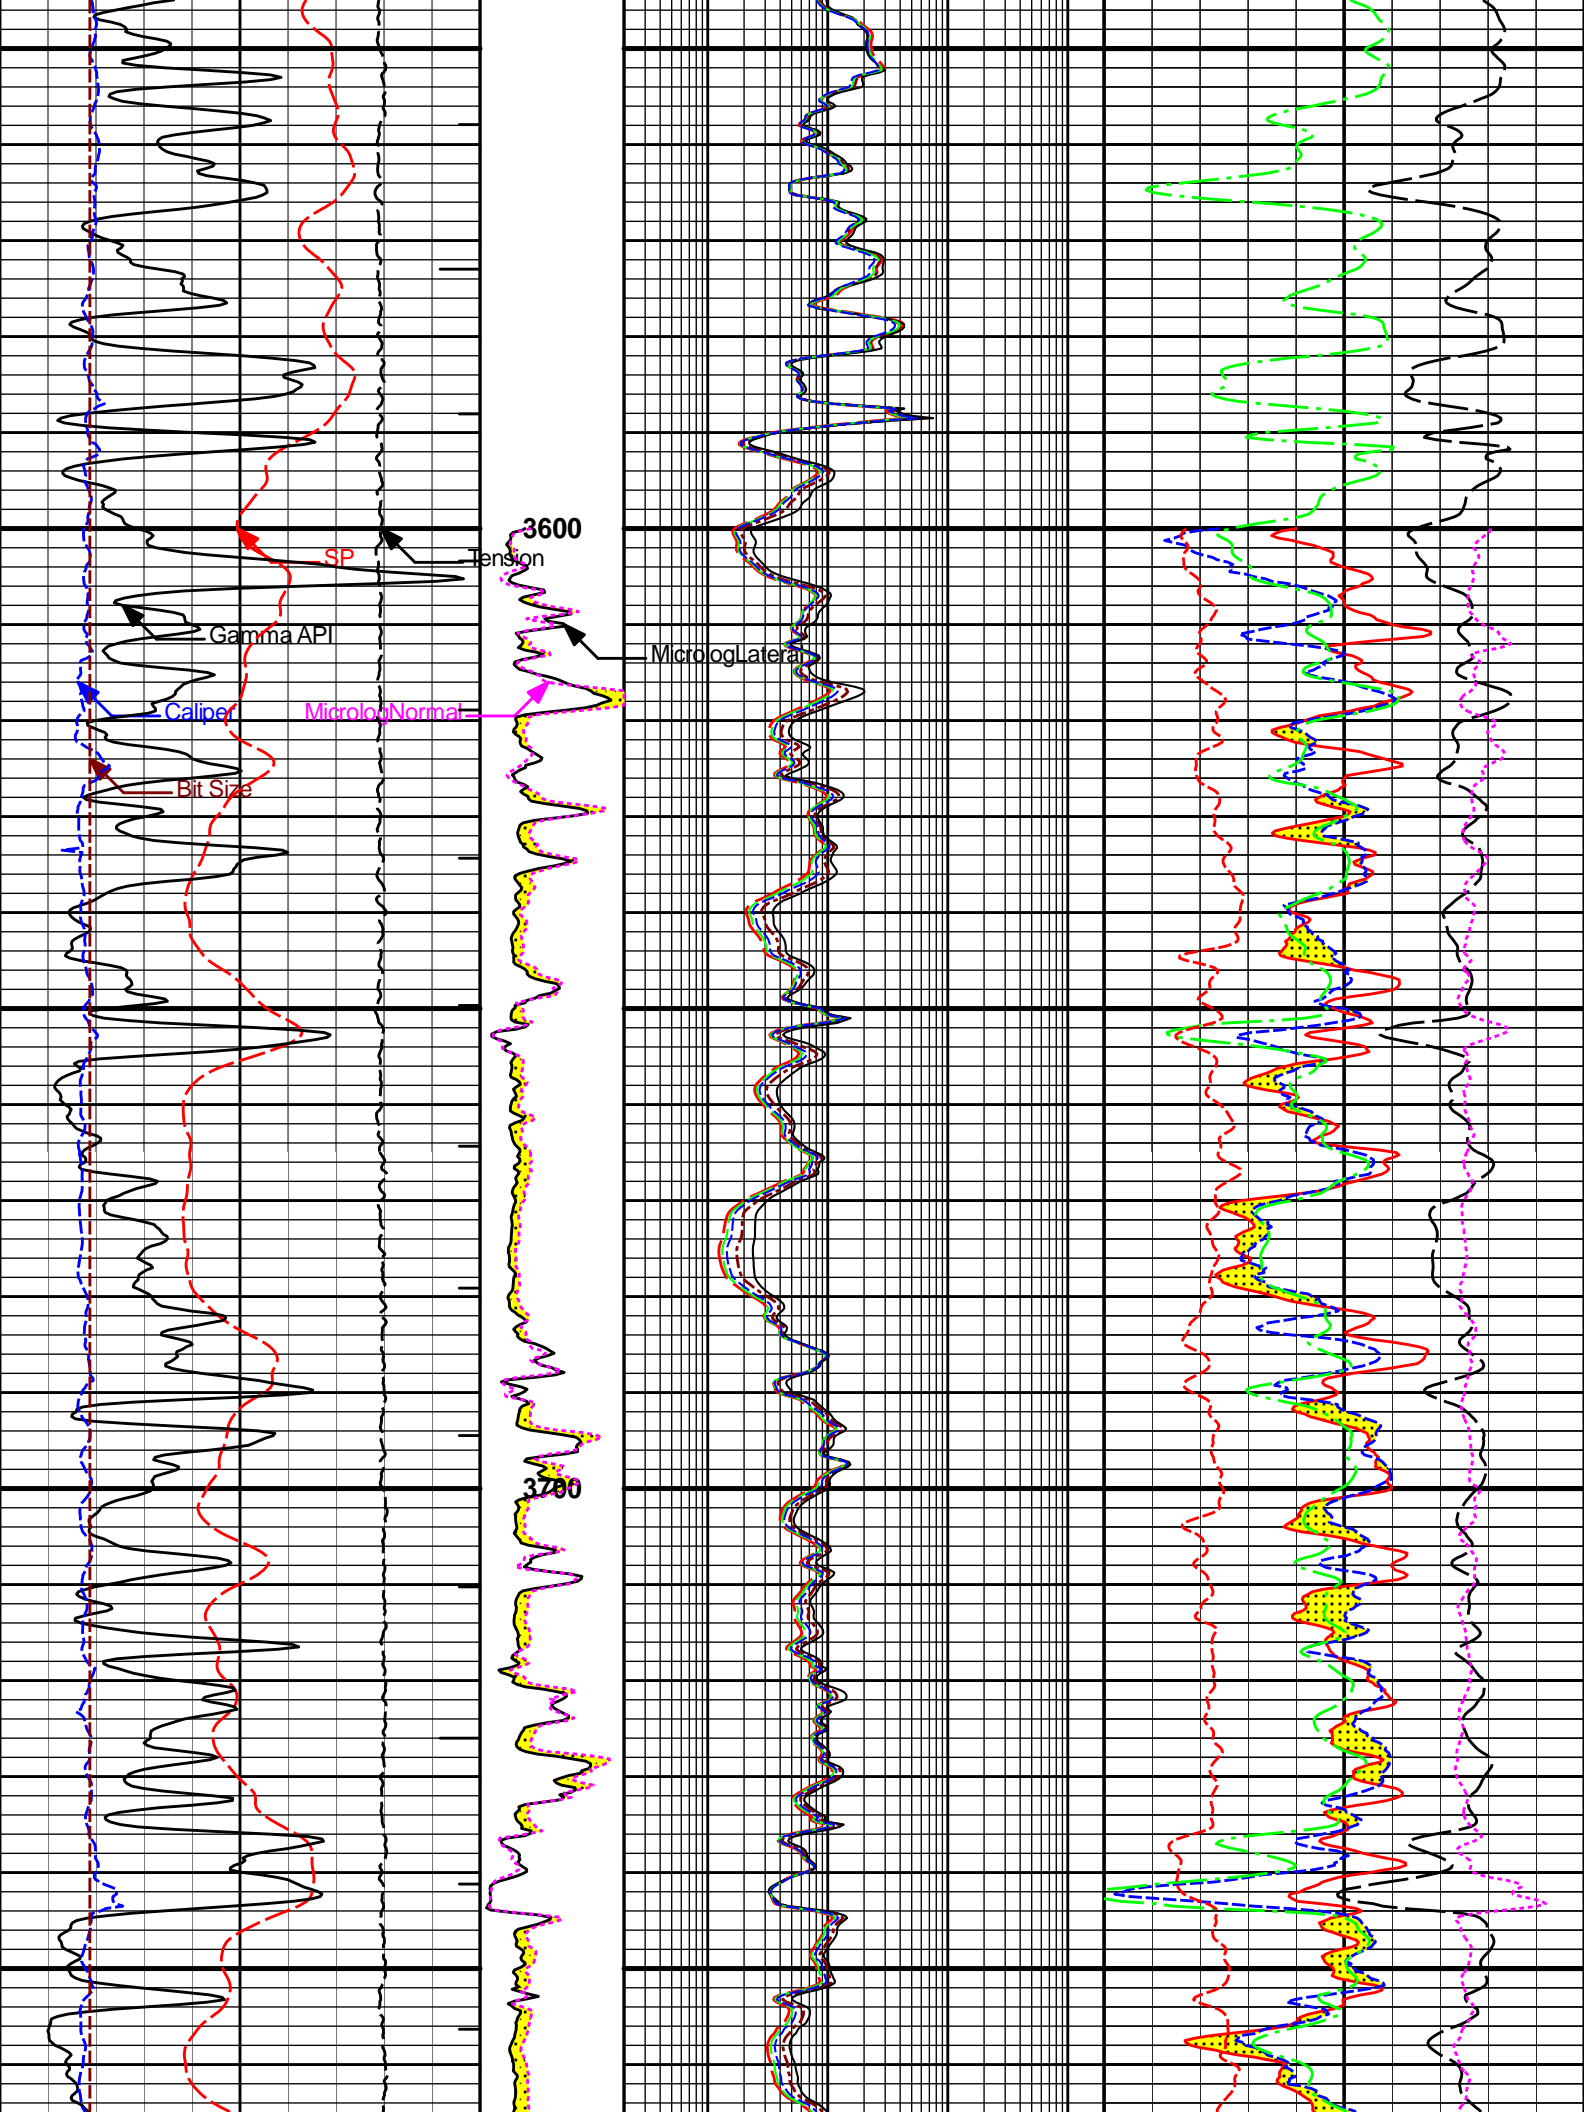


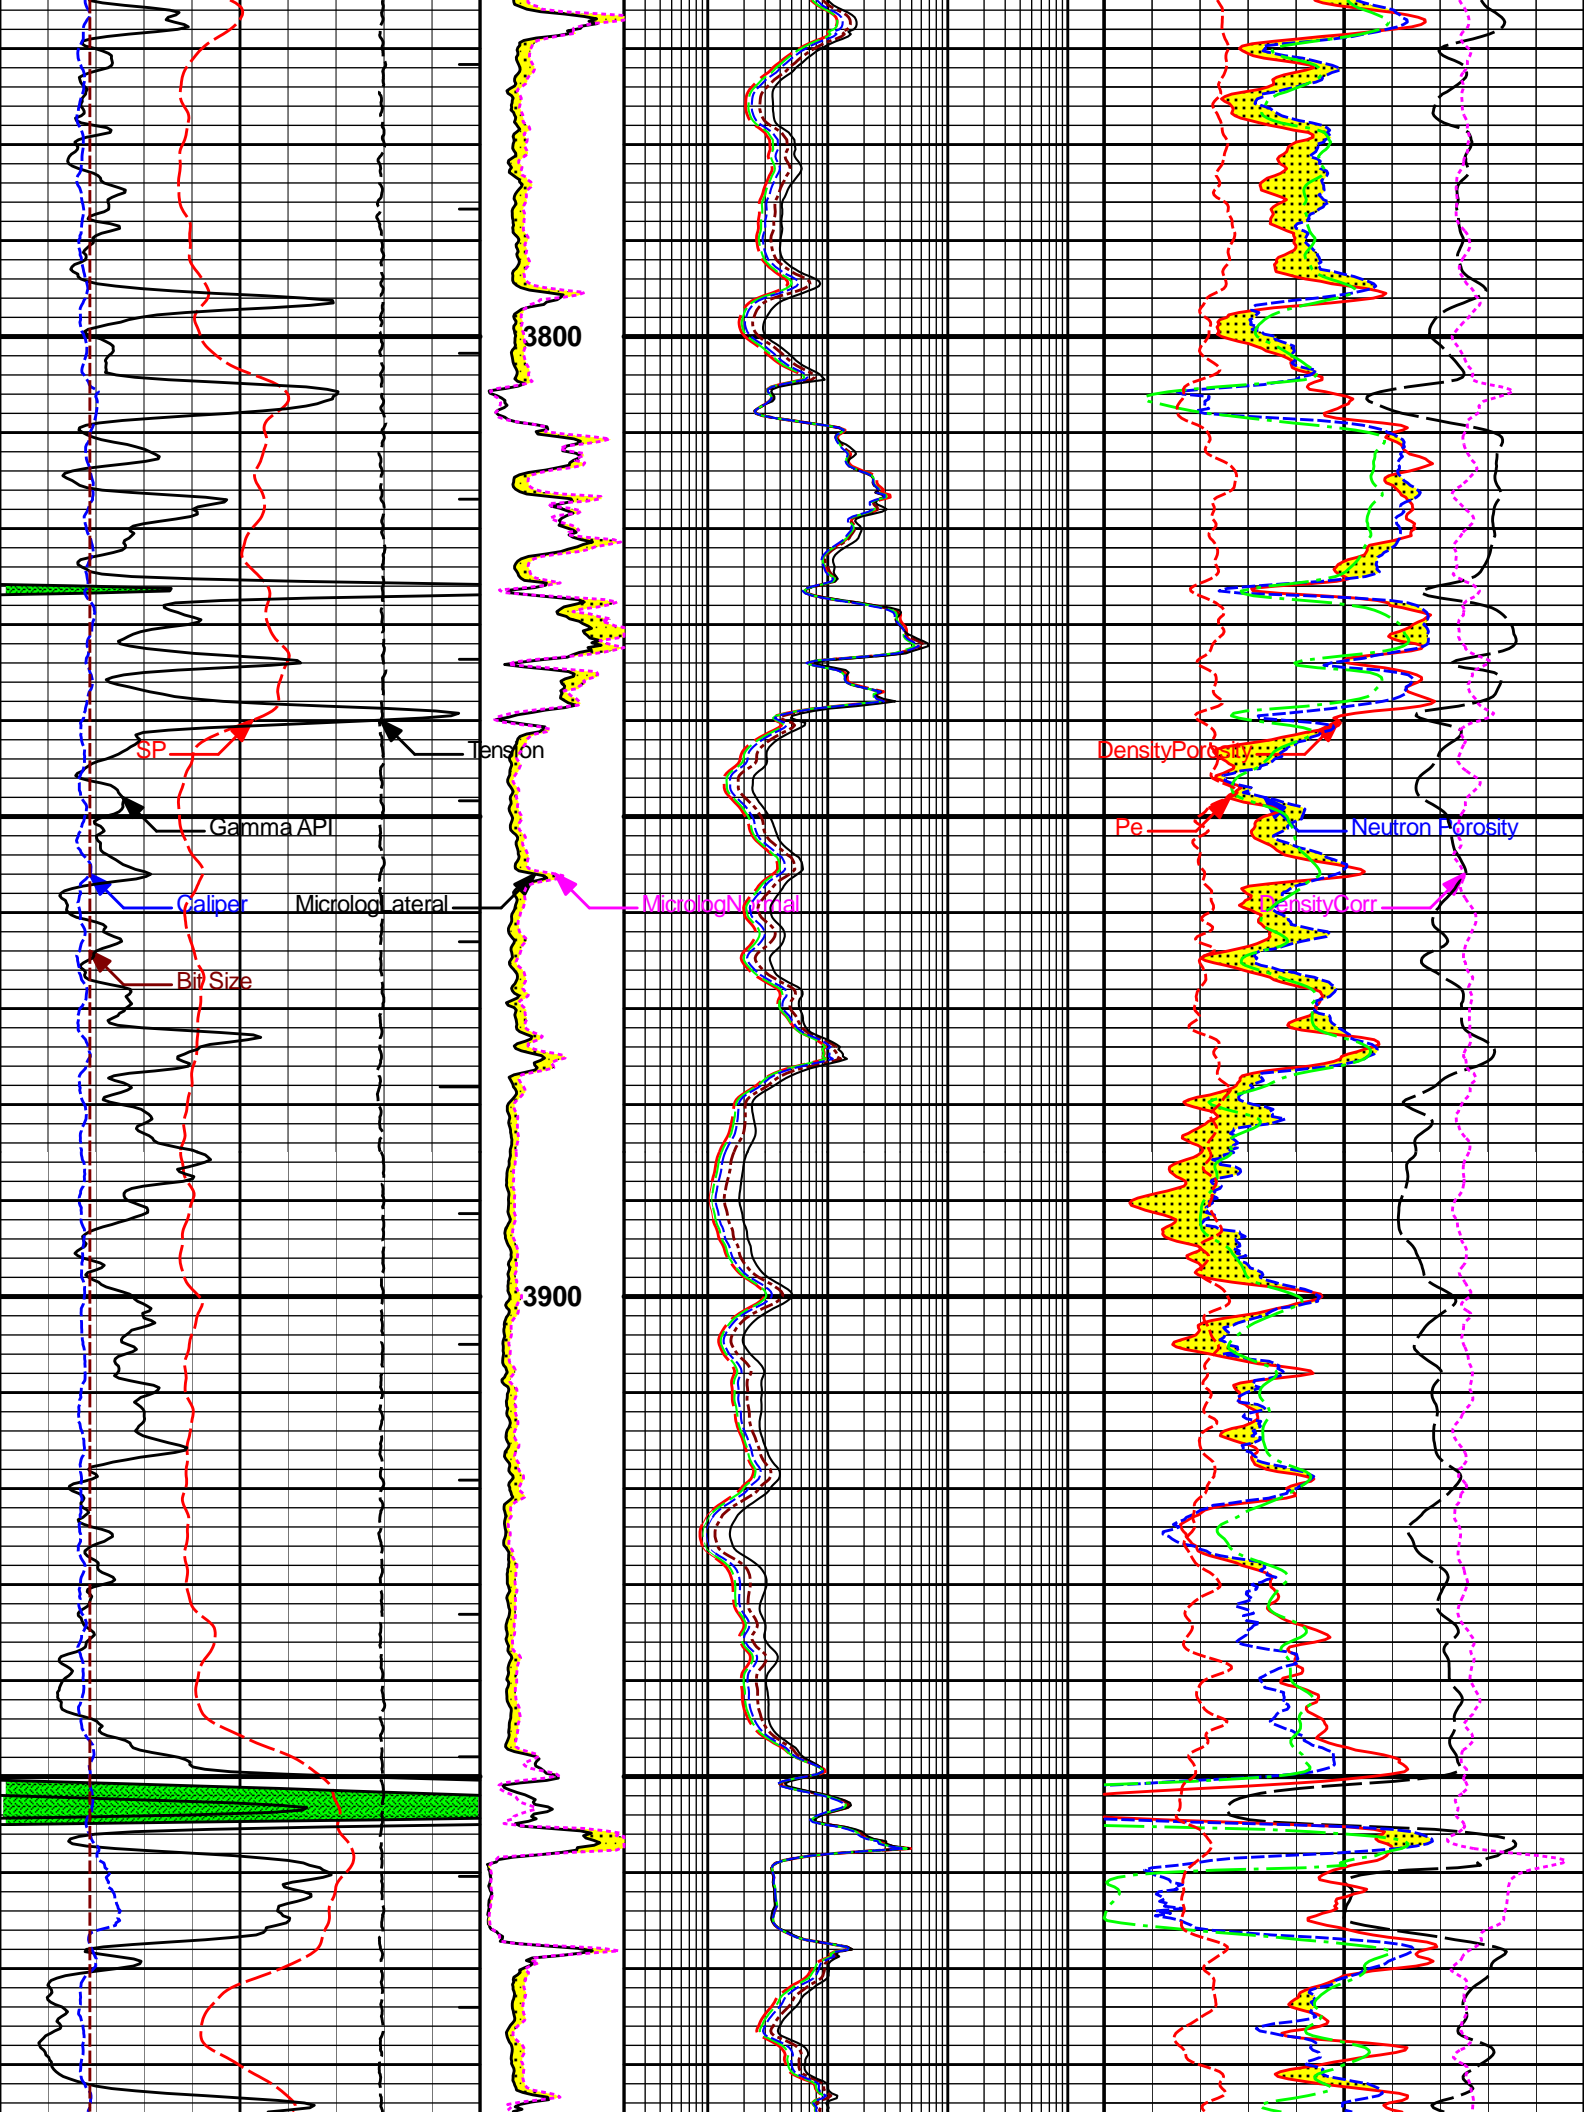


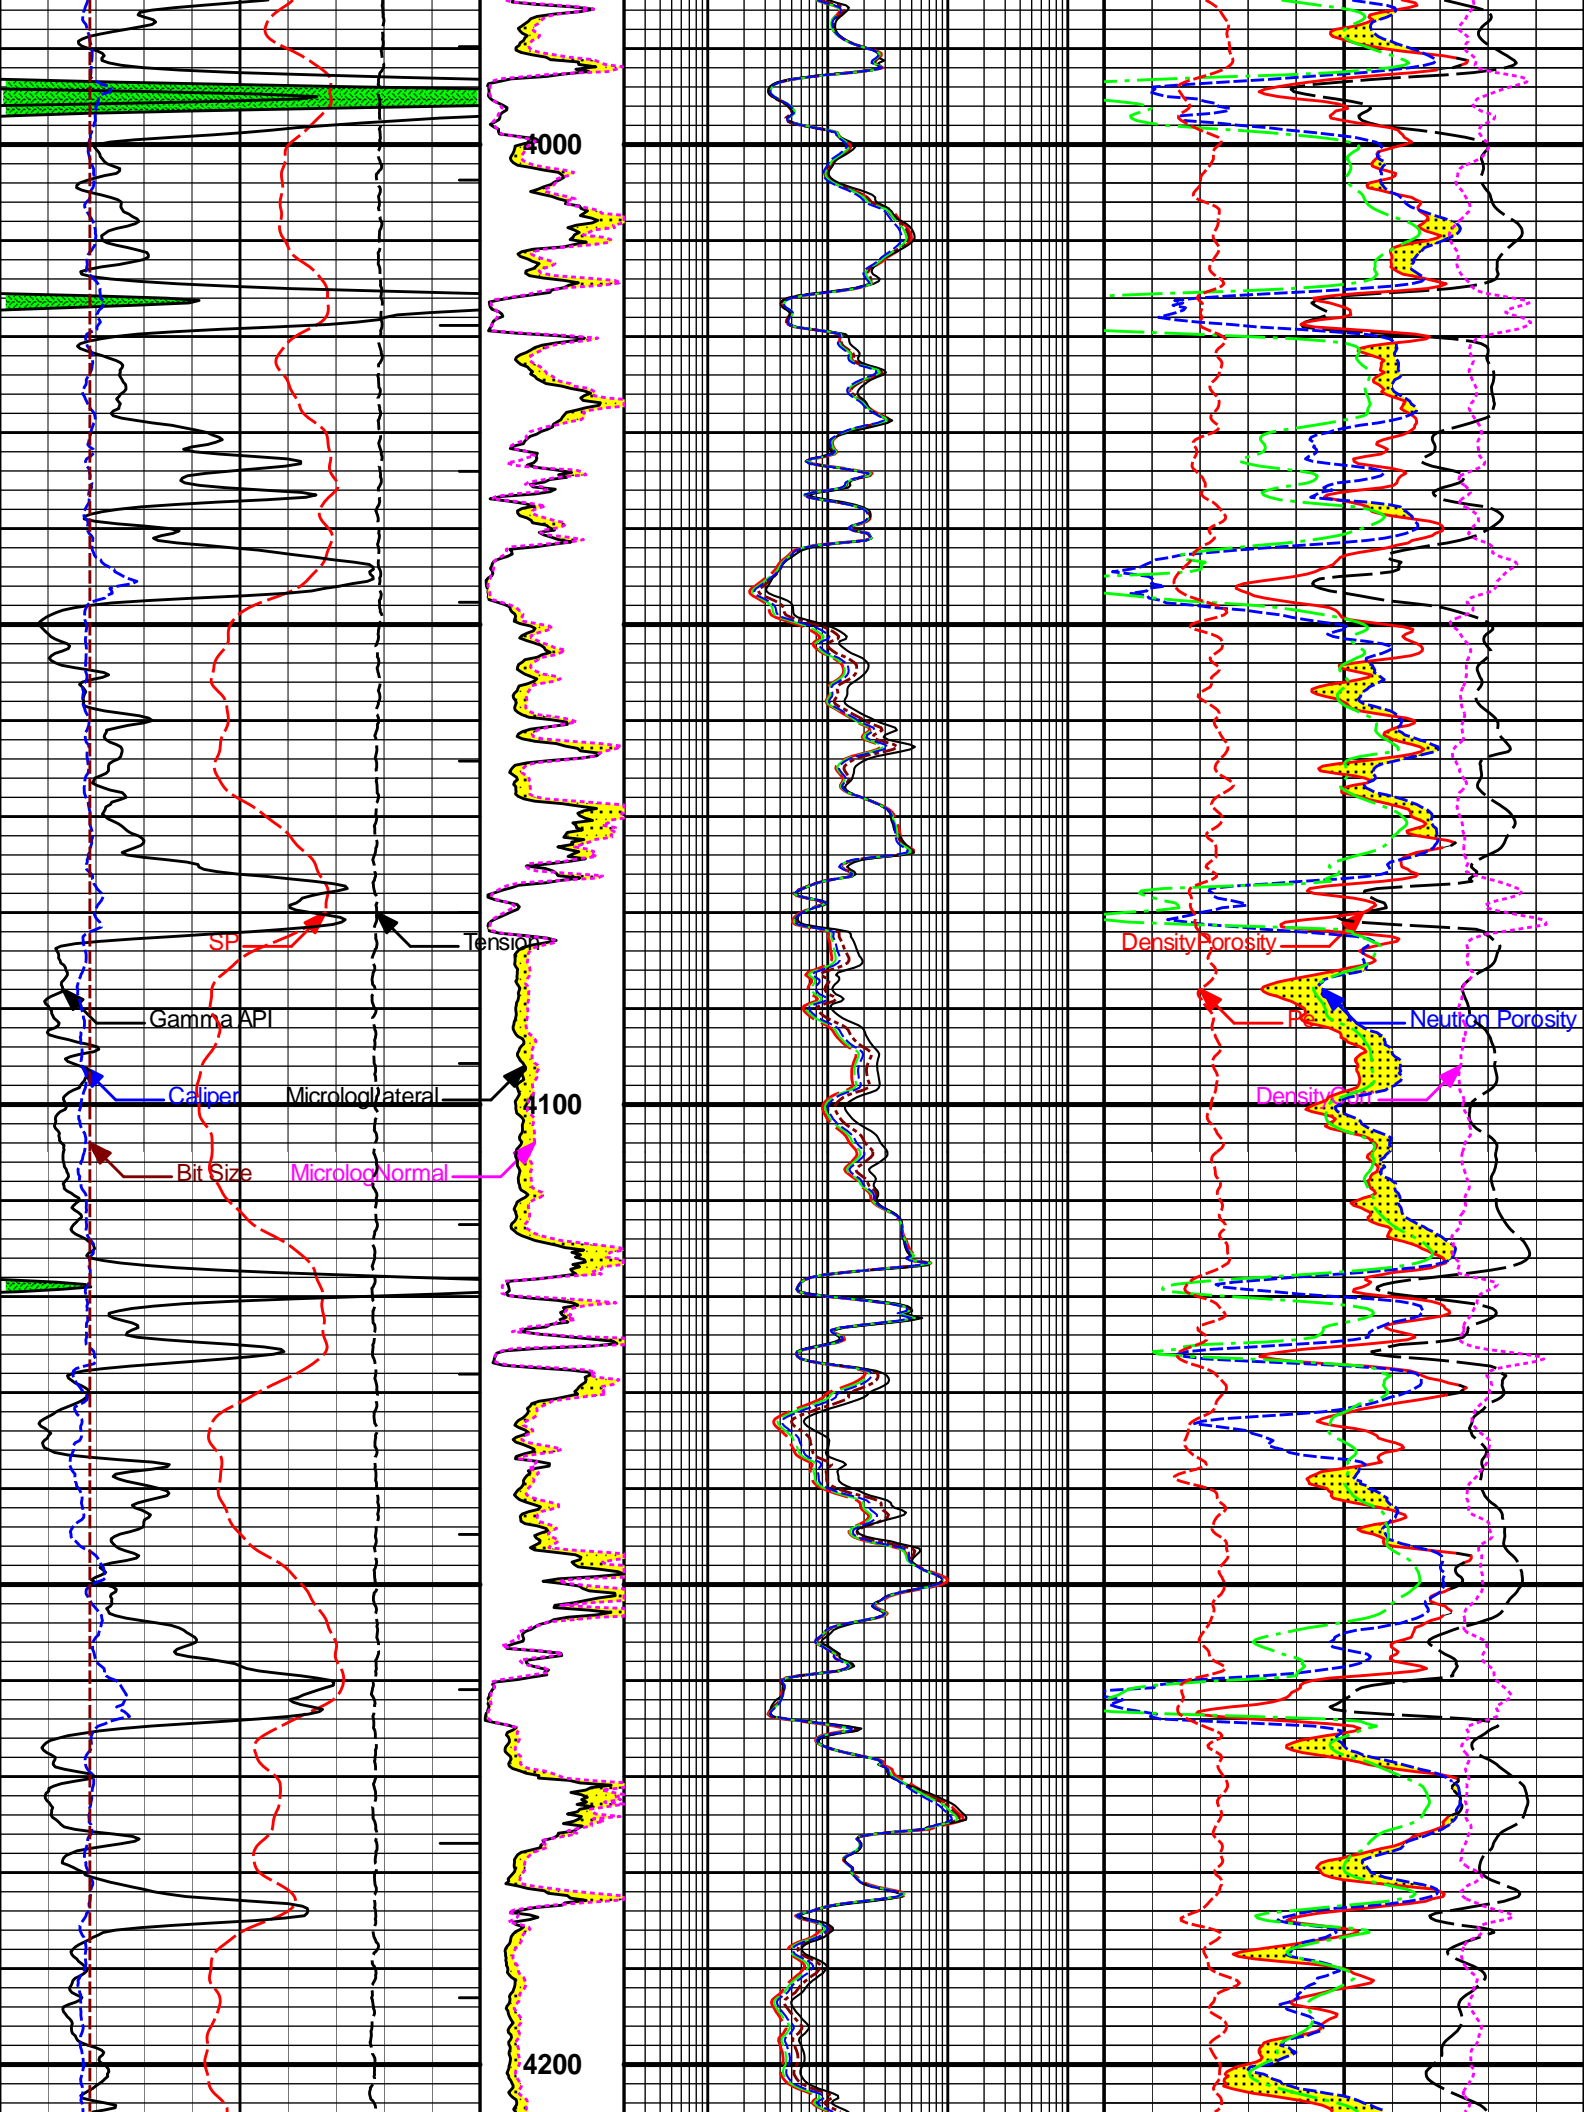


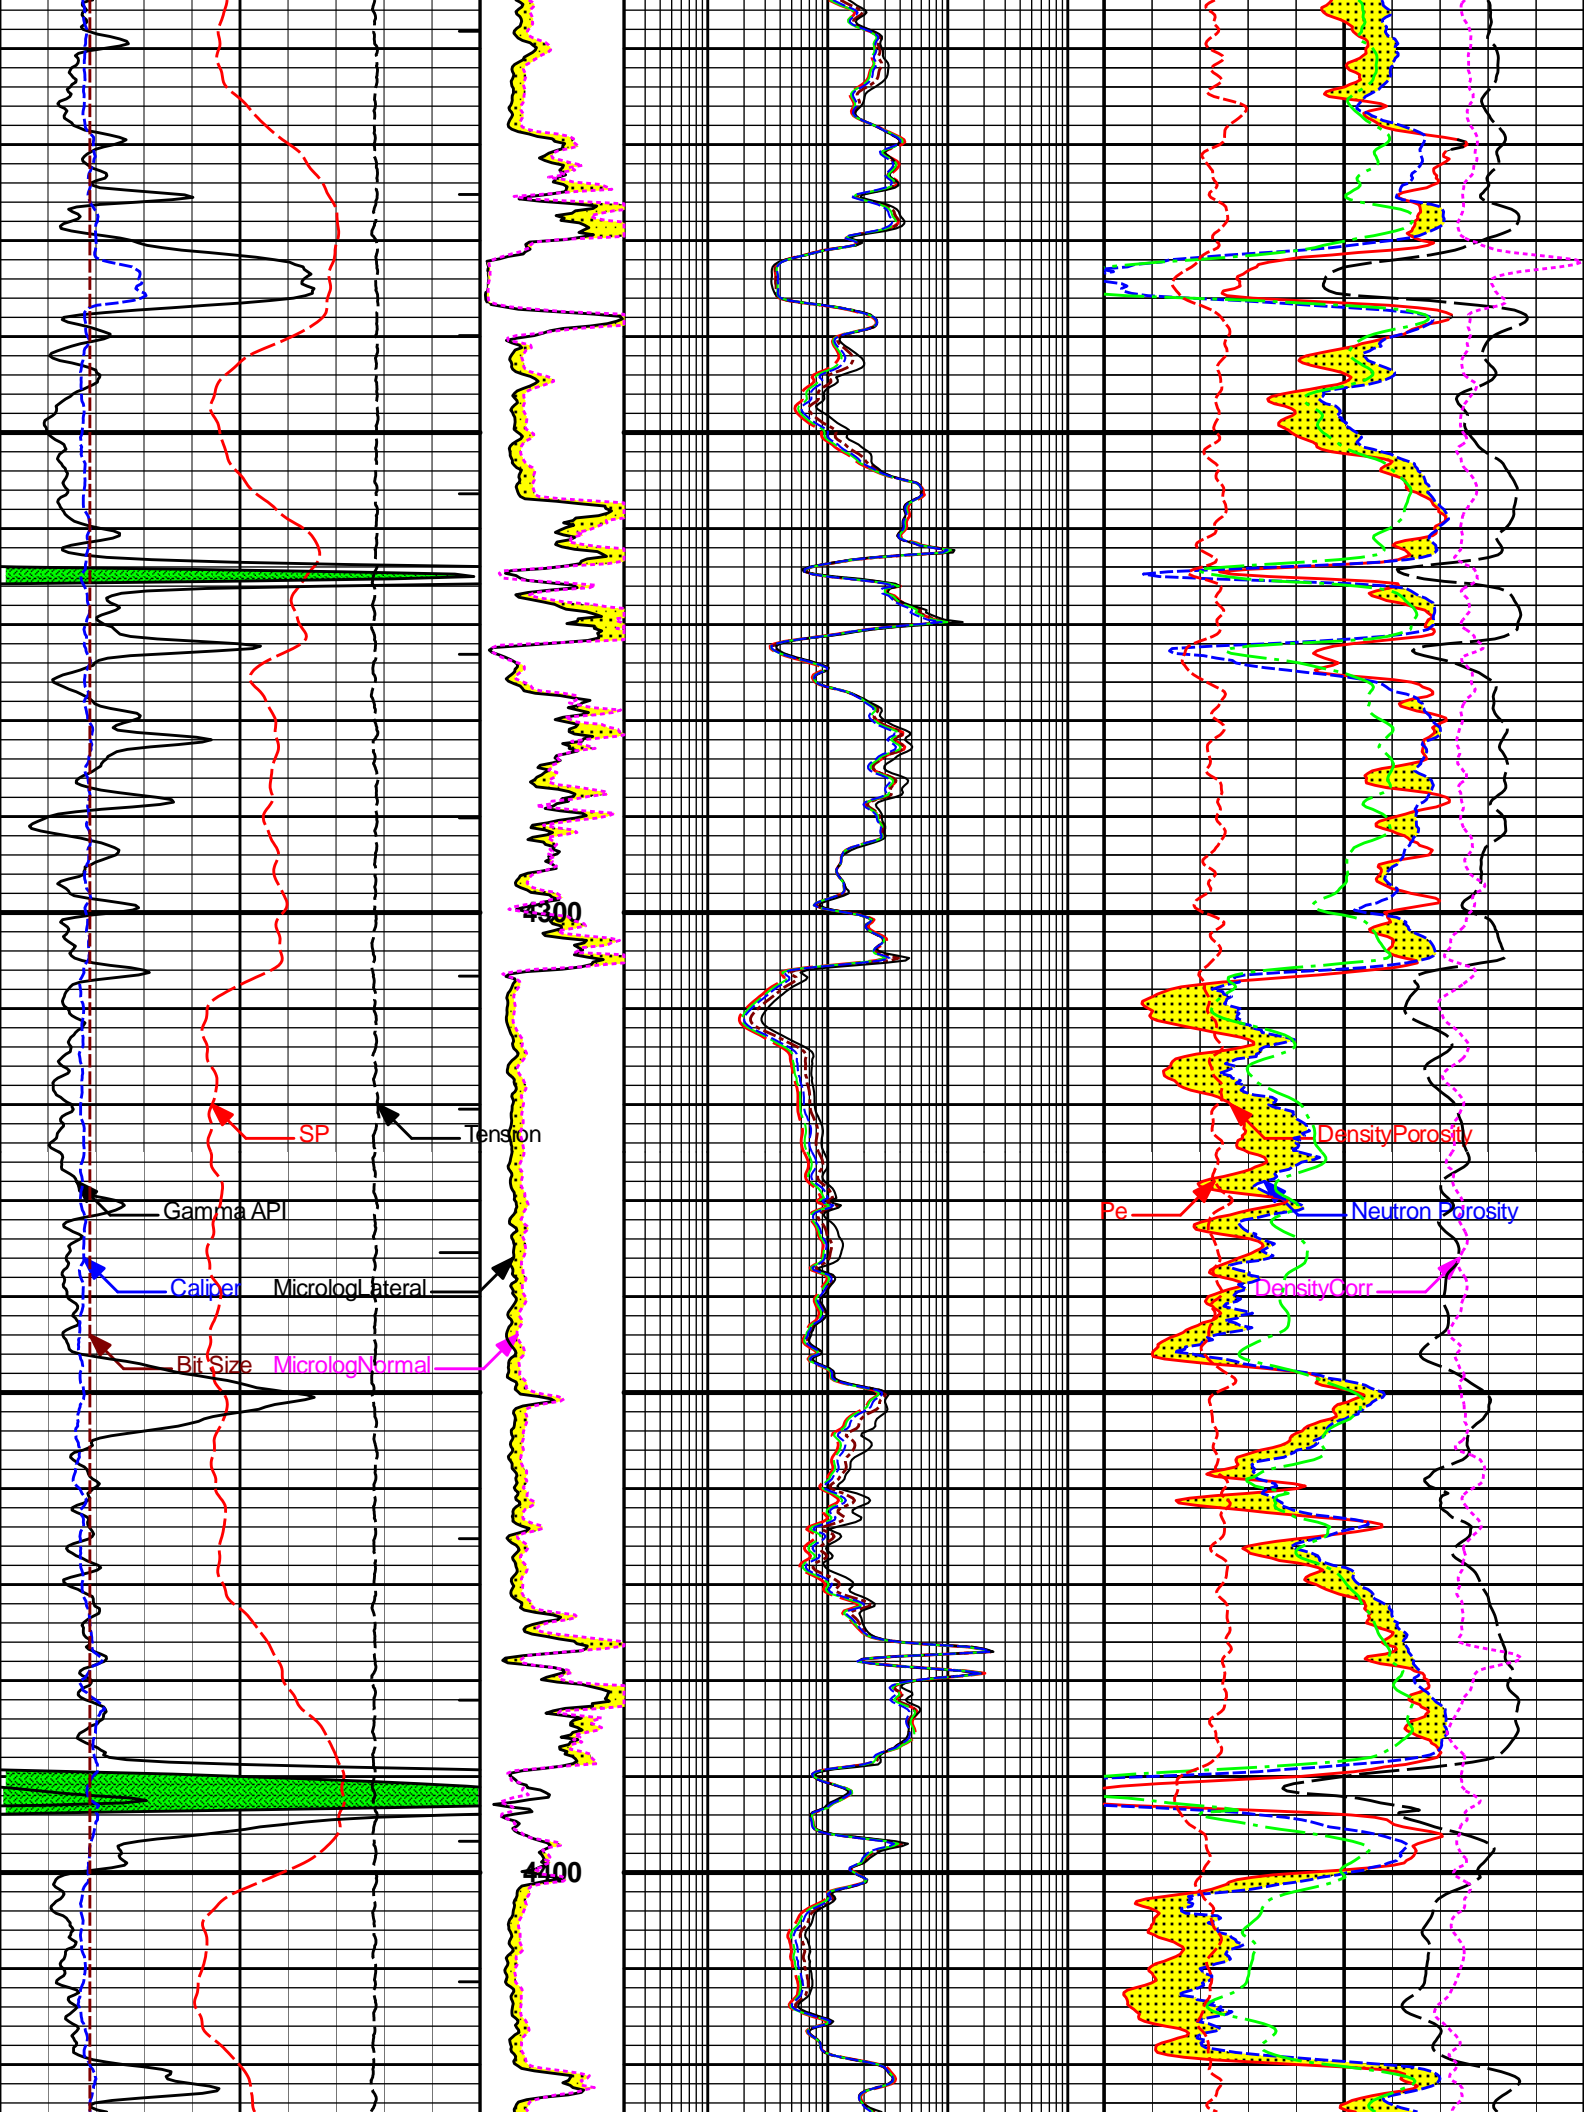

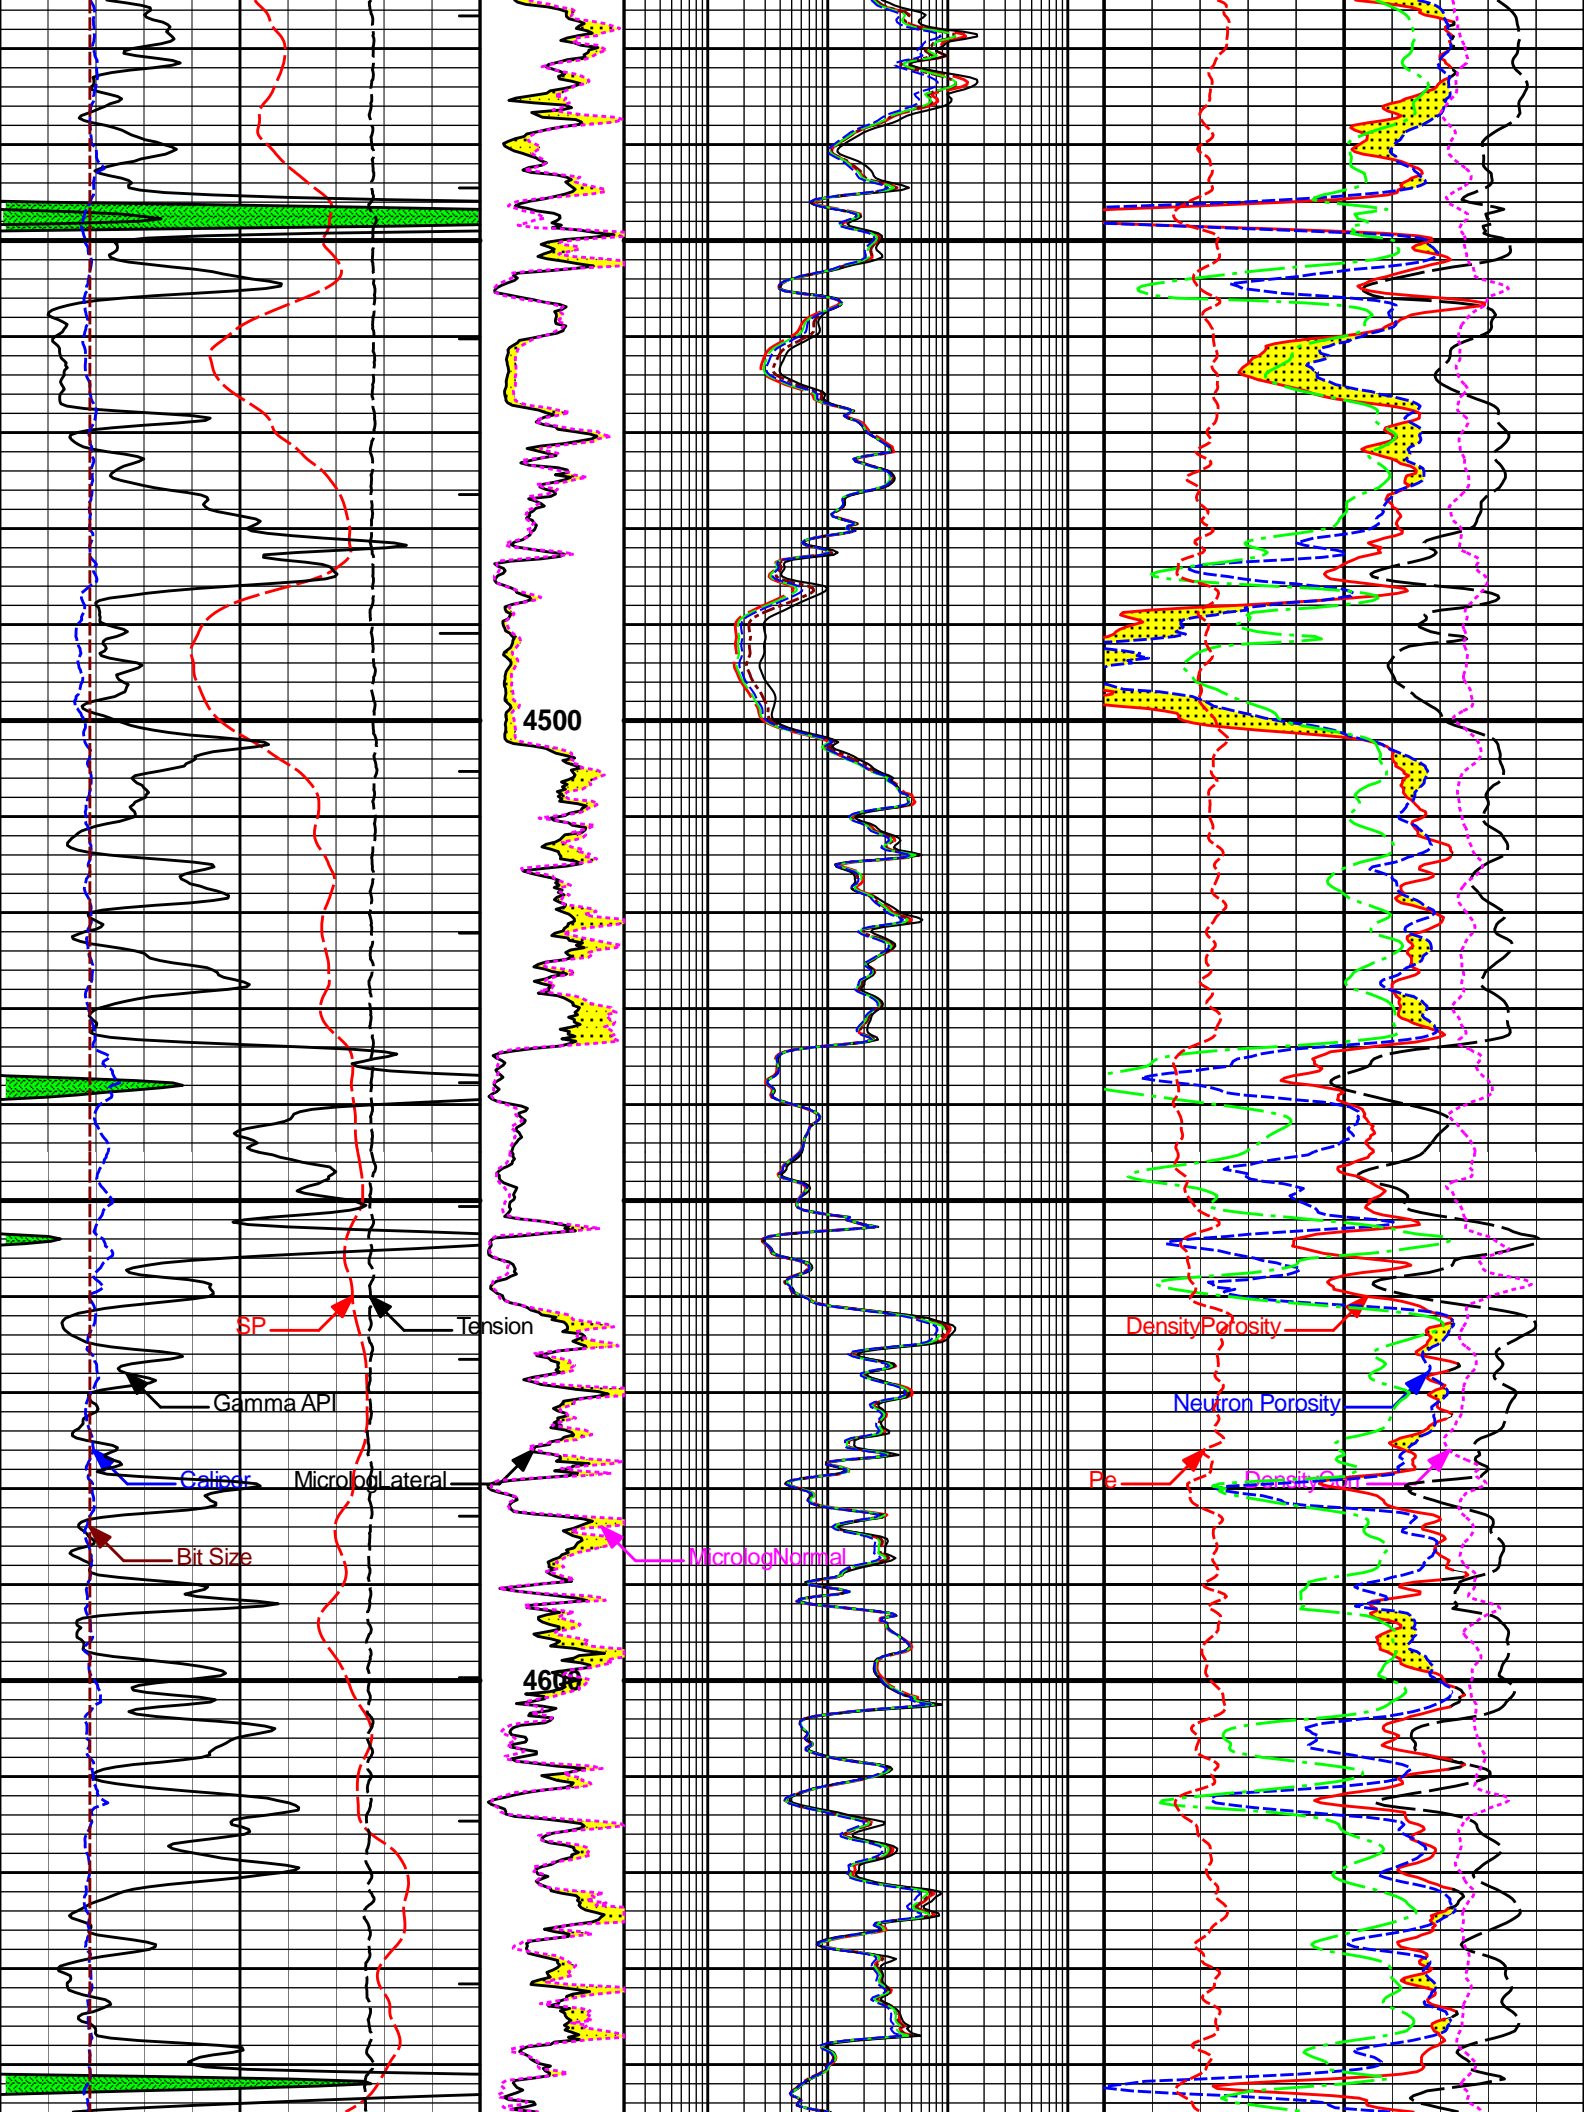

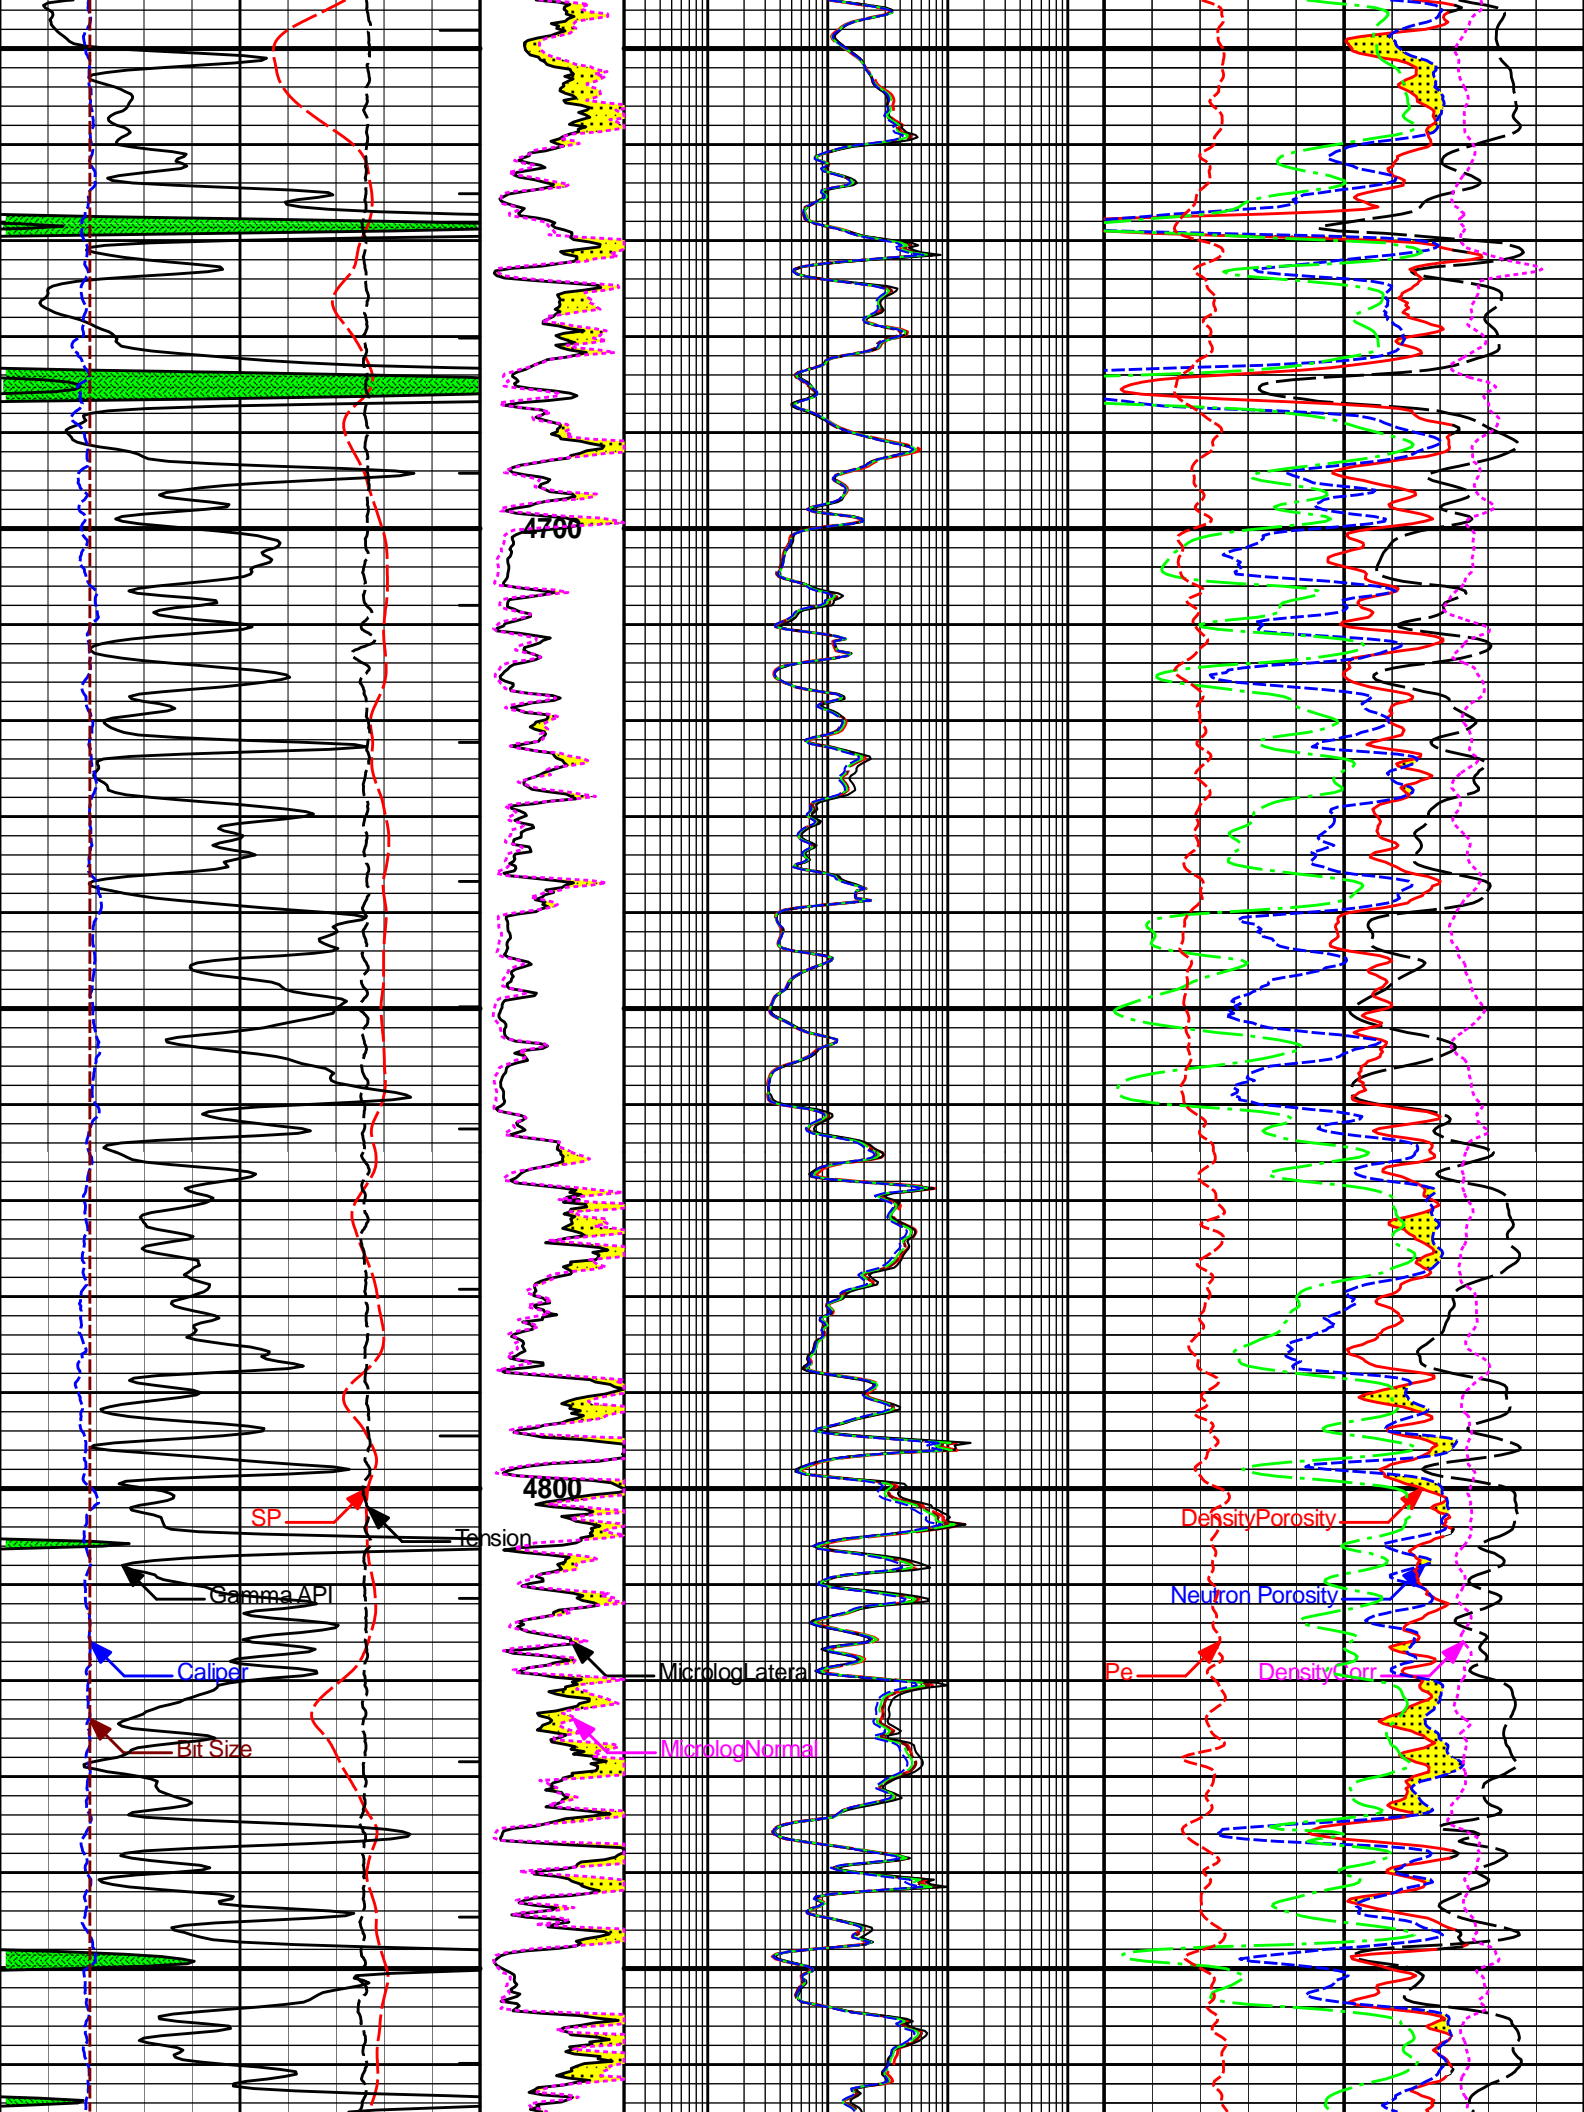

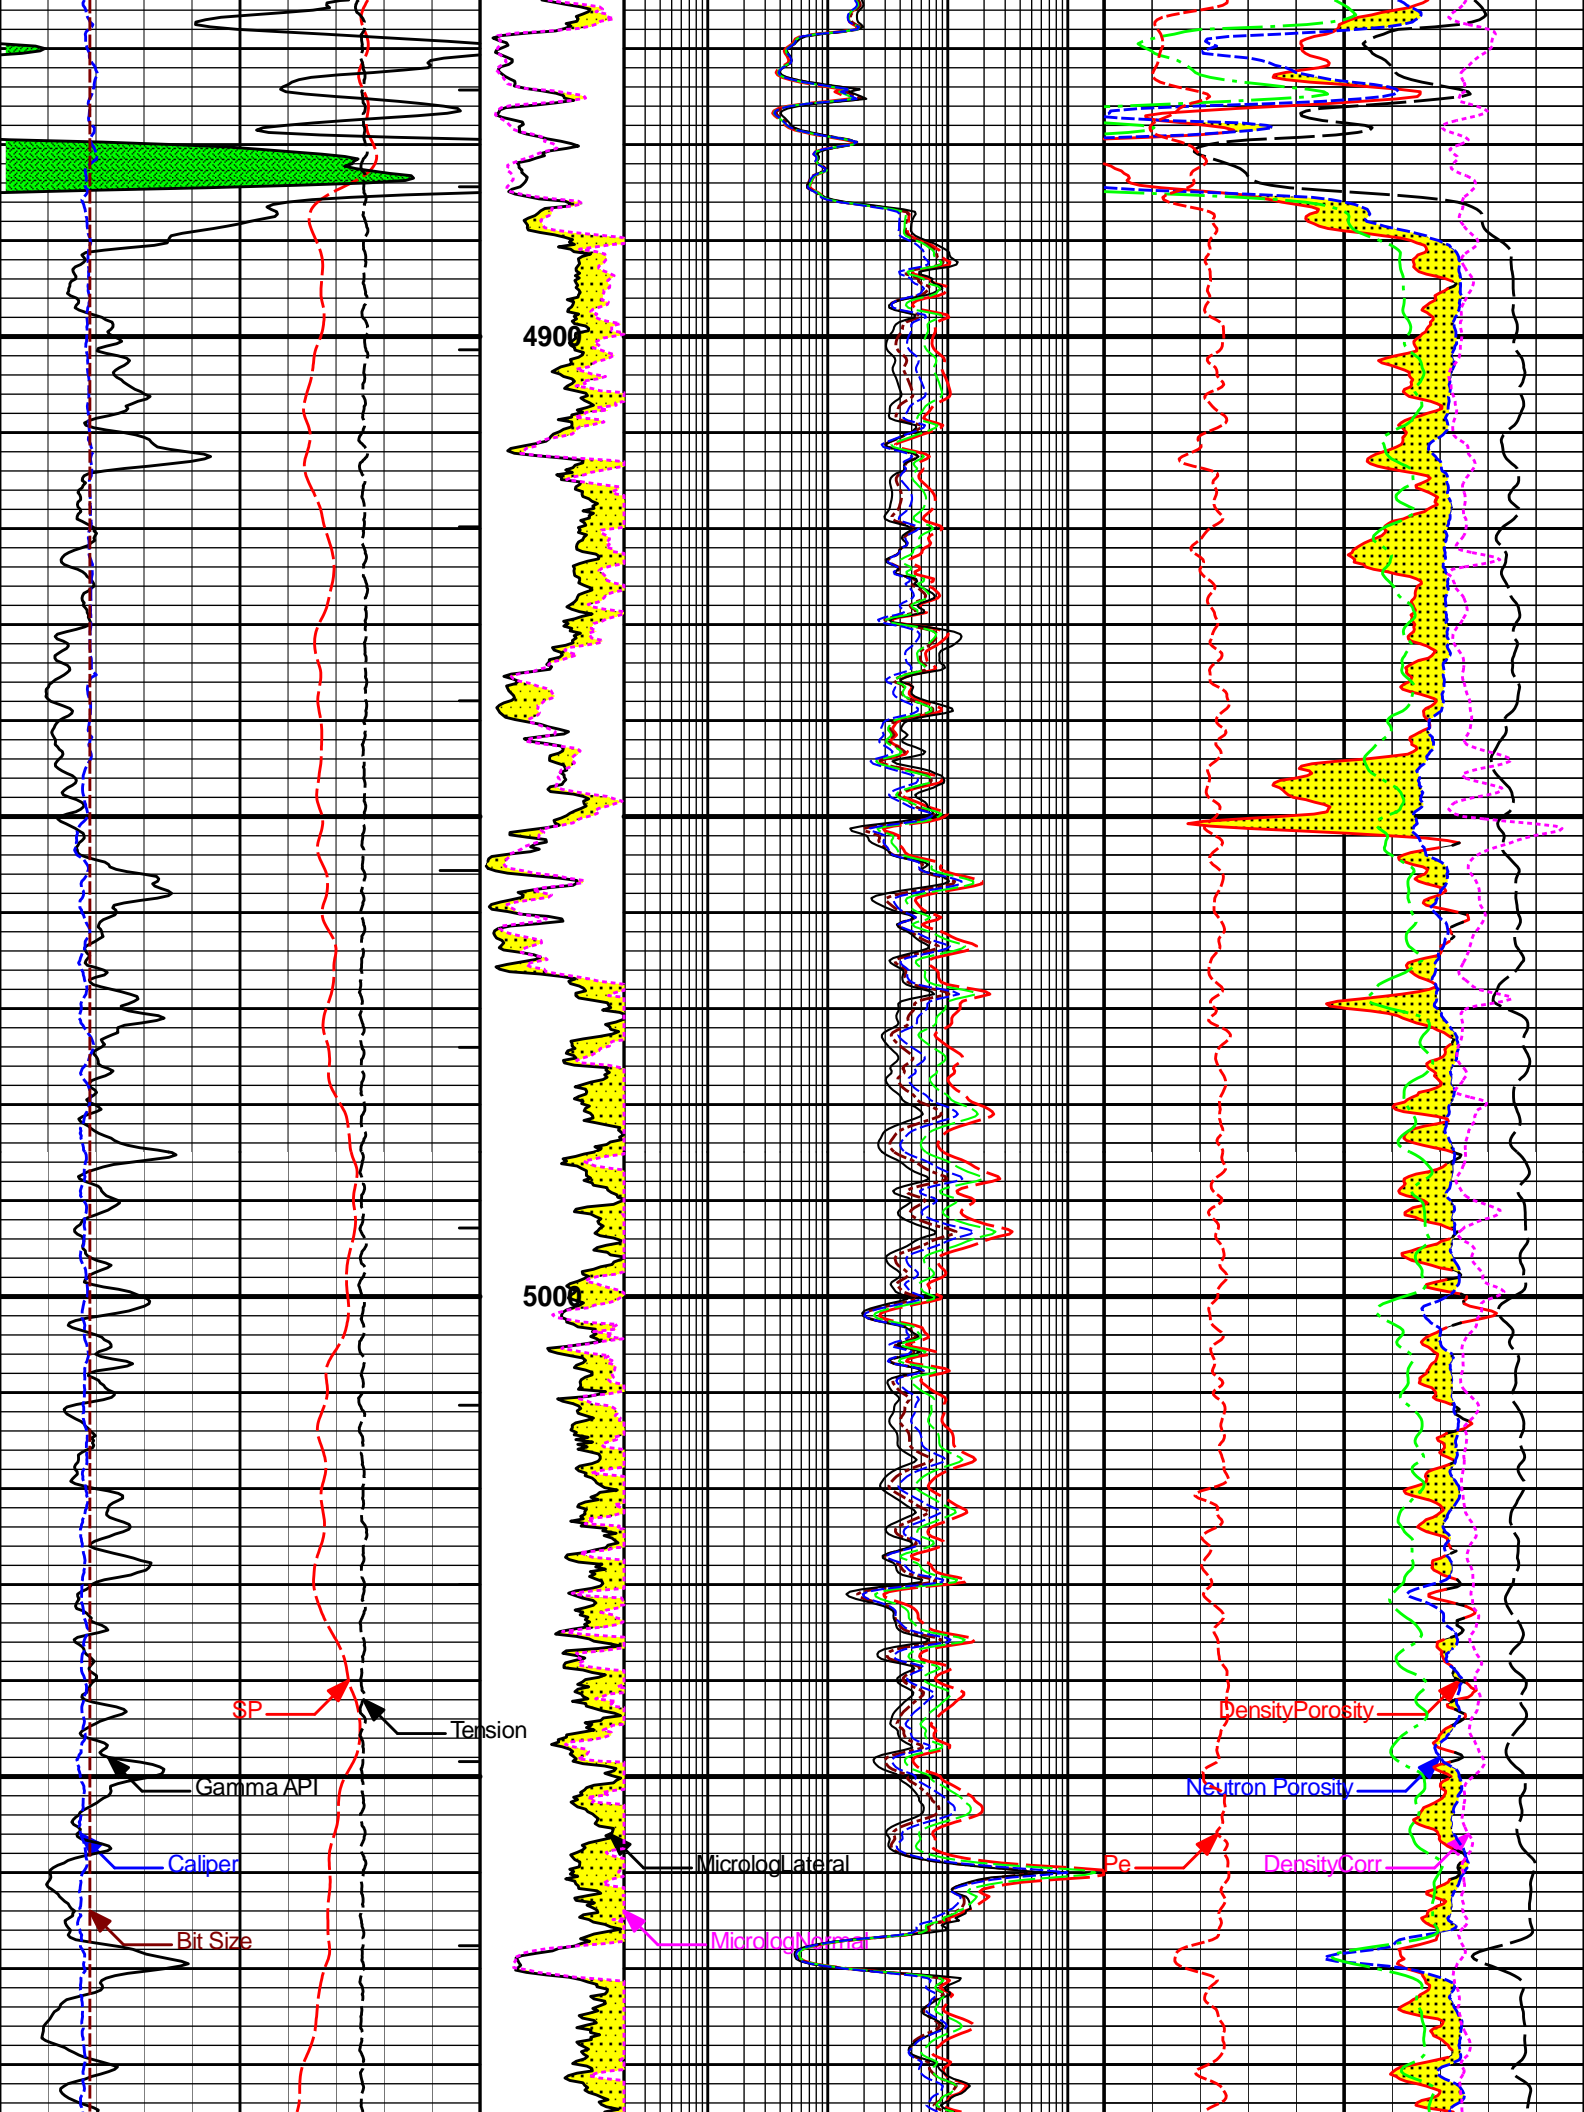

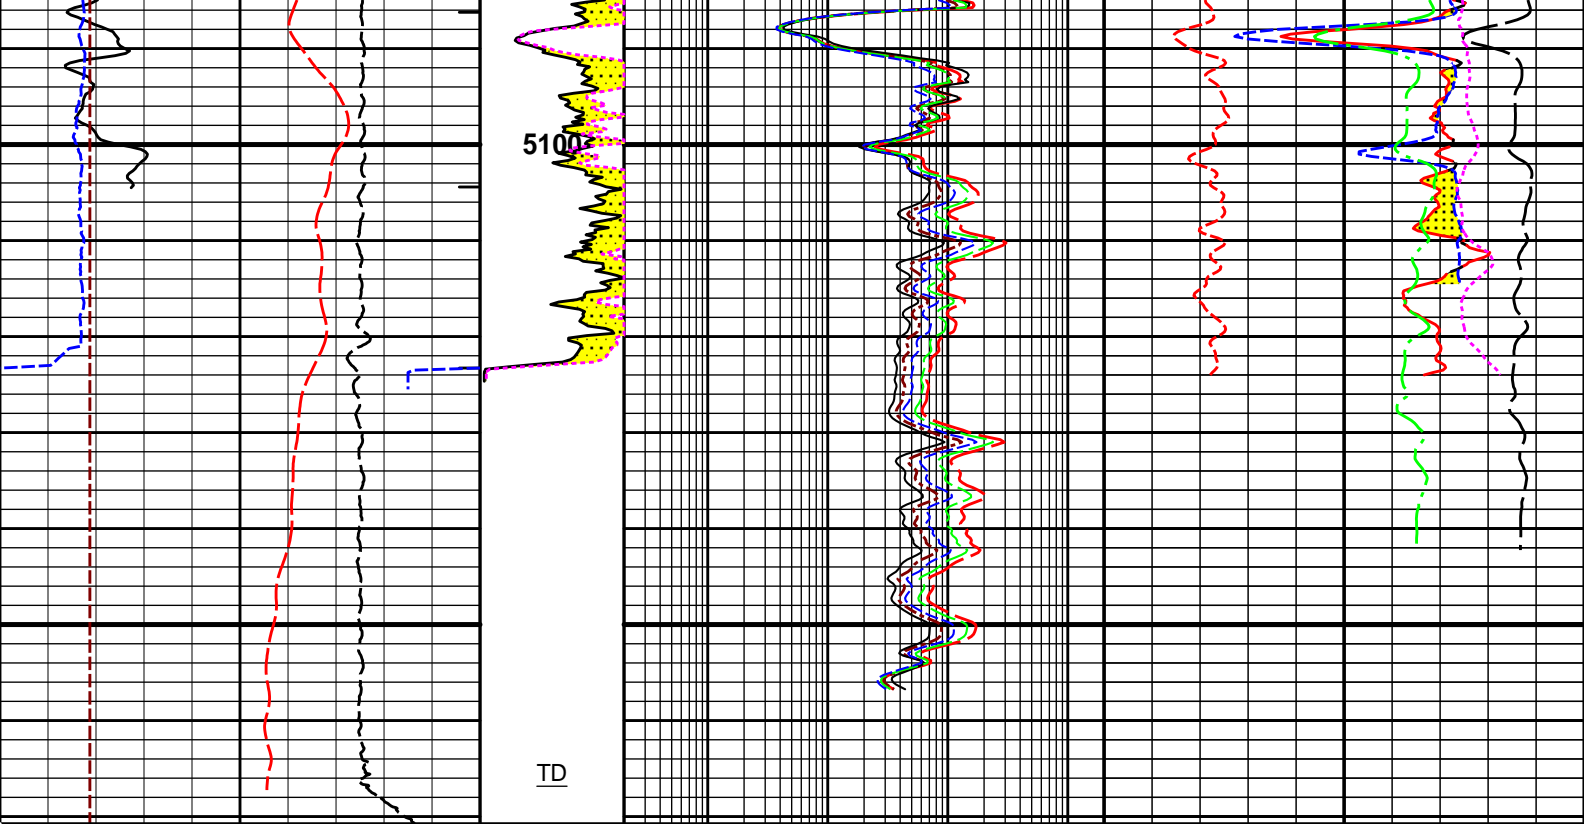

| | | | | | | | | | | | | |
|-----|-----------|-----|---------|-----------|--------------------------|--------------------------|------|----------------|----|-------|------------------|------|
| 6 | Bit Size | 16 | 1 : 240 | 0.2 | 90in Resistivity 2ft Res | 2000 | 0 | Pe | 10 | -0.25 | DensityCorr | 0.25 |
| | inches | | ft | | ohmm | | | barns/electron | | | gram per cc | |
| 6 | Caliper | 16 | 0 | MINV 20 | 0.2 | 20in Resistivity 2ft Res | 2000 | 0.3 | | | Acou Porosity | -0.1 |
| | inches | | | ohmm | | ohmm | | | | | decip | |
| | SP | | 0 | MNOR 20 | 0.2 | 10in Resistivity 2ft Res | 2000 | 0.3 | | | Neutron Porosity | -0.1 |
| | -]20[+ | | | ohmm | | ohmm | | | | | decip | |
| 0 | Gamma API | 150 | | | 0.2 | 60in Resistivity 2ft Res | 2000 | 0.3 | | | DensityPorosity | -0.1 |
| | api | | | PERMEABLE | | ohmm | | | | | decip | |
| | SHALE | | | | 0.2 | 30in Resistivity 2ft Res | 2000 | | | | POROSITY | |
| | | | | | | ohm-metre | | | | | | |
| 15K | Tension | 0 | | | | | | 140 | | | Delta-T | 40 |
| | pounds | | | | | | | | | | microsec per ft | |
| | ITTT | | | | | | | | | | | |

HALLIBURTON

Plot Time: 26-Sep-22 21:34:27
 Plot Range: 1795 ft to 5170.75 ft
 Data: 09_26_MERIT\Well Based\DAQ-MAIN
 Plot File: \\QUAD\ACRT-SDL-DSN-ML-BSAT

5 INCH MAIN LOG


5 INCH MAIN LOG


HALLIBURTON


Plot Time: 26-Sep-22 21:34:27
 Plot Range: 1795 ft to 5170.75 ft

REPEAT SECTION

REPEAT SECTION

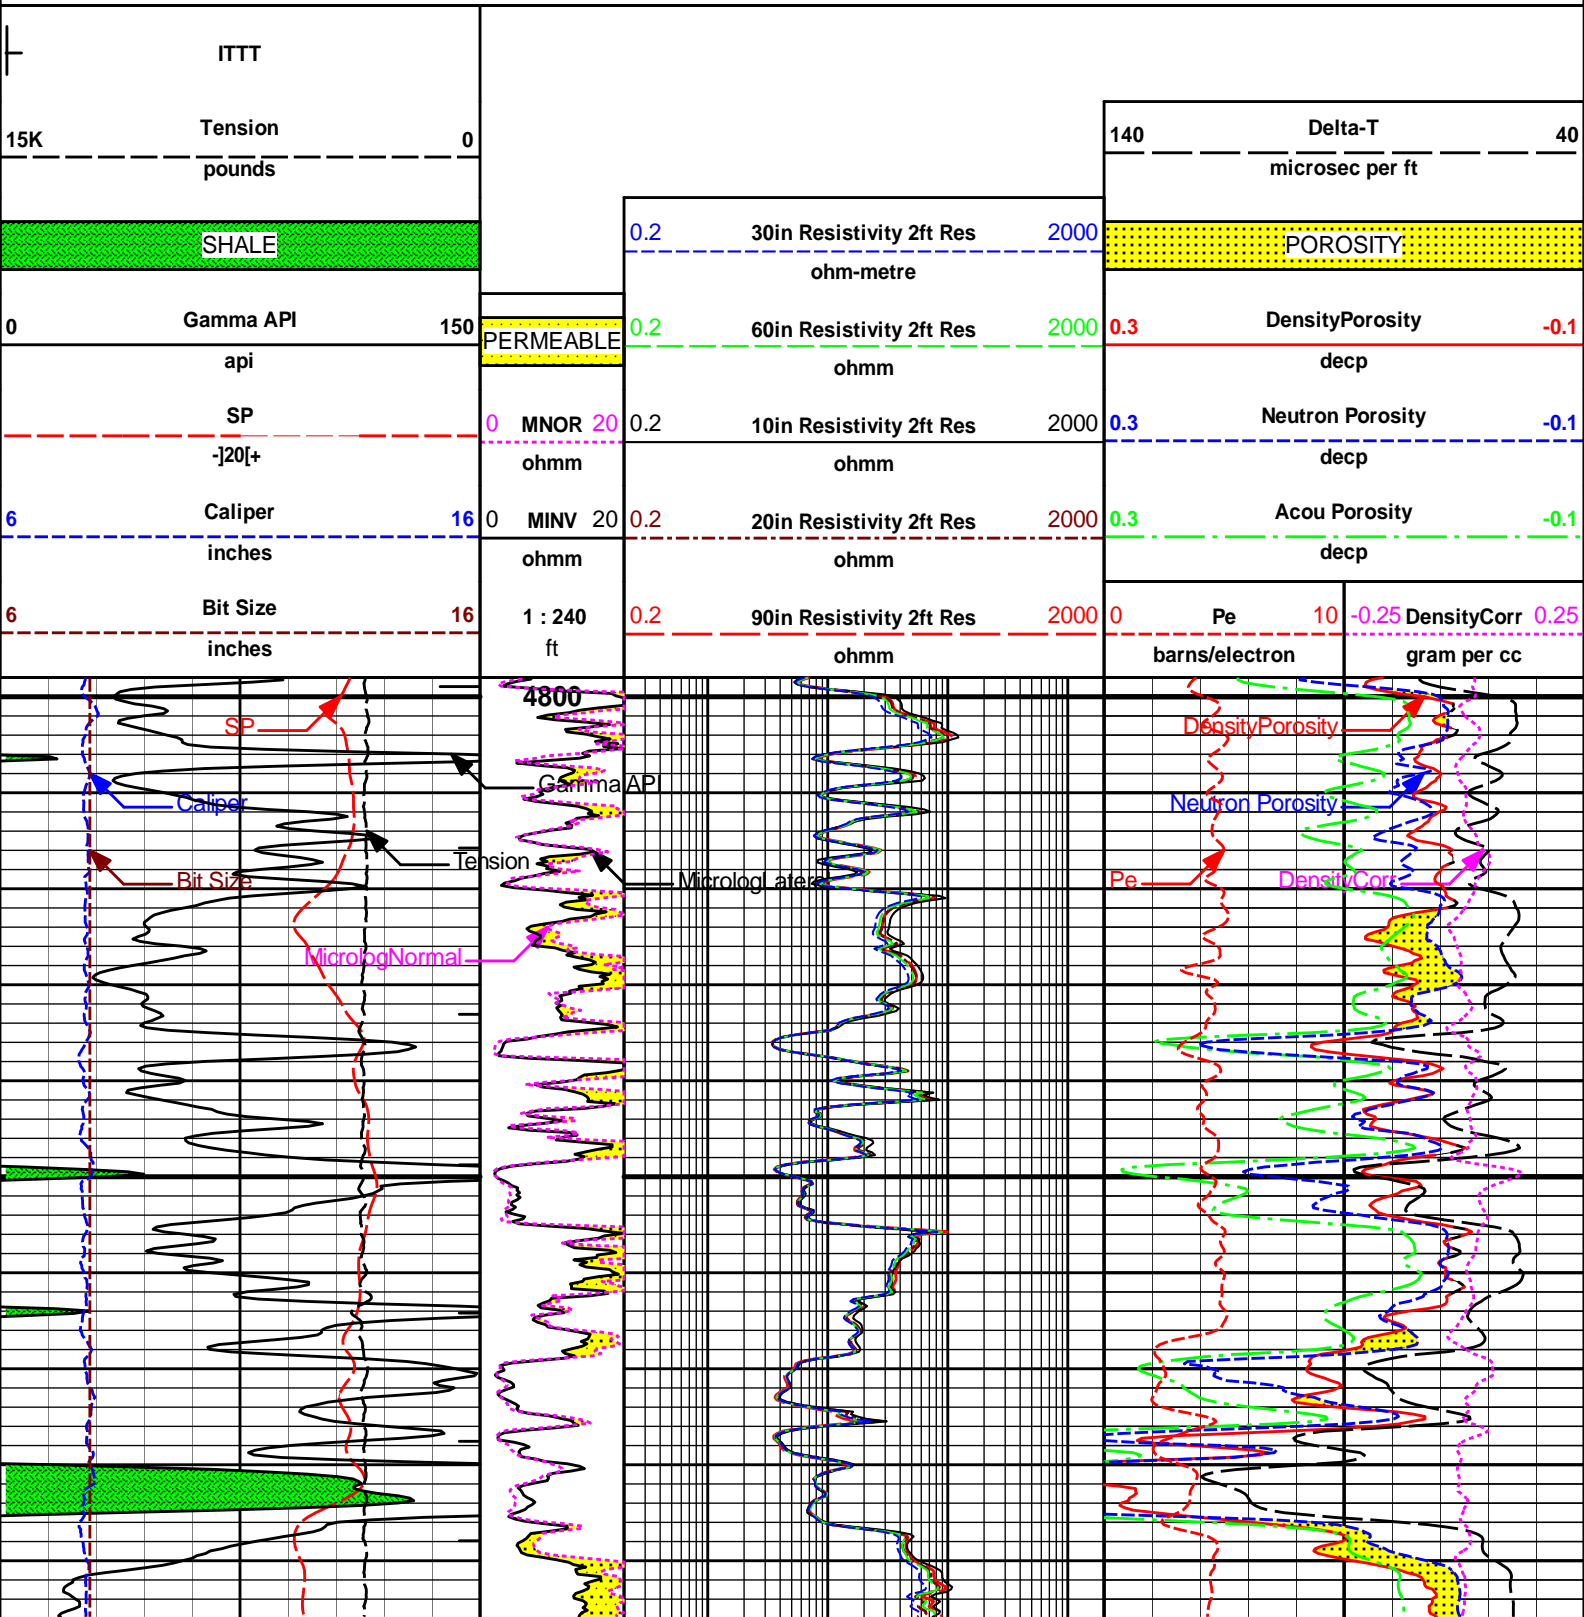

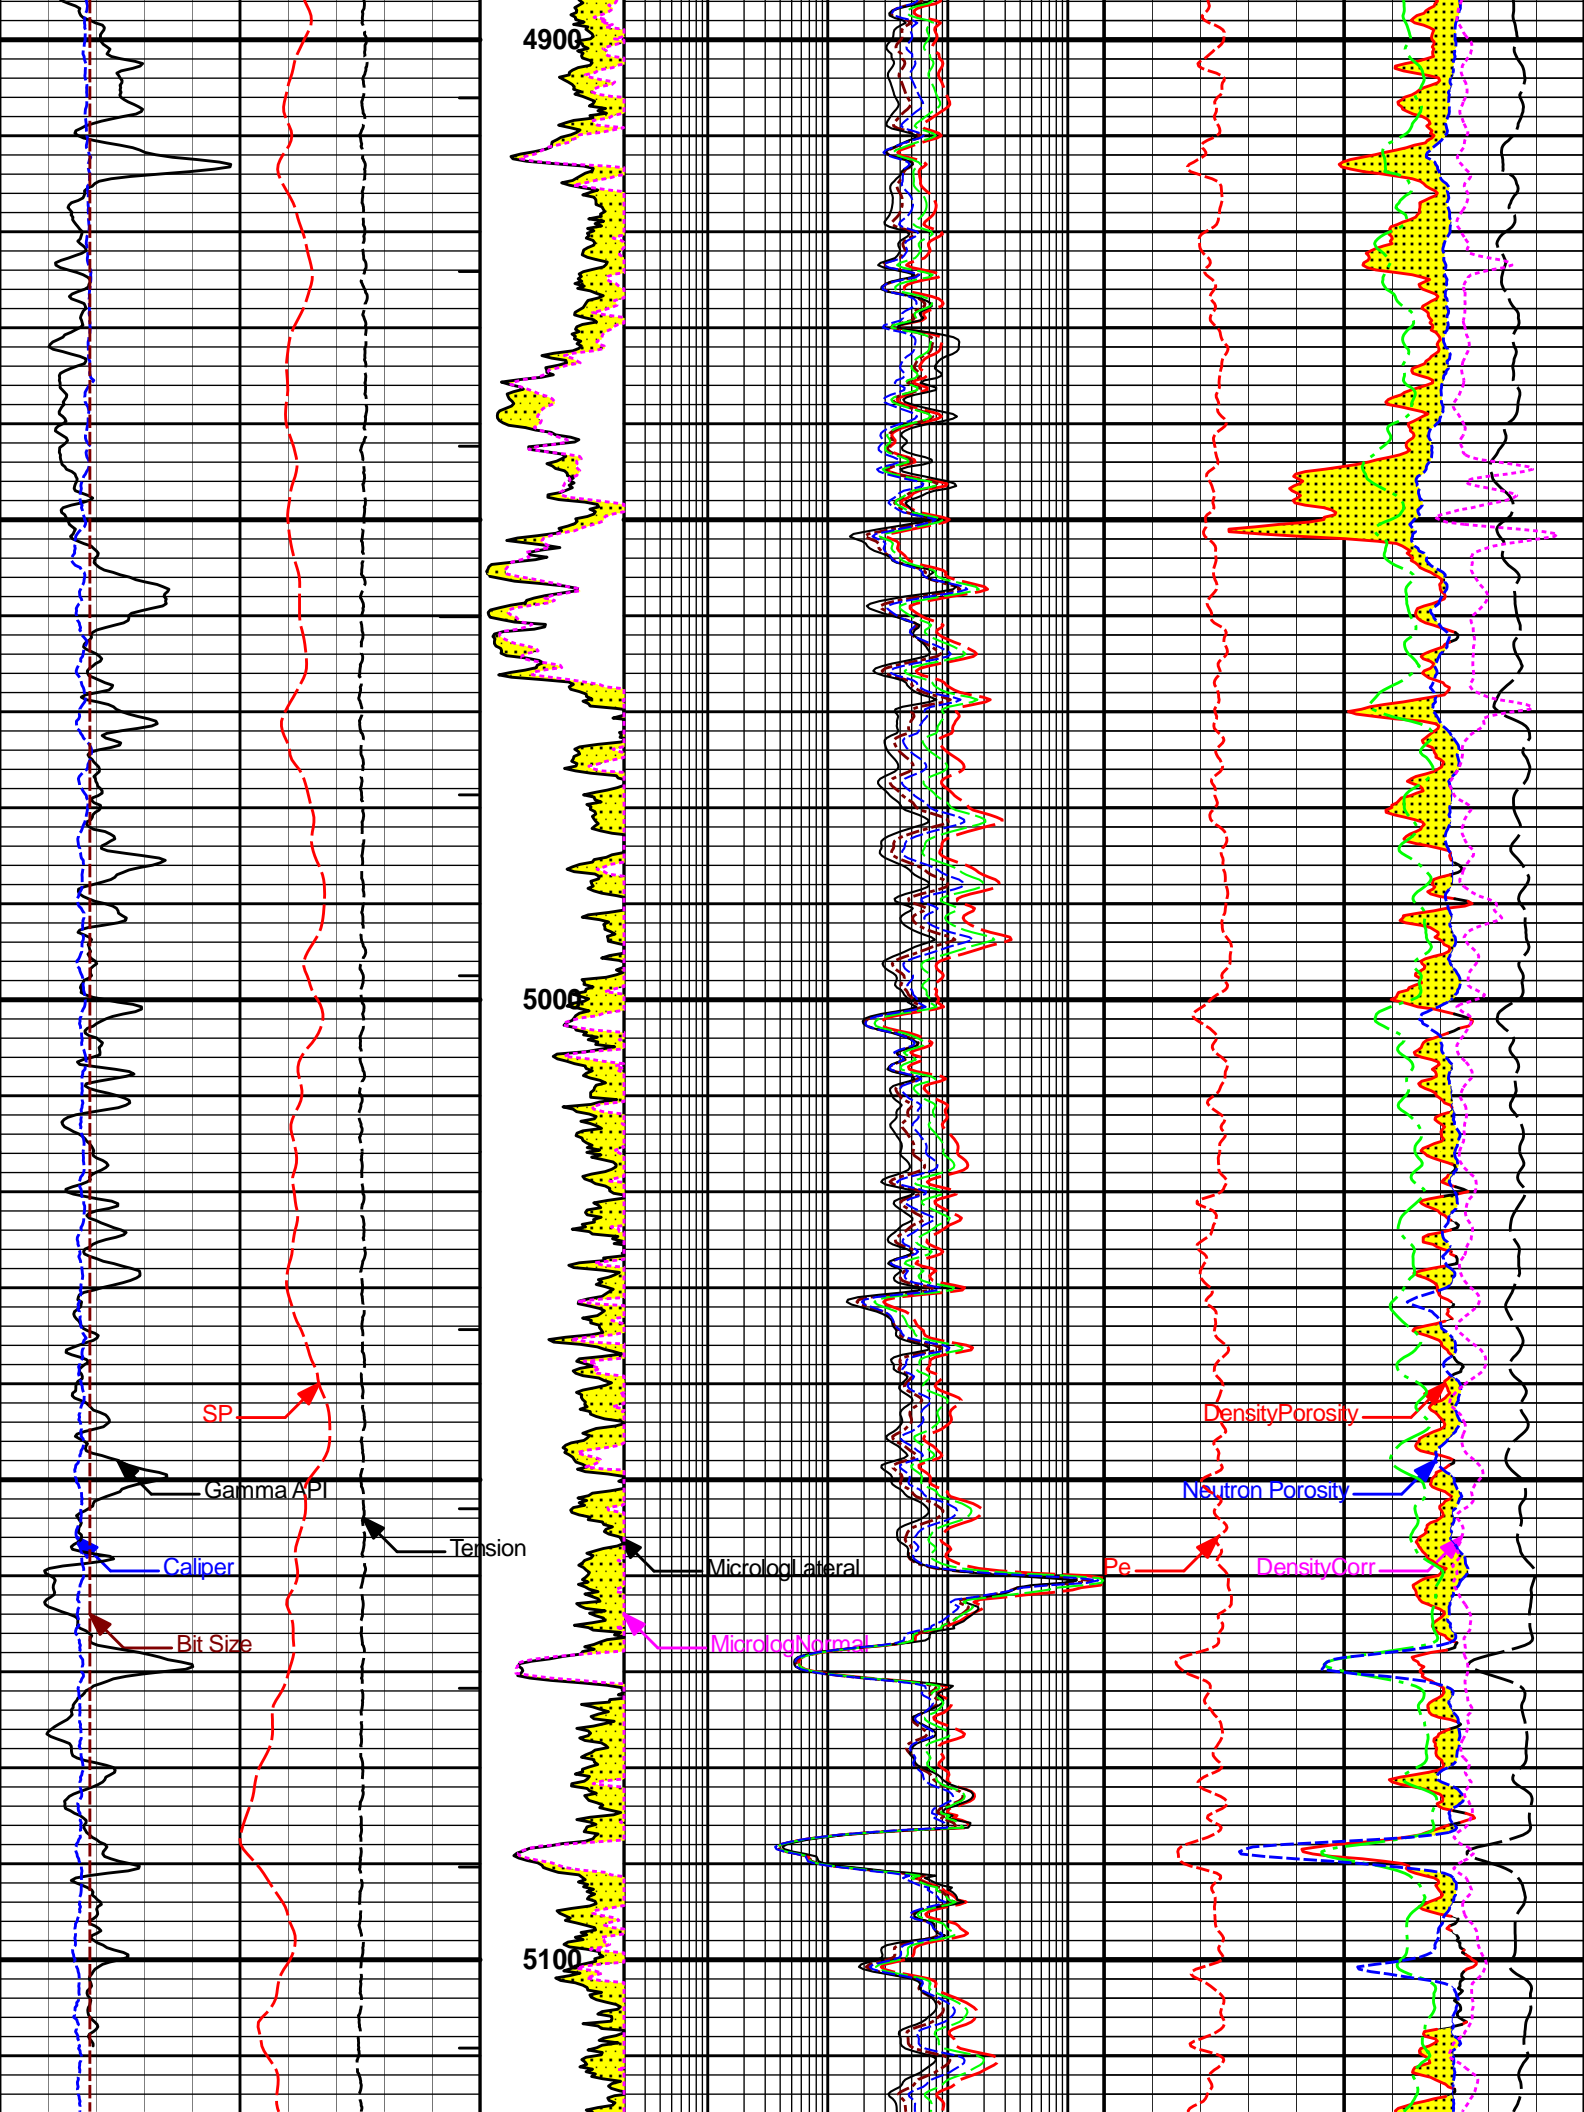

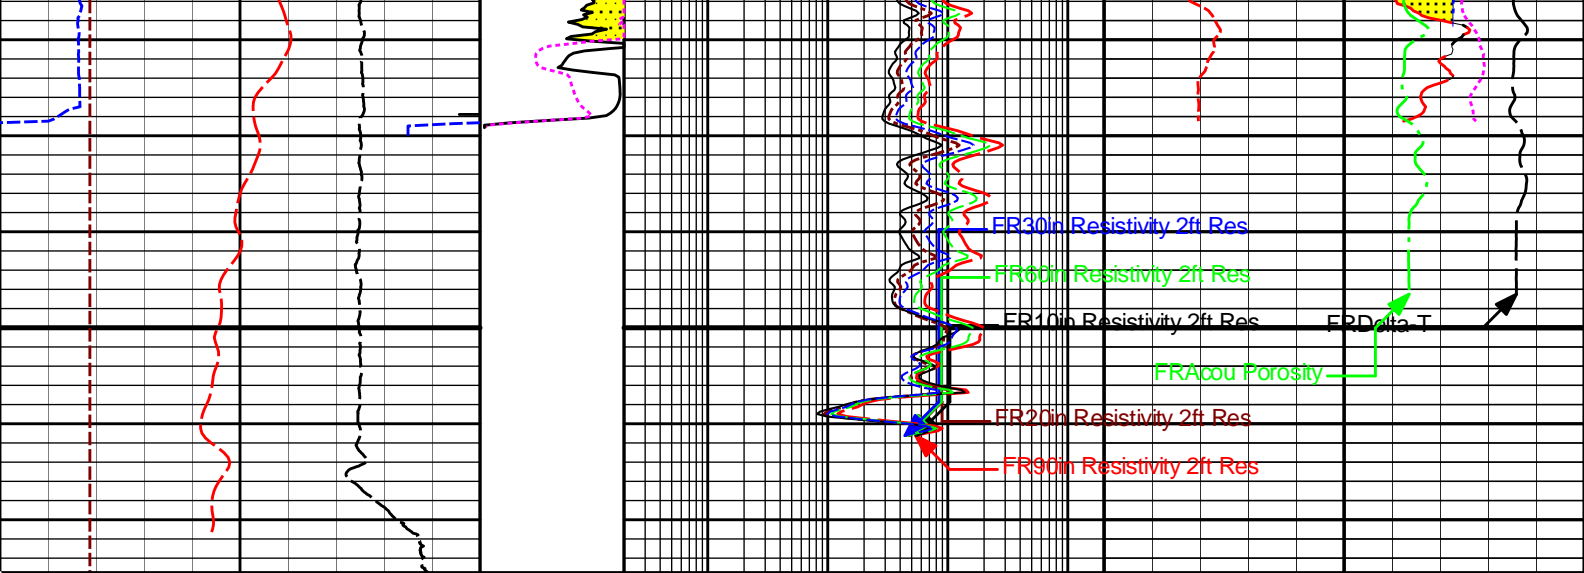

| | | | | | | | | | | | | |
|-----|-----------|-----|-----------|-----|--------------------------|------|-----|------------------|----|-------|-------------|------|
| 6 | Bit Size | 16 | 1 : 240 | 0.2 | 90in Resistivity 2ft Res | 2000 | 0 | Pe | 10 | -0.25 | DensityCorr | 0.25 |
| | inches | | ft | | ohmm | | | barns/electron | | | gram per cc | |
| 6 | Caliper | 16 | 0 MINV 20 | 0.2 | 20in Resistivity 2ft Res | 2000 | 0.3 | Acou Porosity | | | | -0.1 |
| | inches | | ohmm | | ohmm | | | decip | | | | |
| | SP | | 0 MNOR 20 | 0.2 | 10in Resistivity 2ft Res | 2000 | 0.3 | Neutron Porosity | | | | -0.1 |
| | - 20 + | | ohmm | | ohmm | | | decip | | | | |
| 0 | Gamma API | 150 | PERMEABLE | 0.2 | 60in Resistivity 2ft Res | 2000 | 0.3 | DensityPorosity | | | | -0.1 |
| | api | | | | ohmm | | | decip | | | | |
| | SHALE | | | 0.2 | 30in Resistivity 2ft Res | 2000 | | POROSITY | | | | |
| | | | | | ohm-metre | | | | | | | |
| 15K | Tension | 0 | | | | | 140 | Delta-T | | | | 40 |
| | pounds | | | | | | | microsec per ft | | | | |
| | ITTT | | | | | | | | | | | |

HALLIBURTON

Plot Time: 26-Sep-22 21:34:30
 Plot Range: 4798 ft to 5175.5 ft
 Data: 09_26_MERITWell Based\DAQ-0001-003\
 Plot File: \\QUAD\ACRT-SDL-DSN-ML-BSAT RPT

REPEAT SECTION

REPEAT SECTION

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 11405267

Reference Calibration Date: 05-Aug-21 10:53:16

Engineer: MOHAMED ABUELGASIM

Calibration Date: 17-Jun-22 16:53:35

Calibrator Source S/N: TB-768

Calibrator API Reference:203.00 api

Equivalent Calibrator API Reference:206.6 api

| Measurement | Measured | Calibrated | Units |
|-------------------------|----------|------------|-------|
| Background | 19.1 | 17.9 | api |
| Background + Calibrator | 238.9 | 224.5 | api |
| Calibrator | 219.9 | 206.6 | api |

DUAL SPACED NEUTRON SHOP CALIBRATION

Tool Name: DSNT - 11019641

Reference Calibration Date: 19-Aug-22 17:45:26

Engineer: J. Cabanzo

Calibration Date: 19-Aug-22 18:08:05

Software Version: WL INSITE R6.6.7 (Build 8)

Calibration Version: 1

Logging Source S/N: 96395B

Tank Serial Number: 10585331

Reference value assigned to Tank: 54.090

Snow Block S/N: 2

Calibration Tank Water Temperature: 86 degF

Min. Tool Housing Outside Diameter: 3.625 in

CALIBRATION CONSTANTS

| Measurement | Prev. Value | New Value | Control Limit On New Value |
|-------------|-------------|-----------|----------------------------|
| Gain: | 0.95915 | 0.96288 | 0.900 - 1.100 |

WATER TANK SUMMARY (Horizontal Water Tank)

| Measurement | Current Reading (Previous Coef.) | Calibrated (New Coef.) | Change | Control Limit On Change |
|-------------------|----------------------------------|------------------------|--------|-------------------------|
| Porosity (decp): | 0.2233 | 0.2244 | 0.0012 | +/- 0.0020 |
| Calibrated Ratio: | 10.1421 | 10.1815 | 0.039 | +/- 0.050 |

VERIFIER

| Measurement | Value | Control Limit |
|-----------------------------|--------|-------------------|
| Snow-Block Porosity (decp): | 0.0589 | 0.02000 - 0.09000 |

PASS/FAIL SUMMARY

| | |
|-------------------|--------|
| Background Check: | Passed |
| Gain-Range Check: | Passed |
| Snow-Block Check: | Passed |

DUAL SPACED NEUTRON FIELD CALIBRATION

Tool Name: DSNT - 11019641

Reference Calibration Date: 19-Aug-22 18:08:05

Engineer: J. Cabanzo

Calibration Date: 19-Aug-22 18:09:36

Software Version: WL INSITE R6.6.7 (Build 8)

Calibration Version: 1

Logging Source S/N: 96395B

Snow Block S/N: 2

NEUTRON FIELD-CHECK SUMMARY

| | Shop | Field | Difference | Control Limit On Change |
|-----------------------------|--------|--------|------------|-------------------------|
| Snow-Block Porosity (decp): | 0.0589 | 0.0712 | 0.0122 | +/- 0.0150 |

PASS/FAIL SUMMARY

| | |
|---------------------|--------|
| Block Change Check: | Passed |
|---------------------|--------|

Snow Block Stat Check:

Passed

Temperature Check:

Passed

DENSITY CALIPER SHOP CALIBRATIONTool Name: **SDLT - 10695352**Reference Calibration Date: **19-Aug-22 15:31:53**Engineer: **J. Cabanzo**Calibration Date: **19-Aug-22 15:37:09**Software Version: **WL INSITE R6.6.7 (Build 8)**Calibration Version: **1**Host Tool Name: **DSNT - 11019641****CALIBRATION COEFFICIENTS**

| Measurement | Previous Value | New Value | Control Limit On New Value |
|-------------|----------------|--------------|----------------------------|
| Pad Offset | -2934.34 | -3021.58 | -7000.00 - -1000.00 |
| Pad Gain | 0.0003900 | 0.0003927 | 0.0002000 - 0.0006000 |
| Arm Offset | -3023.74 | -2984.46 | -5000.00 - 3000.00 |
| Arm Gain | 0.0005200 | 0.0005114 | 0.0003000 - 0.0007000 |
| Arm Power | -0.000005411 | -0.000004687 | -0.000010000 - 0.000010000 |

The ring diameter is computed from: $\text{DIAMETER} = \text{PAD EXTENSION} + \text{ARM EXTENSION} + \text{TOOL DIAMETER}$

Tool Diameter: 4.50 in

CALIBRATION RINGS

| Measurement | Current Reading (Previous Coeff.) | Calibrated (New Coeff.) | Change | Control Limit On New Value |
|------------------|-----------------------------------|-------------------------|--------|----------------------------|
| PAD EXTENSION: | | | | |
| Small Ring (in) | 2.02 | 2.00 | -0.02 | +/- 0.20 |
| Medium Ring (in) | 3.76 | 3.75 | -0.01 | +/- 0.20 |
| RING DIAMETER: | | | | |
| Small Ring (in) | 6.54 | 6.50 | -0.04 | +/- 0.20 |
| Medium Ring (in) | 8.30 | 8.25 | -0.05 | +/- 0.20 |
| Large Ring (in) | 15.00 | 15.00 | 0.00 | +/- 0.20 |

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check: Passed

Ring-Measurement Check: Passed

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check: Passed

SDLT CALIPER FIELD CALIBRATIONTool Name: **SDLT - 10695352**Reference Calibration Date: **19-Aug-22 15:37:09**Engineer: **J. Cabanzo**Calibration Date: **19-Aug-22 15:38:25**Software Version: **WL INSITE R6.6.7 (Build 8)**Calibration Version: **1****MEASURED CALIPER VALUES**

| Measurement | Shop | Field | Change | Control Limit On New Value |
|---------------|------|-------|--------|----------------------------|
| Pad Extension | 3.75 | 3.76 | 0.01 | +/- 0.10 |
| Ring Diameter | 8.25 | 8.24 | -0.01 | +/- 0.15 |

PASS/FAIL SUMMARY

Pad Extension Check: Passed

Diameter Check: Passed

MICRO LOG SHOP CALIBRATIONTool Name: **Microlog Pad - 10695352**Reference Calibration Date: **19-Aug-22 15:26:27**Engineer: **M. GALLION**Calibration Date: **18-Sep-22 11:56:50**

Host Tool Name: DSNT - 11019641

CALIBRATION COEFFICIENT SUMMARY

| Measurement | Micro Log Normal | | Micro Log Lateral | | Units |
|----------------------|------------------|------------|-------------------|------------|-------|
| | Measured | Calibrated | Measured | Calibrated | |
| Tool Zero | -0.07 | -0.05 | -0.01 | 0.01 | ohmm |
| Calibration Point #1 | 0.00 | 0.02 | -0.00 | 0.02 | ohmm |
| Calibration Point #2 | 20.00 | 20.00 | 20.00 | 20.00 | ohmm |
| Internal Reference | 19.93 | 19.93 | 19.99 | 20.00 | ohmm |

| Measurement | Micro Log Normal Tool Value | | Micro Log Lateral Tool Value | | Units |
|----------------------|-----------------------------|---------|------------------------------|---------|-------|
| | | | | | |
| Tool Zero | | -0.11 | | 0.29 | V |
| Calibration Point #1 | | 18.75 | | 2.31 | V |
| Calibration Point #2 | | 5342.97 | | 6961.14 | V |
| Internal Reference | | 5325.50 | | 6960.16 | V |

MICRO LOG FIELD CHECK

Tool Name: Microlog Pad - 10695352

Reference Calibration Date: 18-Sep-22 11:56:50

Engineer: M. GALLION

Calibration Date: 18-Sep-22 11:57:39

Software Version: WL INSITE R6.6.5 (Build 5)

Calibration Version: 1

| Measurement | Micro Log Normal | | Micro Log Lateral | | Units |
|--------------------|------------------|-------|-------------------|-------|-------|
| | Shop | Field | Shop | Field | |
| Tool Zero | -0.05 | -0.05 | 0.01 | 0.01 | ohmm |
| Internal Reference | 19.93 | 19.94 | 20.00 | 20.00 | ohmm |

Summary

| Signal | Shop | Field | Difference | Tolerance |
|------------------|-------|-------|------------|-----------|
| Microlog Normal | 19.93 | 19.94 | -0.01 | +/- 0.80 |
| Microlog Lateral | 20.00 | 20.00 | 0.00 | +/- 0.80 |

SPECTRAL DENSITY SHOP CALIBRATION

Tool Name: SDLT Pad - 10865883

Reference Calibration Date: 18-Aug-22 15:18:35

Engineer: J. Cabanzo

Calibration Date: 18-Aug-22 15:40:41

Software Version: WL INSITE R6.6.7 (Build 8)

Calibration Version: 1

Logging Source S/N: 5406GW

Aluminum Block S/N: 10585329

Density: 2.595g/cc

Pe: 3.270

Magnesium Block S/N: 10585330

Density: 1.679g/cc

Pe: 2.580

DENSITY CALIBRATION SUMMARY

| Measurement | Previous Value | New Value | Control Limit |
|----------------|----------------|-----------|---------------|
| Near Bar Gain | 1.0268 | 1.0413 | 0.90 - 1.10 |
| Near Dens Gain | 1.0028 | 1.0178 | 0.90 - 1.10 |
| Near Peak Gain | 1.0111 | 1.0223 | 0.90 - 1.10 |
| Near Lith Gain | 0.9937 | 1.0032 | 0.90 - 1.10 |
| Far Bar Gain | 1.0130 | 1.0125 | 0.90 - 1.10 |
| Far Dens Gain | 1.0018 | 1.0019 | 0.90 - 1.10 |
| Far Peak Gain | 0.9966 | 0.9966 | 0.90 - 1.10 |
| Far Lith Gain | 0.9721 | 0.9764 | 0.90 - 1.10 |

| | | | |
|------------------|--------|---------|------|
| Near Bar Offset | 0.0440 | -0.0871 | NONE |
| Near Dens Offset | 0.2346 | 0.1031 | NONE |
| Near Peak Offset | 0.1484 | 0.0544 | NONE |

| | | | |
|----------------------|--------|--------|------------|
| Near Peak Offset | 0.1464 | 0.0044 | NONE |
| Near Lith Offset | 0.2572 | 0.1772 | NONE |
| Far Bar Offset | 0.0901 | 0.0959 | NONE |
| Far Dens Offset | 0.1963 | 0.1949 | NONE |
| Far Peak Offset | 0.2260 | 0.2243 | NONE |
| Far Lith Offset | 0.3754 | 0.3427 | NONE |
| <hr/> | | | |
| Near Bar Background | 926.68 | 925.11 | 700 - 1450 |
| Near Dens Background | 305.57 | 305.68 | 230 - 480 |
| Near Peak Background | 132.20 | 132.48 | 100 - 210 |
| Near Lith Background | 164.41 | 164.83 | 125 - 260 |
| Far Bar Background | 582.80 | 586.26 | 450 - 900 |
| Far Dens Background | 228.90 | 229.53 | 175 - 345 |
| Far Peak Background | 90.63 | 91.49 | 70 - 140 |
| Far Lith Background | 94.02 | 94.43 | 75 - 145 |

| CALIBRATION BLOCK SUMMARY | | | | |
|---------------------------|------------------------------------|--------------------------|--------|----------------------------|
| Measurement | Current Reading (Previous Coef) | Calibrated (New Coef) | Change | Control Limit On Change |
| MAGNESIUM | | | | |
| Density (g/cc) | 1.678 | 1.678 | 0.000 | +/- 0.015 |
| Pe | 2.546 | 2.552 | 0.006 | +/- 0.150 |
| ALUMINUM | | | | |
| Density (g/cc) | 2.596 | 2.595 | -0.001 | +/- 0.01500 |
| Pe | 3.221 | 3.228 | 0.007 | +/- 0.150 |

| TOOL SUMMARY | | | | |
|----------------------------|---------------|----------------|--------------|----------------|
| Measurement | Near Detector | | Far Detector | |
| | Value | Control Limits | Value | Control Limits |
| QUALITY | | | | |
| Background | 0.0014 | +/- 0.0110 | 0.0003 | +/- 0.0140 |
| Magnesium Block | -0.0006 | +/- 0.0110 | -0.0014 | +/- 0.0140 |
| Aluminum Block | -0.0004 | +/- 0.0110 | -0.0004 | +/- 0.0140 |
| Resolution | 8.83 | 6.00 - 11.50 | 8.98 | 6.00 - 11.50 |
| Internal Verifier(B+D+P+L) | 1528 | 1200 - 2700 | 1002 | 800 - 1700 |

| PASS/FAIL SUMMARY | |
|--------------------------------|--------|
| Background Quality Check: | Passed |
| Background Range Check: | Passed |
| Background Resolution Check: | Passed |
| Background Verification Check: | Passed |
| Magnesium Quality Check: | Passed |
| Aluminum Quality Check: | Passed |
| Gains Check: | Passed |
| Changes in Calibration Blocks: | Passed |

SPECTRAL DENSITY FIELD CHECK

Tool Name: SDLT Pad - 10865883

Reference Calibration Date: 18-Aug-22 15:40:41

Engineer: M. GALLION

Calibration Date: 17-Sep-22 19:26:40

Software Version: WL INSITE R6.6.5 (Build 5)

Calibration Version: 1

Pad Temperature: 96.0 degF

| DENSITY FIELD CALIBRATION SUMMARY | | | | |
|-----------------------------------|------|-------|--------|-------------------|
| Measurement | Shan | Field | Change | Control Limit +/- |

| Measurement | Shop | Field | Change | Control Limit +/- |
|--------------------|----------|----------|--------|-------------------|
| Near (B+D+P+L) cps | 1528.096 | 1528.486 | 0.390 | 15.742 |
| Far (B+D+P+L) cps | 1001.708 | 996.589 | -5.119 | 16.936 |
| Near Resolution | 8.83 | 8.77 | -0.060 | 0.50 |
| Far Resolution | 8.98 | 8.90 | -0.080 | 1.00 |

| PASS/FAIL SUMMARY | |
|-------------------------|--------|
| Bkg Quality Check: | Passed |
| Bkg Resolution Check: | Passed |
| Bkg Verification Check: | Passed |

| ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION | | | |
|---|----------------------------|-----------------------------|--------------------|
| Tool Name: | ACRt Sonde - 10933411 | Reference Calibration Date: | 10-Mar-22 11:52:39 |
| Engineer: | MOHAMED ABUELGASIM | Calibration Date: | 17-Jun-22 12:35:28 |
| Software Version: | WL INSITE R6.6.7 (Build 8) | Calibration Version: | 1 |
| Host Tool Name: | ACRt Instrument - 10967817 | | |

| TYPICAL GAIN RANGE | | | | | | | | | |
|--------------------|--------|----------|-------|--------|----------|-------|--------|----------|-------|
| Subarray | R12KHz | | | R36KHz | | | R72KHz | | |
| | Lower | (mmho/m) | Upper | Lower | (mmho/m) | Upper | Lower | (mmho/m) | Upper |
| A1 (80") | 0.95 | 1.0093 | 1.05 | 0.95 | 1.0097 | 1.05 | 0.95 | 1.0029 | 1.05 |
| A2 (50") | 0.95 | 1.0129 | 1.05 | 0.95 | 1.0137 | 1.05 | 0.95 | 1.0066 | 1.05 |
| A3 (29") | 0.95 | 1.0093 | 1.05 | 0.95 | 1.0074 | 1.05 | 0.95 | 1.0011 | 1.05 |
| A4 (17") | 0.95 | 1.0092 | 1.05 | 0.95 | 1.0064 | 1.05 | 0.95 | 1.0040 | 1.05 |
| A5 (10") | N/A | N/A | N/A | 0.95 | 0.9991 | 1.05 | 0.95 | 0.9969 | 1.05 |
| A6 (6") | N/A | N/A | N/A | 0.95 | 0.9833 | 1.05 | 0.95 | 0.9814 | 1.05 |

| SONDE OFFSET | | | | | | |
|--------------|----------|--|----------|--|----------|--|
| Subarray | R12KHz | | R36KHz | | R72KHz | |
| | (mmho/m) | | (mmho/m) | | (mmho/m) | |
| A1 (80") | -0.514 | | -4.153 | | -5.096 | |
| A2 (50") | -1.142 | | -3.528 | | -4.869 | |
| A3 (29") | -10.576 | | -3.717 | | -3.307 | |
| A4 (17") | -100.911 | | -32.858 | | -26.318 | |
| A5 (10") | N/A | | -93.684 | | -45.343 | |
| A6 (6") | N/A | | 345.620 | | 160.599 | |

| TRANSMITTER CURRENT GAIN | | | |
|--------------------------|-------|------|-------|
| Signal | Lower | R | Upper |
| 12K | 0.6 | 0.94 | 1.3 |
| 36K | 1.0 | 1.85 | 2.0 |
| 72K | 1.0 | 1.18 | 2.0 |

| R-MUD VERIFICATION | | | |
|--------------------|---------------|------------------|---------------|
| Signal | Lower (ohm-m) | Measured (ohm-m) | Upper (ohm-m) |
| Mud Cell | 0.95 | 1.00 | 1.05 |

| PASS/FAIL SUMMARY | |
|-------------------|------|
| GAIN RANGE CHK | PASS |
| SONDE OFFSET CHK | PASS |
| TOOL OK TO LOG | |

| CALIBRATION SUMMARY | | | | | | |
|---------------------|------|-------|------|------------|-----------|-------|
| Sensor | Shop | Field | Post | Difference | Tolerance | Units |

| | | | | | | |
|---|----------|----------|-------|--------------------------|------------|-------|
| Gamma Ray Calibrator | 206.6 | ----- | ----- | 0.0 | +/- 9.00 | api |
| DSNT-11019641 | | | | | | |
| Snow-Block Porosity | 0.0589 | 0.0712 | ----- | -0.0123 | +/- 0.0150 | decp |
| SDLT-10695352 | | | | | | |
| Pad Extension | 3.75 | 3.76 | ----- | -0.01 | +/-0.10 | in |
| Ring Diameter | 8.25 | 8.24 | ----- | 0.01 | +/-0.15 | in |
| Microlog Pad-10695352 | | | | | | |
| MicroLog Normal | 19.93 | 19.94 | ----- | -0.01 | +/-0.80 | ohmm |
| MicroLog Lateral | 20.00 | 20.00 | ----- | 0.00 | +/-0.80 | ohmm |
| SDLT Pad-10865883 | | | | | | |
| Near(B+D+P+L) | 1528.096 | 1528.486 | ----- | -0.390 | +/-15.742 | cps |
| Far(B+D+P+L) | 1001.708 | 996.589 | ----- | 5.119 | +/-16.936 | cps |
| ACRt Sonde-10933411 | | | | | | |
| Mud Cell | 1.00 | ----- | ----- | 0 | ----- | ohm-m |
| Data: 09_26_MERIT\0001 GTET-DSNT-SDLT-BSAT-ACRTIDLE | | | | Date: 26-Sep-22 20:48:03 | | |

HALLIBURTON**PARAMETERS REPORT**


| Depth (ft) | Tool Name | Mnemonic | Description | Value | Units |
|------------|-----------------|----------|---|-----------|-------|
| TOP | | | | | |
| | SHARED | BS | Bit Size | 7.875 | in |
| | SHARED | UBS | Use Bit Size instead of Caliper for all applications. | No | |
| | SHARED | MDBS | Mud Base | Water | |
| | SHARED | MDWT | Borehole Fluid Weight | 9.200 | ppg |
| | SHARED | WAGT | Weighting Agent | Barite | |
| | SHARED | BSAL | Borehole salinity | 0.00 | ppm |
| | SHARED | FSAL | Formation Salinity NaCl | 0.00 | ppm |
| | SHARED | KPCT | Percent K in Mud by Weight? | 0.00 | % |
| | SHARED | RMUD | Mud Resistivity | 1.000 | ohmm |
| | SHARED | TRM | Temperature of Mud | 75.0 | degF |
| | SHARED | CSD | Logging Interval is Cased? | No | |
| | SHARED | ICOD | AHV Casing OD | 5.500 | in |
| | SHARED | CSTR | Compressive Strength | 1000.00 | psia |
| | SHARED | ST | Surface Temperature | 75.0 | degF |
| | SHARED | TD | Total Well Depth | 5173.00 | ft |
| | SHARED | BHT | Bottom Hole Temperature | 200.0 | degF |
| | SHARED | SVTM | Navigation and Survey Master Tool | NONE | |
| | SHARED | AZTM | High Res Z Accelerometer Master Tool | GTET | |
| | SHARED | TEMM | CBM Temperature Master Tool | GTET | |
| | SHARED | MSAL | Water-base mud filtrate salinity | 0.00 | ppm |
| | Rwa / CrossPlot | XPOK | Process Crossplot? | Yes | |
| | Rwa / CrossPlot | FCHO | Select Source of F | Automatic | |
| | Rwa / CrossPlot | AFAC | Archie A factor | 0.6200 | |
| | Rwa / CrossPlot | MFAC | Archie M factor | 2.1500 | |
| | Rwa / CrossPlot | RMFR | Rmf Reference | 0.10 | ohmm |
| | Rwa / CrossPlot | TMFR | Rmf Ref Temp | 75.00 | degF |
| | Rwa / CrossPlot | RWA | Resistivity of Formation Water | 0.05 | ohmm |

| | | | | |
|-----------------|------|--|----------------|------|
| Rwa / CrossPlot | ADP | Use Air Porosity to calculate CrossplotPhi | No | |
| Rwa / CrossPlot | BHSM | Borehole Size Source Tool | SDLT | |
| Rwa / CrossPlot | ROIN | Input for RO Calculation | Rwa | |
| GTET | ACOK | Do ACCZ Calculations? | Yes | |
| GTET | GROK | Process Gamma Ray? | Yes | |
| GTET | GEOK | Process Gamma Ray EVR? | No | |
| GTET | TPOS | Tool Position for Gamma Ray Tools. | Eccentered | |
| GTET | BHSM | Borehole Size Source Tool | SDLT | |
| DSNT | DNOK | Process DSN? | Yes | |
| DSNT | DEOK | Process DSN EVR? | No | |
| DSNT | NLIT | Neutron Lithology | Limestone | |
| DSNT | DNSO | DSN Standoff - 0.25 in (6.35 mm) Recommended | 0.250 | in |
| DSNT | DNTT | Temperature Correction Type | None | |
| DSNT | DPRS | DSN Pressure Correction Type | None | |
| DSNT | SHCO | View More Correction Options | No | |
| DSNT | UTVD | Use TVD for Gradient Corrections? | No | |
| DSNT | LHWT | Logging Horizontal Water Tank? | No | |
| DSNT | UCLA | Classic Neutron Parameter utilized? | No | |
| DSNT | BHSM | Borehole Size Source Tool | SDLT | |
| SDLT | CLOK | Process Caliper Outputs? | Yes | |
| Microlog Pad | MLOK | Process MicroLog Outputs? | Yes | |
| SDLT Pad | DNOK | Process Density? | Yes | |
| SDLT Pad | DNOK | Process Density EVR? | No | |
| SDLT Pad | CB | Logging Calibration Blocks? | No | |
| SDLT Pad | SPVT | SDLT Pad Temperature Valid? | Yes | |
| SDLT Pad | DTWN | Disable temperature warning | No | |
| SDLT Pad | DMA | Formation Density Matrix | 2.710 | g/cc |
| SDLT Pad | DFL | Formation Density Fluid | 1.000 | g/cc |
| SDLT Pad | BHSM | Borehole Size Source Tool | SDLT | |
| BSAT | MBOK | Compute BCAS Results? | Yes | |
| BSAT | FLLO | Frequency Filter Low Pass Value? | 5000 | Hz |
| BSAT | FLHI | Frequency Filter High Pass Value? | 27000 | Hz |
| BSAT | DTFL | Delta -T Pore Fluid | 189.00 | uspf |
| BSAT | DTMT | Delta -T Matrix Type | Limestone 47.6 | |
| BSAT | DTSH | Delta -T Shale | 100.00 | uspf |
| BSAT | SPEQ | Acoustic Porosity Equation | Wylie | |
| ACRt Sonde | RTOK | Process ACRt? | Yes | |
| ACRt Sonde | MNSO | Minimum Tool Standoff | 1.50 | in |
| ACRt Sonde | TCS1 | Temperature Correction Source | FP Lwr & FP Up | |
| ACRt Sonde | TPOS | Tool Position | Centered | |
| ACRt Sonde | RMOP | Rmud Source | Mud Cell | |
| ACRt Sonde | RMIN | Minimum Resistivity for MAP | 0.20 | ohmm |
| ACRt Sonde | RMAX | Maximum Resistivity for MAP | 200.00 | ohmm |
| ACRt Sonde | THQY | Threshold Quality | 0.50 | |
| ACRt Sonde | MRFX | Fixed mud resistivity | 2000 | ohmm |
| ACRt Sonde | BHSM | Borehole Size Source Tool | SDLT | |
| ACRt Sonde | MBFL | Apply Corkscrew Effect? | No | |

BOTTOM

TOOL STRING DIAGRAM REPORT

| Description | Overbody Description | O.D. | Diagram | Sensors @ Delays | Length | Accumulated Length |
|-----------------------------------|---|---|-----------------------------|---|----------|--------------------|
| | | Ø 2.310 in → | | ← Fishing Neck @ 77.17 ft | 78.05 ft | |
| RWCH-12027540 135.00 lbs | Weak Point 12000 lbs- 00000012 0.01 lbs | Ø 3.625 in → | | ← Load Cell @ 74.36 ft ← BH Temperature @ 73.80 ft | 6.25 ft | |
| | | Ø 0.010 in* → | | ← Z-Accelerometer @ 71.35 ft | 71.80 ft | |
| GTET-11405267 165.00 lbs | | Ø 3.625 in → | | ← GammaRay @ 65.74 ft | 8.52 ft | |
| | | | | | 63.28 ft | |
| DSNT-11019641 174.00 lbs | DSN Decentralizer- 11019643 6.60 lbs | Ø 5.000 in* → Ø 3.625 in → | | ← DSN Far @ 56.34 ft ← DSN Near @ 55.59 ft | 9.69 ft | |
| | | | | | 53.59 ft | |
| SDLT-10695352 360.00 lbs | SDLT Pad-10865883 65.00 lbs Microlog Pad-10695352 8.00 lbs RAM-Cs137-10020004 1.00 lbs | Ø 4.500 in → Ø 4.500 in* → Ø 4.750 in* → Ø 0.800 in* → | | ← Microlog @ 45.78 ft ← SDL Caliper @ 45.59 ft ← SDL @ 45.58 ft | 10.81 ft | |
| | | | | | 42.78 ft | |
| Flex Joint-10883966 140.00 lbs | | Ø 3.625 in → | | | 5.67 ft | |
| | | | | 37.11 ft | | |
| | Centralizer 25-00000001 8.00 lbs | Ø 4.000 in* → | | | | |
| BSAT-10747681 300.00 lbs | | Ø 3.625 in → | ← Receiver Array @ 28.59 ft | 15.77 ft | | |

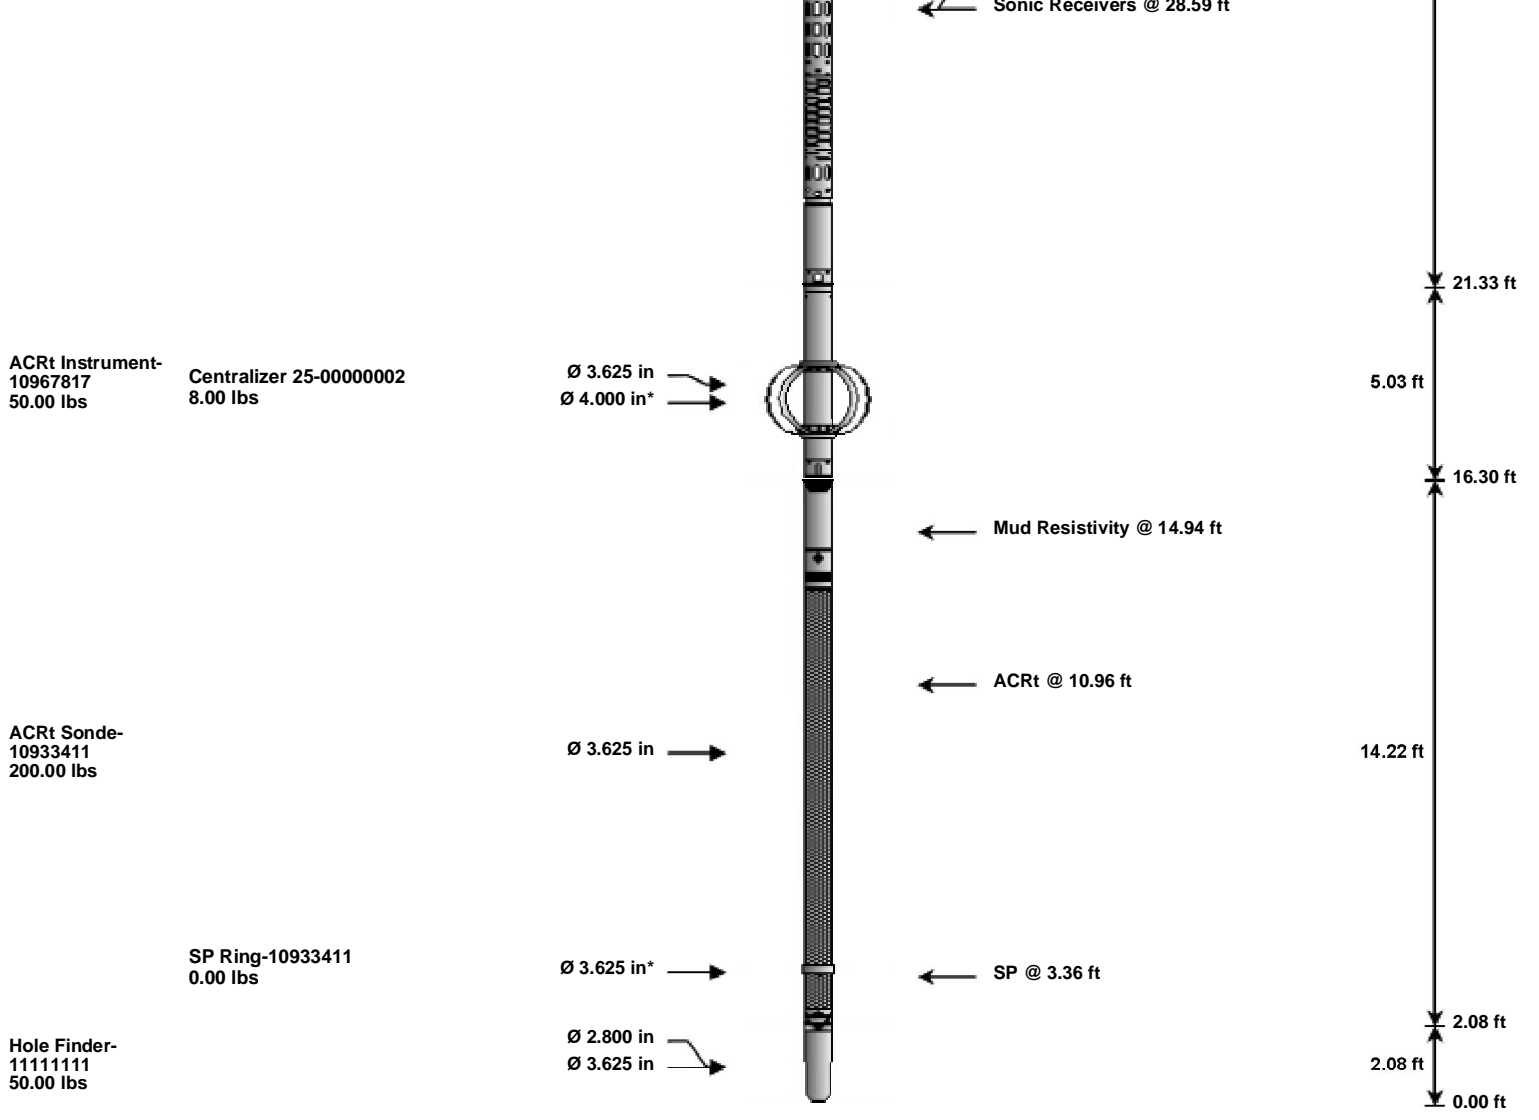

| Mnemonic | Tool Name | Serial Number | Weight (lbs) | Length (ft) | Accumulated Length (ft) | Max. Log. Speed (fpm) |
|--------------|---|---------------|-----------------|--------------|-------------------------|-----------------------|
| RWCH | Releasable Wireline Cable Head | 12027540 | 135.00 | 6.25 | 71.80 | 300.00 |
| WP12K | Weak Point 12000 lbs | 00000012 | 0.01 | 0.01 | * 72.60 | 300.00 |
| GTET | Gamma Telemetry Tool | 11405267 | 165.00 | 8.52 | 63.28 | 60.00 |
| DSNT | Dual Spaced Neutron | 11019641 | 174.00 | 9.69 | 53.59 | 60.00 |
| DCNT | DSN Decentralizer | 11019643 | 6.60 | 5.13 | * 56.92 | 300.00 |
| SDLT | Spectral Density Tool | 10695352 | 360.00 | 10.81 | 42.78 | 60.00 |
| SDLP | Density Insite Pad | 10865883 | 65.00 | 2.55 | * 44.99 | 60.00 |
| Cs137 | Logging Source, SDLT-I, 1.78 Ci - Cs137 | 10020004 | 1.00 | 0.80 | * 45.22 | 300.00 |
| MICP | Microlog Pad | 10695352 | 8.00 | 1.00 | * 45.28 | 60.00 |
| FLEX | Flex Joint | 10883966 | 140.00 | 5.67 | 37.11 | 300.00 |
| BSAT | Borehole Sonic Array Tool | 10747681 | 300.00 | 15.77 | 21.33 | 60.00 |
| OBCEN | Centralizer - 25 in. Overbody | 00000001 | 8.00 | 2.08 | * 33.99 | 300.00 |
| ACRt | Array Compensated True Resistivity Instrument Section | 10967817 | 50.00 | 5.03 | 16.30 | 120.00 |
| OBCEN | Centralizer - 25 in. Overbody | 00000002 | 8.00 | 2.08 | * 17.29 | 300.00 |
| ACRt | Array Compensated True Resistivity Sonde Section | 10933411 | 200.00 | 14.22 | 2.08 | 120.00 |
| SP | SP Ring | 10933411 | 0.00 | 0.25 | * 3.36 | 300.00 |
| HFND | Hole Finder | 11111111 | 50.00 | 2.08 | 0.00 | 300.00 |
| Total | | | 1,670.61 | 78.05 | | |

* Not included in Total Length and Length Accumulation.

Data: 09_26_MERIT0001 GTET-DSNT-SDLT-BSAT-ACRTIDLE

Date: 26-Sep-22 18:49:20

COMPANY MERIT ENERGY COMPANY, LLC

WELL GELONA No. 1-10

| | | | |
|--------------------|-----------------|------------|----|
| WELL | CELONA No. 1-12 | | |
| FIELD | ST LOUIS | | |
| COUNTY | FINNEY | STATE | KS |
| HALLIBURTON | | QUAD COMBO | |