

MICRO LOG

Company	DIXON OPERATING COMPANY, LLC.	
Well	BYER #3-3	
Field	MIKE'S METEOR	
County	STAFFORD	State KANSAS
Location:	API # : 15-185-24118-0000 1650' FSL & 990' FEL SW - NE - SE	
Permanent Datum	SEC 3 TWP 23S RGE 12W	GROUND LEVEL Elevation 1831
Log Measured From	KELLY BUSHING 8' A.G.L	K.B. 1839
Drilling Measured From	KELLY BUSHING	D.F. 1837 G.L. 1831
Date	10/4/22	
Run Number	THREE	
Depth Driller	3840	
Depth Logger	3833	
Bottom Logged Interval	3817	
Top Log Interval	2800	
Casing Driller	8 5/8" @ 306	
Casing Logger	306	
Bit Size	7 7/8	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 12,000 PPM
Density / Viscosity	9.0/46	
pH / Fluid Loss	9.5/12.8	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	.680 @ 70F	
Rmf @ Meas. Temp	.510 @ 70F	
Rmc @ Meas. Temp	.816 @ 70F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.414 @ 115F	
Time Circulation Stopped	7 HOURS	
Time Logger on Bottom	11:30 P.M.	
Maximum Recorded Temperature	115F	
Equipment Number	3802	
Location	HAYS, KANSAS	
Recorded By	COLE ROBBEN	
Witnessed By	TIM PRIEST	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:


FROM HUDSON, KANSAS GO TWO MILES EAST, 1 3/4 MILES SOUTH, WEST INTO




MAIN SECTION

Database File	7227pe.db
Dataset Pathname	pass11M
Presentation Format	_micro
Dataset Creation	Wed Oct 05 01:23:27 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

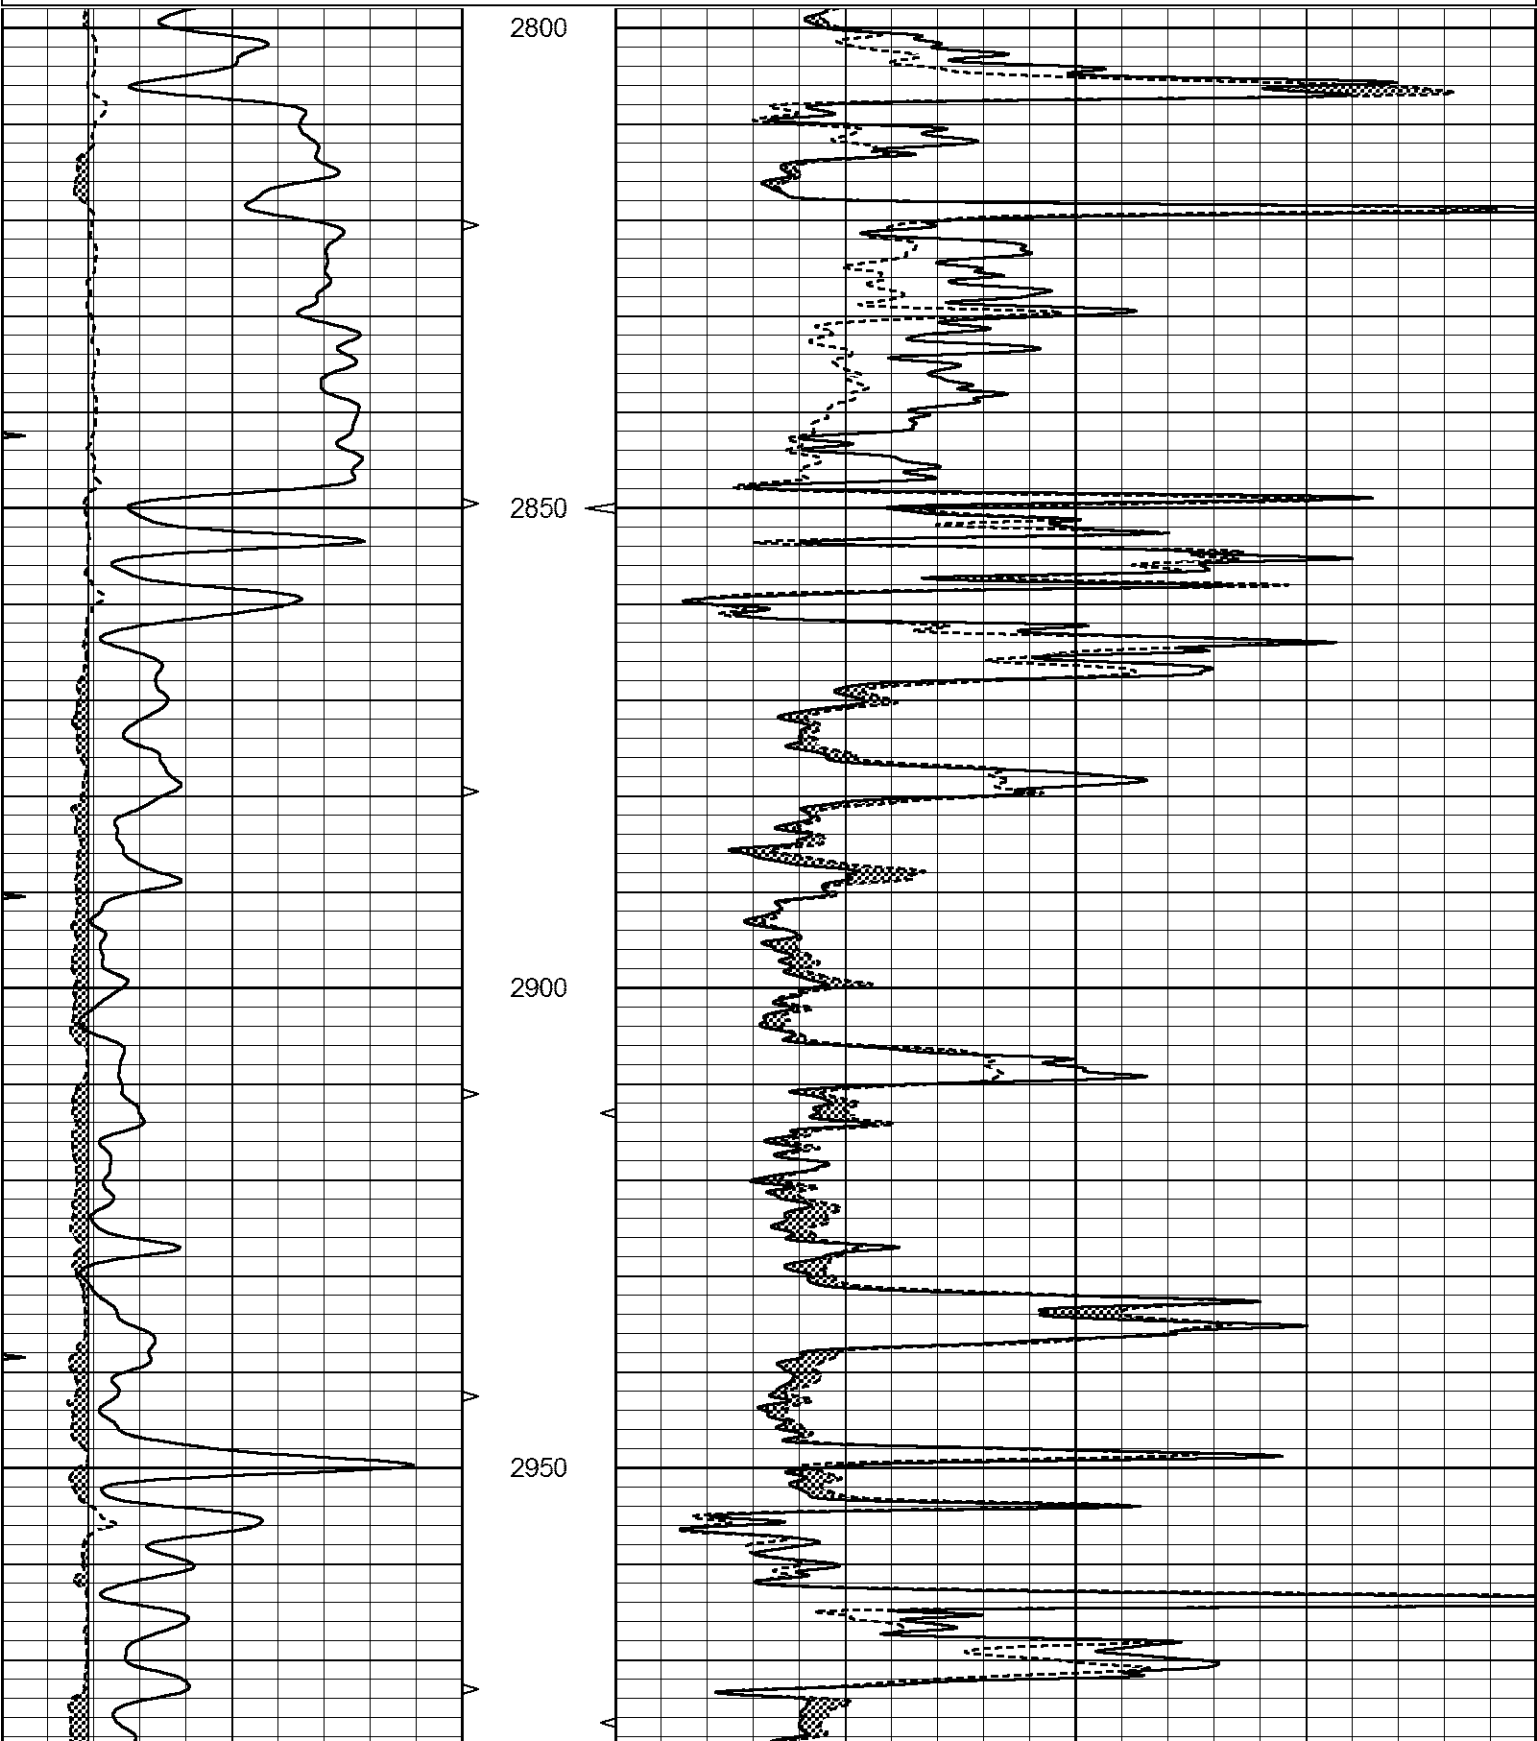

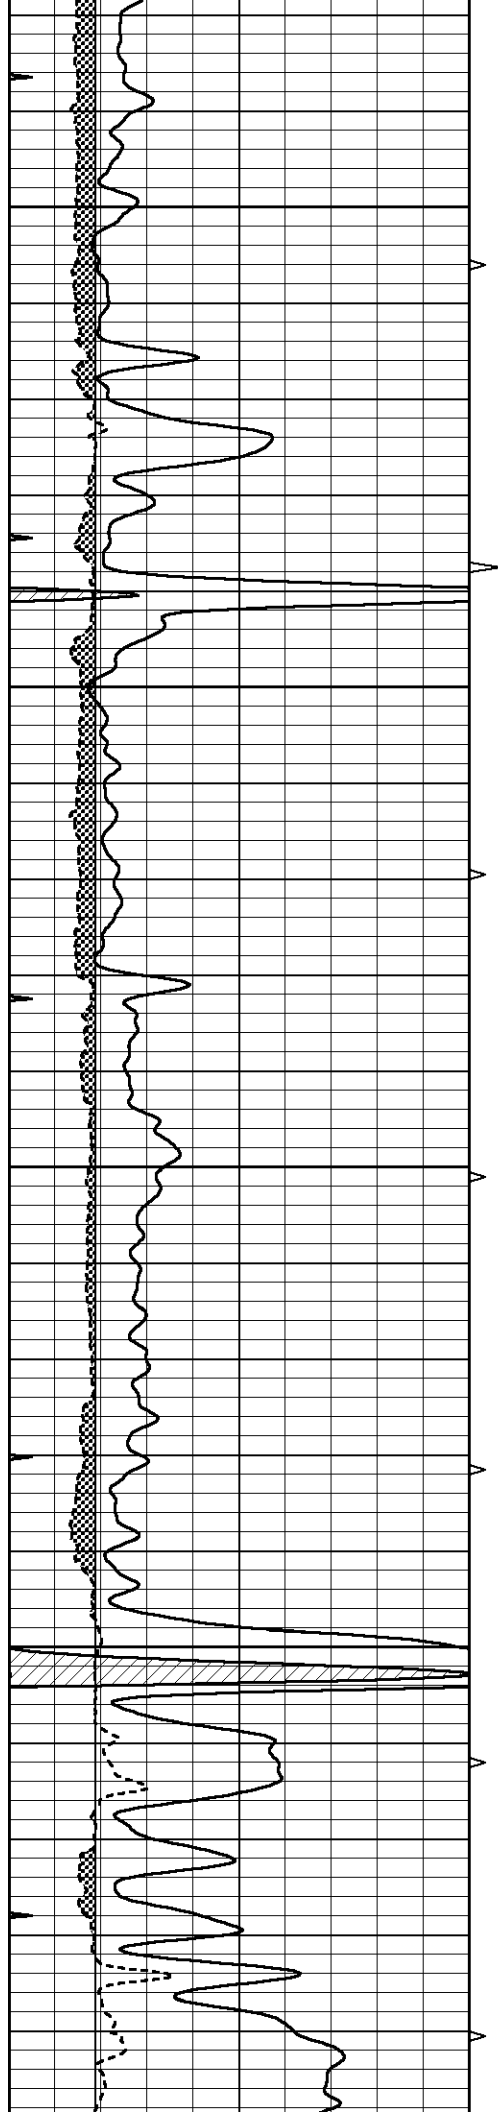




3000


3050


3100


3150

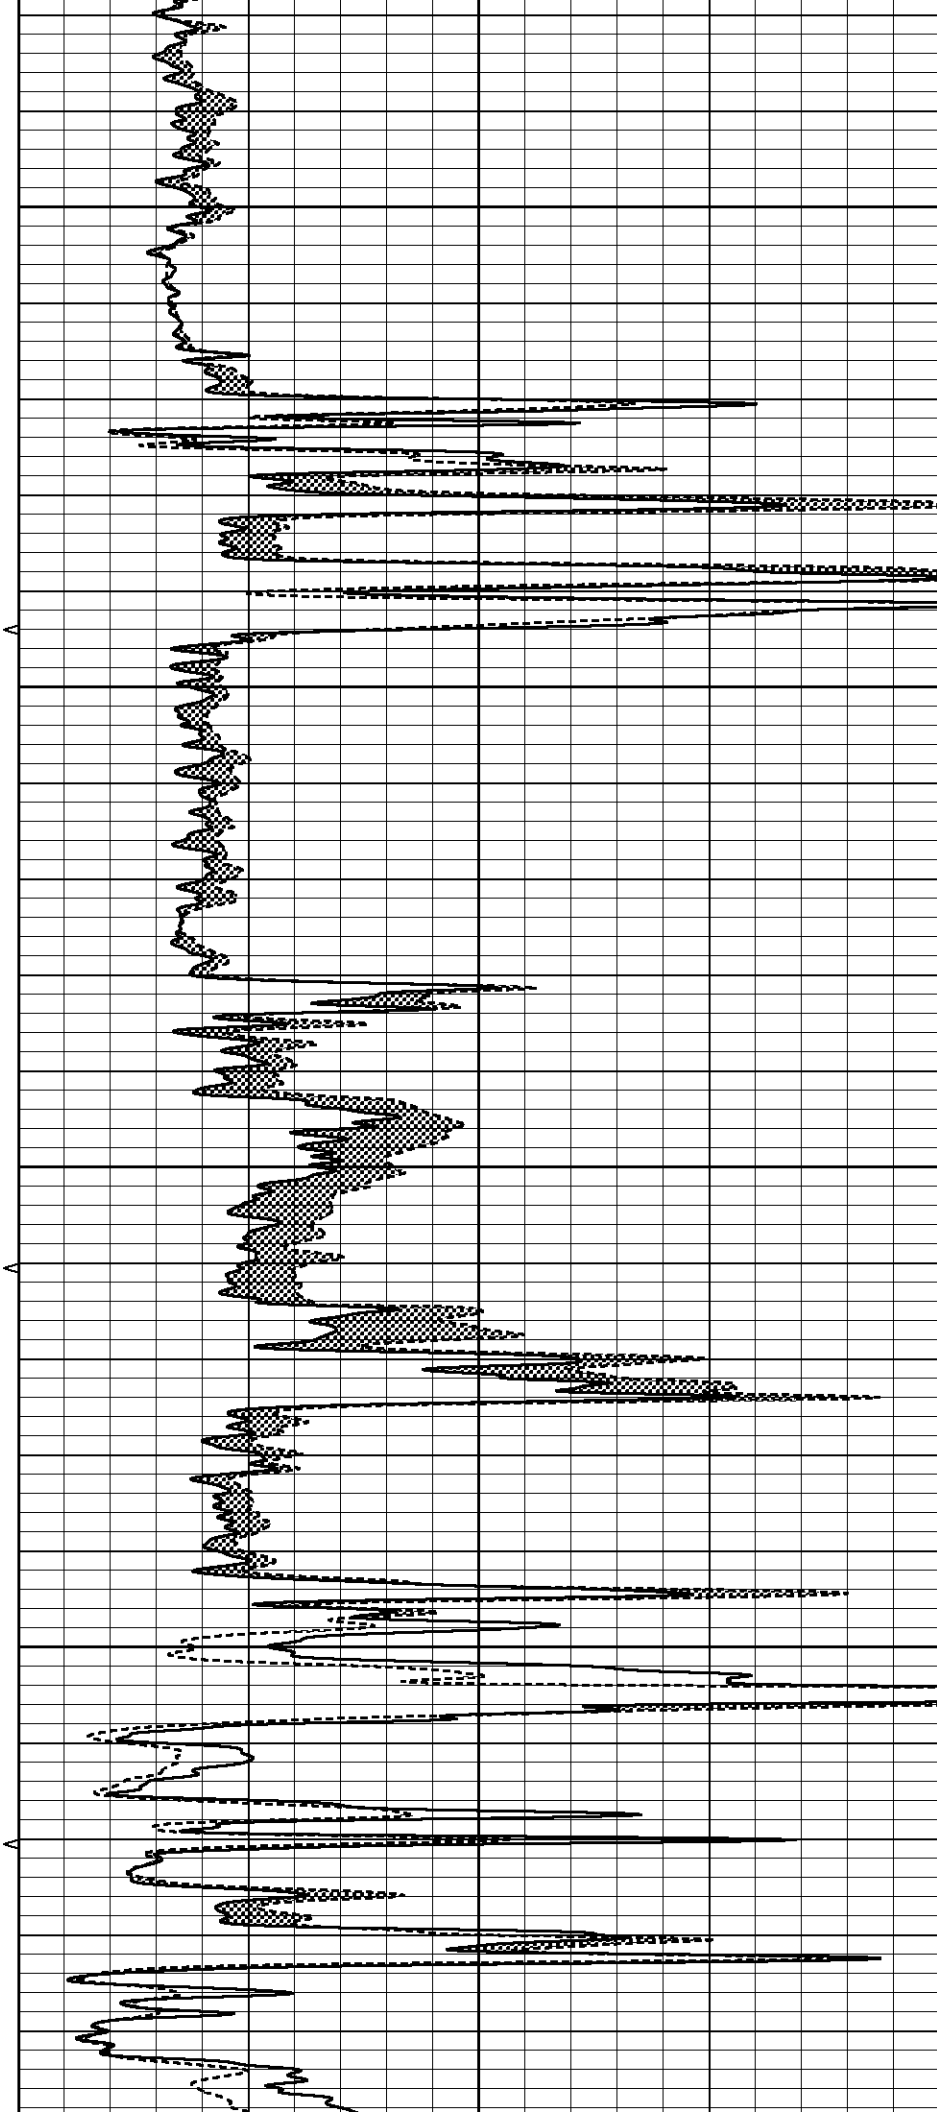

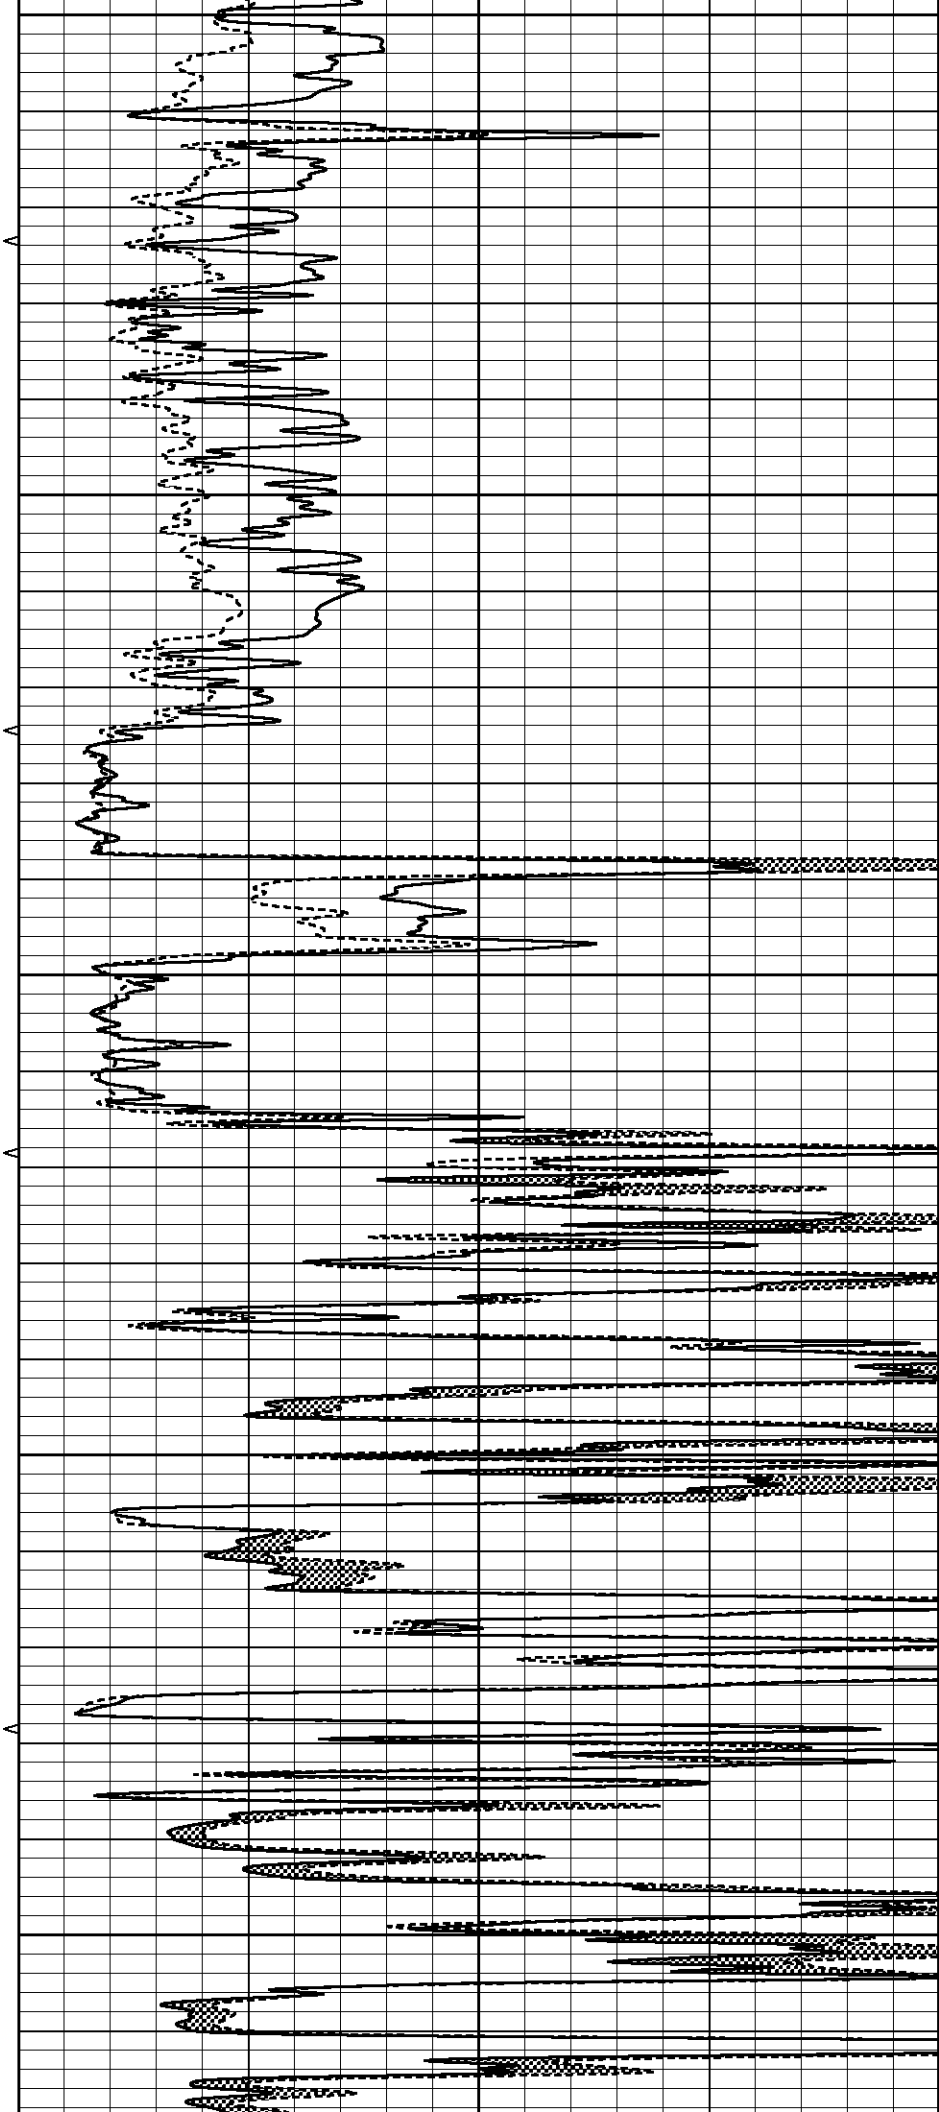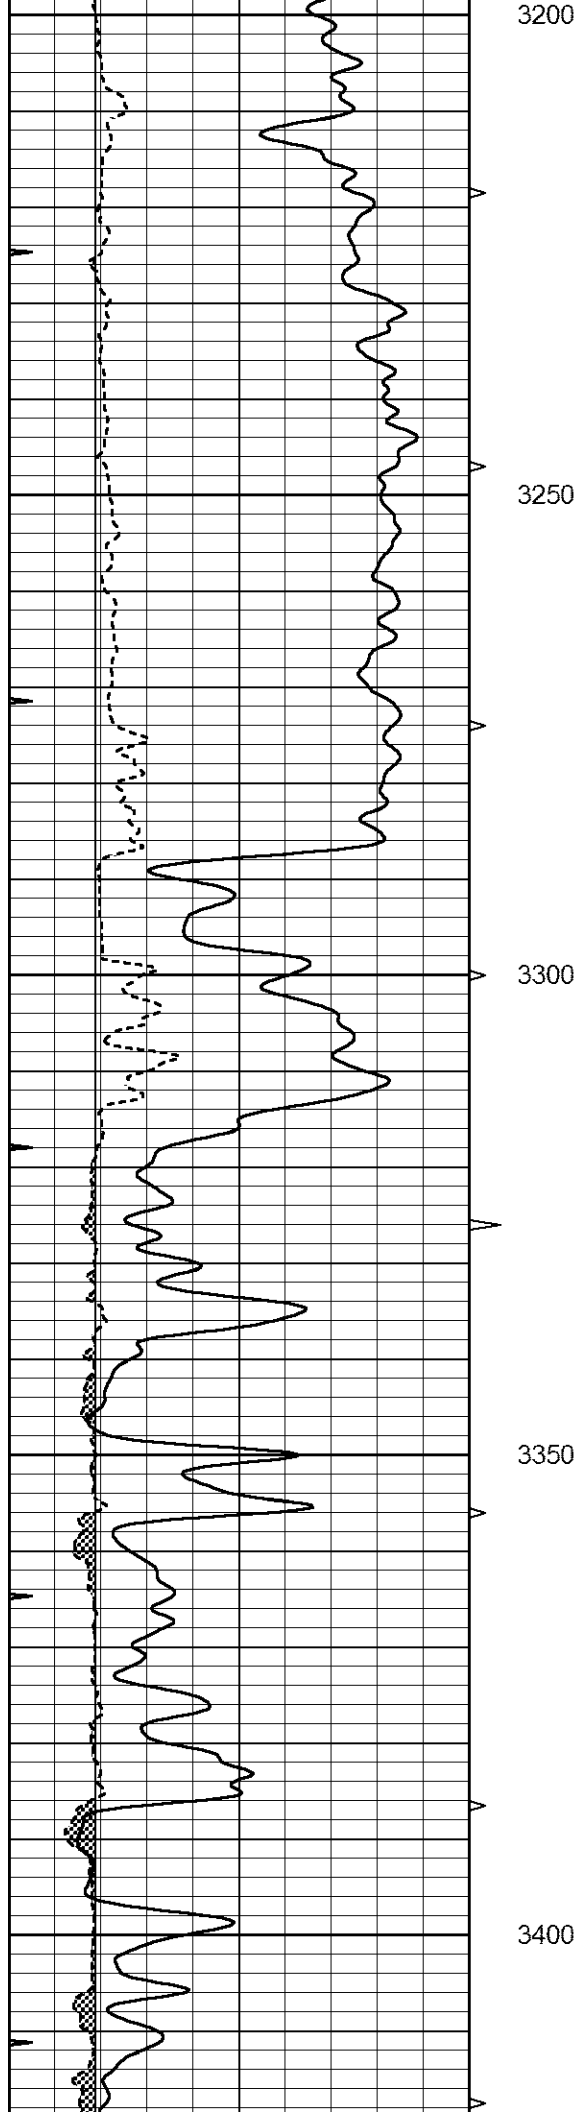

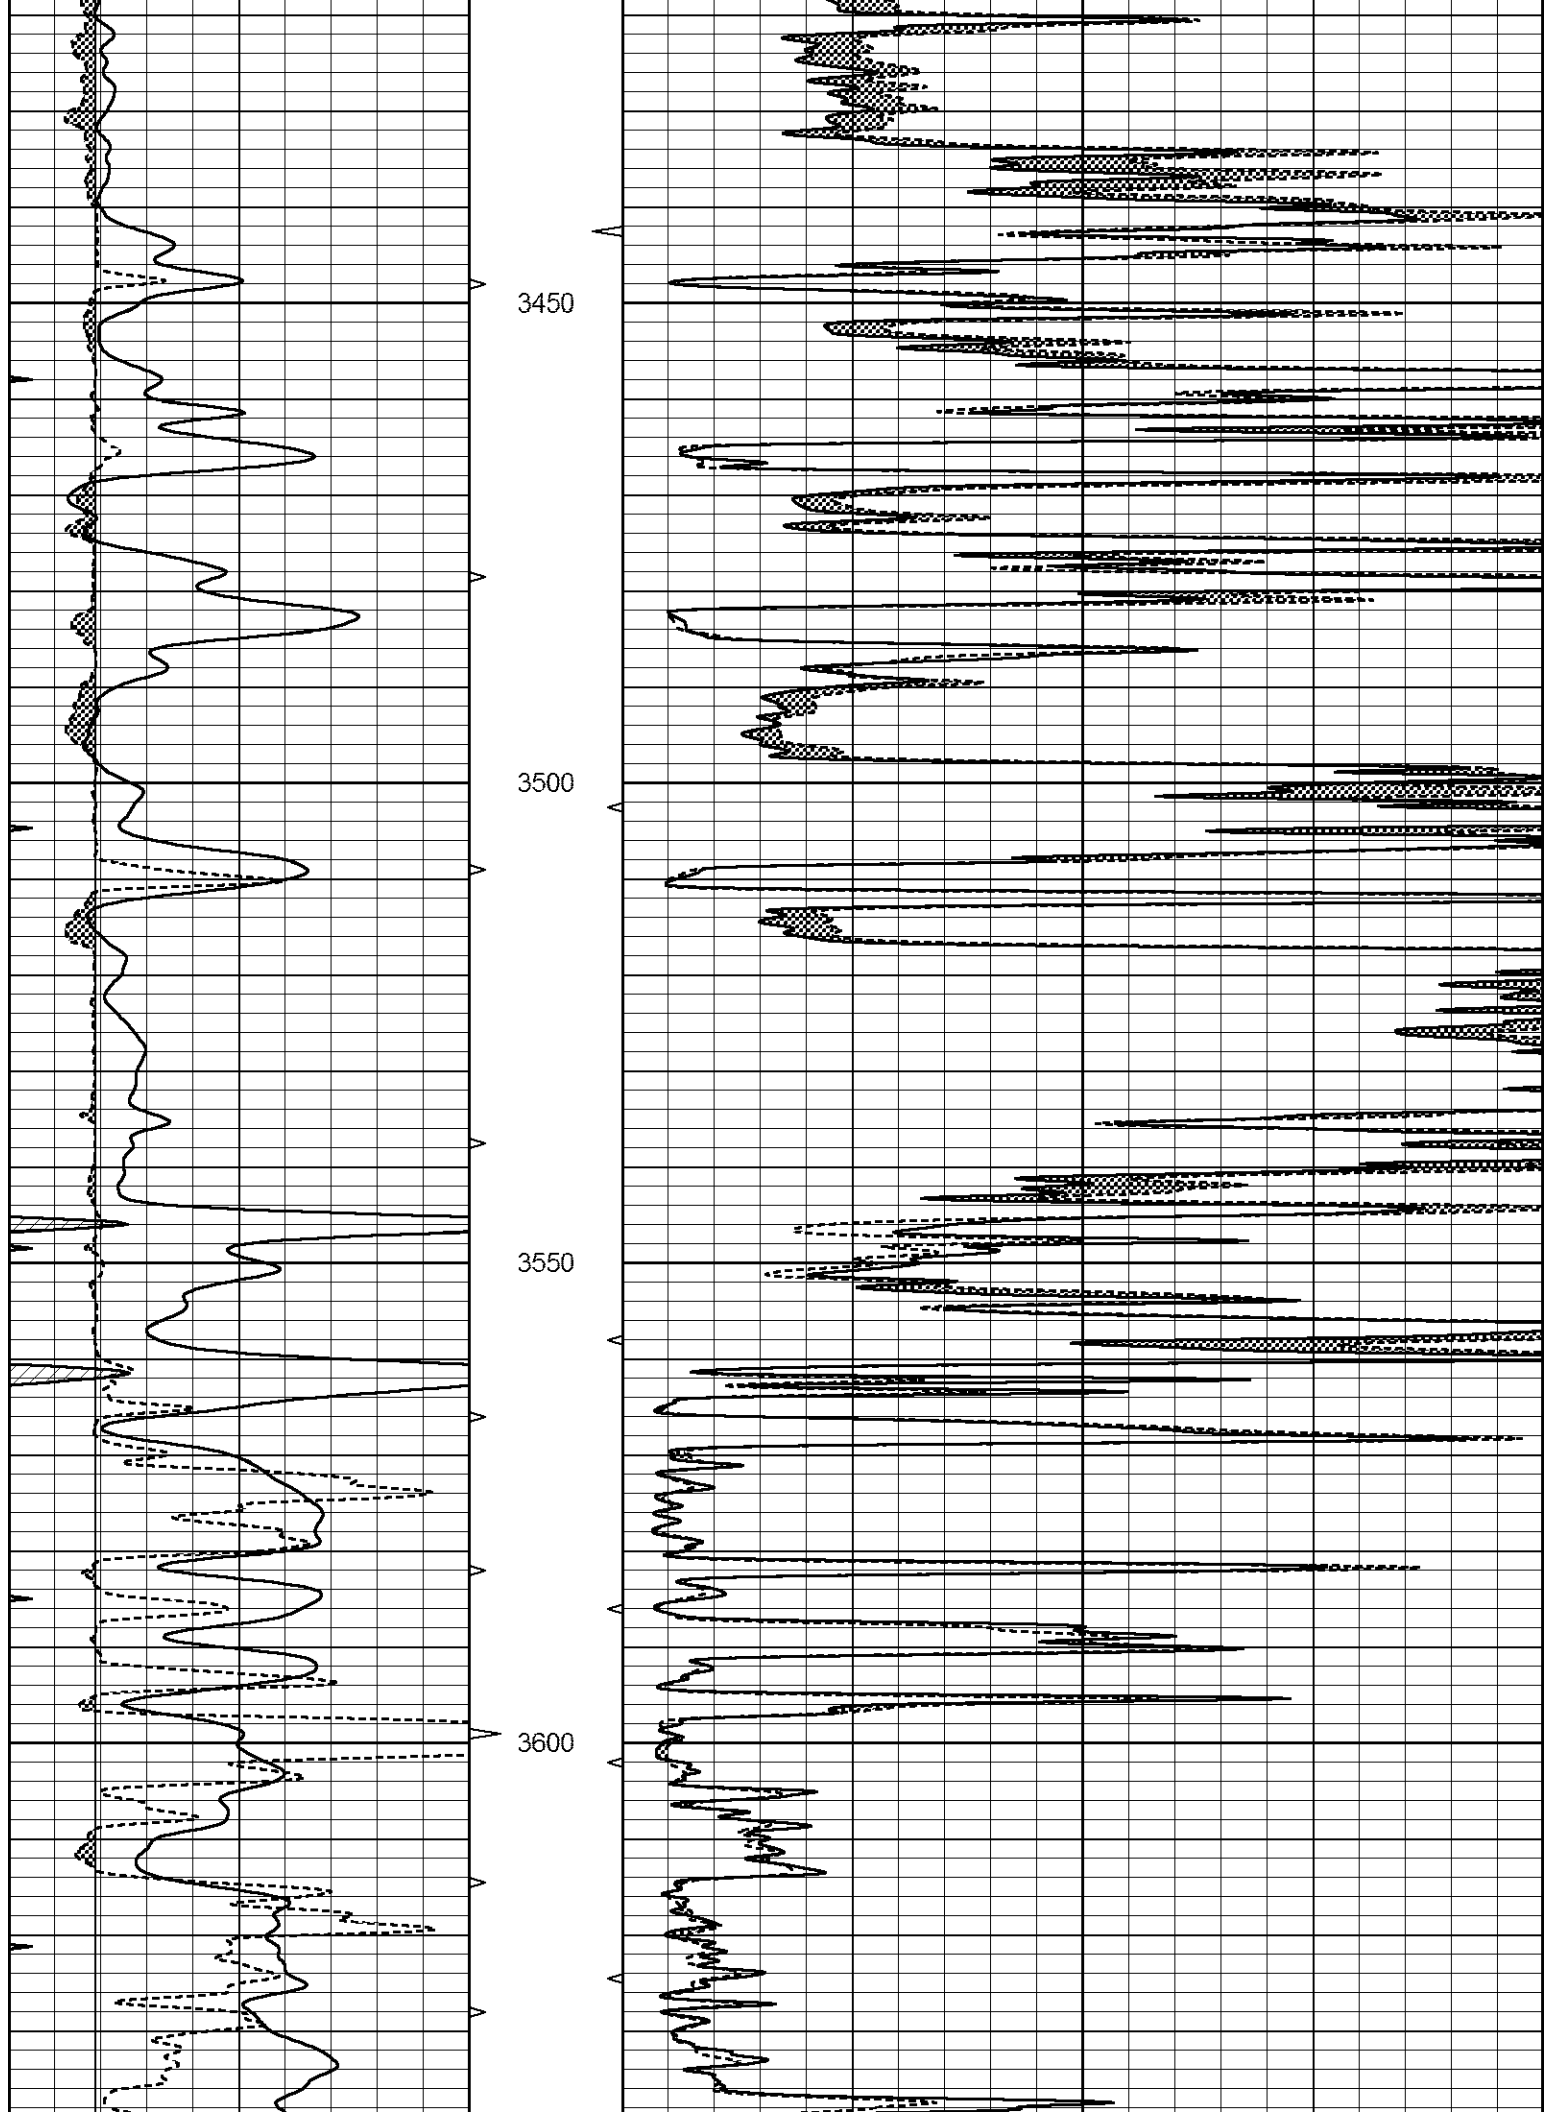

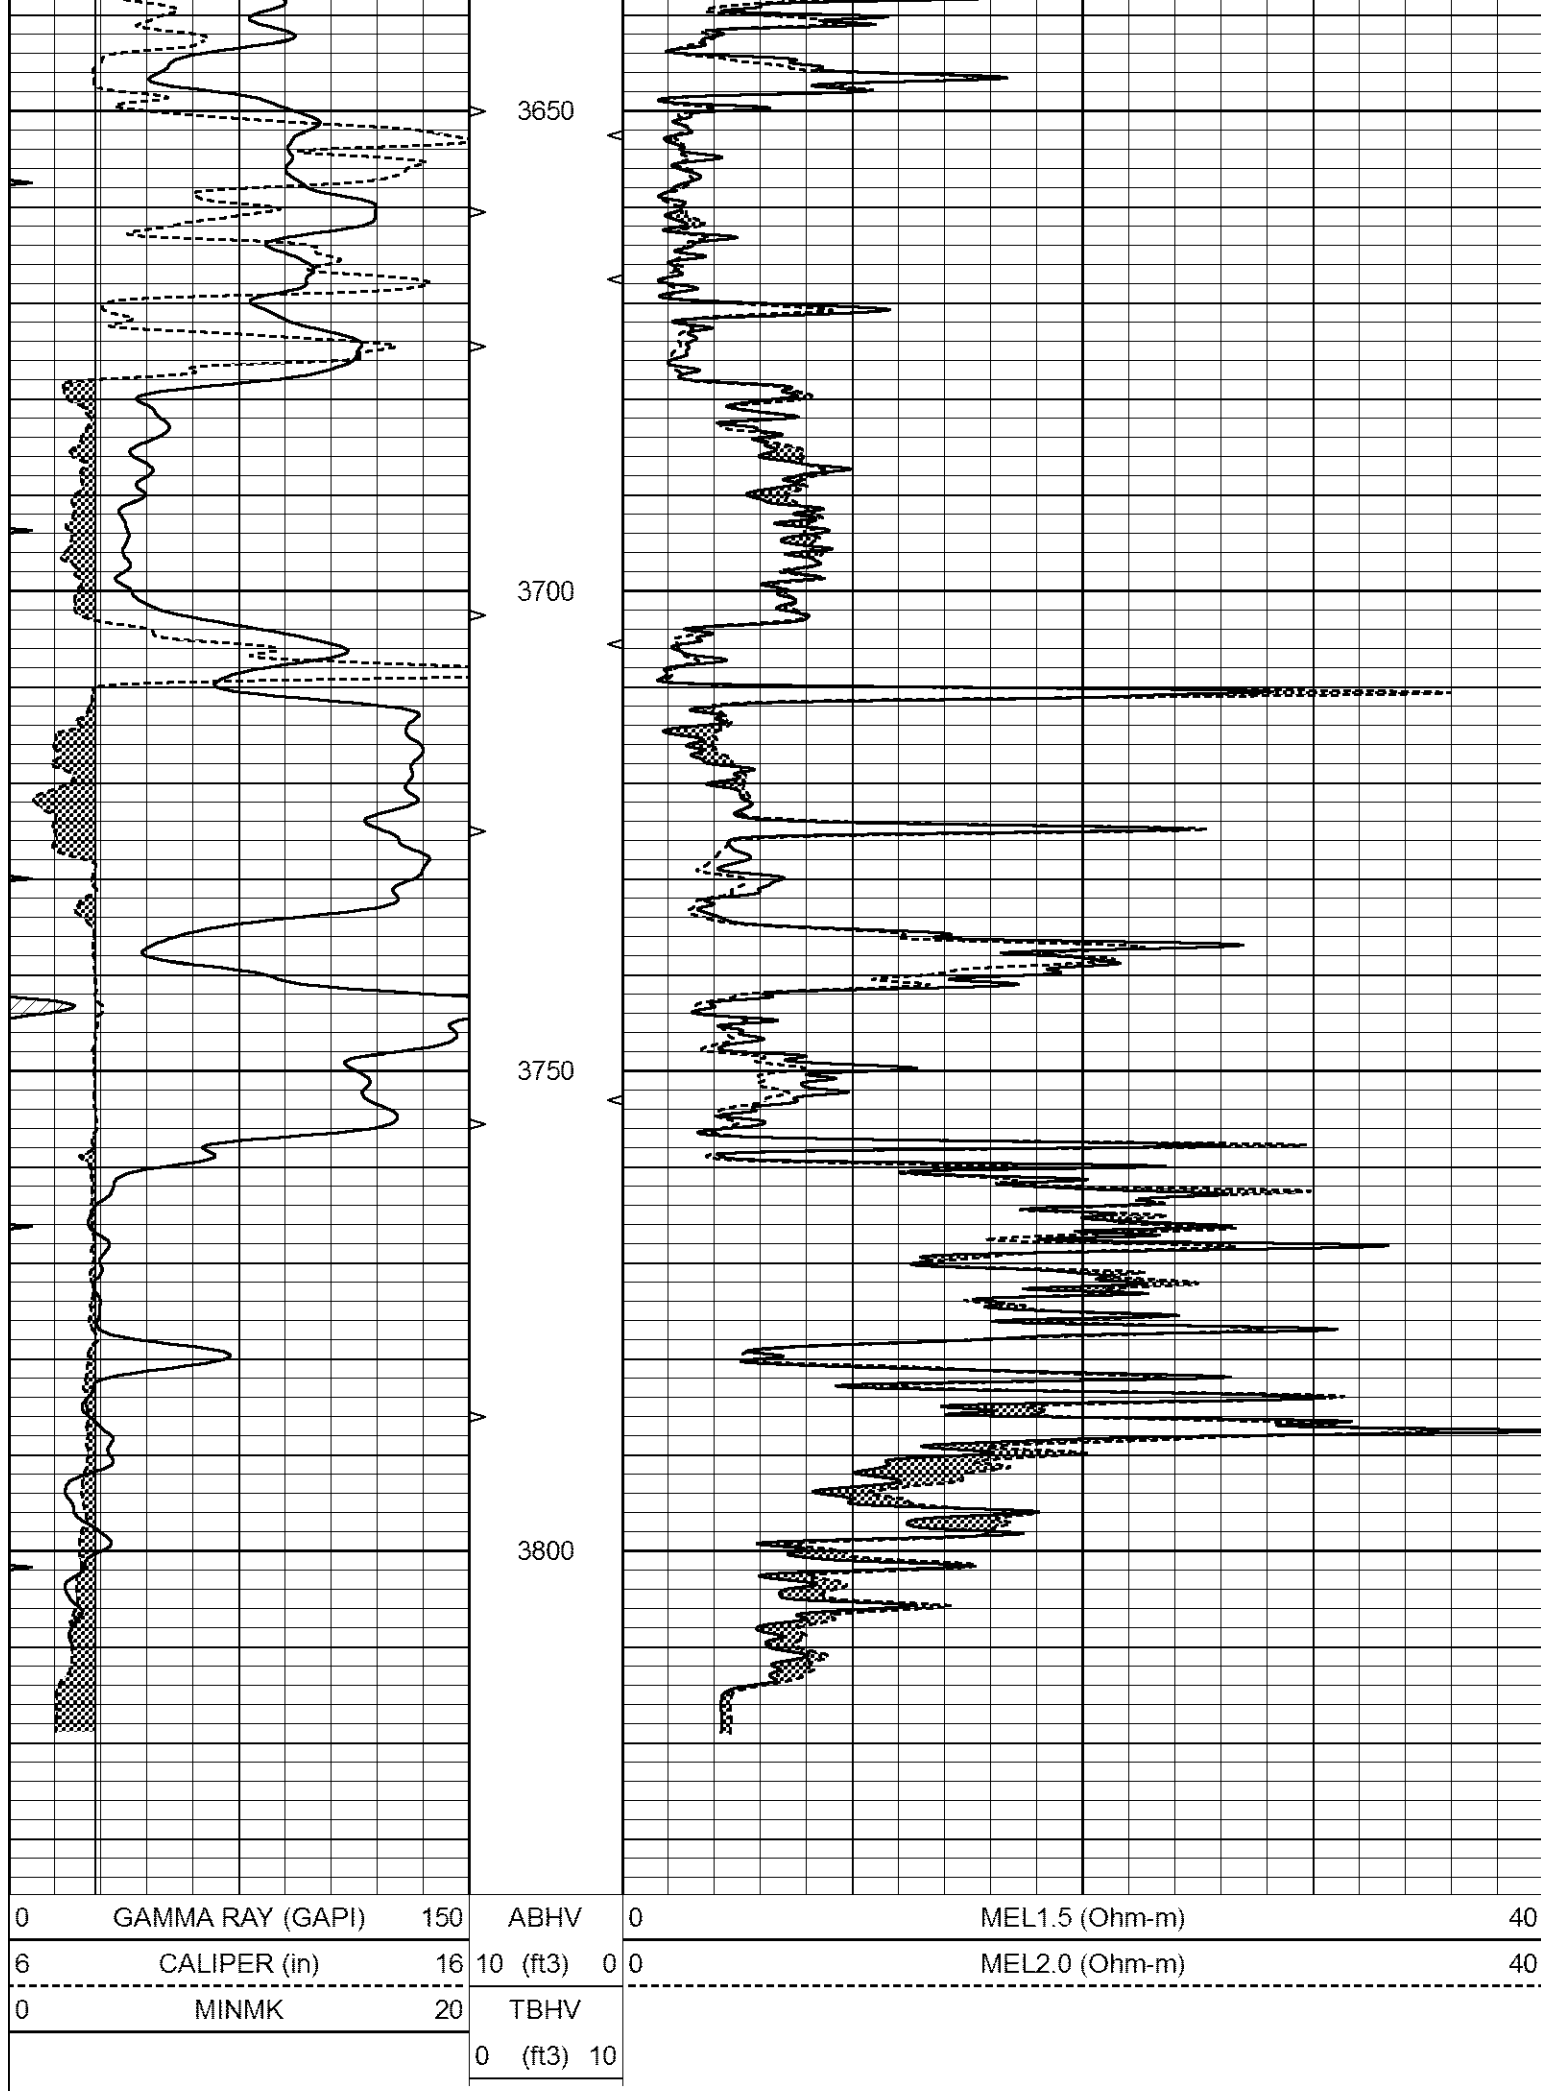


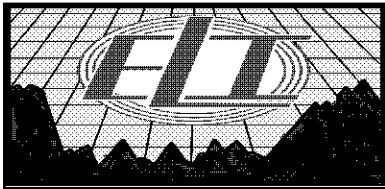


REPEAT SECTION

Database File 7227pe.db
Dataset Pathname pass11R
Presentation Format _micro
Dataset Creation Wed Oct 05 01:34:57 2022
Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

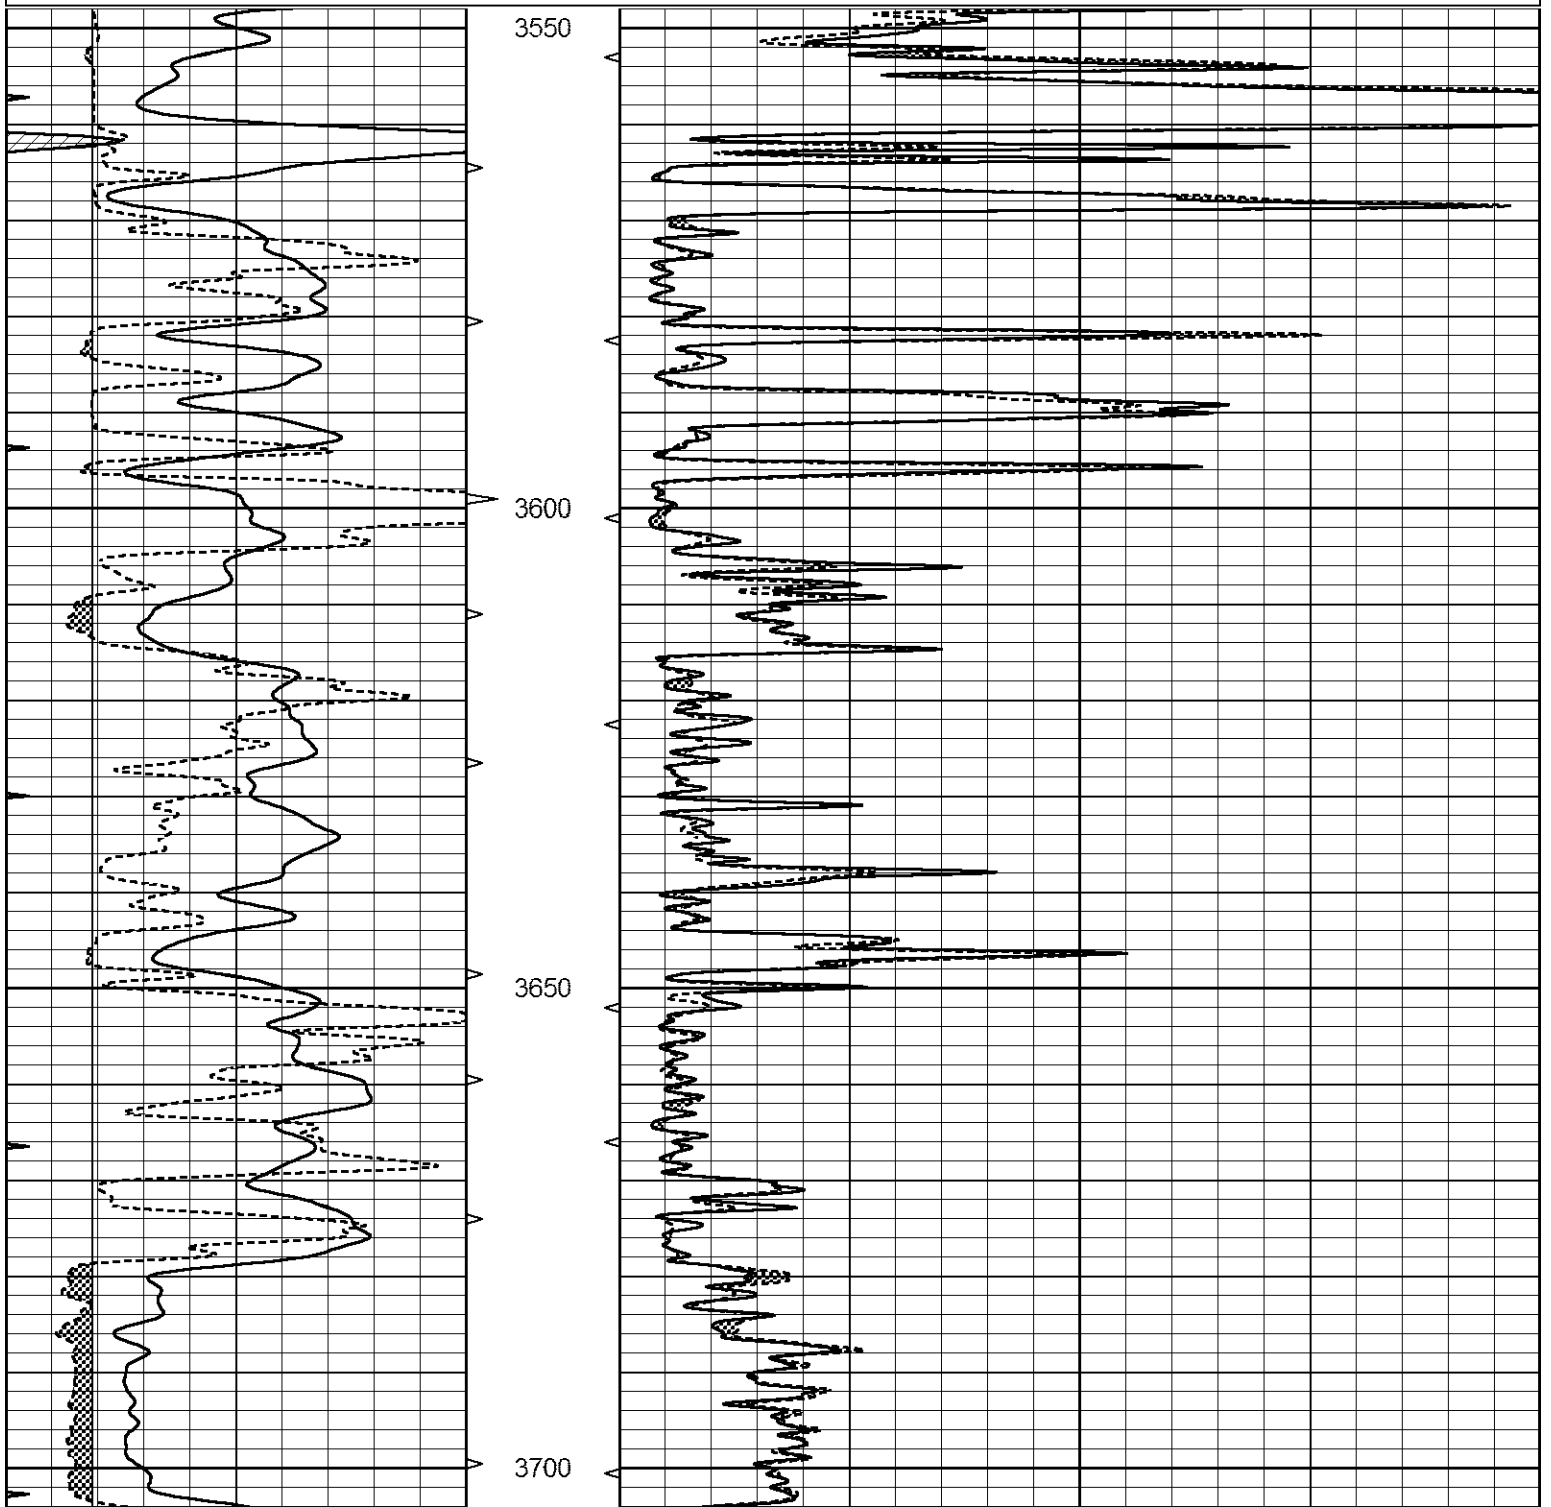

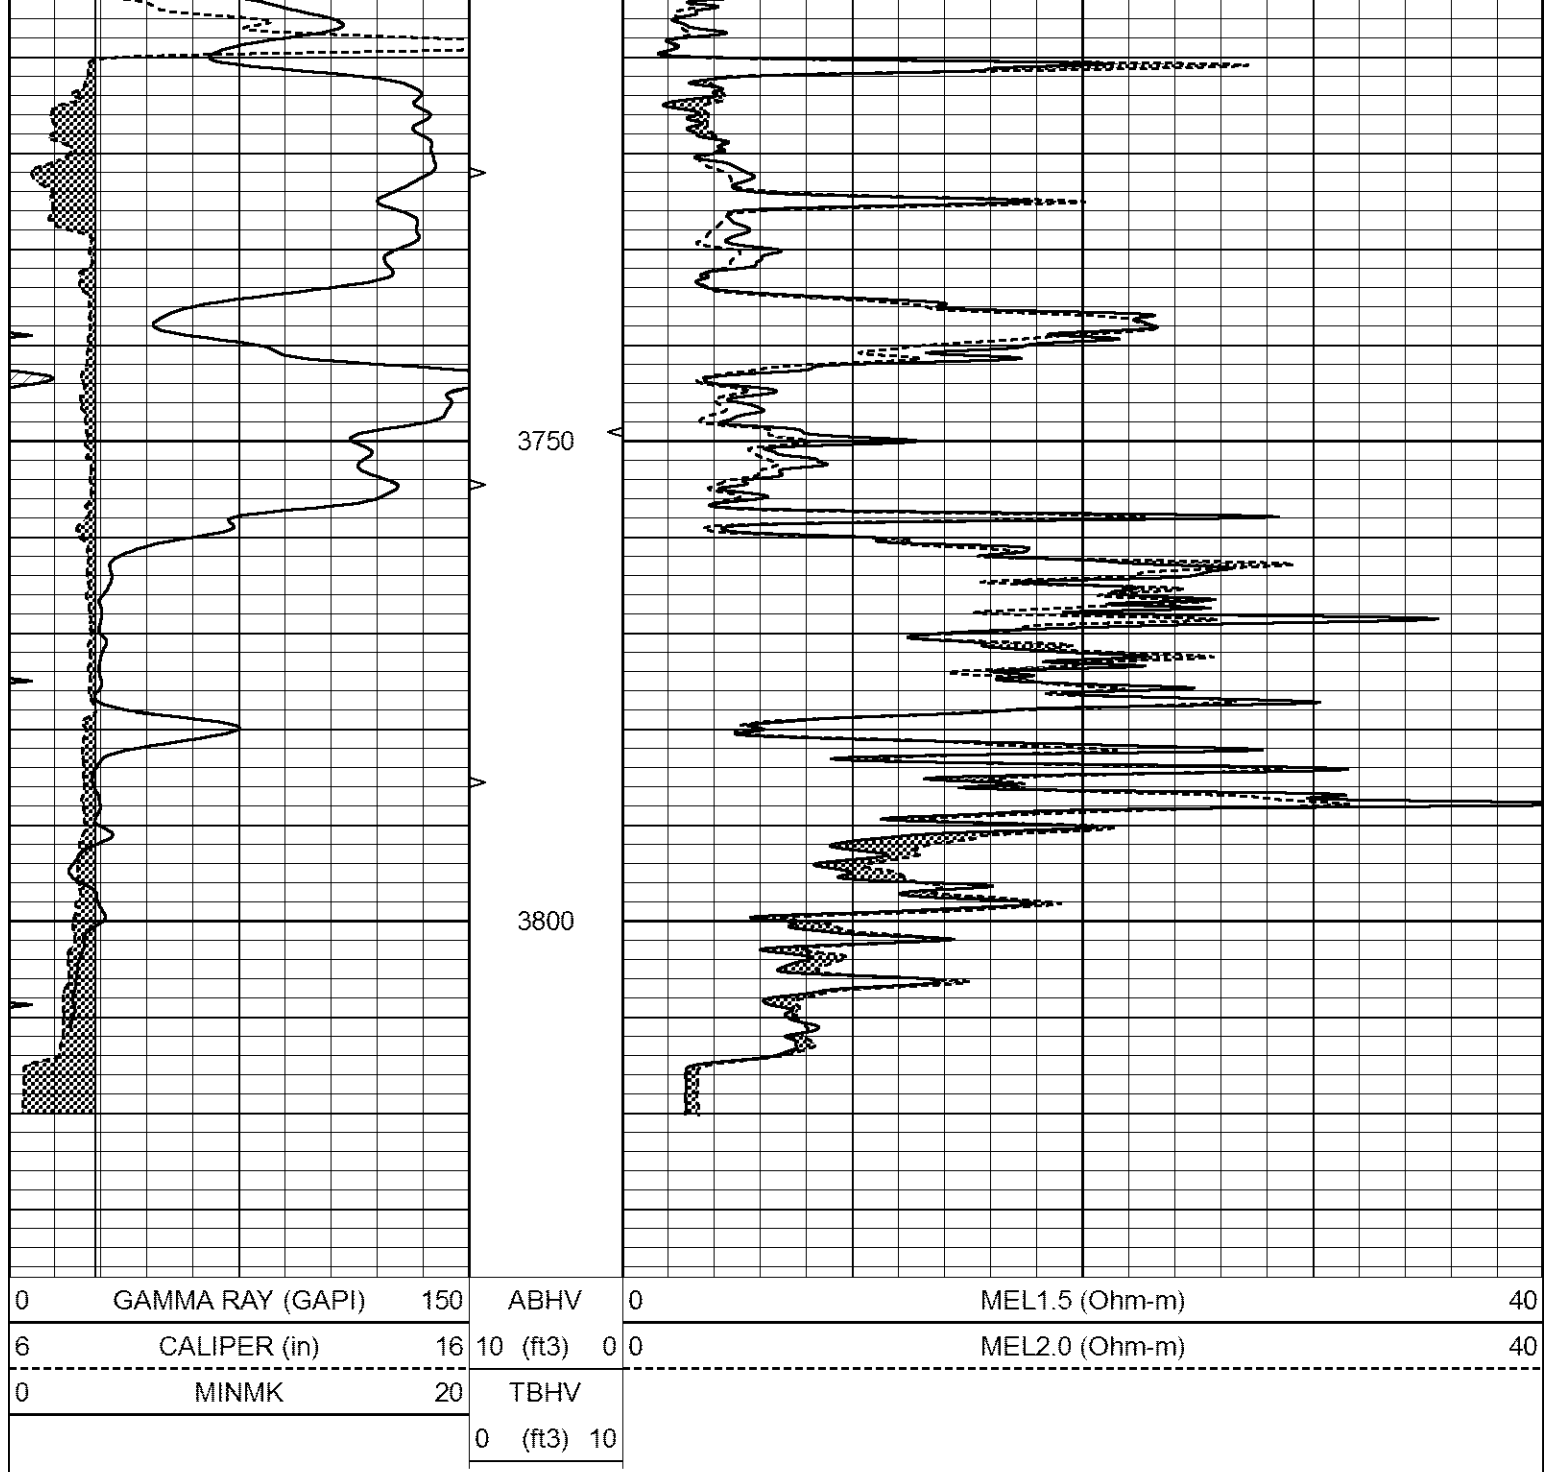

Calibration Report			
Database File	7227pe.db		
Dataset Pathname	pass11M		
Dataset Creation	Wed Oct 05 01:23:27 2022		
MICRO_USR Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeL		
Performed:	Thu Aug 25 03:27:32 2022		
Caliper Calibration:	Gain=4.500	Offset=0.380	
	Low Cal	High Cal	
References	8.000	14.000	
Readings	1.451	3.049	
1.5" Calibration:	Gain=65.000	Offset=-0.020	

References	Low Cal	High Cal
Readings	0.000	20.000
	0.004	0.843
2" Calibration:		
	Gain=60.000	Offset=0.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.021	0.810
Microlog Calibration Report		
Serial-Model:	070911-ProbeL	
Performed:	Sat May 14 04:48:25 2022	
	Readings	References
	Zero	Cal
Normal	0.0002	0.4836
Inverse	0.0018	0.6297
Caliper	0.0000	1.0000
	Zero	Cal
	0.0000	10.0000
	0.0000	10.0000
	0.0000	1.0000
	Zero	Cal
	0.0000	10.0000
	0.0000	10.0000
	0.0000	1.0000
Gamma Ray Calibration Report		
Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Sat Jul 02 05:55:58 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2600	GAPI/cps